Start qt-creator

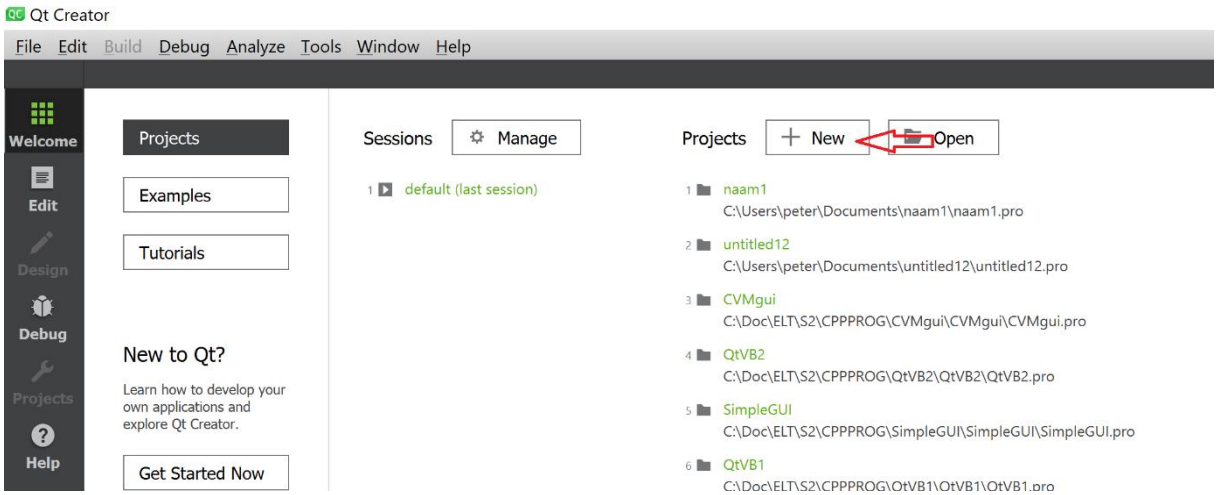

Select "***New***" project

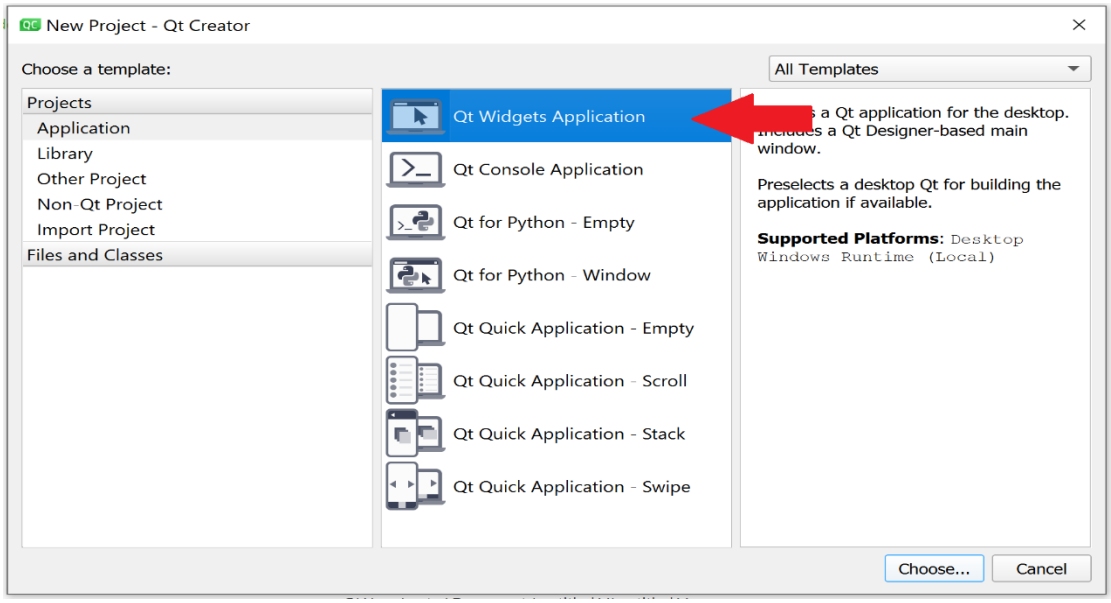

Select "***Qt Widget Application***"

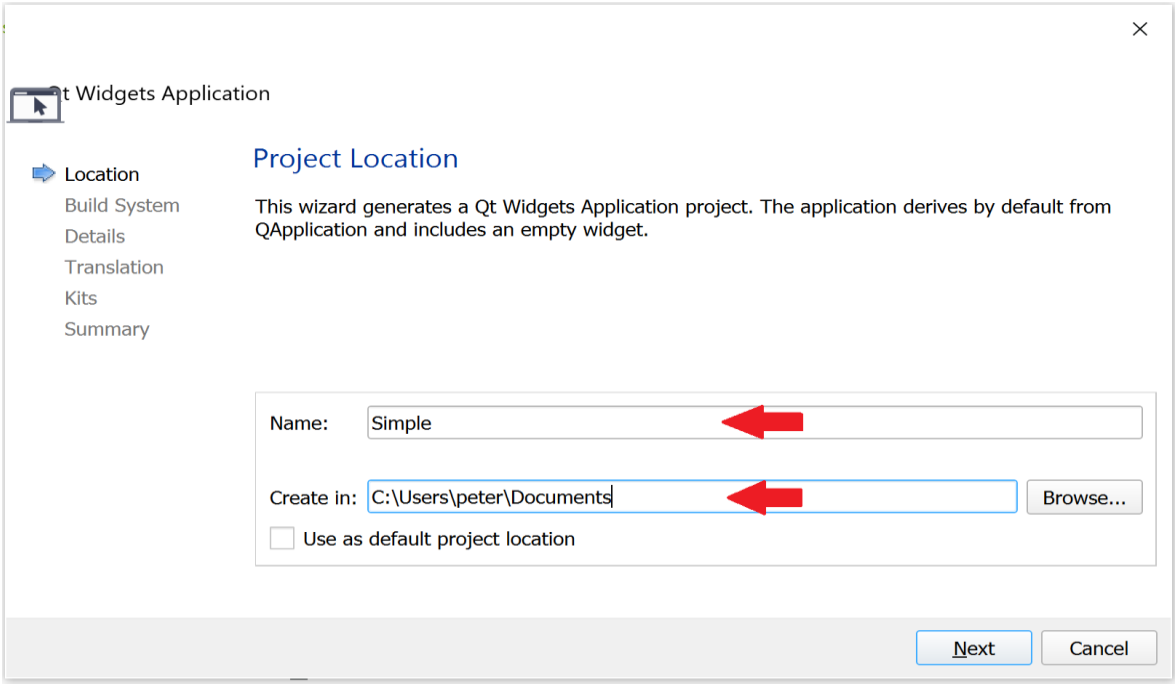

Give your project a name, set a location and click "***Next***"

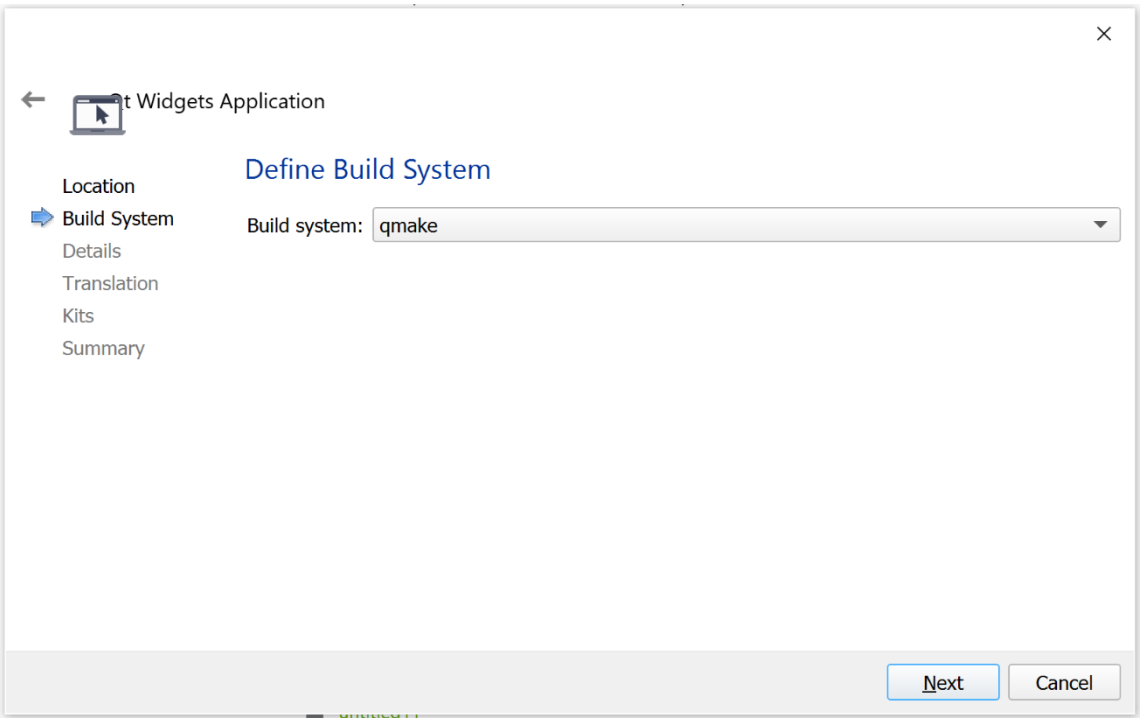

Select "***Next***"

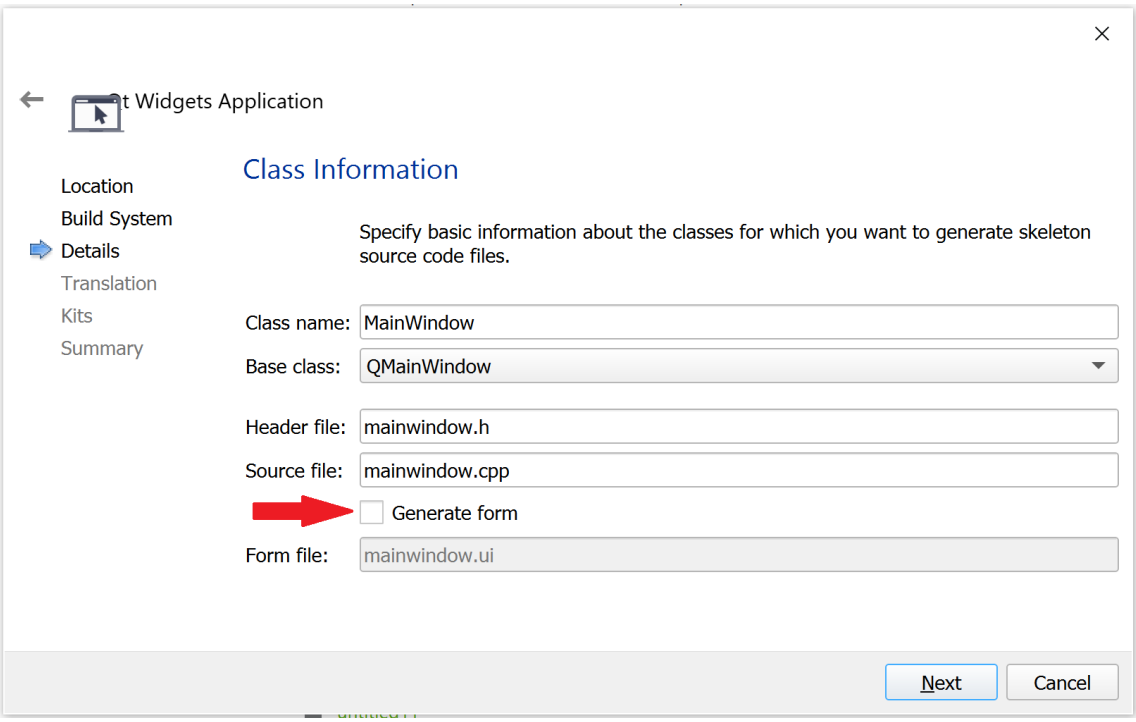

Uncheck "***Generate form***"

Select "***Next***"

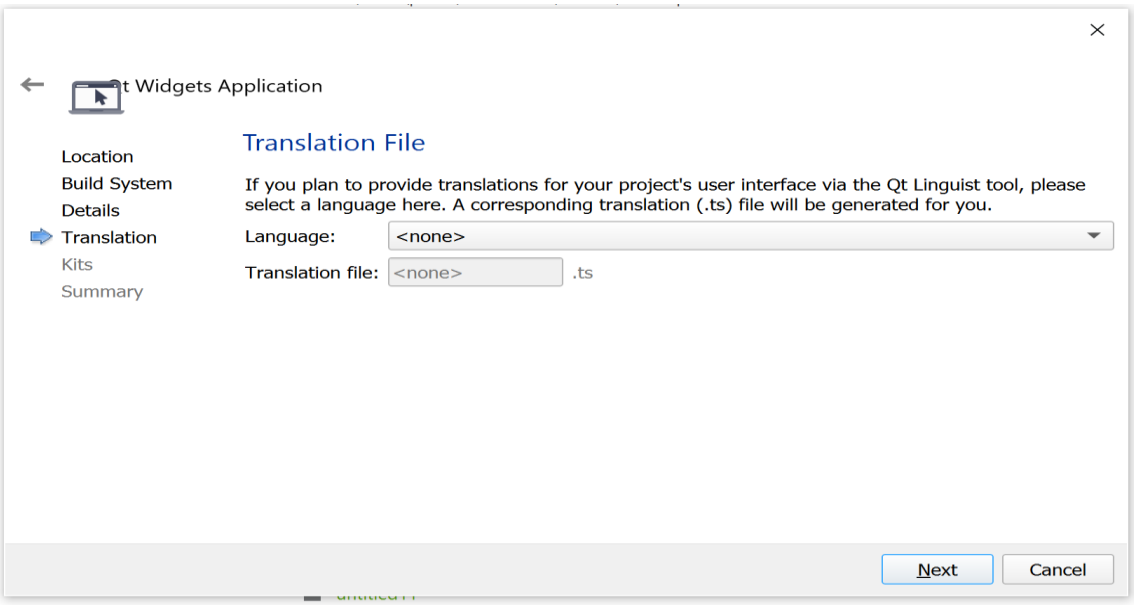

Select "***Next***"

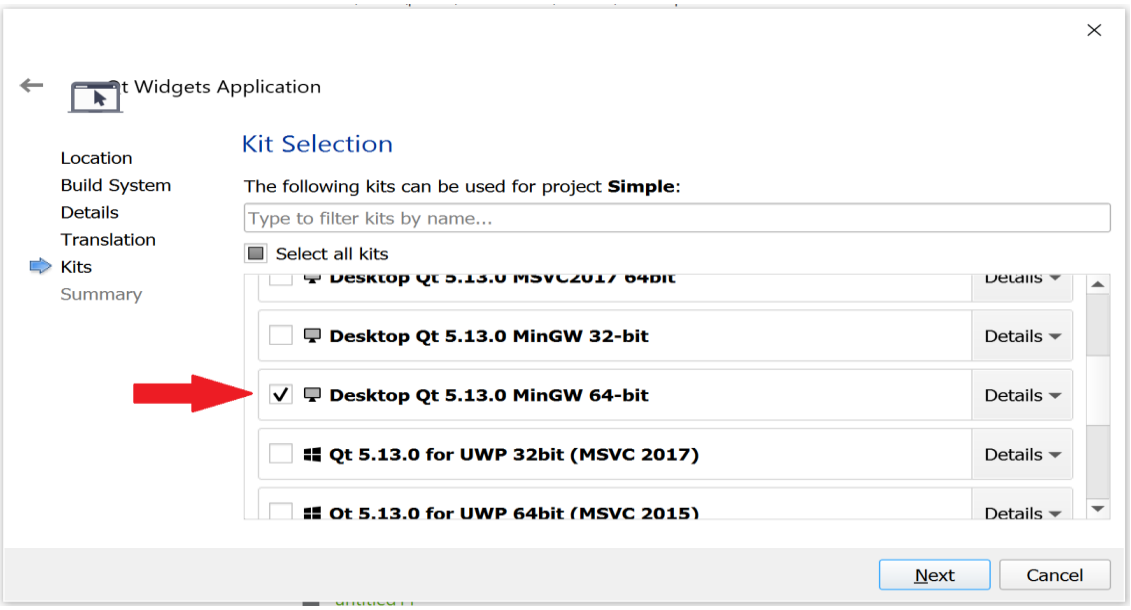

Check "***Desktop Qt x.xx.x MinGW 64-bit***"

Select "***Next***"

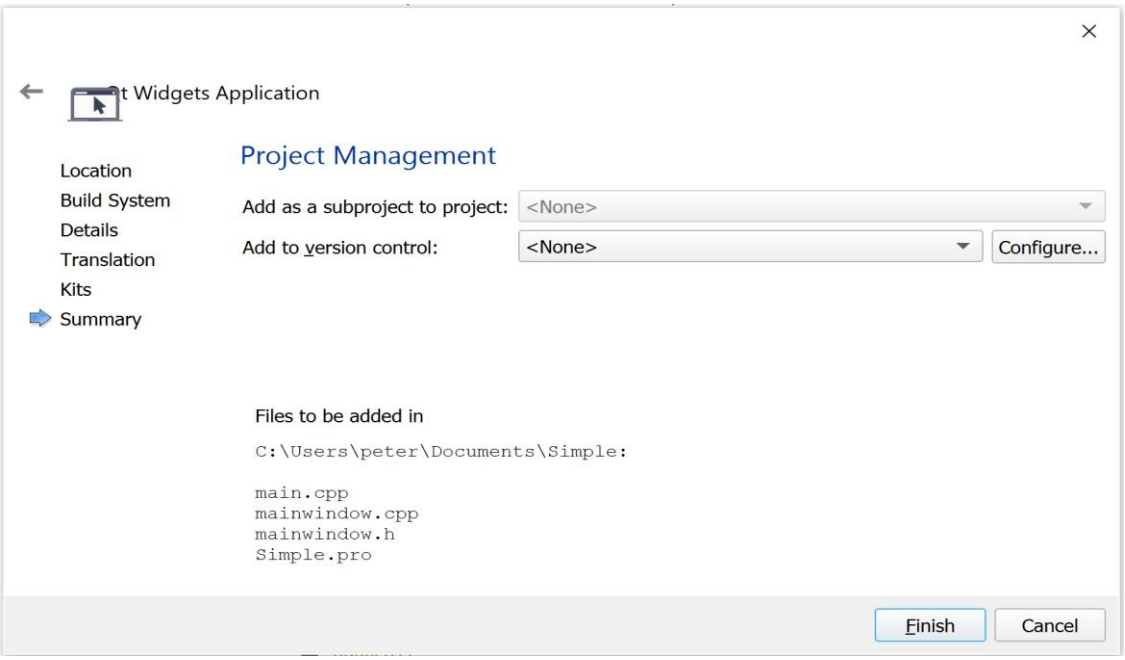

Select "***Finish***"

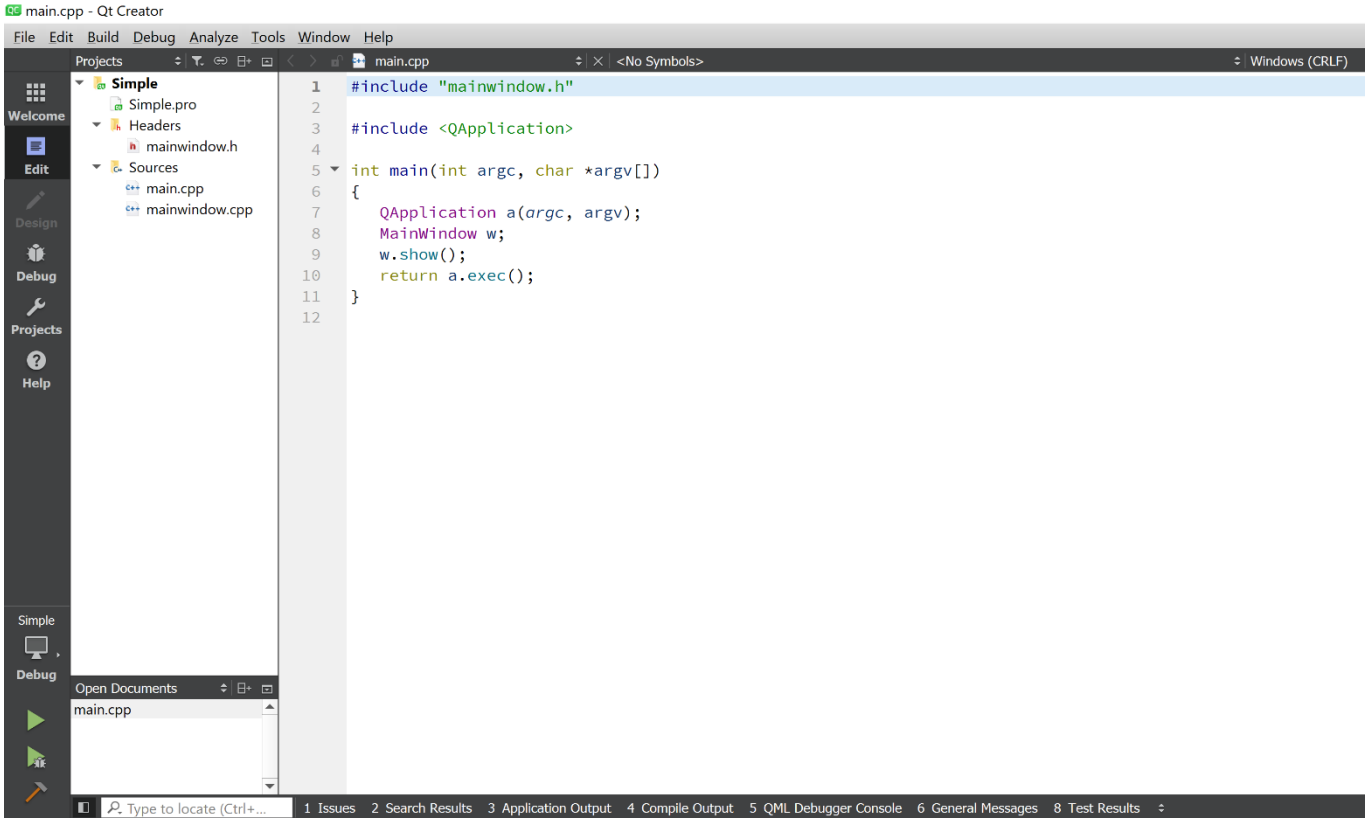

Open the header file *mainwindow.h*

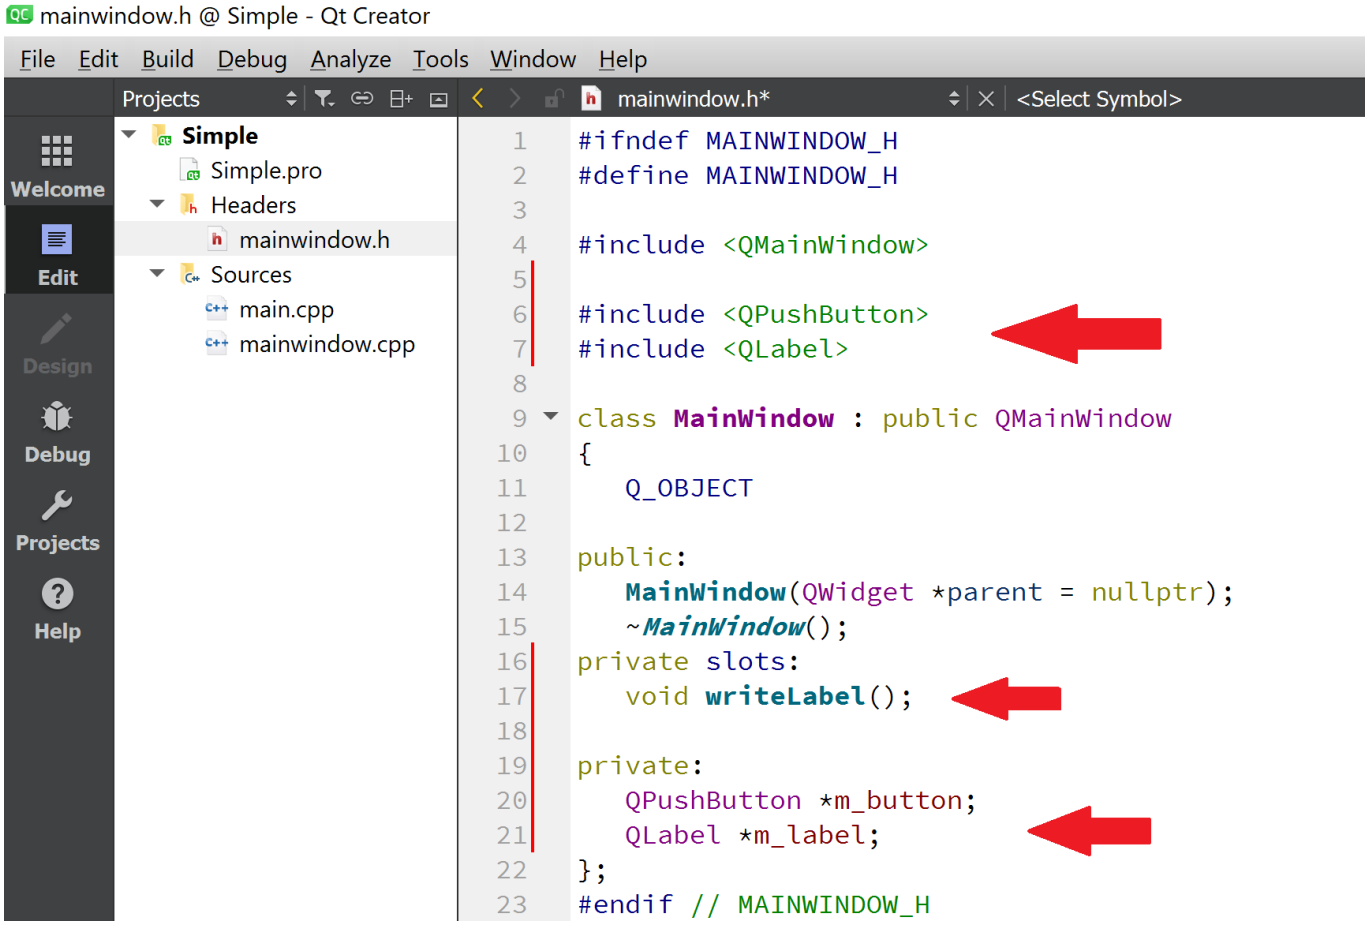

Add the header files <QPushButton> and <Qlabel> for the pushbutton and label widgets.

Add the (private slot) function writeLabel() to the class MainWindow.

Add 2 (private) pointer variables *m_button en *m_label to the class MainWindow.

Now open the file *mainwindow.cpp*

mainwindow.cpp @ Simple - Qt Creator

```
#include "mainwindow.h"

MainWindow::MainWindow(QWidget *parent)
    : QMainWindow(parent)
{
    // Create the button, make "this" the parent
    m_button = new QPushButton("Button", this);
    // set size and location of the button
    m_button->setGeometry(QRect(QPoint(100,100),
    QSize(80, 20)));

    // Create the label, make this the parent
    m_label = new QLabel("Label",this);
    // set size and location of the label
    m_label->setGeometry(QRect(QPoint(100,50),QSize(100,20)));

    // Connect m_button signal to appropriate slot writeLabel
    connect(m_button, SIGNAL(clicked()), this, SLOT(writeLabel()));
}

MainWindow::~MainWindow()
{
}

void MainWindow::writeLabel()
 {
     m_label->setText("Overwrite the label text");
 }
```

Add the code for creating a button and a label in the constructor of MainWindow.

Add the function writeLabel() to the class MainWindow.

Connect (by using connect) the m_button *signal* to the writeLabel *slot*. This connection will execute the function writeLabel() as soon as the m_button was clicked.

Now open the file *main.cpp*

main.cpp @ Simple - Qt Creator

```
#include "mainwindow.h"
#include <QApplication>

int main(int argc, char *argv[])
{
    QApplication::setAttribute(Qt::AA_EnableHighDpiScaling); // for HighDPI screens only

    QApplication app(argc, argv);
    MainWindow w;
    // size of the window is 500 x 200
    w.setFixedSize(500,200);
    w.show();
    return app.exec();
}
```

“HighDpiScaling can by turned on by using the QApplication::setAttribute function. This is only required in case you have an HighDPI screen.

w.setFixedSize is used to set the windowsize to 500 by 200 pixels.

Compile and run the application:
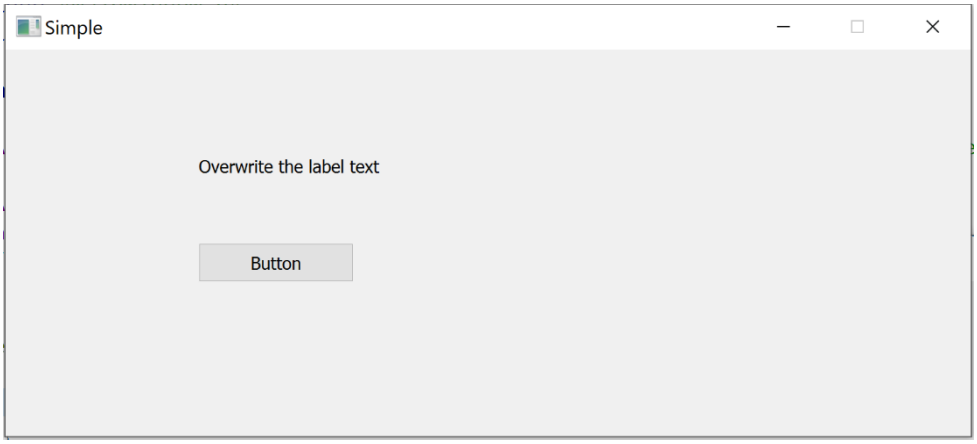
After clicking "***Button***":