

INF6953G: Lab 3

Scaling Databases and Implementing Cloud Patterns

Foutse Khomh
S. Amirhossein Abtahizadeh
Département Génie Informatique et Génie Logiciel
École Polytechnique de Montréal, Québec, Canada
`foutse.khomh[at]polymtl.ca`
`a.abtahizadeh[at]polymtl.ca`

Le An, Alexandre Courouble, Mahdis Zolfagharinia

24th March, 2016

1 What were the results of comparing MySQL to MySQL Cluster. Were any of the results surprising, why or why not?

For the sake of comparing MySQL to MySQL Cluster, we set up both databases on AWS EC2 t2.micro instances. The MySQL database was installed on a single node, while the cluster was setup on a set of four different instances. The first instance would hold the Master and the MySQL nodes while the last three would host the data nodes. We were able to benchmark both databases using Sysbench. The following graphs show the performance of both MySQL and MySQL cluster for 1, 2, 4, 8, 16, 32, 64 threads. The first graph shows the performance for 5000 requests while the second shows the performance for 10000 requests. Surprisingly, the standard, single node, MySQL database performed much better than the MySQL cluster. This is due to the fact that the cluster loses a lot of time retrieving its data in the different node, while the single MySQL database has its data stored locally.

Table 1: Standard MySQL database for 5,000 and 10,000 requests

Threads	RUN 1	RUN 2	RUN 3	RUN 4	RUN 5	Ave
1	18.2181	17.407	17.0613	17.5541	17.4762	17.54334
2	13.41	12.27	12.1952	12.1937	12.6667	12.54712
4	9.9552	9.3964	9.475	9.5032	9.5069	9.56734
8	7.6619	7.416	7.5856	7.4626	7.5195	7.52912
16	7.1771	7.2072	7.0762	7.201	7.4908	7.23046
32	7.5209	7.5417	7.2536	7.6366	7.5859	7.50774
64	7.876	7.9273	7.738	7.7734	7.883	7.83954
<hr/>						
1	34.8471	34.1328	35.2154	35.13	35.0568	34.87642
2	24.6062	25.0049	25.0378	26.0313	24.2948	24.995
4	18.6257	19.5078	19.2396	19.5402	19.0886	19.20038
8	15.4853	15.4936	15.4145	15.3122	15.2498	15.39108
16	14.5878	14.4886	14.276	14.3334	14.5122	14.4396
32	15.1839	15.0592	15.1763	14.8511	15.247	15.1035
64	16.0652	15.8419	15.7523	15.6156	15.5246	15.75992

Table 2: MySQL Cluster database for 5,000 and 10,000 requests

Threads	RUN 1	RUN 2	RUN 3	RUN 4	RUN 5	Ave
1	173.2053	172.9695	173.7134	174.7191	173.5074	173.62294
2	89.4818	89.3134	91.7446	89.1134	90.6561	90.06186
4	51.3983	50.6517	50.4449	49.9384	50.9365	50.67396
8	37.7805	33.8364	34.4088	34.4184	32.4636	34.58154
16	31.5065	35.7803	33.0235	28.9578	29.2076	31.69514
32	33.3696	29.9097	30.1347	37.6644	38.3286	33.8814
64	96.2788	103.1298	93.9575	93.5443	90.1477	95.41162
1	347.184	345.8543	347.5745	346.2828	345.6313	346.50538
2	179.7974	179.343	178.6592	178.5416	178.5469	178.97762
4	102.6787	102.8269	102.6938	102.5759	102.9661	102.74828
8	72.4372	76.1949	67.143	65.701	64.6265	69.22052
16	55.4122	66.8513	52.3867	58.7464	53.9262	57.46456
32	72.7672	67.0859	65.9568	68.0945	76.6679	70.11446
64	163.1642	177.5465	201.6157	194.4587	173.9654	182.1501

2 When and why should we use The Gatekeeper and Competing Consumers Patterns?

The Competing Consumer Pattern is a cloud pattern that is meant to assure stability and availability for variable amount of requests. This pattern is a great scalable solution for an application with a highly variable workload.

The Gatekeeper pattern is a pattern that has for purpose to keep sensitive information safe. We should use this pattern to prevent malicious user from injecting wrongful SQL commands to our database.

3 Describe your solutions to implement the two Cloud patterns strategies.

3.1 Competing Consumers pattern

3.1.1 Overview

We use 4 AWS t2.micro machines to build the server side of the *Competing consumers pattern*. We install and configure on the other three data nodes (*slave nodes*). The Competing Consumers pattern only handles **INSERT** requests. After inserting a client request into the specific data node, the master node will reply to the cMySQL in the 4 machines (referred as to data node in the rest of this section). We configure the 4 data nodes as a cluster, where one machine (the *master node*) receives requests from clients and distributes them either to itself with a message (*e.g.*, "Data inserted into Slave1"). Figure ??? illustrates the workflow of server which implements the Competing consumers pattern.??? In the rest of this section, we elaborate three key points of the implementation of this pattern in terms of the data nodes' configuration, master node's implementation, and socket connection. Our source code in Java can be found at: [the-link](#).

3.1.2 Configuration of data nodes

We load *Sakila* database into the 4 data nodes. The master node is responsible to balance work loads among the 4 data nodes, *i.e.*, distributing and sending queries to itself or to the slave nodes.

3.1.3 Implementation of the master node

For each client request, the master node will receive a string through the socket connection. The client request string contains the client identifier and her SQL request statement, an example of which is shown as follow:

```
200a3b9b-17a1-4808-b1ba-54d159ea4108+2006||INSERT INTO film (title,
description, release_year, language_id) VALUES ('sample_movie', 'This
```

```
is just a test', 2016, 1)
```

In the request, the client identifier and the SQL statement are separated by `||`. The master node parse the all letters and numbers (*i.e.*, `[0-9a-z]`) in the client identifier to convert each of these characters to an ASCII decimal number and sum all ASCII decimal numbers. The result is noted as *DigitSum*. As there are 4 data node in the cluster, to balance the workload in these node, we divide *DigitSum* by 4 and calculate the remainder, noted as *Rem* (*i.e.*, $DigitSum \% 4 = Rem$). *Rem* is an integer ranged from 0 to 3. The master node will assign the request (by sending the SQL statement), where $Rem = 0$, to itself; the request, where $Rem = 1$, to slave node #1; the request, where $Rem = 2$, to slave node #2; and the request, where $Rem = 3$, to slave node #3.

We use Java Database Connectivity (JDBC) API to send MySQL queries from the master node to slave nodes. We configure the port 3306 for the MySQL communication among the 4 data nodes.

3.1.4 Socket connection

We apply the GlassFish server to implement the message queue, which builds a communication channel between clients and data servers. When a client's request has passed through the message queue, we will receive this request, concatenate the client's UID with its `INSERT` request statement, and send it to the master node by the socket connection.

In the socket connection, on the one hand, the client program establishes a socket connection object, which initialize a `DataOutputStream` object and a `DataInputStream` object. The client uses the `DataOutputStream` object to send the request (the client's UID + a SQL statement) to the master node. It uses the the `DataInputStream` to receive the response sent back by the master node.

On the other hand, the master node acts as the socket server, which runs a dead loop in order to wait for clients' requests. The master node uses a `DataInputStream` object to receive socket packets. One packet represents a client's request. The master node converts each of the packets into a `String` object (*i.e.*, a request), then applied the mechanism described in Section 3.1.3 to decide the request's priority and send it to the corresponding data node. Once a request is well inserted into the data node, the master node will reply to the client through a `DataOutputStream` object.

Similar to the real web environment, if there is a socket connection error, the client will receive an error message. The client can decide whether to re-send a request to the master node.

3.2 Gatekeeper pattern

3.2.1 Overview

We use 3 AWS t2.micro instances to build the server side of the *Gatekeeper* pattern. The first instance refers as to the *gatekeeper*, which filters out malicious information from all clients' requests. The second instance refers as to the *trusted host*, which receives safe requests from the gatekeeper and send them to the database. The third instance refers as to the *sensitive data node*, which handles clients' requests and send the result back to the trusted host. To ensure the confidentiality of the database, the sensitive data node can be only reached by the trusted host. And the trusted host can be only reached by the gatekeeper and the sensitive data node. Therefore, one client's request targeted to the sensitive data node will pass through the gatekeeper, trusted host, and handled by the the sensitive data node; then the results will be sent back by the sensitive data node through the trusted host and the gatekeeper to the client. Figure ??? illustrates the workflow of server which implements the Gatekeeper pattern.???

In the rest of this section, we elaborate three key points of the sensitive data node's configuration, the trusted host's configuration and implementation, and the gatekeeper's implementation. Our source code in Java can be found at: [???the-link???](#).

3.2.2 Configuration of the sensitive data node

We configure the security rules (through AWS security group) and allow the machine of the sensitive data node to only accept the inbound TCP requests from the IP of the trusted host through the port 3306. Thus, other machines cannot directly send queries to the sensitive database.

3.2.3 Configuration and implementation of the trusted host

We configure the security rules and allow the machine of the trusted host to only accept the inbound requests from the IP of the gatekeeper through the port of 6666. Thus, only the gatekeeper can directly send a query to the trusted host, which can then transfer the query to the sensitive database.

The trusted host applies a socket connection to exchange data with the gatekeeper. In this connection, the trusted host acts as the socket server, which runs a dead loop to wait for the gatekeeper's queries. While the gatekeeper acts as the socket client, which send safe SQL queries to the trusted host and send back the response to clients.

The trusted host uses JDBC API to send MySQL queries, which are received from the gatekeeper, to the sensitive data node. The JDBC API will wait and receive the response from the sensitive data node, and send it back the gatekeeper.

3.2.4 Implementation of the gatekeeper node

The gatekeeper node receives `SELECT` or `INSERT` requests from clients. As in Section 3.1.3, the gatekeeper node parses a client request to extract her UID and the SQL query. It considers the requests, in which the UID with the first character as letters (*i.e.*, [a-z], ASCII code from 97 to 122) as safe requests, and will transfer it to the trusted host. Other requests are considered as malicious requests, and will be rejected by the gatekeeper node.

To communicate with clients, there is another socket connection between the gatekeeper node and the client program. In this socket connection, the gatekeeper node acts as a socket server, while the client program acts as a socket client.

4 Describe the implementation of multi-threaded application scenarios.

5 What were the results of comparing the patterns in terms of performance? Were any of the results surprising, why or why not?

5.1 Setup

We intend to compare the performance between the Competing Consumers pattern and Gatekeeper pattern. We use the following scenario to evaluate the performance of the pattern applications.

- We simulate respectively 25, 50, 75, and 100 concurrent clients for the scenario. The GlassFish server is deployed in an AWS instance, which connects with the master node (in the Competing Consumers pattern) and with the gatekeeper node (in the Gatekeeper pattern).
- For the Competing Consumers pattern, each of the clients send 5 `SELECT` queries to the database, then wait for 5 seconds; she send 100 `SELECT` queries to the database, then wait for 5 seconds; she finally send 5 `INSERT` queries to the database. For the Gatekeeper pattern, the clients only send `INSERT` queries to the database.
- We repeat the scenario 5 times for each number of clients.

We use the application execution time to measure their performance. The lower the execution time indicates the higher performance of the pattern application.

Table 3: Application execution time of the Competing Consumers pattern.

# of clients	Run1	Run2	Run3	Run4	Run5	Average
25	207	208	206	203	207	206.2
50	404	403	406	410	416	407.8
75	602	604	608	604	605	604.6
100	795	801	808	834	806	808.8

Table 4: Application execution time of the Gatekeeper pattern.

# of clients	Run1	Run2	Run3	Run4	Run5	Average
25	204	205	203	205	205	204.4
50	405	403	403	402	402	403
75	603	605	605	605	650	613.6
100	793	805	806	806	805	803

5.2 Results

Table 3 and Table 4 show the execution time of the Competing Consumers pattern and the Gatekeeper pattern according to the scenario. Figure 1 illustrates the average execution time (in the 5 runs) of the two patterns. We observe that the execution time tends to linearly increase with the increase of the clients. The two cloud design patterns have very similar execution time for each number of clients.

These results are not surprising, because for the two patterns, their scenario and concurrent clients are generated by the same machine. They also use the same GlassFish server to transform REST calls to the queries. Therefore, the two patterns need the same time to simulate concurrent client requests.

In addition, the speed of the network connection between clients and data nodes is much slower than the response speed of data nodes. Although in the Competing consumers pattern, there are four data nodes handling the SQL queries, while there are only one data node handling the SQL queries in the Gatekeeper pattern, the total network connection time between clients and data nodes decides the execution time of an application of a cloud design pattern.

Hence, when the network connection becomes the bottleneck of the speed of the service, higher number of concurrent clients needs higher number of total requests, which need a larger amount of time to be executed.

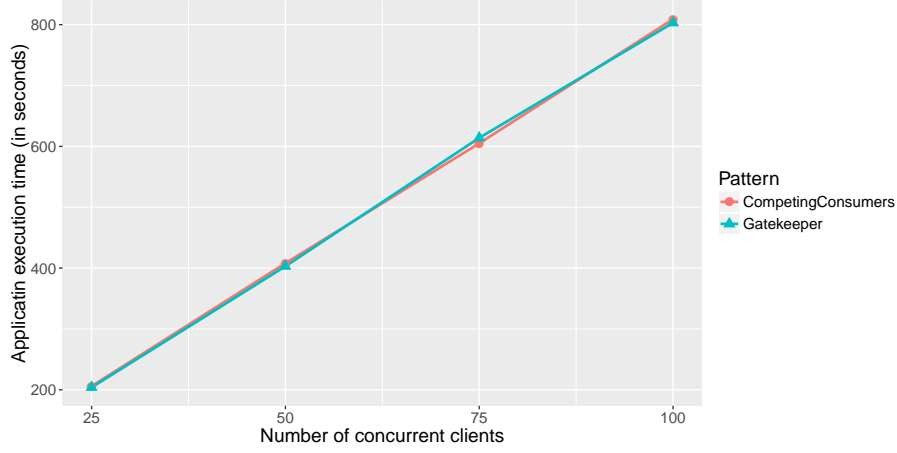


Figure 1: Comparison of the execution time (in seconds) of the Competing Consumers pattern against the Gatekeeper pattern.

6 What were the results of measuring energy consumption in scenarios?

6.1 Setup

We also intend to compare the energy consumption of the Competing Consumers patterns against the Gatekeeper pattern. We use the same scenario and the same numbers of clients as in Section 5.

We use the software-based energy measurement tool, PowerAPI [1], to measure the energy consumption of the MySQL processes in terms of CPU in the data nodes. PowerAPI outputs the power of the subject process (in Watt) based on a certain sampling frequency. We use the frequency of 1 second to measure the power generated by the each MySQL process. We use the command line interface (CLI) of PowerAPI collect the CPU power with the frequency of 1 second:

```
./bin/powerapi modules procfs-cpu-simple monitor --frequency 1000
--apps mysqld
```

Then, we use the following equation to calculate the energy consumed by the MySQL process (in Joule).

$$E(J) = P(W) \times t(s) \quad (1)$$

where $E(J)$ stands for the energy consumption in Joule, $P(W)$ stands for the power of the process in Watt, and $t(s)$ stands for the time spent during each power collection.

Table 5: Energy consumption in the data nodes in terms of CPU for the Competing Consumers pattern.

# of clients	Run1	Run2	Run3	Run4	Run5	Average
25	9.1	9.2	8.8	8.7	8.8	8.9
50	17.1	17.3	17.4	16.6	17.1	17.1
75	27.8	27.3	27.4	27.0	25.1	26.9
100	29.3	30.3	26.0	29.3	28.5	28.7

Table 6: Energy consumption in the data node in terms of CPU for the Gatekeeper pattern.

# of clients	Run1	Run2	Run3	Run4	Run5	Average
25	0.4	0.9	0.3	0.3	0.4	0.5
50	0.8	0.6	0.3	0.7	0.7	0.6
75	0.9	0.7	0.9	1.0	2.0	1.1
100	1.6	1.7	1.7	1.2	1.1	1.5

To ensure the precision of the energy consumption measurement, we start the PowerAPI CLI in each of the studied data nodes (four in the Competing Consumers pattern and one in the Gatekeeper pattern) before launching the pattern application. This approach would cause that PowerAPI runs one or two seconds earlier than the cloud pattern application. But according to our observation, PowerAPI can precisely evaluate power generated by the subject process. Before launching a cloud pattern application, the PowerAPI always output 0 power generated by the data nodes in terms of the MySQL processes.

We stop the PowerAPI CLI in each of the studied data nodes after the program of a cloud application has completed.

Finally, we sum the energy consumed by the subject MySQL process in every second during the application’s execution to obtain the total energy consumed in a data node in terms of CPU.

6.2 Results

Table 5 and Table 6 show the data nodes’ energy consumption in terms of CPU for the Competing Consumers pattern and the Gatekeeper pattern according to our scenario. Figure 2 illustrates the average energy consumption in the data nodes’ CPUs (in the 5 runs) of the two patterns.

We observe that the data nodes of the Competing Consumers pattern consume significantly more energy than the data node of the Gatekeeper pattern. Because we only use one data node in the Gatekeeper pattern, while we use four data nodes in the Competing Consumers pattern. In addition, in the Gatekeeper pattern, the gatekeeper node refuse all request in which the UID begins with a

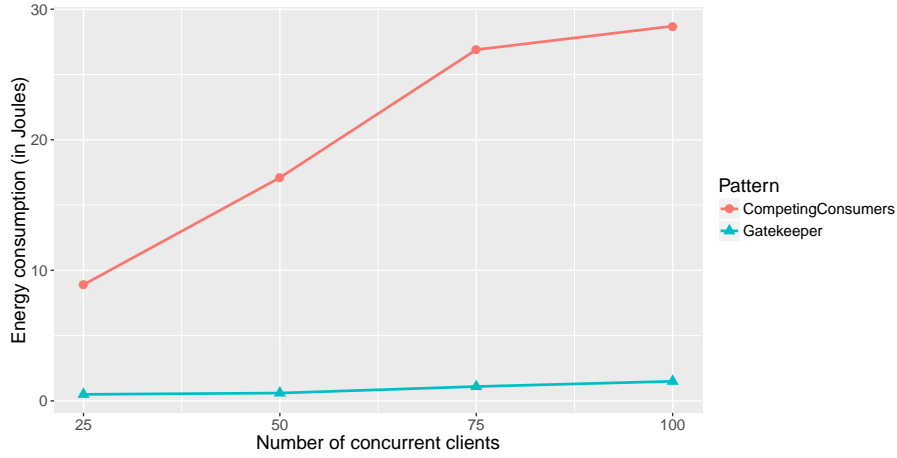


Figure 2: Comparison of the energy consumption (in Joules) of the Competing Consumers pattern against the Gatekeeper pattern.

number. In other words, about half of the requests are not reached to the data node, but are rejected by the gatekeeper node.

In both cloud design patterns, the energy consumption tends to increase with the increase of the concurrent client numbers. In the Competing Consumers pattern, energy consumption increases linearly with the number of clients when the client number is from 25 to 75. But when the client number is from 75 to 100, the energy consumption only slightly increases. One explanation is that, based on the network connection capacity (among AWS instances) and the data nodes' MySQL processing capacity, the four data nodes in this pattern can handle up to $\frac{75 \times 100}{4} = 1875$ requests per second. When the number of clients is more than 75, the network connection and the data nodes will reach their maximum capacity. Therefore, the increasing trend of the energy consumption tends to slow down with the increase of the number of clients. For the Gatekeeper pattern, the energy consumption almost linearly increases with the increase of the number of clients. There is only a little difference of energy consumption between 25 clients and 50 clients, because Run #2 of 25 clients is an outlier, which consume more than 100% than other runs. In the future, we will eliminate outlier values and use the median value of all runs to avoid this problem.

7 Discussion and future work

In this project, we experienced a lot of failures when using the GlassFish server. Especially, if we set the number of concurrent clients more than 250, the failure rate significantly increases. We tried to tune the configuration of the GlassFish server in terms of the thread pool, and also to optimize MySQL on maximum connection and maximum timeout. But we still met failures with a large client

number. In addition, as we observed the linear increasing trend of the execution time of our applications with the increase of the client number, we may need about two hours to run a scenario with 1000 clients. 5 runs with 1000 clients for both patterns would need about 10 hours. Therefore, 5 runs for all client numbers would require 18.5 hours. If we experienced failures, the required time to accomplish the whole experiment will be even longer and unpredictable. Thus, with the limited time, we reduce the numbers of clients to 25, 50, 75, and 100. Our experimental client numbers may not represent concurrent requests received by a cloud service in the real-life. But to simulate a real-life scenario, we should first deploy our cloud pattern applications in the machines with better performance than AWS t2.micro.

We should also consider to replace the GlassFish server with newer resolutions to obtain a higher stability. In addition, we may also need to adjust our experimental scenario. Because in the real-life, a client cannot generate 100 requests without any interval like a robot. In the future, we plan add some interval time to more closely simulate a client's consecutive queries. Moreover, the total application execution time may not the best metric to measure the performance of a cloud pattern. In the future, we need to measure the amount of time for each query from the it is sent from the client side until the client receives the response. Then we can calculate the average or median response time of all queries of all clients. This result can better reflect a cloud service's performance. Regarding the measurement of the energy consumption, although PowerAPI is