04/08/2023 (BOOK-8)

```
In [65]: import numpy as np
    import pandas as pd
    import matplotlib.pyplot as plt
    import seaborn as sns
    from sklearn.linear_model import LogisticRegression
    from sklearn.preprocessing import StandardScaler
    import re
    from sklearn.datasets import load_digits
    from sklearn.model_selection import train_test_split
```

In [66]: a=pd.read_csv(r"C:\Users\user\Downloads\Book8.csv")
a

Out[66]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ОСТ
0	3197	TELANGANA	1901	6.9	41.8	7.8	45.2	22.0	123.6	237.8	177.2	77.7	75.5
1	3198	TELANGANA	1902	0.0	0.0	0.2	10.7	7.3	52.4	146.3	142.8	190.5	41.7
2	3199	TELANGANA	1903	12.9	4.6	0.0	9.9	40.7	99.2	505.2	246.7	191.9	155.8
3	3200	TELANGANA	1904	0.0	0.0	10.8	8.0	14.7	104.2	139.5	50.0	162.3	44.4
4	3201	TELANGANA	1905	0.0	4.3	12.8	27.6	32.2	129.5	82.4	237.3	179.1	19.6
110	3307	TELANGANA	2011	0.0	11.9	2.6	25.6	9.3	83.9	268.2	225.9	107.6	13.9
111	3308	TELANGANA	2012	6.7	0.0	0.2	14.0	8.4	124.4	300.3	229.9	202.4	83.6
112	3309	TELANGANA	2013	2.4	29.0	0.2	24.4	8.5	213.4	453.8	230.6	161.4	205.9
113	3310	TELANGANA	2014	0.2	2.9	58.3	10.3	73.3	62.3	146.0	205.2	146.8	29.6
114	3311	TELANGANA	2015	17.5	0.0	43.0	65.7	23.3	266.9	104.4	160.5	158.3	15.6

115 rows × 20 columns

In [67]: a.info()

<class 'pandas.core.frame.DataFrame'>
RangeIndex: 115 entries, 0 to 114
Data columns (total 20 columns):

#	Column	Non-Null Count	Dtype					
0	index	115 non-null	int64					
1	SUBDIVISION	115 non-null	object					
2	YEAR	115 non-null	int64					
3	JAN	115 non-null	float64					
4	FEB	115 non-null	float64					
5	MAR	115 non-null	float64					
6	APR	115 non-null	float64					
7	MAY	115 non-null	float64					
8	JUN	115 non-null	float64					
9	JUL	115 non-null	float64					
10	AUG	115 non-null	float64					
11	SEP	115 non-null	float64					
12	OCT	115 non-null	float64					
13	NOV	115 non-null	float64					
14	DEC	115 non-null	float64					
15	ANNUAL	115 non-null	float64					
16	Jan-Feb	115 non-null	float64					
17	Mar-May	115 non-null	float64					
18	Jun-Sep	115 non-null	float64					
19	Oct-Dec	115 non-null	float64					
<pre>dtypes: float64(17), int64(2), object(1)</pre>								
memory usage: 18.1+ KB								

In [68]: b=a.fillna(method='ffill')
b


Out[68]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ОСТ
0	3197	TELANGANA	1901	6.9	41.8	7.8	45.2	22.0	123.6	237.8	177.2	77.7	75.5
1	3198	TELANGANA	1902	0.0	0.0	0.2	10.7	7.3	52.4	146.3	142.8	190.5	41.7
2	3199	TELANGANA	1903	12.9	4.6	0.0	9.9	40.7	99.2	505.2	246.7	191.9	155.8
3	3200	TELANGANA	1904	0.0	0.0	10.8	8.0	14.7	104.2	139.5	50.0	162.3	44.4
4	3201	TELANGANA	1905	0.0	4.3	12.8	27.6	32.2	129.5	82.4	237.3	179.1	19.6
		•••											
110	3307	TELANGANA	2011	0.0	11.9	2.6	25.6	9.3	83.9	268.2	225.9	107.6	13.9
111	3308	TELANGANA	2012	6.7	0.0	0.2	14.0	8.4	124.4	300.3	229.9	202.4	83.6
112	3309	TELANGANA	2013	2.4	29.0	0.2	24.4	8.5	213.4	453.8	230.6	161.4	205.9
113	3310	TELANGANA	2014	0.2	2.9	58.3	10.3	73.3	62.3	146.0	205.2	146.8	29.6
114	3311	TELANGANA	2015	17.5	0.0	43.0	65.7	23.3	266.9	104.4	160.5	158.3	15.6

115 rows × 20 columns


```
In [69]: b.plot.bar(legend=None)
```

Out[69]: <AxesSubplot:>

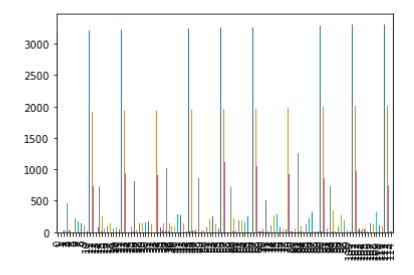


In [70]: b.plot.line(legend=None)

Out[70]: <AxesSubplot:>

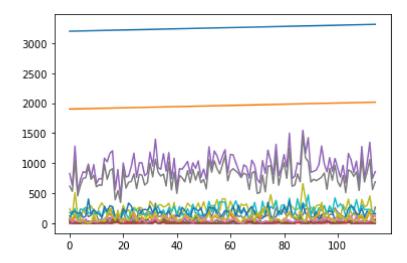


```
In [71]: b.plot.area(legend=None)
```

Out[71]: <AxesSubplot:>

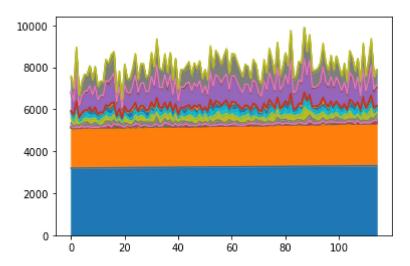

In [72]: b.plot.hist(legend=None)

Out[72]: <AxesSubplot:ylabel='Frequency'>

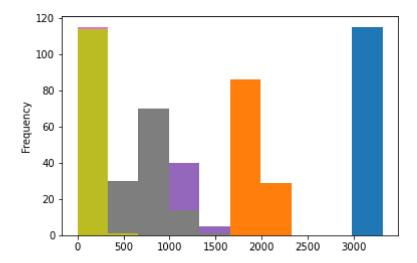

```
In [73]: b.plot.pie(y='YEAR',figsize=(8,8),labels=None,legend=None)
```

Out[73]: <AxesSubplot:ylabel='YEAR'>



```
In [ ]:
```