04/08/2023 (BOOK-34)

In [299]: import numpy as np
 import pandas as pd
 import matplotlib.pyplot as plt
 import seaborn as sns
 from sklearn.linear_model import LogisticRegression
 from sklearn.preprocessing import StandardScaler
 import re
 from sklearn.datasets import load_digits
 from sklearn.model_selection import train_test_split

In [300]: a=pd.read_csv(r"C:\Users\user\Downloads\Book34.csv")
a

Out[300]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ОСТ
0	897	BIHAR	1901	51.8	19.6	11.9	1.1	65.6	66.3	245.9	319.4	155.1	8.3
1	898	BIHAR	1902	4.6	0.7	24.3	17.3	66.3	118.2	361.0	225.5	358.7	28.5
2	899	BIHAR	1903	5.3	4.7	2.0	4.7	28.2	192.9	115.0	342.6	173.9	147.0
3	900	BIHAR	1904	6.3	1.7	3.5	5.3	118.7	191.6	394.4	351.3	84.4	98.1
4	901	BIHAR	1905	16.0	30.1	32.6	21.4	77.5	50.5	409.1	495.3	353.9	11.6
110	1007	BIHAR	2011	4.2	7.7	9.2	23.9	74.5	211.0	241.1	278.7	234.1	10.0
111	1008	BIHAR	2012	18.1	2.7	7.3	20.4	18.8	96.2	354.0	240.4	233.8	34.3
112	1009	BIHAR	2013	5.1	22.6	0.6	32.3	89.5	183.3	182.0	213.6	143.3	197.1
113	1010	BIHAR	2014	17.0	33.5	8.4	0.7	103.9	115.2	265.4	307.6	160.3	47.8
114	1011	BIHAR	2015	12.8	1.8	27.2	38.7	39.5	122.1	231.5	287.0	101.7	10.4

115 rows × 20 columns

In [301]: a.info()

<class 'pandas.core.frame.DataFrame'>
RangeIndex: 115 entries, 0 to 114
Data columns (total 20 columns):

#	Column	Non-Null Count	Dtype				
0	index	115 non-null	int64				
1	SUBDIVISION	115 non-null	object				
2	YEAR	115 non-null	int64				
3	JAN	115 non-null	float64				
4	FEB	115 non-null	float64				
5	MAR	115 non-null	float64				
6	APR	115 non-null	float64				
7	MAY	115 non-null	float64				
8	JUN	115 non-null	float64				
9	JUL	115 non-null	float64				
10	AUG	115 non-null	float64				
11	SEP	115 non-null	float64				
12	OCT	115 non-null	float64				
13	NOV	115 non-null	float64				
14	DEC	115 non-null	float64				
15	ANNUAL	115 non-null	float64				
16	Jan-Feb	115 non-null	float64				
17	Mar-May	115 non-null	float64				
18	Jun-Sep	115 non-null	float64				
19	Oct-Dec	115 non-null	float64				
<pre>dtypes: float64(17), int64(2), object(1)</pre>							
memory usage: 18.1+ KB							

memory usage: 18.1+ KB

In [302]: b=a.fillna(method='ffill')
b

Out[302]:


	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ОСТ
0	897	BIHAR	1901	51.8	19.6	11.9	1.1	65.6	66.3	245.9	319.4	155.1	8.3
1	898	BIHAR	1902	4.6	0.7	24.3	17.3	66.3	118.2	361.0	225.5	358.7	28.5
2	899	BIHAR	1903	5.3	4.7	2.0	4.7	28.2	192.9	115.0	342.6	173.9	147.0
3	900	BIHAR	1904	6.3	1.7	3.5	5.3	118.7	191.6	394.4	351.3	84.4	98.1
4	901	BIHAR	1905	16.0	30.1	32.6	21.4	77.5	50.5	409.1	495.3	353.9	11.6
110	1007	BIHAR	2011	4.2	7.7	9.2	23.9	74.5	211.0	241.1	278.7	234.1	10.0
111	1008	BIHAR	2012	18.1	2.7	7.3	20.4	18.8	96.2	354.0	240.4	233.8	34.3
112	1009	BIHAR	2013	5.1	22.6	0.6	32.3	89.5	183.3	182.0	213.6	143.3	197.1
113	1010	BIHAR	2014	17.0	33.5	8.4	0.7	103.9	115.2	265.4	307.6	160.3	47.8
114	1011	BIHAR	2015	12.8	1.8	27.2	38.7	39.5	122.1	231.5	287.0	101.7	10.4

115 rows × 20 columns

•


In [303]: b.plot.bar(legend=None)

Out[303]: <AxesSubplot:>

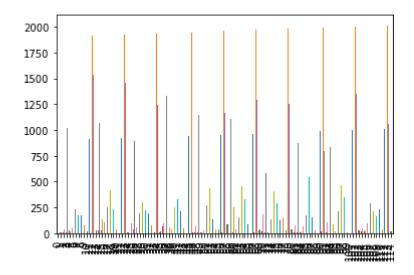


In [304]: b.plot.line(legend=None)

Out[304]: <AxesSubplot:>

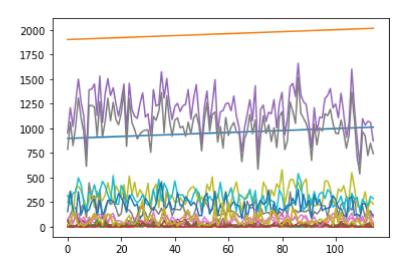


```
In [305]: b.plot.area(legend=None)
```

Out[305]: <AxesSubplot:>

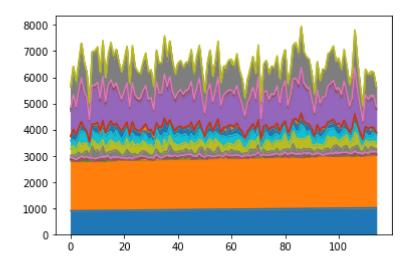


In [306]: b.plot.hist(legend=None)

Out[306]: <AxesSubplot:ylabel='Frequency'>

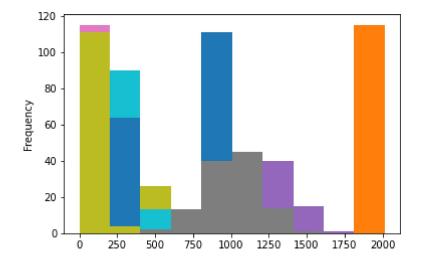

```
In [307]: b.plot.pie(y='YEAR',figsize=(8,8),labels=None,legend=None)
```

Out[307]: <AxesSubplot:ylabel='YEAR'>

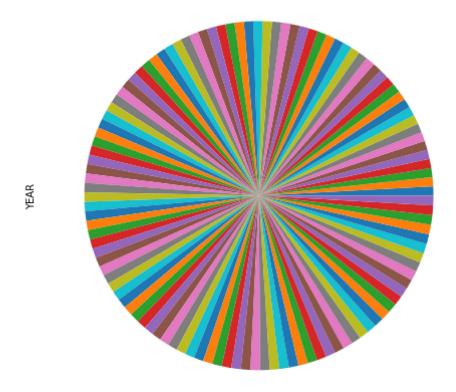

```
In [ ]:
```