

THE EXPERT'S VOICE® IN JAVA

Beginning Java 8 APIs, Extensions and Libraries

Swing, JavaFX, JavaScript, JDBC and Network
Programming APIs

Kishori Sharan

Foreword by Jeff Friesen, JavaWorld Columnist

*THIRD IN A SERIES OF THREE: CONTINUE
YOUR LEARNING, WITH FOCUS ON JAVA
APIs, EXTENSIONS AND LIBRARIES*

Apress®

Beginning Java 8 APIs, Extensions, and Libraries

**Swing, JavaFX, JavaScript, JDBC, and
Network Programming APIs**



Kishori Sharan

apress®

Beginning Java 8 APIs, Extensions and Libraries: Swing, JavaFX, JavaScript, JDBC and Network Programming APIs

Copyright © 2014 by Kishori Sharan

This work is subject to copyright. All rights are reserved by the Publisher, whether the whole or part of the material is concerned, specifically the rights of translation, reprinting, reuse of illustrations, recitation, broadcasting, reproduction on microfilms or in any other physical way, and transmission or information storage and retrieval, electronic adaptation, computer software, or by similar or dissimilar methodology now known or hereafter developed. Exempted from this legal reservation are brief excerpts in connection with reviews or scholarly analysis or material supplied specifically for the purpose of being entered and executed on a computer system, for exclusive use by the purchaser of the work. Duplication of this publication or parts thereof is permitted only under the provisions of the Copyright Law of the Publisher's location, in its current version, and permission for use must always be obtained from Springer. Permissions for use may be obtained through RightsLink at the Copyright Clearance Center. Violations are liable to prosecution under the respective Copyright Law.

ISBN-13 (pbk): 978-1-4302-6661-7

ISBN-13 (electronic): 978-1-4302-6662-4

Trademarked names, logos, and images may appear in this book. Rather than use a trademark symbol with every occurrence of a trademarked name, logo, or image we use the names, logos, and images only in an editorial fashion and to the benefit of the trademark owner, with no intention of infringement of the trademark.

The use in this publication of trade names, trademarks, service marks, and similar terms, even if they are not identified as such, is not to be taken as an expression of opinion as to whether or not they are subject to proprietary rights.

While the advice and information in this book are believed to be true and accurate at the date of publication, neither the authors nor the editors nor the publisher can accept any legal responsibility for any errors or omissions that may be made. The publisher makes no warranty, express or implied, with respect to the material contained herein.

Publisher: Heinz Weinheimer

Lead Editor: Steve Anglin

Development Editor: Matthew Moodie

Technical Reviewers: Jeff Friesen

Editorial Board: Steve Anglin, Mark Beckner, Ewan Buckingham, Gary Cornell, Louise Corrigan, James T. DeWolf, Jonathan Gennick, Robert Hutchinson, Michelle Lowman, James Markham, Matthew Moodie, Jeff Olson, Jeffrey Pepper, Douglas Pundick, Ben Renow-Clarke, Dominic Shakeshaft, Gwenan Spearing, Matt Wade, Steve Weiss

Coordinating Editor: Anamika Panchoo

Copy Editor: Mary Behr

Compositor: SPi Global

Indexer: SPi Global

Artist: SPi Global

Cover Designer: Anna Ishchenko

Distributed to the book trade worldwide by Springer Science+Business Media New York, 233 Spring Street, 6th Floor, New York, NY 10013. Phone 1-800-SPRINGER, fax (201) 348-4505, e-mail orders-ny@springer-sbm.com, or visit www.springeronline.com. Apress Media, LLC is a California LLC and the sole member (owner) is Springer Science + Business Media Finance Inc (SSBM Finance Inc). SSBM Finance Inc is a Delaware corporation.

For information on translations, please e-mail rights@apress.com, or visit www.apress.com.

Apress and friends of ED books may be purchased in bulk for academic, corporate, or promotional use. eBook versions and licenses are also available for most titles. For more information, reference our Special Bulk Sales–eBook Licensing web page at www.apress.com/bulk-sales.

Any source code or other supplementary material referenced by the author in this text is available to readers at www.apress.com. For detailed information about how to locate your book's source code, go to www.apress.com/source-code.

*To
My parents, Ram Vinod Singh and Pratibha Devi*

Contents at a Glance

About the Author

About the Technical Reviewer

Acknowledgments

Foreword

Introduction

Chapter 1: Introduction to Swing

Chapter 2: Swing Components

Chapter 3: Advanced Swing

Chapter 4: Applets

Chapter 5: Network Programming

Chapter 6: JDBC API

Chapter 7: Java Remote Method Invocation

Chapter 8: Java Native Interface

Chapter 9: Introduction to JavaFX

Chapter 10: Scripting in Java

Index

Contents

About the Author

About the Technical Reviewer

Acknowledgments

Foreword

Introduction

Chapter 1: Introduction to Swing

What Is Swing?

The Simplest Swing Program

Components of a JFrame

Adding Components to a JFrame

Some Utility Classes

The Point Class

The Dimension Class

The Insets Class

The Rectangle Class

Layout Managers

FlowLayout

BorderLayout

CardLayout

BoxLayout

GridLayout

GridBagLayout

SpringLayout

GroupLayout

The null Layout Manager

Creating a Reusable JFrame

Event Handling

Handling Mouse Events

Summary

Chapter 2: Swing Components

What Is a Swing Component?

JButton

JPanel

JLabel

Text Components

JTextComponent

JTextField

JPasswordField

JFormattedTextField

JTextArea

JEditorPane

JTextPane

Validating Text Input

Making Choices

JSpinner

JScrollBar

JScrollPane

JProgressBar

JSlider

JSeparator

Menus

JToolBar

JToolBar Meets the Action Interface

JTable

JTree

JTabbedPane and JSplitPane

Custom Dialogs

Standard Dialogs

File and Color Choosers

JFileChooser

JColorChooser

JWindow

Working with Colors

Working with Borders

Working with Fonts

Validating Components

Painting Components and Drawing Shapes

Immediate Painting

Double Buffering

JFrame Revisited

Summary

Chapter 3: Advanced Swing

Using HTML in Swing Components

Threading Model in Swing

Pluggable Look and Feel

Skinnable Look-and-Feel

Drag and Drop

Multiple Document Interface Application

The Toolkit Class

Decorating Components Using JLayer

Translucent Windows

Shaped Window

Summary

Chapter 4: Applets

What Is an Applet?

Developing an Applet

Writing an Applet

Deploying an Applet

Creating the HTML Document

Deploying Applets in Production

Deploying Applets for Testing

Installing and Configuring Java Plug-in

Installing the Java Plug-in

Opening the Java Control Panel

Configuring Java Plug-in

Viewing an Applet

Using the appletviewer to Test Applets

Using the codebase Attribute

Example 1

Example 2

Example 3

The Life Cycle of an Applet

The init() Method

The start() Method

The stop() Method

The destroy() Method

Passing Parameters to Applets
Publishing the Applet's Parameter Information
Publishing the Applet's Information
Other Attributes of the <applet> Tag
Using Images in an Applet
Playing Audio Clips in an Applet
Interacting with the Applet's Environment
Communion of Applet, HTML, and JavaScript
Packaging Applets in Archives
The Event Dispatching Thread and Applets
Painting in Applets
Is the Java Code Trusted?
Security Restrictions for Applets
Signing Applets

- Step 1: Developing an Applet
- Step 2: Packaging Class Files into a JAR File
- Step 3: Generating Private/Public Key Pair
- Step 4: Signing the JAR File
- Step 5: Creating the HTML File
- Step 6: Viewing the Signed Applet

Summary

Chapter 5: Network Programming

What Is Network Programming?
Network Protocol Suite
IP Addressing Scheme

- IPv4 Addressing Scheme
- IPv6 Addressing Scheme

Special IP Addresses

- Loopback IP Address
- Unicast IP Address
- Multicast IP Address
- Anycast IP Address
- Broadcast IP Address
- Unspecified IP Address

Port Numbers

Socket API and Client-Server Paradigm

- The Socket Primitive
- The Bind Primitive
- The Listen Primitive
- The Accept Primitive
- The Connect Primitive
- The Send/Sendto Primitive
- The Receive/ReceiveFrom Primitive
- The Close Primitive

Representing a Machine Address

Representing a Socket Address

Creating a TCP Server Socket

Creating a TCP Client Socket

Putting a TCP Server and Clients Together

Working with UDP Sockets

Creating a UDP Echo Server

A Connected UDP Socket

UDP Multicast Sockets

URI, URL, and URN

URI and URL as Java Objects

Accessing the Contents of a URL

Non-Blocking Socket Programming

Socket Security Permissions

Asynchronous Socket Channels

Setting Up an Asynchronous Server Socket Channel

Setting up an Asynchronous Client Socket Channel

Putting the Server and the Client Together

Datagram-Oriented Socket Channels

Creating the Datagram Channel

Setting the Channel Options

Sending Datagrams

Multicasting Using Datagram Channels

Creating the Datagram Channel

Setting the Channel Options

Binding the Channel

Setting the Multicast Network Interface

Joining the Multicast Group

Receiving a Message

Closing the Channel

Further Reading

Summary

Chapter 6: JDBC API

What Is the JDBC API?

System Requirements

Types of JDBC Drivers

JDBC Native API Driver

JDBC-Net Driver

JDBC Driver

A Brief Overview of Java DB

Java DB Installation Files

Configuring Java DB

Running the Java DB Server

Creating a Database Table

Oracle Database

Adaptive Server Anywhere Database

SQL Server Database

[DB2 Database](#)

[MySQL Database](#)

[Java DB Database](#)

Connecting to a Database

[Obtaining the JDBC Driver](#)

[Setting up the CLASSPATH](#)

[Registering a JDBC Driver](#)

[Setting the jdbc.drivers System Property](#)

[Loading the Driver Class](#)

[Using the registerDriver\(\) Method](#)

[Constructing a Connection URL](#)

[Establishing the Database Connection](#)

Setting the Auto-Commit Mode

Committing and Rolling Back Transactions

Transaction Isolation Level

[Dirty Read](#)

[Non-Repeatable Read](#)

[Phantom Read](#)

JDBC-Types-to-Java-Types Mapping

Knowing About the Database

Executing SQL Statements

[Results of Executing a SQL Statement](#)

[Using the Statement Interface](#)

[Using the PreparedStatement Interface](#)

[CallableStatement Interface](#)

Processing Result Sets

[What Is a ResultSet?](#)

[Getting a ResultSet](#)

[Getting the Number of Rows in a ResultSet](#)

[Bidirectional Scrollable ResultSets](#)

[Scrolling Through Rows of a ResultSet](#)

[Knowing the Cursor Position in a ResultSet](#)

[Closing a ResultSet](#)

Making Changes to a ResultSet

[Inserting a Row Using a ResultSet](#)
[Updating a Row Using a ResultSet](#)
[Deleting a Row Using a ResultSet](#)

[Handling Multiple Results from a Statement](#)

[Getting a ResultSet from a Stored Procedure](#)

[MySQL Database](#)
[Adaptive Server Anywhere Database](#)
[Oracle Database](#)
[SQL Server Database](#)
[DB2 Database](#)
[Java DB Database](#)

[ResultSetMetaData](#)

[Using RowSets](#)

[Working with a Large Object \(LOB\)](#)

[Retrieving LOB Data](#)
[Creating a LOB Data](#)

[Batch Updates](#)

[Savepoints in a Transaction](#)

[Using a DataSource](#)

[Retrieving SQL Warnings](#)

[Enabling JDBC Trace](#)

[Summary](#)

Chapter 7: Java Remote Method Invocation

[What Is Java Remote Method Invocation?](#)

[The RMI Architecture](#)

[Developing an RMI Application](#)

[Writing the Remote Interface](#)
[Implementing the Remote Interface](#)
[Writing the RMI Server Program](#)
[Writing the RMI Client Program](#)

Separating the Server and Client Code

Generating Stub and Skeleton

Running the RMI Application

 Running the RMI Registry

 Running the RMI Server

 Running an RMI Client Program

Troubleshooting an RMI Application

 java.rmi.StubNotFoundException

 java.rmi.server.ExportException

 java.security.AccessControlException

 java.lang.ClassNotFoundException

Debugging an RMI Application

Dynamic Class Downloading

Garbage Collection of Remote Objects

Summary

Chapter 8: Java Native Interface

What Is the Java Native Interface?

System Requirements

Getting Started with the JNI

 Writing the Java Program

 Compiling the Java Program

 Creating the C/C++ Header File

 Writing the C/C++ Program

 Creating a Shared Library

 Running the Java Program

Native Function Naming Rules

Data Type Mapping

Using JNI Functions in C/C++

Working with Strings

Working with Arrays

Accessing Java Objects in Native Code

Getting a Class Reference

Accessing Fields and Methods of a Java Object/Class

Creating Java Objects

Exception Handling

Handle the Exception in Native Code

Handling the Exception in Java Code

Throwing a New Exception from Native Code

Creating an Instance of the JVM

Synchronization in Native Code

Summary

Chapter 9: Introduction to JavaFX

What Is JavaFX?

The History of JavaFX

System Requirements

The JavaFX Runtime Library

JavaFX Source Code

Your First JavaFX Application

Creating the HelloJavaFX Class

Overriding the start() Method

Showing the Stage

Launching the Application

Adding the main() Method

Adding a Scene to the Stage

Improving the HelloFX Application

The Life Cycle of a JavaFX Application

Terminating a JavaFX Application

What Are Properties and Bindings?

Properties and Bindings in JavaFX

- Using Properties in JavaFX Beans
- Handling Property Invalidation Events
- Handling Property Change Events
- Property Bindings in JavaFX

Observable Collections

Event Handling

- Event Processing Mechanism
- Creating Event Filters and Handlers
- Registering Event Filters and Handlers

Layout Panes

Controls

Using 2D Shapes

Drawing on a Canvas

Applying Effects

Applying Transformations

Animation

- Using the Timeline Animation

FXML

Printing

Summary

Chapter 10: Scripting in Java

What Is Scripting in Java?

Executing Your First Script

Using Other Scripting Languages

Exploring the javax.script Package

- The ScriptEngine and ScriptEngineFactory Interfaces
- The AbstractScriptEngine Class
- The ScriptEngineManager Class

The Compilable Interface and the CompiledScript Class
The Invocable Interface
The Bindings Interface and the SimpleBindings Class
The ScriptContext Interface and the SimpleScriptContext Class
The ScriptException Class
Discovering and Instantiating ScriptEngines

Executing Scripts

Passing Parameters

Passing Parameters from Java Code to Scripts
Passing Parameters from Scripts to Java Code

Advanced Parameter Passing Techniques

Bindings
Scope
Defining the Script Context
Putting Them Together

Using a Custom ScriptContext

Return Value of the eval() Method

Reserved Keys for Engine Scope Bindings

Changing the Default ScriptContext

Sending Scripts Output to a File

Invoking Procedures in Scripts

Implementing Java Interfaces in Scripts

Using Compiled Scripts

Using Java in Scripting Languages

Declaring Variables
Importing Java Classes
Creating and Using Java Objects
Using Overloaded Java Methods
Using Java Arrays
Extending Java Classes Implementing Interfaces
Using Lambda Expressions

Implementing a Script Engine

[The Expression Class](#)

[The JKScriptEngine Class](#)

[The JKScriptEngineFactory Class](#)

[Preparing for Deployment](#)

[Packaging the JKScript Files](#)

[Using the JKScript Script Engine](#)

The jrunscript Command-line Shell

[The Syntax](#)

[Execution Modes of the Shell](#)

[Listing Available Script Engines](#)

[Adding a Script Engine to the Shell](#)

[Using Other Script Engines](#)

[Passing Arguments to Scripts](#)

The jjs Command-Line Tool

JavaFX in Nashorn

Summary

Index

About the Author



Kishori Sharan is a Senior Software Consultant at Doozer, Inc. He holds a Master of Science in Computer Information Systems from Troy State University in Montgomery, Alabama. He is a Sun Certified Java Programmer and Sybase Certified PowerBuilder Developer Professional. He specializes in developing enterprise applications using Java SE, Java EE, PowerBuilder, and Oracle database. He has been working in the software industry for over 16 years. He has helped several clients migrate legacy applications to the Web. He loves writing technical books in his free time. He maintains his web site at www.jdojo.com where he posts blogs on Java and JavaFX.

About the Technical Reviewer



Jeff Friesen is a freelance tutor, author, and software developer with an emphasis on Java, Android, and HTML5. In addition to writing several books for Apress and serving as a technical reviewer for other Apress books, Jeff has written numerous articles on Java and other technologies for JavaWorld (www.javaworld.com), informIT (www.informit.com), java.net, SitePoint (www.sitepoint.com), and others. Jeff can be contacted via his web site at tutortutor.ca.

Acknowledgments

My heartfelt thanks are due to my father-in-law, Mr. Jim Baker, for displaying extraordinary patience in reading the initial draft of the book. I am very grateful to him for spending so much of his valuable time teaching me quite a bit of English grammar that helped me produce better material.

I would like to thank my friend Richard Castillo for his hard work in reading my initial draft of the book and weeding out several mistakes. Richard was instrumental in running all examples and pointing out errors.

My wife, Ellen, was always patient when I spent long hours at my computer desk working on this book. She would happily bring me snacks, fruit, and a glass of water every 30 minutes or so to sustain me during that period. I want to thank her for all of her support in writing this book. She also deserves my sincere thanks for letting me sometimes seclude myself on weekends so I could focus on this book.

I would like to thank my family members and friends for their encouragement and support for writing this book: my elder brothers, Janki Sharan and Dr. Sita Sharan; my sister and brother-in-law, Ratna and Abhay; my nephews Babalu, Dabalu, Gaurav, Saurav, and Chitranjan; my friends Shivashankar Ravindranath, Kannan Somasekar, Mahbub Choudhury, Biju Nair, Srinivas Kakkera, Anil Kumar Singh, Chris Coley, Willie Baptiste, Rahul Jain, Larry Brewster, Greg Langham, Ram Atmakuri, LaTondra Okeke, Rahul Nagpal, Ravi Datla, Prakash Chandra, and many more friends not mentioned here.

My sincere thanks are due to the wonderful team at Apress for their support during the publication of this book. Thanks to Anamika Panchoo, the Senior Coordinating Editor, for providing excellent support and for being exceptionally patient with me when I asked her so many questions in the beginning, Thanks to Matthew Moodie and Jeff Friesen for their technical insights and feedback during the editing process. My heartfelt thanks go to Jeff for his diligence in reviewing the book and pointing out technical errors. He did not stop at just pointing out the errors; he also included the solution in his comments that helped me save time. Last but not least, my sincere thanks to Steve Anglin, the Lead Editor at Apress, for taking the initiative for the publication of this book.

Foreword

I recently had the privilege of tech reviewing Kishori Sharan's *Beginning Java 8 APIs, Extensions, and Libraries* book, which continues on from his *Beginning Java 8 Language Features* book by covering more advanced Java APIs. Within this volume, you learn about Swing, applets, network programming, JDBC, remote method invocation, the Java Native Interface, JavaFX, and Java's scripting framework.

This book offers a wealth of detail. For example, in his chapter on JDBC, Kishori covers result sets along with row sets, which derive from result sets, and which you might expect to see covered in a book focused on enterprise Java. Kishori also provides decent coverage of Java's Swing user interface API while not shying away from the modern JavaFX alternative.

As I recommended in my forward to this book's predecessor, I believe that *Beginning Java 8 APIs, Extensions, and Libraries* definitely deserves a place on your bookshelf.

—Jeff Friesen
August/2014

Introduction

How This Book Came About

My first encounter with the Java programming language was during a one-week Java training session in 1997. I did not get a chance to use Java in a project until 1999. I read two Java books and took a Java 2 Programmer certification examination. I did very well on the test, scoring 95 percent. The three questions that I missed on the test made me realize that the books I read did not adequately cover all of the details on all of the necessary Java topics. I made up my mind to write a book on the Java programming language. So I formulated a plan to cover most of the topics that a Java developer needs understand to use the Java programming language effectively in a project, as well as to get a certification. I initially planned to cover all essential topics in Java in 700 to 800 pages.

As I progressed, I realized that a book covering most of the Java topics in detail could not be written in 700 to 800 hundred pages; one chapter that covered data types, operators, and statements spanned 90 pages. I was then faced with the question, “Should I shorten the content of the book or include all the details that I think a Java developer needs?” I opted for including all the details in the book, rather than shortening the content to keep the number of pages low. It has never been my intent to make lots of money from this book. I was never in a hurry to finish this book because that rush could have compromised the quality and the coverage of its contents. In short, I wrote this book to help the Java community understand and use the Java programming language effectively, without having to read many books on the same subject. I wrote this book with the plan that it would be a comprehensive one-stop reference for everyone who wants to learn and grasp the intricacies of the Java programming language.

One of my high school teachers used to tell us that if one wanted to understand a building, one must first understand the bricks, steel, and mortar that make up the building. The same logic applies to most of the things that we want to understand in our lives. It certainly applies to an understanding of the Java programming language. If you want to master the Java programming language, you must start by understanding its basic building blocks. I have used this approach throughout this book, endeavoring to build each topic by describing the

basics first. In the book, you will rarely find a topic described without first learning its background. Wherever possible, I have tried to correlate the programming practices with activities in our daily life. Most books about the Java programming language either do not include any pictures at all or have only a few. I believe in the adage, “A picture is worth a thousand words.” To a reader, a picture makes a topic easier to understand and remember. I have included plenty of illustrations in this book to aid readers in understanding and visualizing concepts. Developers who have little or no programming experience can have difficulty putting things together to make a complete program. Keeping them in mind, the book contains over 216 complete Java programs that are ready to be compiled and run.

I spent countless hours doing research for this book. My main sources of research were the Java Language Specification, white papers and articles on Java topics, and Java Specification Requests (JSRs). I also spent quite a bit of time reading the Java source code to learn more about some of the Java topics. Sometimes it took a few months to research a topic before I could write the first sentence on it. It was always fun to play with Java programs, sometimes for hours, to add them to the book.

Structure of the Book

This is the third book in the three-book Beginning Java series. This book contains 10 chapters. The chapters cover the Java libraries and extensions such as Swing, JavaFX, Nashorn, Java Native Interface, network programming, etc. If you have intermediate level Java experience, you can pick up chapters in any order. The new features of Java 8 are included wherever they fit in the chapter. The Nashorn script engine, which was added in Java 8, is covered in depth.

Audience

This book is designed to be useful for anyone who wants to learn the Java programming language. If you are a beginner with little or no programming background in Java, you are advised to read the companion books, *Beginning Java 8 Fundamentals* and *Beginning Java 8 Language Features*, before reading this book.

If you are a Java developer with an intermediate or advanced level of experience, you can jump to a chapter or a section in a chapter directly.

If you are reading this book to get a certification in the Java programming language, you need to read almost all of the chapters, paying attention to all of the detailed descriptions and rules. Most of the certification programs test your fundamental knowledge of the language, not advanced knowledge. You need to read only those topics that are part of your certification test. Compiling and running over 216 complete Java programs will help you prepare for your certification.

If you are a student who is attending a class in the Java programming language, you should read the chapters of this book selectively. You need to read only those chapters that are covered in your class syllabus. I am sure that you, as a Java student, do not need to read the entire book page by page.

How to Use This Book

This book is the beginning, not the end, of gaining knowledge of the Java programming language. If you are reading this book, it means you are heading in the right direction to learn the Java programming language, which will enable you to excel in your academic and professional career. However, there is always a higher goal for you to achieve and you must constantly work hard to achieve it. The following quotations from some great thinkers may help you understand the importance of working hard and constantly looking for knowledge with both your eyes and mind open.

The learning and knowledge that we have is, at the most, but little compared with that of which we are ignorant.

—Plato

True knowledge exists in knowing that you know nothing. And in knowing that you know nothing, that makes you the smartest of all.

—Socrates

Readers are advised to use the API documentation for the Java programming language as much as possible while using this book. The Java API

documentation is where you will find a complete list of everything available in the Java class library. You can download (or view) the Java API documentation from the official web site of Oracle Corporation at www.oracle.com. While you read this book, you need to practice writing Java programs yourself. You can also practice by tweaking the programs provided in the book. It does not help much in your learning process if you just read this book and do not practice by writing your own programs. Remember that “practice makes perfect,” which is also true in learning how to program in Java.

Source Code and Errata

Source code and errata for this book may be downloaded from www.apress.com/source-code.

Questions and Comments

Please direct all your questions and comments for the author to ksharan@jdojo.com.

CHAPTER 1



Introduction to Swing

In this chapter, you will learn

- What Swing is
- The difference between a character-based interface and a graphical user interface
- How to develop the simplest Swing program
- What a JFrame is and how it is made up of different components
- How to add components to a JFrame
- What a layout manager is and different types of layout managers in Swing
- How to create reusable frames
- How to handle events
- How to handle mouse events and how to use the adapter class to handle mouse events

What Is Swing?

Swing provides graphical user interface (GUI) components to develop Java applications with a rich set of graphics such as windows, buttons, checkboxes, etc. What is a GUI? Before I define a GUI, let me first define a user interface (UI). A program does three things:

- Accepts inputs from the user
- Processes the inputs, and
- Produces outputs

A user interface provides a means to exchange information between a user and a program, in terms of inputs and outputs. In other words, a user interface defines the way the interaction between the user and a program takes place. Typing text using a keyboard, selecting a menu item using a mouse, or clicking a button can provide input to a program. The output from a program can be displayed on a computer monitor in the form of character-based text, a graph such as a bar chart, a picture, etc.

You have written many Java programs. You have seen programs where users had to provide inputs to the program in the form of text entered on the console, and the program would print the output on the console. A user interface where the user's input and the program's output are in text form is known as a *character-based user interface*. A GUI lets users interact with a program using graphical elements called *controls* or *widgets*, using a keyboard, a mouse, and other devices.

Figure 1-1 shows a program that lets users enter a person's name and date of birth (DOB), and save the information by using the keyboard. It is an example of a character-based user interface.

```
Please enter person details
Name:John Jacobs
DOB:01/12/1971
Enter S to Save and E to exit without saving:S
```

Figure 1-1. An example of a program with a character-based user interface

Figure 1-2 lets the user perform the same actions, but using a graphical user interface. It displays six graphical elements in a window. It uses two labels (Name : and DOB :), two text fields where the user will enter the Name and DOB values, and two buttons (Save and Close). A graphical user interface, compared to a character-based user interface, makes the user's interaction with a program easier. Can you guess what kind of application you are going to develop

in this chapter? It will be all about GUI. GUI development is interesting and a little more complex than character-based program development. Once you understand the elements involved in GUI development, it will be fun to work with it.



Figure 1-2. An example of a program with a graphical user interface

This chapter attempts to cover the basics of GUI development using Swing's components and top-level containers. Care has been taken to explain GUI-related details for those programmers who might not have used any programming languages/tools (e.g. Visual C++, Visual Basic, VB.NET, or PowerBuilder) to develop a GUI before. If you have already used a GUI development language/tool, it will be easier for you to understand the materials covered in this chapter. Swing is a vast topic and it is not possible to cover every detail of it. It deserves a book by itself. In fact, there are a few books in the market dedicated to only Swing.

A *container* is a component that can hold other components inside it. A container at the highest level is called a *top-level container*. A JFrame, a JDialog, a JWindow, and a JApplet are examples of top-level containers. A JPanel is an example of a simple container. A JButton, a JTextField, etc. are examples of components. In a Swing application, every component must be contained within a container. The container is known as the component's parent and the component is known as container's child. This parent-child relationship (or container-contained relationship) is known as *containment hierarchy*. To display a component on the screen, a top-level container must be at the root of the containment hierarchy. Every Swing application must have at least one top-level container. [Figure 1-3](#) shows the containment hierarchy of a Swing application. A top-level container contains a container called "Container

1,” which in turn contains a component called “Component 1” and a container called “Container 2,” which in turn contains two components called “Component 2” and “Component 3.”

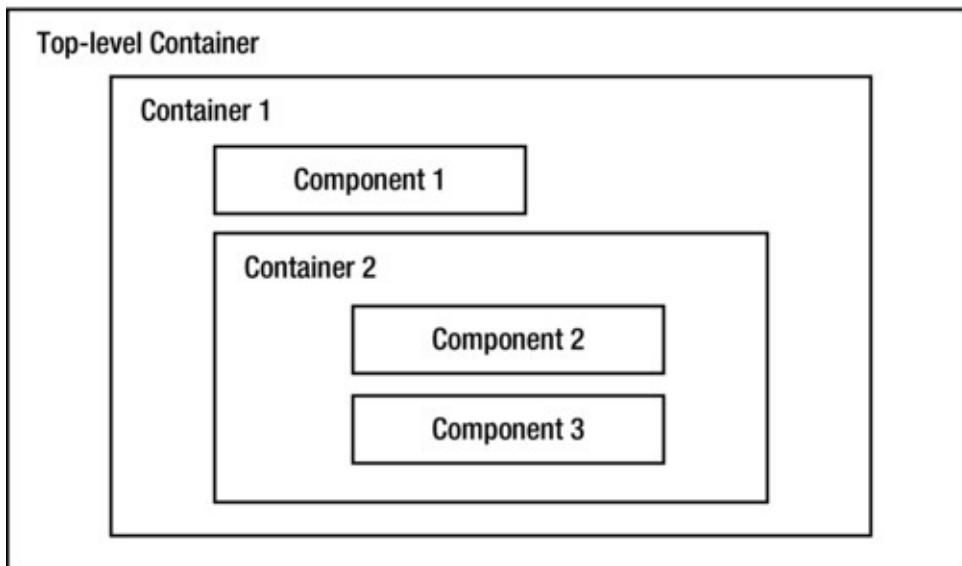


Figure 1-3. Containment hierarchy in a Swing application

The Simplest Swing Program

Let’s start with the simplest Swing program. You will display a `JFrame`, which is a top-level container with no components in it. To create and display a `JFrame`, you need to do the following:

- Create a `JFrame` object.
- Make it visible.

To create a `JFrame` object, you can use one of the constructors of the `JFrame` class. One of the constructors takes a string, which will be displayed as the title for the `JFrame`. Classes representing Swing components are in the `javax.swing` package, so is the `JFrame` class. The following snippet of code creates a `JFrame` object with its title set to “Simplest Swing”:

```
// Create a JFrame object
JFrame frame = new JFrame("Simplest Swing");
```

When you create a `JFrame` object, by default, it is not visible. You need to call its `setVisible(boolean visible)` method to make it visible. If you pass `true` to this method, the `JFrame` is made visible, and if you pass `false`, it is made invisible.

```
// Make the JFrame visible on the screen  
frame.setVisible(true);
```

That is all you have to do to develop your first Swing application! In fact, you can wrap the two statements, to create and display a `JFrame`, into one statement, like so:

```
new JFrame("Simplest Swing").setVisible(true);
```

Tip Creating a `JFrame` and making it visible from the `main` thread is not the correct way to start up a Swing application. However, it does not do any harm in the trivial programs that you will use here, so I will continue using this approach to keep the code simple to learn, so you can focus on the topic you are learning. It also takes an understanding of event-handling and threading mechanisms in Swing to understand why you need to start a Swing application the other way. [Chapter 3](#) explains how to start up a Swing application in detail. The correct way of creating and showing a `JFrame` is to wrap the GUI creation and make it visible in a `Runnable` and pass the `Runnable` to the `invokeLater()` method of the `javax.swing.SwingUtilities` or `java.awt.EventQueue` class as shown:

```
import javax.swing.JFrame;  
  
import javax.swing.SwingUtilities;  
  
...  
  
SwingUtilities.invokeLater(() -> new  
JFrame("Test").setVisible(true));
```

[Listing 1-1](#) has the complete code to create and display a `JFrame`. When you run this program, it displays a `JFrame` at the top-left corner of the screen as shown in [Figure 1-4](#). The figure shows the frame when the program was run on

Windows XP. On other platforms, the frame may look a little different. Most of the screenshots for the GUIs in this chapter were taken on Windows XP.

Listing 1-1. Simplest Swing Program

```
// SimplestSwing.java
package com.jdojo.swing;

import javax.swing.JFrame;

public class SimplestSwing {
    public static void main(String[] args) {
        // Create a frame
        JFrame frame = new JFrame("Simplest
Swing");

        // Display the frame
        frame.setVisible(true);
    }
}
```

This was not very impressive, was it? Do not despair. You will improve this program as you learn more about Swing. This was just to show you the tip of the iceberg of what Swing offers.

You can resize the `JFrame` shown in the [Figure 1-4](#) to make it bigger. Place your mouse pointer on any of the four edges (left, top, right, or bottom) or any of the four corners of the displayed `JFrame`. The mouse pointer changes its shape to a resize pointer (a line with arrows at both ends) when you place it on the `JFrame`'s edge. Then just drag the resize mouse pointer to resize the `JFrame` in the direction you want to resize it.



[**Figure 1-4.**](#) The Simplest Swing frame

[**Figure 1-5**](#) shows the resized `JFrame`. Note that the text “Simplest Swing” that you passed to the constructor when you created the `JFrame` is displayed in the title bar of the `JFrame`.



Figure 1-5. The Simplest Swing frame after resizing

How do you exit a Swing application? How do you exit when you run the program listed in [Listing 1-1](#)? When you click the close button in the title bar (right-most button on the title bar with an X), the `JFrame` is closed. However, the program does not exit. If you are running this program from a command prompt, the prompt does not return when you close the `JFrame`. You will have to force exit the program, for example, by pressing `Ctrl + C` if you are running it from a command prompt on Windows. So, how do you exit a Swing application? You can define one of the four behaviors of a `JFrame` to determine what happens when the `JFrame` is closed. They are defined in the `javax.swing.WindowConstants` interface as four constants. The `JFrame` class implements the `WindowConstants` interface. You can reference all these constants using `JFrame.CONSTANT_NAME` syntax (or you can use the `WindowConstants.CONSTANT_NAME` syntax). The four constants are

- `DO NOTHING ON CLOSE`: This option does not do anything when the user closes a `JFrame`. If you set this option for a `JFrame`, you must provide some other way to exit the application, such as an `Exit` button or an `Exit` menu option in the `JFrame`.
- `HIDE ON CLOSE`: This option just hides a `JFrame` when the user closes it. This is the default behavior. This is what

happened when you clicked the close button from the title bar to close the program listed in [Listing 1-1](#). The `JFrame` was just made invisible and the program was still running.

- `DISPOSE_ON_CLOSE`: This option hides and disposes of the `JFrame` when the user closes it. Disposing a `JFrame` releases any operating system-level resources used by it.
Note the difference between `HIDE_ON_CLOSE` and `DISPOSE_ON_CLOSE`. When you use the option `HIDE_ON_CLOSE`, a `JFrame` is just hidden, but it is still using all the operating system resources. If your `JFrame` is hidden and shown very frequently, you may want to use this option. However, if your `JFrame` consumes many resources, you may want to use the `DISPOSE_ON_CLOSE` option, so the resources may be released and reused while it is not being displayed.
- `EXIT_ON_CLOSE`: This option exits the application. Setting this option works when a `JFrame` is closed, as if `System.exit()` has been called. This option should be used with some care. This option will exit the application. If you have more than one `JFrame` or any other type of window displayed on the screen, using this option for one `JFrame` will close all other windows. Use this option with caution as you may lose any unsaved data when the application exits.

You can set the default close behavior of a `JFrame` by passing one of the four constants to its `setDefaultCloseOperation()` method as shown:

```
// Exit the application when the JFrame is closed  
frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
```

You solved one problem with the first example. Another problem is that the `JFrame` is displayed with no viewable area. It displays only the title bar. You need to set the size and position of your `JFrame` before or after it is visible. The size of a frame is defined by its width and height in pixels that you can set using its `setSize(int width, int height)` method. The position is defined by the (x, y) coordinates in pixels of the top-left corner of the `JFrame` with

respect to the top-left corner of the screen. By default, its position is set to (0, 0) and this is the reason the `JFrame` was displayed at the top-left corner of the screen. You can set the (x, y) coordinates of the `JFrame` using its `setLocation(int x, int y)` method. If you want to set its size and its position in one step, use its `setBounds(int x, int y, int width, int height)` method instead. [Listing 1-2](#) fixes these two problems in the Simplest Swing program.

Listing 1-2. Revised Simplest Swing Program

```
// RevisedSimplestSwing.java
package com.jdojo.swing;

import javax.swing.JFrame;

public class RevisedSimplestSwing {
    public static void main(String[] args) {
        // Create a frame
        JFrame frame = new JFrame("Revised
Simplest Swing");

        // Set the default close behavior to exit
        // the application
        frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);

        // Set the x, y, width and height
        // properties in one go
        frame.setBounds(50, 50, 200, 200);

        // Display the frame
        frame.setVisible(true);
    }
}
```

Tip You can position a `JFrame` in the center by calling its `setLocationRelativeTo()` method with a null argument.


Components of a JFrame

You displayed a `JFrame` in the previous section. It looked empty; however, it was not really empty. When you create a `JFrame`, the following things are automatically done for you:

- A container, which is called a *root pane*, is added as the sole child of the `JFrame`. The root pane is a container. It is an object of the `JRootPane` class. You can get the reference of the root pane by using the `getRootPane()` method of the `JFrame` class.
- Two containers called *glass pane* and *layered pane* are added to the root pane. By default, the glass pane is hidden and it is placed on top of the layered pane. As the name suggests, the glass pane is transparent, and even if you make it visible, you can see through it. The layered pane is named as such because it can hold other containers or components in its different layers. Optionally, a layered pane can hold a menu bar. However, a menu bar is not added by default when you create a `JFrame`. You can get the reference of the glass pane and the layered pane by using the `getGlassPane()` and `getLayeredPane()` methods of the `JFrame` class, respectively.
- A container called a *content pane* is added to the layered pane. By default, the content pane is empty. This is the container in which you are supposed to add all your Swing components, such as buttons, text fields, labels, etc. Most of the time, you will be working with the content pane of the `JFrame`. You can get the reference of the content pane by using the `getContentPane()` method of the `JFrame` class.

[Figure 1-6](#) shows the assembly of a `JFrame`. The root pane, layered pane, and glass pane cover the entire viewable area of a `JFrame`. The viewable area of a `JFrame` is its size minus its insets on all four sides. Insets of a container consist of the space used by the border around the container on four sides: top,

left, bottom, and right. For a `JFrame`, the top inset represents the height of the title bar. [Figure 1-6](#) depicts the layered pane smaller than the size of the root pane for better visualization.

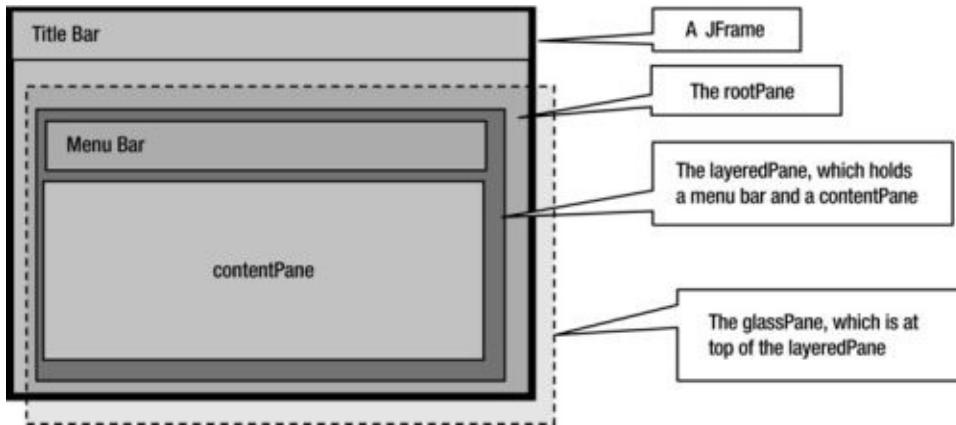

[Figure 1-6](#). The making of a `JFrame`

Are you confused? If you are confused with all the panes of a `JFrame`, here is a simpler explanation. Think of a `JFrame` as a picture frame. A picture frame has a glass cover, and so does a `JFrame`, in the form of a glass pane. Behind the glass cover, you place your picture. That is your layered pane. You can place multiple pictures inside one picture frame. Each picture will make up one layer behind the glass cover. As long as one picture is not fully overlapped by another, you can view it wholly or partly. All pictures taken together in different layers form the layered pane of your picture frame. The picture layer, which is farthest from the glass cover, is your content pane. Usually your picture frame contains only one picture in it. So does the layered pane; by default, it contains one content pane. The picture in the picture frame is the content of interest and paintings are placed there. So is the case with the content pane; all components are placed in the content pane.

The containment hierarchy of a `JFrame` is listed below. A `JFrame` is at the top of the hierarchy, and the menu bar (it is not added by default; it is shown here for completeness) and the content pane are at the bottom of the containment hierarchy.

`JFrame`

```
    root pane
        glass pane
        layered pane
            menu bar
```

content pane

If you are still not able to understand all of the “pains” (read panes) of a JFrame, you can revisit this section later. For now, you have to understand only one pane of the JFrame, and that is the content pane, which holds the Swing components of a JFrame. You should add all components you want to add to a JFrame to its content pane. You can get the reference of the content pane as follows:

```
// Create a JFrame  
JFrame frame = new JFrame("Test");  
  
// Get the reference of the content pane  
Container contentPane = frame.getContentPane();
```

Adding Components to a JFrame

This section explains how to add components to the content pane of a JFrame. Use the `add()` method of a container (note that a content pane is also a container) to add a component to the container.

```
// Add aComponent to aContainer  
aContainer.add(aComponent);
```

The `add()` method is overloaded. The arguments to the method, apart from the component being added, depend on other factors such as how you want the component to be laid out in the container. The next section discusses all versions of the `add()` method.

I will limit the current discussion to adding a button, which is a Swing component, to a JFrame. An object of the JButton class represents a button. If you have used Windows, you must have used a button such as an OK button on a message box, Back and Forward buttons on an Internet browser window. Typically, a JButton contains text that is also called its label. This is how you create a JButton:

```
// Create a JButton with Close text  
JButton closeButton = new JButton("Close");
```

To add `closeButton` to the content pane of a `JFrame`, you have to do two things:

- Get the reference of the content pane of the `JFrame`.

```
Container contentPane =  
frame.getContentPane();
```

- Call the `add()` method of the content pane.

```
contentPane.add(closeButton);
```

That is all it takes to add a component to the content pane. If you want to add a `JButton` using one line of code, you can do so by combining all three statements into one, like so:

```
frame.getContentPane().add(new JButton("Close"));
```

The code to add components to a `JFrame` is shown in [Listing 1-3](#). When you run the program, you get a `JFrame` as shown in the [Figure 1-7](#). Nothing happens when you click the `Close` button because you have not yet added any action to it.

Listing 1-3. Adding Components to a `JFrame`

```
// AddingComponentToJFrame.java  
package com.jdojo.swing;  
  
import javax.swing.JFrame;  
import javax.swing.JButton;  
import java.awt.Container;  
  
public class AddingComponentToJFrame {  
    public static void main(String[] args) {  
        JFrame frame = new JFrame("Adding  
Component to JFrame");  
        frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);  
        Container contentPane  
= frame.getContentPane();  
  
        // Add a close button
```

```
    JButton closeButton = new
JButton("Close");
    contentPane.add(closeButton);

    // set the size of the frame 300 x 200
frame.setBounds(50, 50, 300, 200);
frame.setVisible(true);
}
}
```

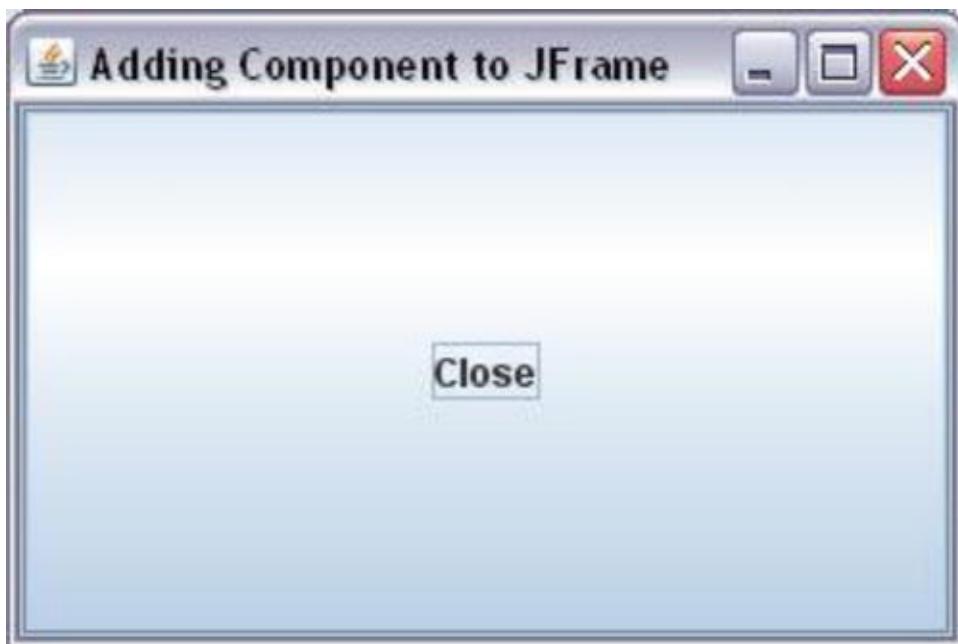


Figure 1-7. A `JFrame` with a `JButton` with `Close` as its text

The code did its job of adding a `JButton` with the `Close` text to the `JFrame`. However, the `JButton` looks very big and it fills the entire viewable area of the `JFrame`. Note that you have set the size of the `JFrame` to 300 pixels wide and 200 pixels high using the `setBounds()` method. Since the `JButton` fills the entire `JFrame`, can you set the `JFrame`'s size little smaller? Alternatively, can you set the size for the `JButton` itself? Both suggestions are not going to work in this case. If you want to make the `JFrame` smaller, you need to guess how much smaller it needs to be made. If you want to set the size for the `JButton`, it will fail miserably; the `JButton` will always fill the entire viewable area of the `JFrame`. What is going on? To get a complete understanding of what is going on, you need to read the next section about the

layout manager.

Swing provides a magical and quick solution to the problem of computing the size of the `JFrame` and `JButton`. The `pack()` method of the `JFrame` class is that magical solution. The method goes through all the components you have added to the `JFrame` and decides their preferred size and sets the size of the `JFrame` just enough to display all the components. When you call this method, you do not need to set the size of the `JFrame`. The `pack()` method will calculate the size of the `JFrame` and set it for you. To fix the sizing problem, remove the call to the `setBounds()` method and add a call to the `pack()` method instead. Note that the `setBounds()` method was setting the `(x, y)` coordinates for the `JFrame` too. If you still want to set the `(x, y)` coordinates of the `JFrame` to `(50, 50)`, you can use its `setLocation(50, 50)` method. [Listing 1-4](#) contains the modified code and [Figure 1-8](#) shows the resulting `JFrame`.

[Listing 1-4](#). Packing All Components of a `JFrame`

```
// PackedJFrame.java
package com.jdojo.swing;

import javax.swing.JFrame;
import java.awt.Container;
import javax.swing.JButton;

public class PackedJFrame {
    public static void main(String[] args) {
        JFrame frame = new JFrame("Adding
Component to JFrame");
        frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);

        // Add a close button
        JButton closeButton = new JButton("Close");
        Container contentPane
= frame.getContentPane();
        contentPane.add(closeButton);

        // Calculates and sets appropriate size
    }
}
```

```

for the frame
    frame.pack();
    frame.setVisible(true);
}
}

```

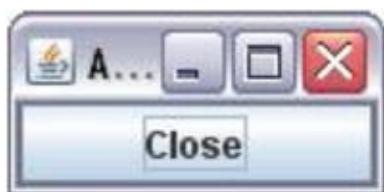


Figure 1-8. Packed JFrame with a JButton

So far, you have been successful in adding one JButton to a JFrame. Let's add another JButton to the same JFrame. Call the new button helpButton. The code will be similar to [Listing 1-4](#), except that this time you will add two instances of the JButton class. [Listing 1-5](#) contains the complete program. [Figure 1-9](#) shows the result when you run the program.

Listing 1-5. Adding Two Buttons to a JFrame

```

// JFrameWithTwoJButtons.java
package com.jdojo.swing;

import javax.swing.JFrame;
import java.awt.Container;
import javax.swing.JButton;

public class JFrameWithTwoJButtons {
    public static void main(String[] args) {
        JFrame frame = new JFrame("Adding
Component to JFrame");
        frame.setDefaultCloseOperation(JFrame.EXIT_
        // Add two buttons - Close and Help
        JButton closeButton = new
JButton("Close");
        JButton helpButton = new JButton("Help");

```

```

        Container contentPane
= frame.getContentPane();
        contentPane.add(closeButton);
        contentPane.add(helpButton);
frame.pack();
frame.setVisible(true);
}
}

```

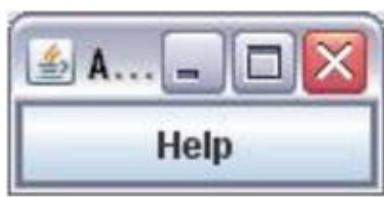


Figure 1-9. A JFrame with two buttons: Close and Help. Only the Help button is visible

When you added the Help button, you lost the Close button. Does this mean that you can add only one button to a JFrame? The answer is no. You can add as many buttons to a JFrame as you want. So, where is your Close button? You need to understand the layout mechanism of a content pane before I can answer this question.

A content pane is a container. You add components to it. However, it hands over the task of laying out all components within it to an object known as a *layout manager*. A layout manager is simply a Java object whose sole job is to determine the position and size of components within a container. The example in [Listing 1-5](#) was carefully chosen to introduce you to the concept of the layout manager. Many types of layout managers exist. They differ in the way they position and size components within the container.

By default, the content pane of a JFrame uses a layout manager called BorderLayout. Only the Help button was displayed in the previous example because of the way the BorderLayout lays out the components. In fact, when you added two buttons, the content pane received both of them. To confirm that both buttons are still there in the content pane, add the following snippet of code at the end of the `main()` method in [Listing 1-5](#) that displays the number of components that the content pane has. It will print a message on the standard output: "Content Pane has 2 components." Each container has a `getComponents()` method, which returns an array of components added to it.

```
// Get the components added to the content pane  
Component[] comps = contentPane.getComponents();  
  
// Display how many components the content pane has  
System.out.println("Content Pane has " + comps.length  
+ " components.");
```

With this background, it is time to learn various layout managers. You will solve the puzzle of the missing Close button when I discuss the BorderLayout manager in a later section. But before I discuss the various layout managers, I will introduce you to some utility classes that are frequently used when working with Swing applications.

 **Tip** A component can be added to only one container at one time. If you add the same component to another container, the component is removed from the first container and added to the second one.

Some Utility Classes

Before you start developing some serious Swing GUIs, it is worth mentioning some utility classes that are used frequently. They are simple classes. Most of them have some properties that can be specified in their constructors, and have getters and setters for those properties.

The Point Class

As the name suggests, an object of the Point class represents a location in a two-dimensional space. A location in a two-dimensional space is represented by two values: an x coordinate and a y coordinate. The Point class is in the java.awt package. The following snippet of code demonstrates its use:

```
// Create an object of the Point class with (x, y)  
coordinate of (20, 40)  
Point p = new Point(20, 40);
```

```
// Get the x and y coordinate of p  
int x = p.getX();  
int y = p.getY();  
  
// Set the x and y coordinate of p to (10, 60)  
p.setLocation(10, 60);
```

The main usage of the `Point` class in Swing is to set and get the location (x and y coordinates) of a component. For example, you can set the location of a JButton.

```
JButton closeButton = new JButton("Close");  
  
// The following two statements do the same thing.  
// You will use one of the following statements and  
not both.  
closeButton.setLocation(10, 15);  
closeButton.setLocation(new Point(10, 15));  
  
// Get the location of the closeButton  
Point p = closeButton.getLocation();
```

The Dimension Class

An object of the `Dimension` class wraps the width and height of a component. The width and height of a component are collectively known as its size. In other words, an object of the `Dimension` class is used to represent the size of a component. You can use an object of the `Dimension` class to wrap any two arbitrary integers. However, in this chapter, it will be used in the context of the size of a component. The class is in the `java.awt` package.

```
// Create an object of the Dimension class with  
a width and height of 200 and 20  
Dimension d = new Dimension(200, 20);  
  
// Set the size of closeButton to 200 x 20. Both of  
the statements have the same effect.  
// You will use one of the following two statements.  
closeButton.setSize(200, 20);
```

```
closeButton.setSize(d);  
  
// Get the size of closeButton  
Dimension d2 = closeButton.getSize();  
int width = d2.width;  
int height = d2.height;
```

The Insets Class

An object of the `Insets` class represents spaces that are left around a container. It wraps four properties named `top`, `left`, `bottom`, and `right`. Their values represent the spaces left on the four side of a container. The class is in the `java.awt` package.

```
// Create an object of the Insets class  
// using its constructor Insets(top, left, bottom,  
right)  
Insets ins = new Insets(20, 5, 5, 5);  
  
// Get the insets of a JFrame  
Insets ins = frame.getInsets();  
int top = ins.top;  
int left = ins.left;  
int bottom = ins.bottom;  
int right = ins.right;
```

The Rectangle Class

As its name suggests, an instance of the `Rectangle` class represents a rectangle. It is in the `java.awt` package. You can define a rectangle in many ways. A `Rectangle` is defined by three properties:

- (x, y) coordinates of the upper-left corner
- Width
- Height

You can think of a `Rectangle` object as a combination of a `Point` object and a `Dimension` object; the `Point` object holds the (x, y) coordinates of the upper left corner and the `Dimension` object holds the width and height. You can create an object of the `Rectangle` class by specifying different combinations of its properties.

```
// Create a Rectangle object whose upper-left corner  
is at (0, 0)  
// with width and height as zero  
Rectangle r1 = new Rectangle();  
  
// Create a Rectangle object from a Point object with  
its width and height as zero  
Rectangle r2 = new Rectangle(new Point(10, 10));  
  
// Create a Rectangle object from a Point object and  
a Dimension object  
Rectangle r3 = new Rectangle(new Point(10, 10), new  
Dimension(200, 100));  
  
// Create a Rectangle object by specifying its upper-  
left corner's  
// coordinate at (10, 10) and width as 200 and height  
as 100  
Rectangle r4 = new Rectangle(10, 10, 200, 100);
```

The `Rectangle` class defines many methods to manipulate a `Rectangle` object and to inquire about its properties, such as the (x, y) coordinate of its upper-left corner, width, and height.

An object of the `Rectangle` class defines the location and size of a component in a Swing application. The location and size of a component are known as its bounds. Two methods, `setBounds()` and `getBounds()`, can be used to set and get the bounds of any component or container. The `setBounds()` method is overloaded and you can specify x, y, width, and height properties of a component, or a `Rectangle` object. The `getBounds()` method returns a `Rectangle` object. In [Listing 1-2](#), you used the `setBounds()` method to set the x, y, width, and height of the frame. Note that the “bounds” of a component is a combination of its location and its size. The combination of the `setLocation()` and `setSize()` methods will

accomplish the same as the `setBounds()` method does. Similarly, you can use the combination of `getLocation()` (or, `getX()` and `getY()`) and `getSize()` (or, `getWidth()` and `getHeight()`) instead of using the `getBounds()` method.

Layout Managers

A container uses a layout manager to compute the position and size of all its components. In other words, the job of a layout manager is to compute four properties (x, y, width, and height) of all components in a container. The x and y properties determine the position of a component within the container. The width and height properties determine the size of the component. You might ask, “Why do you need a layout manager to perform a simple task of computing four properties of a component? Can’t you just specify these four properties in the program and let the container use them for displaying the components?” The answer is yes. You can specify these properties in your program. If you do that, your component will not be repositioned and resized when the container is resized. In addition, you will have to specify the size of the component for all platforms on which your application will run because different platforms render components a little differently. Suppose your application displays text in multiple languages. The optimal size for a JButton, say a Close button, will be different in different languages and you will have to calculate the size of the Close button in each language and set it, depending on the language the application is using. However, you do not have to take all of these into consideration if you use a layout manager. The layout manager will do these simple, though time-consuming, things for you.

Using a layout manager is optional. If you do not use a layout manager, you are responsible for computing and setting the position and size of all components in a container.

Technically, a layout manager is an object of a Java class that implements the `LayoutManager` interface. There is another interface called `LayoutManager2` that inherits from the `LayoutManager` interface. Some of the layout manager classes implement the `LayoutManager2` interface. Both interfaces are in the `java.awt` package.

There are many layout managers. Some layout managers are simple and easy to code by hand. Some are very complex to code by hand and they are meant to

be used by GUI builder tools such as NetBeans. If none of the available layout managers meet your needs, you can create your own. Some useful layout managers are available for free on the Internet. Sometimes you need to nest them to get the desired effects. I will discuss the following layout managers in this section:

- FlowLayout
- BorderLayout
- CardLayout
- BoxLayout
- GridLayout
- GridBagLayout
- GroupLayout
- SpringLayout

Every container has a default layout manager. The default layout manager for the content pane of a JFrame is BorderLayout, and for a JPanel, it is FlowLayout. It is set when you create the container. You can change the default layout manager of a container by using its `setLayout()` method. If you do not want your container to use a layout manager, you can pass null to the `setLayout()` method. You can use the `getLayout()` method of a container to get the reference of the layout manager the container is currently using.

```
// Set FlowLayout as the layout manager for the
content pane of a JFrame
JFrame frame = new JFrame("Test Frame");
Container contentPane = frame.getContentPane();
contentPane.setLayout(new FlowLayout());

// Set BorderLayout as the layout manager for a JPanel
JPanel panel = new JPanel();
panel.setLayout(new BorderLayout());

// Get the layout manager for a container
```

```
LayoutManager layoutManager = container.getLayout()
```

Starting from Java 5, the calls to `add()` and `setLayout()` methods on a `JFrame` are forwarded to its content pane. Before Java 5, calling these methods on a `JFrame` would throw a runtime exception. That is, from Java 5, the two calls `frame.setLayout()` and `frame.add()` will do the same as calling `frame.getContentPane().setLayout()` and `frame.getContentPane().add()`. It is very important to note that the `getLayout()` method of a `JFrame` returns the layout manager of the `JFrame` and not its content pane. To avoid this trouble of asymmetric call forwarding (some calls are forwarded and some not) from the `JFrame` to its content pane, it is better to call the content pane's methods directly rather than calling them on a `JFrame`.

FlowLayout

The `FlowLayout` is the simplest layout manager in Swing. It lays out the components horizontally, and then vertically. It lays the components in the order they are added to the container. When it is laying the components horizontally, it may lay them left to right, or right to left. The horizontal layout direction depends on the orientation of the container. You can set the orientation of a container by calling its `setComponentOrientation()` method. If you want to set the orientation of a container and all its children, you can use the `applyComponentOrientation()` method instead. Here is a snippet of code that sets the orientation of a container:

```
// Method - 1
// Set the orientation of the content pane of a frame
// to "right to left"
JFrame frame = new JFrame("Test");
Container pane = frame.getContentPane();
pane.setComponentOrientation(ComponentOrientation.RIGHT_TO_LEFT);

// Method - 2
// Set the orientation of the content pane and all its
// children to "right to left"
JFrame frame = new JFrame("Test");
```

```
Container pane = frame.getContentPane();  
pane.applyComponentOrientation(ComponentOrientation.RI
```

If your application is multilingual and the component orientation will be decided at runtime, you may want to set the components locale and orientation in a more generic way rather than hard-coding it in your program. You can globally set the default locale for all Swing components in your application like so:

```
// "ar" is used for Arabic locale  
JComponent.setDefaultLocale(new Locale("ar"));
```

When you create a JFrame, you can get the component's orientation according to the default locale and set it to the frame and its children. This way, you do not have to set the orientation for every container in your application.

```
// Get the default locale  
Locale defaultLocale = JComponent.getDefaultLocale();  
  
// Get the component's orientation for the default  
locale  
ComponentOrientation componentOrientation  
= ComponentOrientation.getOrientation(defaultLocale);  
  
// Apply the component's default orientation for the  
whole frame  
frame.applyComponentOrientation(componentOrientation);
```

A FlowLayout tries to place all components into one row, giving them their preferred size. If all components do not fit into one row, it starts another row. Every layout manager has to compute the height and width of the space where it needs to lay out all components. A FlowLayout asks for width, which is the sum of the preferred widths of all components. It asks for height, which is the height of the tallest component in the container. It adds extra space to the width and height to account for horizontal and vertical gaps between the components. [Listing 1-6](#) demonstrates how to use a FlowLayout for the content pane of a JFrame. It adds three buttons to the content pane. [Figure 1-10](#) shows the screen with three buttons using the FlowLayout.

[Listing 1-6](#). Using a FlowLayout Manager

```

// FlowLayoutTest.java
package com.jdojo.swing;

import java.awt.Container;
import java.awt.FlowLayout;
import javax.swing.JButton;
import javax.swing.JFrame;

public class FlowLayoutTest {
    public static void main(String[] args) {
        JFrame frame = new JFrame("Flow Layout
Test");
        frame.setDefaultCloseOperation(JFrame.EXIT_
        Container contentPane
= frame.getContentPane();
        contentPane.setLayout(new FlowLayout());
        for(int i = 1; i <= 3; i++) {
            contentPane.add(new
JButton("Button " + i));
        }

        frame.pack();
        frame.setVisible(true);
    }
}

```

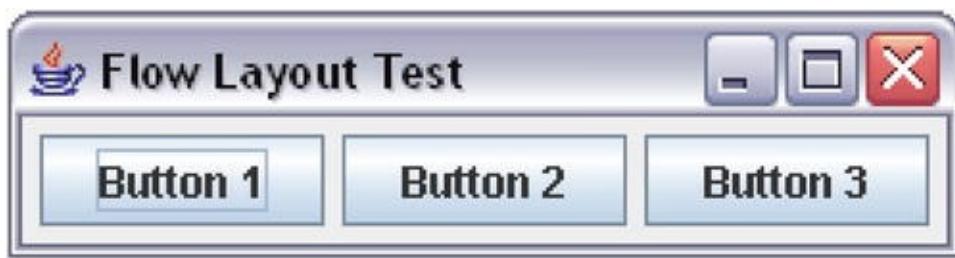


Figure 1-10. Three buttons in a JFrame with a FlowLayout Manager

When you expand the frame horizontally, the buttons are displayed as shown in [Figure 1-11](#).

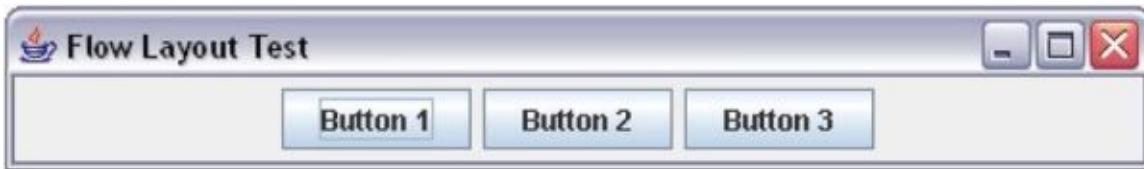


Figure 1-11. After the `JFrame` using a `FlowLayout` has been expanded horizontally

By default, a `FlowLayout` aligns all components in the center of the container. You can change the alignment by calling its `setAlignment()` method or passing the alignment in its constructor, like so:

```
// Set the alignment when you create the layout
manager object
FlowLayout flowLayout = new
FlowLayout(FlowLayout.RIGHT);

// Set the alignment after you have created the flow
layout manager
flowLayout.setAlignment(FlowLayout.RIGHT);
```

The following five constants are defined in the `FlowLayout` class to represent the five different alignments: `LEFT`, `RIGHT`, `CENTER`, `LEADING`, and `TRAILING`. The definitions of the first three constants are obvious. The `LEADING` alignment may mean either left or right; it depends on the orientation of the component. If the component's orientation is `RIGHT_TO_LEFT`, the `LEADING` alignment means `RIGHT`. If component's orientation is `LEFT_TO_RIGHT`, the `LEADING` alignment means `LEFT`. Similarly, `TRAILING` alignment may mean either left or right. If the component's orientation is `RIGHT_TO_LEFT`, the `TRAILING` alignment means `LEFT`. If component's orientation is `LEFT_TO_RIGHT`, the `TRAILING` alignment means `RIGHT`. It is always a good idea to use `LEADING` and `TRAILING` instead of `RIGHT` and `LEFT`, so you do not have to worry about the orientation of your component.

You can set the gaps between two components either in the constructor of the `FlowLayout` class or using its `setHgap()` and `setVgap()` methods. [Listing 1-7](#) has the complete code that adds three buttons to a `JFrame`. The content pane uses a `FlowLayout` with the `LEADING` alignment and the `JFrame`'s orientation is set to `RIGHT_TO_LEFT`. When you run the program, the `JFrame` will look as shown in [Figure 1-12](#).

Listing 1-7. Customizing a FlowLayout

```
// FlowLayoutTest2.java
package com.jdojo.swing;

import java.awt.ComponentOrientation;
import java.awt.Container;
import java.awt.FlowLayout;
import javax.swing.JButton;
import javax.swing.JFrame;

public class FlowLayoutTest2 {
    public static void main(String[] args) {
        int horizontalGap = 20;
        int verticalGap = 10;
        JFrame frame = new JFrame("Flow Layout
Test");
        frame.setDefaultCloseOperation(JFrame.EXIT_
        Container contentPane
= frame.getContentPane();
        FlowLayout flowLayout =
            new FlowLayout(FlowLayout.LEADING,
horizontalGap, verticalGap);
        contentPane.setLayout(flowLayout);
        frame.applyComponentOrientation(
            ComponentOrientation.RIGHT_TO_LEFT)

        for(int i = 1; i <= 3; i++) {
            contentPane.add(new JButton("Button " +
+ i));
        }

        frame.pack();
        frame.setVisible(true);
    }
}
```

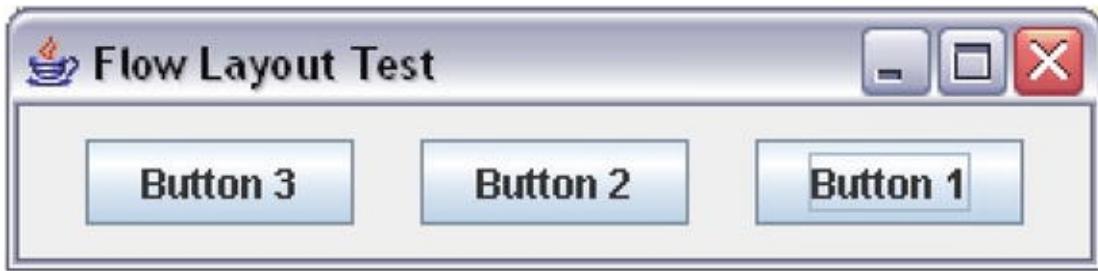


Figure 1-12. A JFrame having three buttons and a customized FlowLayout

You must remember that a `FlowLayout` tries to lay out all components in only one row. Therefore, it does not ask for a height that will fit all components. Rather, it asks for the height of the tallest component in the container. To demonstrate this subtle point, try adding 30 buttons to the `JFrame` so they all do not fit into one row. The following snippet of code demonstrates this:

```
JFrame frame = new JFrame("Welcome to Swing");
frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
frame.getContentPane().setLayout(new FlowLayout());

for(int i = 1; i <= 30; i++) {
    frame.getContentPane().add(new JButton("Button " + i));
}

frame.pack();
frame.setVisible(true);
```

The `JFrame` is shown in [Figure 1-13](#). You can see that not all 30 buttons are displayed. If you resize the `JFrame` to make it bigger in height, you will be able to see all the buttons, as shown in [Figure 1-14](#). The `FlowLayout` hides the components that it cannot display in one row.



Figure 1-13. A JFrame with 30 buttons. Not all buttons are displayed



Figure 1-14. A JFrame with 30 buttons after it is resized

There is a very important implication of the feature of the FlowLayout where it tries to lay out all components in only one row. It asks for the height just enough to display the tallest component. If you nest a container with a FlowLayout manager inside another container that also uses a FlowLayout manager, you will never see more than one row in the nested container. Just to demonstrate this, add 30 instances of the JButton to a JPanel. A JPanel is an empty container with a FlowLayout as its default layout manager. Set the layout manager of the content pane of the JFrame to a FlowLayout and add the JPanel to the content pane of the JFrame. This way, you have the container JPanel with a FlowLayout nested within another container (a content pane), with a FlowLayout. Listing 1-8 contains the complete program to demonstrate this. When you run the program, the resulting JFrame is shown in Figure 1-15. You will always see only one row of buttons even if you resize the JFrame to make it bigger in height.

Listing 1-8. Nesting FlowLayout Managers

```
// FlowLayoutNesting.java
package com.jdojo.swing;

import java.awt.FlowLayout;
import javax.swing.JButton;
import javax.swing.JFrame;
import javax.swing.JPanel;

public class FlowLayoutNesting {
    public static void main(String[] args) {
        JFrame frame = new JFrame("FlowLayout
Nesting");
        frame.setDefaultCloseOperation(JFrame.EXIT
```

```

        // Set the content pane's layout to
FlowLayout
        frame.getContentPane().setLayout(new
FlowLayout());

        // JPanel is an empty container with
a FlowLayout manager
        JPanel panel = new JPanel();

        // Add thirty JButtons to the JPanel
for(int i = 1; i <= 30; i++) {
            panel.add(new JButton("Button "
+ i));
        }

        // Add JPanel to the content pane
frame.getContentPane().add(panel);

        frame.pack();
        frame.setVisible(true);
    }
}

```



Figure 1-15. A nested FlowLayout always display only one row

I would like to finish the discussion about FlowLayout with a note that it has very limited use in a real world applications because of the limitations discussed in this section. It is typically used for prototyping.

BorderLayout

The BorderLayout divides a container's space into five areas: north, south, east, west, and center. When you add a component to a container with a BorderLayout, you need to specify to which of the five areas you want to

add the component. The `BorderLayout` class defines five constants to identify each of the five areas. The constants are `NORTH`, `SOUTH`, `EAST`, `WEST`, and `CENTER`. For example, to add a button to the north area, you write

```
// Add a button to the north area of the container
JButton northButton = new JButton("North");
container.add(northButton, BorderLayout.NORTH);
```

The default layout for the content pane of a `JFrame` is a `BorderLayout`. [Listing 1-9](#) contains the complete program that adds five buttons to the content pane of a `JFrame`. The resulting `JFrame` is shown in [Figure 1-16](#).

Listing 1-9. Adding Components to a `BorderLayout`

```
// BorderLayoutTest.java
package com.jdojo.swing;

import java.awt.BorderLayout;
import javax.swing.JFrame;
import java.awt.Container;
import javax.swing.JButton;

public class BorderLayoutTest {
    public static void main(String[] args) {
        JFrame frame = new JFrame("BorderLayout
Test");
        frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
        Container container
= frame.getContentPane();

        // Add a button to each of the five areas
        // of the BorderLayout
        container.add(new JButton("North"),
BorderLayout.NORTH);
        container.add(new JButton("South"),
BorderLayout.SOUTH);
        container.add(new JButton("East"),
BorderLayout.EAST);
        container.add(new JButton("West"),
BorderLayout.WEST);
```

```

BorderLayout.WEST);
        container.add(new JButton("Center"),
BorderLayout.CENTER);

        frame.pack();
        frame.setVisible(true);
    }
}

```



Figure 1-16. Five areas of the BorderLayout

You can add at most one component to one area of a BorderLayout. You may leave some areas empty. If you want to add more than one component to an area of a BorderLayout, you can do so by adding those components to a container, and then adding that container to the desired area.

The five areas in a BorderLayout (north, south, east, west, and center) are fixed in direction and are not dependent on the orientation of components. Four more constants exist to specify areas in a BorderLayout. These constants are PAGE_START, PAGE_END, LINE_START, and LINE_END. The PAGE_START and PAGE_END constants are the same as the NORTH and SOUTH constants, respectively. The LINE_START and LINE_END constants change their positions depending on the orientation of the container. If the container's orientation is left to right, LINE_START is the same as WEST, and LINE_END is the same as EAST. If the container's orientation is right to left, LINE_START is the same as EAST, and LINE_END is the same as WEST. Figure 1-17 and Figure 1-18 depict the differences in positioning of the areas of a BorderLayout with different component orientations.

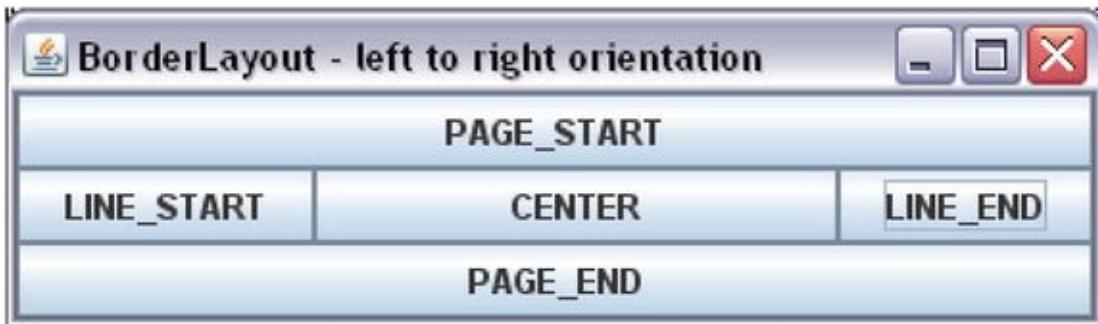


Figure 1-17. A BorderLayout's areas when the container's orientation is left to right



Figure 1-18. A BorderLayout's areas when the container's orientation is right to left

If you do not specify the area for a component, it is added to the center. The following two statements have the same effect:

```
// Assume that the container has a BorderLayout  
// Add a button to the container without specifying  
the area  
container.add(new JButton("Close"));  
  
// The above statement is the same as the following  
container.add(new JButton("Close"),  
BorderLayout.CENTER);
```

I have already stated that you can add at most five components to a BorderLayout, one in each of the five areas. What happens if you add more than one component to the same area of a BorderLayout? That is, what happens if you write the following code?

```
// Assume that container has a BorderLayout  
container.add(new JButton("Close"),  
BorderLayout.NORTH);
```

```
container.add(new JButton("Help"),  
BorderLayout.NORTH);
```

You will find that the north area of the `BorderLayout` displays only one button: the button that was added to it last. That is, the north area will only display the `Help` button. This is what happened in [Listing 1-5](#). You added two buttons called `Close` and `Help` to the content pane of the `JFrame`. Since you did not specify the area of the `BorderLayout` in which you wanted to add them, both of them were added to the center area. Since you can have only one component in each area of a `BorderLayout`, the `Help` button replaced the `Close` button. This is the reason that you did not see the `Close` button when you ran the program in [Listing 1-5](#). To fix this problem, specify the areas for both buttons when you add them to the container.

Tip If you are missing some components in a `BorderLayout` managed container, make sure that you have not added more than one component in the same area. If you add components to a `BorderLayout` mixing the area constants, the `PAGE_START`, `PAGE_END`, `LINE_START`, and `LINE_END` constants take precedence over the `NORTH`, `SOUTH`, `EAST`, and `WEST` constants. That is, if you add two components to a `BorderLayout` using `add(c1, NORTH)` and `add(c2, PAGE_START)`, `c2` will be used, not `c1`.

How does a `BorderLayout` compute the size of the components? It computes the size of the components based on the area in which they are placed. It respects the preferred height of the component in north and south. However, it stretches the component's width horizontally according to the available space in north and south. That is, it does not respect the preferred width of the components in north and south. It respects the preferred width of the components in east and west and gives them height necessary to fill the entire space vertically. The component in the center area is stretched horizontally as well as vertically to fit the available space. That is, the center area does not respect its component's preferred width and height.

CardLayout

The CardLayout lays out components in a container as a stack of cards. Like a stack of cards, only one card (the card at the top) is visible in a CardLayout. It makes only one component visible at a time. You need to use the following steps to use a CardLayout for a container:

- Create a container such as a JPanel.

```
JPanel cardPanel = new JPanel();
```

- Create a CardLayout object.

```
CardLayout cardLayout = new  
CardLayout();
```

- Set the layout manager for the container.

```
cardPanel.setLayout(cardLayout);
```

- Add components to the container. You need to give a name to each component. To add a JButton to the cardPanel, use the following statement:

```
cardPanel.add(new JButton("Card 1"),  
"myLuckyCard");
```

You have named your card myLuckyCard. This name can be used in the `show()` method of the CardLayout to make this card visible.

- Call its `next()` method to show the next card.

```
cardLayout.next(cardPanel);
```

The CardLayout class provides several methods to flip through components. By default, it shows the first component that was added to it. All flipping-related methods take the container it manages as its argument. The `first()` and `last()` methods show the first and the last card, respectively. The `previous()` and `next()` methods show the previous and the next card from the card currently being shown. If the last card is showing, calling the `next()` method shows the first card. If the first card is showing, calling the `previous()` method shows the last card.

[Listing 1-10](#) demonstrates how to use a CardLayout. [Figure 1-19](#) shows

the resulting JFrame. When you click the Next button, the next card is flipped. The program adds two JPanel s to the content pane of the JFrame. One JPanel , buttonPanel , has the Next button, and it is added to the south area of the content pane. Note that, by default, a JPanel uses a FlowLayout.

Listing 1-10. The CardLayout in Action

```
// CardLayoutTest.java
package com.jdojo.swing;

import java.awt.Container;
import javax.swing.JFrame;
import java.awt.CardLayout;
import javax.swing.JPanel;
import javax.swing.JButton;
import java.awt.Dimension;
import java.awt.BorderLayout;

public class CardLayoutTest {
    public static void main(String[] args) {
        JFrame frame = new JFrame("CardLayout
Test");
        frame.setDefaultCloseOperation(JFrame.EXIT
Container contentPane
= frame.getContentPane();

        // Add a Next JButton in a JPanel to the
content pane
        JPanel buttonPanel = new JPanel();
        JButton nextButton = new JButton("Next");
        buttonPanel.add(nextButton);
        contentPane.add(buttonPanel,
BorderLayout.SOUTH);

        // Create a JPanel and set its layout to
CardLayout
        final JPanel cardPanel = new JPanel();
        final CardLayout cardLayout = new
CardLayout();
    }
}
```

```
        cardPanel.setLayout(cardLayout);

        // Add five JButtons as cards to the
cardPanel
        for(int i = 1; i <= 5; i++) {
            JButton card = new JButton("Card "
+ i);
            card.setPreferredSize(new
Dimension(200, 200));
            String cardName = "card" + 1;
            cardPanel.add(card, cardName);
        }

        // Add the cardPanel to the content pane
contentPane.add(cardPanel,
BorderLayout.CENTER);

        // Add an action listener to the Next
button
        nextButton.addActionListener(e ->
cardLayout.next(cardPanel));

        frame.pack();
        frame.setVisible(true);
    }
}
```



Figure 1-19. A CardLayout in action. Click the Next JButton to flip through the cards

The program adds an action listener to the Next button. I have not discussed how to add an action listener to a button yet. It is necessary to see the CardLayout in action. I will discuss how to add an action to a button in detail in the event handling section. For now, it is sufficient to mention that you need to call the `addActionListener()` method of the JButton class to add an action listener to it. This method accepts an object of type ActionListener interface and has one method called `actionPerformed()`. The code in the `actionPerformed()` method is executed when you click the JButton. The code that flips the next card is the call to the `cardLayout.next(cardPanel)` method. The ActionListener interface is a functional interface and you can use a lambda expression to create its instance, like so:

```
// Add an action listener to the Next JButton to flip  
// the next card  
nextButton.addActionListener(e ->
```

```
cardLayout.next(cardPanel));
```

Tip A CardLayout is not used very often because all but one component are hidden from the user. A JTabbedPane, which is easier to use, provides functionality similar to a CardLayout. I will discuss the JTabbedPane in [Chapter 2](#). A JTabbedPane is a container, not a layout manager. It lays out all components as tabs and lets the user switch between those tabs.

BoxLayout

The BoxLayout arranges components in a container either horizontally in one row or vertically in one column. You need to use the following steps to use a BoxLayout in your program:

- Create a container, for example, a JPanel.

```
JPanel hPanel = new JPanel();
```

- Create an object of the BoxLayout class. Unlike other layout managers, you need to pass the container to the constructor of the class. You also need to pass the type of box you are creating (horizontal or vertical) to its constructor. The class has four constants: X_AXIS, Y_AXIS, LINE_AXIS, and PAGE_AXIS. The constant X_AXIS is used to create a horizontal BoxLayout that lays out all components from left to right. The constant Y_AXIS is used to create a vertical BoxLayout that lays out all components from top to bottom. The other two constants, LINE_AXIS and PAGE_AXIS, are similar to X_AXIS and Y_AXIS. However, they use the orientation of the container in laying out the components.

```
// Create a BoxLayout for hPanel to lay
out
// components from left to right
BoxLayout boxLayout = new
```

```
        BoxLayout(hPanel, BoxLayout.X_AXIS);
```

- Set the layout for the container.

```
    hPanel.setLayout(boxLayout);
```

- Add the components to the container.

```
    hPanel.add(new JButton("Button 1"));
    hPanel.add(new JButton("Button 2"));
```

[Listing 1-11](#) uses a horizontal `BoxLayout` to display three buttons, as shown in [Figure 1-20](#).

Listing 1-11. Using a Horizontal `BoxLayout`

```
// BoxLayoutTest.java
package com.jdojo.swing;

import java.awt.Container;
import javax.swing.JFrame;
import javax.swing.JButton;
import javax.swing.JPanel;
import javax.swing.BoxLayout;
import java.awt.BorderLayout;

public class BoxLayoutTest {
    public static void main(String[] args) {
        JFrame frame = new JFrame("BoxLayout
Test");
        frame.setDefaultCloseOperation(JFrame.EXIT_
Container contentPane
= frame.getContentPane();

        JPanel hPanel = new JPanel();
        BoxLayout boxLayout = new
BoxLayout(hPanel, BoxLayout.X_AXIS);
        hPanel.setLayout(boxLayout);

        for(int i = 1; i <= 3; i++) {
            hPanel.add(new JButton("Button "
```

```

+ i));
}

contentPane.add(hPanel,
BorderLayout.SOUTH);
frame.pack();
frame.setVisible(true);
}
}

```

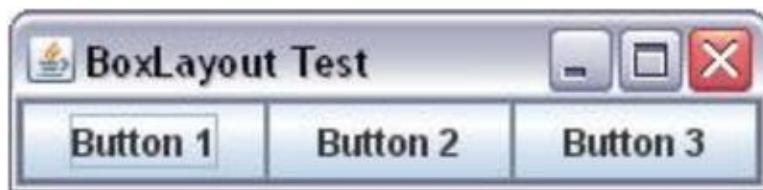


Figure 1-20. A JFrame with a horizontal BoxLayout with three buttons

A BoxLayout tries to give the preferred width to all components in a horizontal layout and the preferred height in a vertical layout. In a horizontal layout, the height of the tallest component is given to all other components. If it cannot adjust the height of a component to match the tallest component in the group, it aligns the component horizontally along the center. You can change this default alignment by setting the component's alignment or the container alignment by using the `setAlignmentY()` method. In a vertical layout, it tries to give the preferred height to all components, and tries to make the size of all components the same width as the widest component. If it cannot make all components have the same width, it aligns them vertically along their centerlines. You can change this default alignment by changing either the component's alignment or the container's alignment using the `setAlignmentX()` method.

The `javax.swing` package contains a `Box` class that makes using a BoxLayout easier. A `Box` is a container that uses a BoxLayout as its layout manager. The `Box` class provides static methods to create a container with a horizontal or vertical layout. The methods `createHorizontalBox()` and `createVerticalBox()` create a horizontal and vertical box, respectively.

```
// Create a horizontal box
Box hBox = Box.createHorizontalBox();
```

```
// Create a vertical box  
Box vBox = Box.createVerticalBox();
```

To add a component to a Box, use its add() method, like so:

```
// Add two buttons to the horizontal box  
hBox.add(new JButton("Button 1"));  
hBox.add(new JButton("Button 2"));
```

The Box class also allows you to create invisible components and add them to a box, so you can adjust spacing between two components. It provides four types of invisible components:

- Glue
- Strut
- Rigid Area
- Filler

A glue is an invisible, expandable component. You can create horizontal and vertical glues using the createHorizontalGlue() and createVerticalGlue() static methods of the Box class. The following snippet of code uses horizontal glue between two buttons in a horizontal box layout. You can also create a glue component using the createGlue() static method of the Box class that can expand horizontally as well as vertically.

```
Box hBox = Box.createHorizontalBox();  
hBox.add(new JButton("First"));  
hBox.add(Box.createHorizontalGlue());  
hBox.add(new JButton("Last"));
```

The buttons with a glue in between look as shown in [Figure 1-21](#). [Figure 1-22](#) shows them after the container is expanded horizontally. Notice the horizontal empty space between the two buttons, which is the invisible glue that has expanded.



Figure 1-21. A horizontal box with two buttons and a horizontal glue between them



Figure 1-22. A horizontal box with two buttons and a horizontal glue between them after resizing

A strut is an invisible component of a fixed width or a fixed height. You can create a horizontal strut using the `createHorizontalStrut()` method that takes the width in pixels as an argument. You can create a vertical strut using the `createVerticalStrut()` method that takes the height in pixels as an argument.

```
// Add a 100px strut to a horizontal box
hBox.add(Box.createHorizontalStrut(100));
```

A rigid area is an invisible component that is always the same size. You can create a rigid area by using the `createRigidArea()` static method of the `Box` class. You need to pass a `Dimension` object to it to specify its width and height.

```
// Add a 10x5 rigid area to a horizontal box
hBox.add(Box.createRigidArea(new Dimension(10, 5)));
```

A filler is an invisible custom component that you can create by specifying your own minimum, maximum, and preferred sizes. The `Filler` static nested class of the `Box` class represents a filler.

```
// Create a filler, which acts like a glue. Note that
// the glue is
// just a filler with a minimum and preferred size set
// to zero and
// a maximum size set to Short.MAX_VALUE in both
// directions
```

```

Dimension minSize = new Dimension(0, 0);
Dimension prefSize = new Dimension(0, 0);
Dimension maxSize = new Dimension(Short.MAX_VALUE,
Short.MAX_VALUE);
Box.Filler filler = new Box.Filler(minSize, prefSize,
maxSize);

```

You can get a very powerful layout by nesting boxes with a horizontal and vertical BoxLayout. The Box class provides convenience methods to create glue, strut, and rigid areas. However, they are all objects of the Box.Filler class. When the minimum and preferred sizes are set to zero, and the maximum size to Short.MAX_VALUE in both directions, a Box.Filler object acts as a glue. When the maximum height of a glue is set to zero, it acts like a horizontal glue. When the maximum width of a glue is set to zero, it acts like a vertical glue. You can create a horizontal strut using the Box.Filler class by using its minimum and preferred sizes of a specified width and zero height, and a maximum size as the specified width and Short.MAX_VALUE height. Can you think of a way to create a rigid area using the Box.Filler class? All sizes (minimum, preferred, and maximum) will be the same for a rigid area. The following snippet of code creates a rigid area of 10x10:

```

// Create a 10x10 rigid area
Dimension d = new Dimension(10, 10);
JComponent rigidArea = new Box.Filler(d, d, d);

```

[Listing 1-12](#) demonstrates how to use the Box class and glue. [Figure 1-23](#) shows the resulting JFrame after you expand it horizontally. When the HFrame is opened, there is no gap between the Previous and Next buttons.

[Listing 1-12](#). A BoxLayout Using the Box Class and Glue

```

// BoxLayoutGlueTest.java
package com.jdojo.swing;

import java.awt.Container;
import javax.swing.JFrame;
import javax.swing.JButton;
import javax.swing.Box;
import java.awt.BorderLayout;

```

```

public class BoxLayoutGlueTest {
    public static void main(String[] args) {
        JFrame frame = new JFrame("BoxLayout with
Glue");
        frame.setDefaultCloseOperation(JFrame.EXIT_ON_
        Container contentPane
        = frame.getContentPane();
        Box hBox = Box.createHorizontalBox();
        hBox.add(new JButton("<<First"));
        hBox.add(new JButton("<Previous"));
        hBox.add(Box.createHorizontalGlue());
        hBox.add(new JButton("Next>"));
        hBox.add(new JButton("Last>>"));

        contentPane.add(hBox,
BorderLayout.SOUTH);
        frame.pack();
        frame.setVisible(true);
    }
}

```



Figure 1-23. A BoxLayout with glue

GridLayout

A GridLayout arranges components in a rectangular grid of equally sized cells. Each component is placed in exactly one cell. It does not respect the preferred size of the component. It divides the available space into equally sized cells and resizes each component to the cell's size.

You can specify either the number of rows or the number of columns in the grid. If you specify both, only the number of rows is used, and the number of columns is computed. Suppose ncomponents is the number of components

added to the container, and `nrows` and `ncols` are the specified number of rows and columns. If `nrows` is greater than zero, the number of columns in the grid is computed using the following formula:

```
ncols = (ncomponents + nrows - 1)/nrows
```

If `nrows` is zero, the number of rows in the grid is computed using the following formula:

```
nrows = (ncomponents + ncols - 1)/ncols
```

You cannot specify a negative number for `nrows` or `ncols`, and at least one of them must be greater than zero. Otherwise, a runtime exception is thrown.

You can create a `GridLayout` using one of the following three constructors of the `GridLayout` class:

- `GridLayout()`
- `GridLayout(int rows, int cols)`
- `GridLayout(int rows, int cols, int hgap, int vgap)`

You can specify the number of rows, the number of columns, a horizontal gap, and a vertical gap between two cells in the grid. You can also set these properties using the methods `setRows()`, `setColumns()`, `setHgap()`, and `setVgap()`.

The no-args constructor creates a grid of one row. The number of columns is the same as the number of components added to the container.

```
// Create a grid layout of one row
GridLayout gridLayout = new GridLayout();
```

The second constructor creates a `GridLayout` by a specified number of rows or columns.

```
// Create a grid layout of 5 rows. Specify 0 as the
// number of columns.
// The number of columns will be computed.
GridLayout gridLayout = new GridLayout(5, 0);
```

```

// Create a grid layout of 3 columns. Specify 0 as the
number of rows.
// The number of rows will be computed.
GridLayout gridLayout = new GridLayout(0, 3);

// Create a grid layout with 2 rows and 3 columns. You
have specified
// a non-zero value for rows, so the value for columns
will be ignored.
// It will be computed based on the number of
components.
GridLayout gridLayout = new GridLayout(2, 3);

```

The third constructor lets you specify the number of rows or the number of columns, and horizontal and vertical gaps between two cells. You can create a GridLayout of three rows with a horizontal gap of 10 pixels and a vertical gap of 20 pixels between cells, as shown:

```
GridLayout gridLayout = new GridLayout(3, 0, 10, 20);
```

[Listing 1-13](#) demonstrates how to use a GridLayout. Note that you do not specify in which cell the component will be placed. You just add the component to the container and the layout manager decides the placement.

Listing 1-13. Using GridLayout

```

// GridLayoutTest.java
package com.jdojo.swing;

import java.awt.GridLayout;
import javax.swing.JPanel;
import java.awt.BorderLayout;
import javax.swing.JFrame;
import java.awt.Container;
import javax.swing.JButton;

public class GridLayoutTest {
    public static void main(String[] args) {
        JFrame frame = new JFrame("GridLayout
Test");

```

```

        frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
        Container contentPane
= frame.getContentPane();


        JPanel buttonPanel = new JPanel();
        buttonPanel.setLayout(new
GridLayout(3, 0));

        for(int i = 1; i <= 9 ; i++) {
            buttonPanel.add(new
JButton("Button " + i));
        }

        contentPane.add(buttonPanel,
BorderLayout.CENTER);
        frame.pack();
        frame.setVisible(true);
    }
}

```

[Figure 1-24](#) shows a container with a GridLayout that has three rows and nine components. [Figure 1-25](#) shows a container with a GridLayout that has three rows and seven components. If you resize the container with a GridLayout, all components will be resized and they will be of the same size. Try resizing the JFrame by running the program in [Listing 1-13](#).

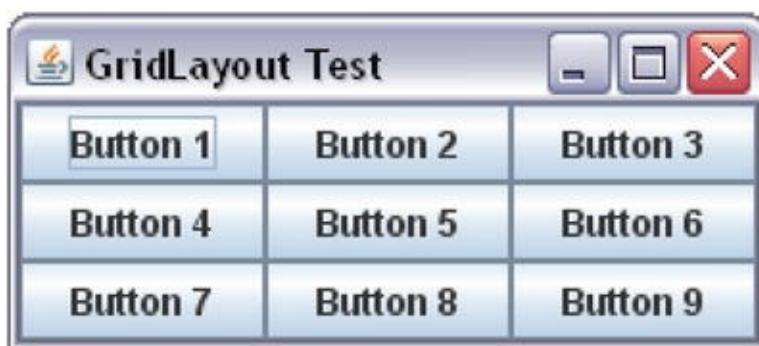

[Figure 1-24](#). A GridLayout with three rows and nine components

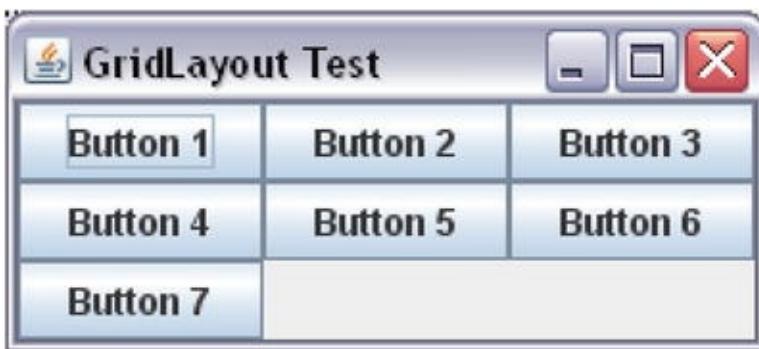


Figure 1-25. A GridLayout with three rows and seven components

A GridLayout is a simple layout manager to code by hand. However, it is not very powerful, for two reasons. First, it forces each component to have the same size, and second, you cannot specify the row and column number (or exact location) of a component in the grid. That is, you can only add a component to the GridLayout. They will be laid out horizontally, and then vertically in the order you add them to the container. If the container's orientation is LEFT_TO_RIGHT, components are laid out from left-to-right, and then top-to-bottom. If the container's orientation is RIGHT_TO_LEFT, components are laid out from right-to-left, and then top-to-bottom. One good use of the GridLayout is to create a group of buttons of the same size. For example, suppose you add two buttons with the text OK and Cancel to a container and want them to have the same size. You can do this by adding the buttons to a container managed by a GridLayout layout manager.

GridBagLayout

The GridBagLayout lays out components in a grid of rectangular cells arranged in rows and columns similar to the GridLayout. However, it is much more powerful than the GridLayout. Its power comes with an added complexity in its usage. It is not as easy to use as the GridLayout. There are so many things you can customize in the GridBagLayout that it becomes hard to learn and use all of its features quickly.

It lets you customize many properties of the components, such as size, alignment, expandability, etc. Unlike the GridLayout, all cells of the grid do not have to be of the same size. A component does not have to be placed exactly in one cell. A component can span multiple cells horizontally as well as

vertically. You can specify how a component inside its cell should be aligned.

The `GridBagLayout` and `GridBagConstraints` classes are used while working with a `GridBagLayout` layout manager. Both classes are in the `java.awt` package. An object of the `GridBagLayout` class defines a `GridBagLayout` layout manager. An object of the `GridBagConstraints` class defines constraints for a component in a `GridBagLayout`. The constraints of a component are used to lay out the component. Some of the constraints include the component's position in the grid, width, height, alignment inside the cell, etc.

The following snippet of code creates an object of the `GridBagLayout` class and sets it as the layout manager for a `JPanel`:

```
// Create a JPanel container
JPanel panel = new JPanel();

// Set GridBagLayout as the layout manager for the
// JPanel
GridBagLayout gridBagLayout = new GridBagLayout();
panel.setLayout(gridBagLayout);
```

Let's use `GridBagLayout` in the simplest form: create a frame, set the layout for its content pane to `GridBagLayout`, and add nine buttons to the content pane. This is accomplished in [Listing 1-14](#). [Figure 1-26](#) shows the screen you get when you run the program.

[Listing 1-14](#). A `GridBagLayout` Used in Its Simplest Form

```
// SimplestGridBagLayout.java
package com.jdojo.swing;

import javax.swing.JFrame;
import java.awt.Container;
import javax.swing.JButton;
import java.awt.GridBagLayout;

public class SimplestGridBagLayout {
    public static void main(String[] args) {
        String title = "GridBagLayout in its
Simplest Form";
```

```

JFrame frame = new JFrame(title);
frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
Container contentPane
= frame.getContentPane();
contentPane.setLayout(new
GridLayout(3, 3));
for(int i = 1; i <= 9; i++) {
    contentPane.add(new
JButton("Button " + i));
}
frame.pack();
frame.setVisible(true);
}
}

```



Figure 1-26. Nine buttons in a GridBagLayout

At first, it seems that a GridBagLayout behaves like a FlowLayout. The effect is the same as if you used a FlowLayout. However, a GridBagLayout is not the same as a FlowLayout, although it has the ability to work like a FlowLayout. It is much more powerful (and error prone too!) than a FlowLayout. When you added nine buttons, you did not specify their cells. You used the `contentPane.add(Component c)` method to add the buttons. The result was that it placed one button after another in a single row.

You can specify the cell in which a component in a GridBagLayout should be placed. To specify the cell for a component, you need to call the `add(Component c, Object constraints)` method, where the second argument is an object of the `GridBagConstraints` class. If you do not specify the constraints object for a component in a GridBagLayout, it places the component in the *next cell*. The next cell is the cell after the cell that was used to place the previous component. If you do not use constraints for any components in a GridBagLayout, all components are placed in one row, as shown in [Figure 1-26](#). I will discuss more about this when I cover the `gridx`

and `gridy` properties of a `GridBagConstraints` object.

Let's set the record straight for the `GridBagLayout` by showing that it is really a grid layout and that it places components in a grid of cells. To prove this, you will display nine buttons in the previous example in a grid of cells with three rows and three columns. This time, there will be only one difference: you will specify the position of the cell in the grid for the buttons. The combination of the row number and column number denotes the position of a cell in the grid. All properties for the components and its cells are specified using an object of the `GridBagConstraints` class. It has many public instance variables. Its `gridx` and `gridy` instance variables specify the column number and row number of a cell, respectively. The first column is denoted by `gridx = 0`, the second column by `gridx = 1`, and so on. The first row is denoted by `gridy = 0`, the second row by `gridy = 1`, and so on.

Which one is the first cell in a grid—the upper-left corner, the upper-right corner, the lower-left corner, or the lower-right corner? It depends on the orientation of the container. If the container uses the `LEFT_TO_RIGHT` orientation, the cell in the upper-left corner of the grid is the first cell. If the container uses the `RIGHT_TO_LEFT` orientation, the cell in the upper-right corner of the grid is the first cell. [Table 1-1](#) and [Table 1-2](#) show the cells with their corresponding `gridx` and `gridy` values in a `GridBagLayout` with different container orientations. These tables show only nine cells. A `GridBagLayout` is not limited to having only nine cells. You can have as many cells as you want. To be exact, you can have a maximum of `Integer.MAX_VALUE` number of rows and columns, which you will never use in any application for sure.

Table 1-1. Values of `gridx` and `gridy` for Cells in a Container With `LEFT_TO_RIGHT` Orientation

<code>gridx=0, gridy=0</code>	<code>gridx=1, gridy=0</code>	<code>gridx=2, gridy=0</code>
<code>gridx=0, gridy=1</code>	<code>gridx=1, gridy=1</code>	<code>gridx=2, gridy=1</code>
<code>gridx=0, gridy=2</code>	<code>gridx=1, gridy=2</code>	<code>gridx=2, gridy=2</code>

Table 1-2. Values of `gridx` and `gridy` for Cells in a Container with `RIGHT_TO_LEFT` Orientation

gridx=2, gridy=0	gridx=1, gridy=0	gridx=0, gridy=0
gridx=2, gridy=1	gridx=1, gridy=1	gridx=0, gridy=1
gridx=2, gridy=2	gridx=1, gridy=2	gridx=0, gridy=2

Setting the `gridx` and `gridy` properties of a component is easy. You create a constraint object for your component, which is an object of the `GridBagConstraints` class; set its `gridx` and `gridy` properties; and pass the constraint object to the `add()` method when you add your component to the container. The following snippet of code shows how to set the `gridx` and `gridy` properties in a constraint for a `JButton`. When you call the `container.add(component, constraint)` method, the constraint object is copied for the component being added, so that you can change some of its properties and reuse it for another component. This way, you do not have to create a new constraint object for each component you add to a `GridBagLayout`. However, this approach is error prone. You may set a constraint for a component and forget to change that when you reuse the constraint object for another component. So, be careful when you reuse a constraint object.

```
// Create a constraint object
GridBagConstraints gbc = new GridBagConstraints();

// Set gridx and gridy properties in the constraint
// object
gbc.gridx = 0;
gbc.gridy = 0;

// Add a JButton and pass the constraint object as the
// second argument to the add() method.
container.add(new JButton("B1"), gbc);

// Set the gridx property to 1. The gridy property
// remains as 0 as set previously.
gbc.gridx = 1;

// Add another JButton to the container
container.add(new JButton("B2"), gbc);
```

[Listing 1-15](#) demonstrates how to set `gridx` and `gridy` values (or cell number) for a component. [Figure 1-27](#) shows the `JFrame` that you get when you run the program.

Listing 1-15. Setting `gridx` and `gridy` Properties for Components in a `GridBagLayout`

```
// GridBagLayoutWithgridxAndgridy.java
package com.jdojo.swing;

import java.awt.GridBagLayout;
import java.awt.Container;
import javax.swing.JFrame;
import javax.swing.JButton;
import java.awt.GridBagConstraints;

public class GridBagLayoutWithgridxAndgridy {
    public static void main(String[] args) {
        String title = "GridBagLayout with gridx
and gridy";
        JFrame frame = new JFrame(title);
        frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);

        Container contentPane
= frame.getContentPane();
        contentPane.setLayout(new
GridBagLayout());

        // Create an object for
GridBagConstraints to set
        // the constraints for each JButton
        GridBagConstraints gbc = new
GridBagConstraints();

        for(int y = 0; y < 3; y++) {
            for(int x = 0; x < 3; x++) {
                gbc.gridx = x;
                gbc.gridy = y;
                String text = "Button (" + x + ", " + y + ")";
                JButton button = new JButton(text);
                frame.add(button, gbc);
            }
        }
    }
}
```

```

+ x + ", " + y + ")");
contentPane.add(new
JButton(text), gbc);
}
}

frame.pack();
frame.setVisible(true);
}
}

```

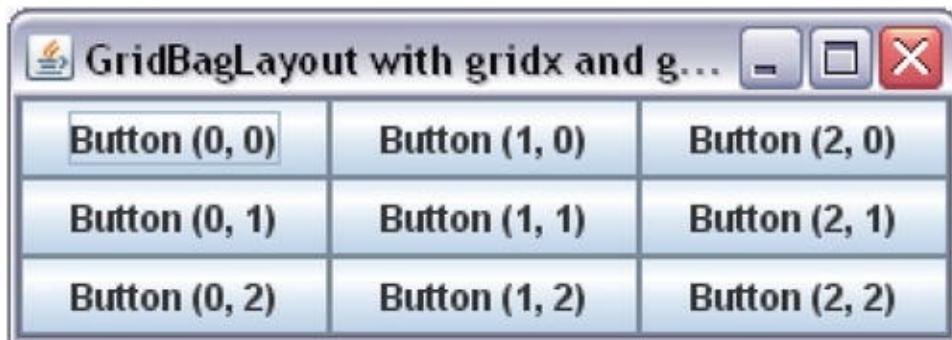


Figure 1-27. A *GridBagLayout* with nine buttons

You can specify other constraints for a component using a `GridBagConstraints` object. All constraints in a `GridBagConstraints` object are set using one of the instance variables listed in [Table 1-3](#). The class also defines many constants such as `RELATIVE`, `REMAINDER`, etc. Note that all instance variables are in lowercase.

Table 1-3. Instance Variables of the *GridBagConstraints* Class

Instance Variable	Default Value	Possible Values	Usage
gridx gridy	RELATIVE	RELATIVE An integer	Column number and row number of the cell in the grid in which the component is placed.
gridwidth gridheight	1	An integer RELATIVE REMAINDER	Number of grid cells used to display the component.
fill	NONE	BOTH HORIZONTAL VERTICAL NONE	Specifies how the component will fill the cell(s) allotted to it in the grid.
ipadx ipady	0	An integer	Specifies the internal padding of a component that is added to its minimum size. A negative integer is allowed, which will decrease the minimum size of the component.
insets	(0,0,0,0)	An Insets object	Specifies the external padding between edges of the components and its cell in the grid. Negative values are allowed.
anchor	CENTER	CENTER, NORTH, NORTHEAST, EAST, SOUTHEAST, SOUTH, SOUTHWEST, WEST, NORTHWEST, PAGE_START, PAGE_END, LINE_START, LINE_END, FIRST_LINE_START, FIRST_LINE_END, LAST_LINE_START, LAST_LINE_END, BASELINE, BASELINE.LEADING, BASELINE.TRAILING, ABOVE.BASELINE, ABOVE.BASELINE.LEADING, ABOVE.BASELINE.TRAILING, BELOW.BASELINE, BELOW.BASELINE.LEADING, BELOW.BASELINE.TRAILING	Where in the display area the component is placed.
weightx weighty	0.0	A positive double value	How the extra space (horizontally and vertically) is distributed among the grid cells when the container is resized.

The following sections discuss the effects of each constraint in detail.

The gridx and gridy Constraints

The `gridx` and `gridy` constraints specify the cell in the grid in which the component is placed. A component can occupy multiple cells horizontally as well as vertically. All the cells that a component occupies, when taken together,

are known as the display area of the component.

Let's have a precise definition of the `gridx` and `gridy` constraints. They specify the starting cell of the display area of a component. By default, each component occupies only one cell. I will discuss how to make a component occupy multiple cells in the next section when I discuss the `gridwidth` and `gridheight` constraints. Please refer to [Listing 1-15](#) for more details on setting `gridx` and `gridy` constraints values for a component.

You can specify a `RELATIVE` value for either or both `gridx` and `gridy` constraints. If you specify the values for `gridx` and `gridy` (an integer greater than or equal to zero), you decide where the component will be placed. If you specify either or both constraint values as `RELATIVE`, the layout manager will determine the value for `gridx` and/or `gridy`. If you read the API documentation for the `GridBagLayout` class, the description of the `RELATIVE` value for `gridx` and/or `gridy` is not very clear. All it says is that when you specify the value for `gridx` and/or `gridy` as `RELATIVE`, the component will be placed next to the component that was added before this component. This description in the API documentation is as clear as mud! The following paragraphs will describe setting the values for `gridx` and `gridy` in full detail with examples.

Case #1

You have specified values for both `gridx` and `gridy`. This is the case of absolute positioning in the grid. Your component is placed according to the value of `gridx` and `gridy` that you have specified. You have already seen an example of this kind in [Listing 1-15](#).

Case #2

You have specified a value for `gridx` and you have set the value for `gridy` to `RELATIVE`. In this case, the layout manager needs to determine the value for `gridy`. Let's look at an example. Assume that you have three buttons to place in the grid, and you have a `container` object whose layout manager is set to a `GridBagLayout`. The following snippet of code adds the three buttons to the grid. [Figure 1-28](#) shows the screen with three buttons.



Figure 1-28. Specifying gridx and Setting gridy to RELATIVE

```
GridBagConstraints gbc = new GridBagConstraints();
JButton b1 = new JButton("Button 1");
JButton b2 = new JButton("Button 2");
JButton b3 = new JButton("Button 3");

gbc.gridx = 0;
gbc.gridy = 0;
container.add(b1, gbc);

gbc.gridx = 0;
gbc.gridy = GridBagConstraints.RELATIVE;
container.add(b2, gbc);

gbc.gridx = 1;
gbc.gridy = GridBagConstraints.RELATIVE ;
container.add(b3, gbc);
```

There is no confusion about the placement of the button `b1` because you have specified both `gridx` and `gridy` values. It is placed in the first row (`gridy = 0`) and first column (`gridx = 0`).

For button `b2`, you have specified `gridx = 0`. You want it to be placed in the first column and the result is the same as you expected. You have specified `gridy` as `RELATIVE` for `b2`. This means that you are telling the `GridBagLayout` to find an appropriate row for `b2` by placing it in the first column (`gridx = 0`). Since the first row is already occupied by `b1` in the first column, the next row available for `b2` is the second row and it is placed there.

You have set `gridx = 1` for the button `b3`. This means that it should be placed in the second column. You have specified its `gridy` as `RELATIVE`. It means that the layout manager needs to find a row for it in the second column. Since the very first row does not have any component placed in the second

column, the layout manager places it in the first row. Where will b3 be placed if you had specified its `gridx` as 0? Apply the same logic again. Since the first column already had b1 and b2 in the first row and the second row, respectively, the only next row available for b3 is the third row and the layout manager would place it just below b2.

Case #3

You have specified a value for `gridy` and you have set the value for `gridx` to `RELATIVE`. In this case, the layout manager needs to determine the value for `gridx`. That is, based on the specified value of the row number, the layout manager has to determine its column number. [Figure 1-29](#) shows the three buttons laid out when you use the following snippet of code. The logic to lay out the buttons this way is the same as in the previous example, except that this time the layout manager decides the column numbers for b2 and b3 instead of their row numbers.



[Figure 1-29](#). Specifying `gridy` and setting `gridx` to `RELATIVE` in a `GridBagLayout`

```
gbc.gridx = 0;  
gbc.gridy = 0;  
container.add(b1, gbc);  
  
gbc.gridx = GridBagConstraints.RELATIVE;  
gbc.gridy = 0;  
container.add(b2, gbc);  
  
gbc.gridx = GridBagConstraints.RELATIVE;  
gbc.gridy = 1;  
container.add(b3, gbc);
```

Case #4

This is the last of the four possibilities in which you specify both `gridx` and `gridy` as `RELATIVE`. The layout manager has to determine the row number as well as the column number for the component being added. It will determine the row number first. The row for the component will be the current row. Which row is the current row? By default, the first row (`gridy = 0`) is the current row. When you add a component, you can also specify its `gridwidth` constraint. One of its values is `REMAINDER`, which means that this is the last component in the row. If you add a component to the first row with its `gridwidth` set to `REMAINDER`, the second row becomes the current row. Once the layout manager determines the row number for a component, which is the current row, it will place the component in the column next to the last component added in that row. The default value for `gridx` and `gridy` is `RELATIVE`. Now you can understand why [Listing 1-14](#) placed all buttons in the first row, which used `RELATIVE` as `gridx` and `gridy` for all buttons, by default. Since the default `gridwidth` is 1, the first row was always the current row. Whenever you added a button, the first row (the current row) was assigned as its row and its column was the next to the last button added in that row. Let's have some examples in which you will set both `gridx` and `gridy` to `RELATIVE`.

Example 1:

The following snippet of code lays out the buttons as shown in [Figure 1-30](#):

```
gbc.gridx = 0;  
gbc.gridy = 0;  
container.add(b1, gbc);  
  
gbc.gridx = GridBagConstraints.RELATIVE;  
gbc.gridy = GridBagConstraints.RELATIVE;  
container.add(b2, gbc);  
  
gbc.gridx = GridBagConstraints.RELATIVE;  
gbc.gridy = 1;  
container.add(b3, gbc);
```



Figure 1-30. Specifying Both `gridx` and `gridy` as RELATIVE

You used absolute positioning for `b1` by specifying its `gridx = 0` and `gridy = 0`. It resulted in placing `b1` in the first row and the first column. You have specified both `gridx` and `gridy` for `b2` as RELATIVE. The layout manager has to determine the row number and the column number for `b2`. It looks at the current row, which is the first row by default. Therefore, it sets `b2`'s row number to 0. It finds that there is already one component (`b1`) placed in the first column. Therefore, it sets the next column, which is the second column, for `b2`. And here you see `b2` placed in the first row and the second column. It is simple to understand the placement of `b3`. Since you have specified its `gridy = 1`, it is placed in the second row. Its `gridx` is RELATIVE and since the first column is available in the second row, it is placed in the first column.

Example 2:

The following snippet of code lays out the buttons as shown in [Figure 1-31](#). Note that the `b1` button is placed in the center of its available space, which is the default behavior. You can customize the placement of a component inside its allocated space using the `anchor` property that I will discuss shortly.



Figure 1-31. Specifying `gridx` and `gridy` as RELATIVE with `gridwidth` as REMAINDER

```
gbc.gridx = 0;  
gbc.gridy = 0;
```

```

gbc.gridwidth = GridBagConstraints.REMAINDER; // Last
component in the row
container.add(b1, gbc);

gbc.gridx = GridBagConstraints.RELATIVE;
gbc.gridy = GridBagConstraints.RELATIVE;
gbc.gridwidth = 1; // Reset to the default value
container.add(b2, gbc);

gbc.gridx = GridBagConstraints.RELATIVE; gbc.gridy
= 1;
container.add(b3, gbc);

```

You specified `gridx = 0` and `gridy = 0` for `b1`. This time, you specified `gridwidth` for `b1` as `REMAINDER`. This means that `b1` is the last component in the first row. Since this is the only component added to the first row, it becomes the first and the last component in this row. After `b1` is added with its `gridwidth` as `REMAINDER`, the second row becomes the current row. For `b2`, `gridx` and `gridy` are set to `RELATIVE`. The layout manager will set the second row (`gridy = 1`) as its row number. Since there is no component placed in the second row before `b2`, it will be the first one in the row. This results in placing `b2` in the second row and the first column. Note that you set the value for `gridwidth` to 1 for `b2` and `b3`. Determining the position of `b3` is simple. Since you specified its `gridy` to 1 (the second row), it is placed in the second row. Its `gridx` is `RELATIVE`. Since `b2` is already in the first column, it is placed in the second column.

The gridwidth and gridheight Constraints

The `gridwidth` and `gridheight` constraints specify the width and height of the display area of a component, respectively. The default value for both is 1. That is, by default, a component is placed in one cell. If you specify `gridwidth = 2` for a component, its display area will be two cells wide. If you specify `gridheight = 2` for a component, its display area will be two cells high. If you have worked with HTML tables, you can compare `gridwidth` with `colspan` and `gridheight` with `rowspan` properties of a cell of an HTML table.

You can specify two predefined constants for `gridwidth` and `gridheight`. They are `REMAINDER` and `RELATIVE`. The `REMAINDER` value for `gridwidth` means that the component will span from its `gridx` cell to the remainder of the row. In other words, it is the last component in the row. The `REMAINDER` value for the `gridheight` indicates that it is the last component in the column. The `RELATIVE` value for `gridwidth` indicates that the width of the display area of the component will be from its `gridx` to the second last cell in the row. The `RELATIVE` value for `gridheight` indicates that the height of the display area of the component will be from its `gridy` to the second last cell. Let's take an example of each kind for `gridwidth`. You can extend this concept for `gridheight`. The only difference is that the `gridwidth` affects the width of a component's display area, whereas the `gridheight` affects the height.

The following snippet of code adds nine buttons to a container—three in the first row and six in the second row:

```
// Expand the component to fill the whole cell
gbc.fill = GridBagConstraints.BOTH;

gbc.gridx = 0;
gbc.gridy = 0;
container.add(new JButton("Button 1"), gbc);

gbc.gridx = 1;
gbc.gridy = 0;
gbc.gridwidth = GridBagConstraints.RELATIVE;
container.add(new JButton("Button 2"), gbc);

gbc.gridx = GridBagConstraints.RELATIVE; gbc.gridy
= 0;
gbc.gridwidth = GridBagConstraints.REMAINDER;
container.add(new JButton("Button 3"), gbc);

// Reset gridwidth to its default value 1
gbc.gridwidth = 1;

// Place six JButtons in second row
gbc.gridy = 1;
for(int i = 0; i < 6; i++) {
```

```
gbc.gridx = i;
container.add(new JButton("Button " + (i + 4)),
gbc);
}
```

The very first statement is new to you. It sets the `fill` instance variable of `GridBagConstraints` to `BOTH`, which indicates that the components added to cells will be expanded in both directions (horizontally and vertically) to fill the entire cell area. I will discuss this in more detail later. The first button is placed in the first row and the first column.

The second button is placed in the first row and the second column. Its `gridwidth` is set to `RELATIVE`, which means it will span from the second column (`gridx = 1`) to the second to last column in the row. Which column is the last column in the first row? You do not know yet. You must look at all components that are added to a `GridBagLayout` to find out the maximum number of rows and columns in the grid. For now, you know that the second button starts in the second column, but you do not know in which column it will end (or up to what column it will extend).

Let's look at the third button. You have specified its `gridy = 0`, which means that it should be placed in the first row. You have set its `gridx` to `RELATIVE`, which means that it will be placed after the second button in the first row. You have set its `gridwidth` value as `REMAINDER`, which means this is the last component in the first row. There is an interesting point to note. The second button will expand as needed from the second column to the second to last column. You are saying that the third button is the last component in the first row and it should occupy the rest of the cells. The result is that there will always be only one cell (the last cell) left for the third button because of the *greedy* value of `RELATIVE` for the `gridwidth` of the second button.

In the second row, you have added six buttons. The total number of cells in each row is decided by the maximum number of columns in a row. Therefore, each row (first and second) will have six cells. You have set the `gridwidth` to its default value of 1, so each button in the second row will occupy only one cell. In the first row, the first button occupies one cell, the third one occupies one cell, and the second one occupies the remaining four, as shown in [Figure 1-32](#).



Figure 1-32. Specifying gridwidth and gridheight

The fill Constraint

A `GridBagLayout` gives the preferred width and height to each component. The width of a column is decided by the widest component in the column. Similarly, the height of a row is decided by the highest component in the row. The `fill` constraint value indicates how a component is expanded horizontally and vertically when its display area is bigger than its size. Note that the `fill` constraint is only used when the component's size is smaller than its display area.

The `fill` constraint has four possible values: `NONE`, `HORIZONTAL`, `VERTICAL`, and `BOTH`. Its default value is `NONE`, which means “do not expand the component.” The value `HORIZONTAL` means “expand the component horizontally to fill its display area.” The value `VERTICAL` means “expand the component vertically to fill its display area.” The value `BOTH` means “expand the component horizontally and vertically to fill its display area.”

The following snippet of code adds nine buttons to a grid of three rows and three columns, as shown in Figure 1-33.

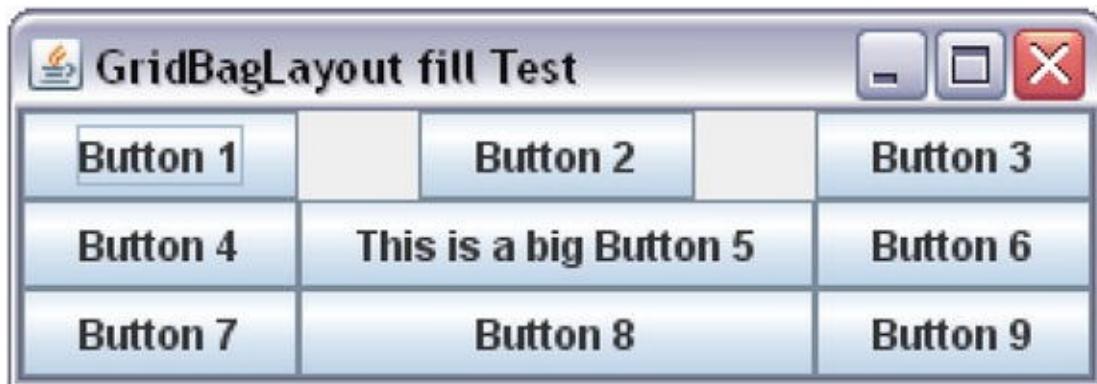


Figure 1-33. Specifying the fill constraint for a component in a `GridBagLayout`

```
gbc.gridx = 0; gbc.gridy = 0;
```

```

container.add(new JButton("Button 1"), gbc);
gbc.gridx = 1; gbc.gridy = 0;
container.add(new JButton("Button 2"), gbc);
gbc.gridx = 2; gbc.gridy = 0;
container.add(new JButton("Button 3"), gbc);

gbc.gridx = 0; gbc.gridy = 1;
container.add(new JButton("Button 4"), gbc);
gbc.gridx = 1; gbc.gridy = 1;
container.add(new JButton("This is a big Button 5"),
gbc);
gbc.gridx = 2; gbc.gridy = 1;
container.add(new JButton("Button 6"), gbc);

gbc.gridx = 0; gbc.gridy = 2;
container.add(new JButton("Button 7"), gbc);
gbc.gridx = 1; gbc.gridy = 2;
gbc.fill = GridBagConstraints.HORIZONTAL;
container.add(new JButton("Button 8"), gbc);
gbc.gridx = 2; gbc.gridy = 2;
gbc.fill = GridBagConstraints.NONE;
container.add(new JButton("Button 9"), gbc);

```

The fifth button decides the width of the second column because it is the widest JButton in that column. Note the empty space in the second column of the first row. It has empty space because for the second button the `fill` value is `NONE`, which is the default and the second button was not expanded to take the entire width of its display area. It was left to its preferred size. Look at the eighth button. You specified that it should expand horizontally, and it did so to match the width of its display area.


The `ipadx` and `ipady` Constraints

The `ipadx` and `ipady` constraints are used to specify internal padding for a component. They increase the preferred size and the minimum size of the component. By default, both constraints are set to zero. Negative values are allowed. The negative value for these constraints will decrease the component's preferred and minimum size. If you specify the value for `ipadx`, the

component's preferred and minimum width will be increased by `2 * ipadx`. Similarly, if you specify the value for `ipady`, the component's preferred and minimum height will be increased by `2 * ipady`. These options are rarely used. The values for `ipadx` and `ipady` are specified in pixels.

The insets Constraints

The `insets` constraint specifies the external padding around the component. It adds spaces around the component. You specify the `insets` value as an object of the `java.awt.Insets` class. It has one constructor called `Insets(int top, int left, int bottom, int right)`. You can specify the padding for all four sides of the component. By default, the value for `insets` is set to an `Insets` object with zero pixels on all four sides. The following snippet of code adds nine buttons in a 3X3 grid with five pixels insets on all four sides for all buttons. The resulting layout is shown in [Figure 1-34](#). Note that you have specified the `fill` constraint as `BOTH` for all buttons but you still see the gap between adjacent buttons because of their `insets` constraints. The `insets` constraints tell the layout manager to leave a space between the edge of the component and the edge of the display area.

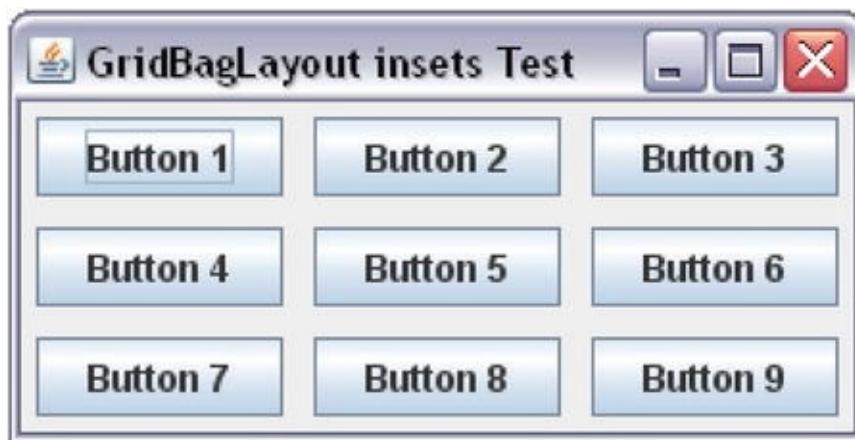

[Figure 1-34](#). Specifying insets for components in a `GridBagLayout`

```
gbc.fill = GridBagConstraints.BOTH;
gbc.insets = new Insets(5, 5, 5, 5);
int count = 1;
for(int y = 0; y < 3; y++) {
    gbc.gridy = y;
```

```

        for(int x = 0; x < 3; x++) {
            gbc.gridx = x;
            container.add(new JButton("Button " +
+ count++), gbc);
        }
    }
}


```

The anchor Constraint

The `anchor` constraint specifies where a component should be placed within its display area when its size is smaller than that of its display area. By default, its value is set to `CENTER`, which means that the component is centered within its display area.

There are many constants defined in the `GridBagConstraints` class that can be used as a value for the `anchor` constraint. All constants can be categorized in three categories: absolute, orientation-based, and baseline-based.

The absolute values are `NORTH`, `SOUTH`, `WEST`, `EAST`, `NORTHWEST`, `NORTHEAST`, `SOUTHWEST`, `SOUTHEAST`, and `CENTER`. [Figure 1-35](#) shows how a component is placed inside a cell with different absolute anchor values. Note that all nine components in the figure have their `fill` constraint set to `NONE`.

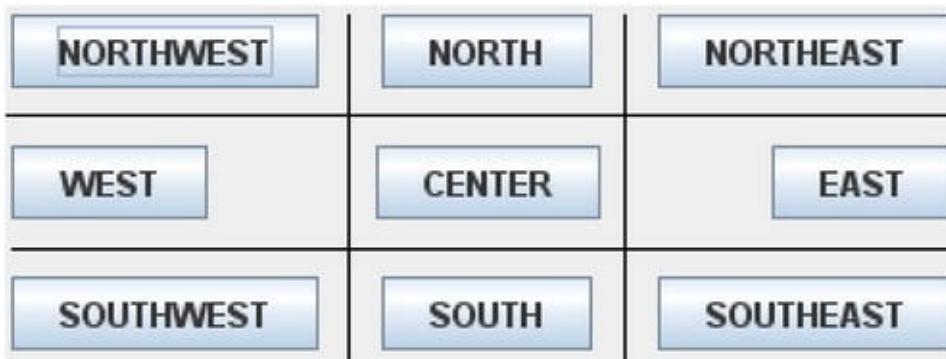

[Figure 1-35](#). Absolute anchor values and their effects on component location in the display area

The orientation-based values are used based on the `ComponentOrientation` property of the container. They are `PAGE_START`, `PAGE_END`, `LINE_START`, `LINE_END`, `FIRST_LINE_START`, `FIRST_LINE_END`, `LAST_LINE_START`, and

`LAST_LINE_END`. [Figure 1-36](#) and [Figure 1-37](#) show the effects of using orientation-based anchor values when the container's orientation is set to `LEFT_TO_RIGHT` and `RIGHT_TO_LEFT`. You may notice that the orientation-based values adjust themselves according to the orientation used by the container.

<code>FIRST_LINE_START</code>	<code>PAGE_START</code>	<code>FIRST_LINE_END</code>
<code>LINE_START</code>	<code>CENTER</code>	<code>LINE_END</code>
<code>LAST_LINE_START</code>	<code>PAGE_END</code>	<code>LAST_LINE_END</code>


[Figure 1-36](#). Orientation-based anchor values and their effects when the container's orientation is `LEFT_TO_RIGHT`

<code>FIRST_LINE_END</code>	<code>PAGE_START</code>	<code>FIRST_LINE_START</code>
<code>LINE_END</code>	<code>CENTER</code>	<code>LINE_START</code>
<code>LAST_LINE_END</code>	<code>PAGE_END</code>	<code>LAST_LINE_START</code>

[Figure 1-37](#). Orientation-based anchor values and their effects when the container's orientation is `RIGHT_TO_LEFT`


The baseline-base anchor's values are used when you want to align the components in a row along their baseline. What is the baseline of a component? The baseline is relative to text. It is an imaginary line on which the characters of the text rest. A component may have a baseline. Generally, the baseline for a component is the distance in pixels between its top edge and the baseline of the text it displays. You can get the baseline value for a component by using its `getBaseline(int width, int height)` method. Note that you need to pass the width and height of the component to get its baseline. Not every

component has a baseline. If a component does not have a baseline, this method returns `-1`. [Figure 1-38](#) shows three components, a `JLabel`, a `JTextField` and a `JButton`, that are aligned along their baseline in a row in a `GridBagLayout`.

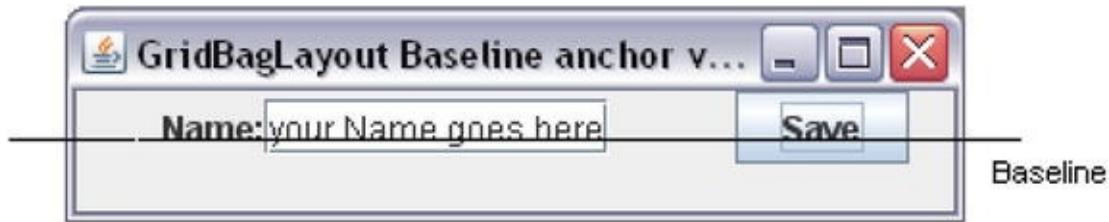

[Figure 1-38](#). A `JLabel`, a `JTextField`, and a `JButton` aligned along their baselines

Each row in a `GridBagLayout` can have a baseline. [Figure 1-38](#) shows the baseline for a row that has three components. A solid horizontal line in the figure indicates the baseline. Note that this solid horizontal baseline is an imaginary line and it does not really exist. It is shown only to demonstrate the baseline concept. A row in a `GridBagLayout` has a baseline only if at least one component has a valid baseline and whose anchor value is `BASLINE`, `BASELINE_LEADING`, or `BASELINE_TRAILING`. [Figure 1-39](#) shows some of the baseline-based anchor values in action. [Table 1-4](#) lists all possible values and their descriptions.

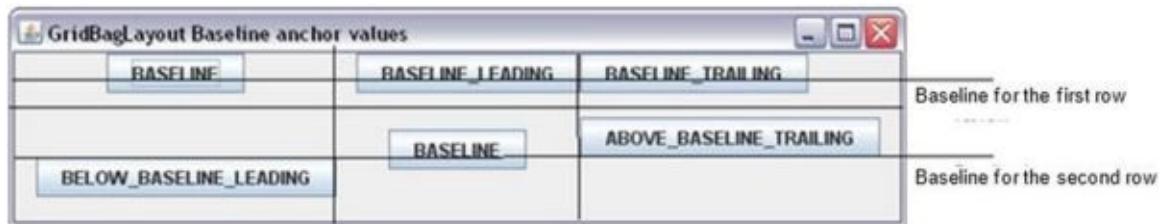

[Figure 1-39](#). Some baseline-based anchor values in action

Table 1-4. List of Baseline-Based Anchor's Values and Descriptions

Baseline-Based Anchor Values	Vertical Alignment	Horizontal Alignment
<code>BASELINE</code>	Row baseline	Center
<code>BASELINE.LEADING</code>	Row baseline	Aligned along the leading edge**

BASELINE_TRAILING	Row baseline	Aligned along the trailing edge***
ABOVE_BASELINE	Bottom edge touches baseline of the starting row	Center
ABOVE_BASELINE.LEADING	Bottom edge touches baseline of the starting row*	Aligned along the leading edge**
ABOVE_BASELINE.TRAILING	Bottom edge touches baseline of the starting row	Aligned along the trailing edge***
BELLOW_BASELINE	Top edge touches baseline of the starting row*	Center
BELLOW_BASELINE.LEADING	Top edge touches baseline of the starting row	Aligned along the leading edge**
BELLOW_BASELINE.TRAILING	Top edge touches baseline of the starting row*	Aligned along the trailing edge***

*starting row: The phrase “starting row” applies only when a component spans multiple rows. Otherwise, read it as the row in which the component is placed. If a row has no baseline, the component is vertically centered

**Leading edge is left edge for LEFT_TO_RIGHT orientation and right edge for RIGHT_TO_LEFT orientation

***Trailing edge is right edge for LEFT_TO_RIGHT orientation and left edge for RIGHT_TO_LEFT orientation

The weightx and weighty Constraints

The weightx and weighty constraints control how the extra space in the container is distributed among rows and columns. The default values for weightx and weighty are zero. They can have any non-negative value.

Figure 1-40 shows a JFrame using the GridBagLayout with nine buttons. Figure 1-41 shows the same JFrame expanded horizontally and vertically.



Figure 1-40. A `JFrame` with a `GridBagLayout` having nine buttons with no extra spaces

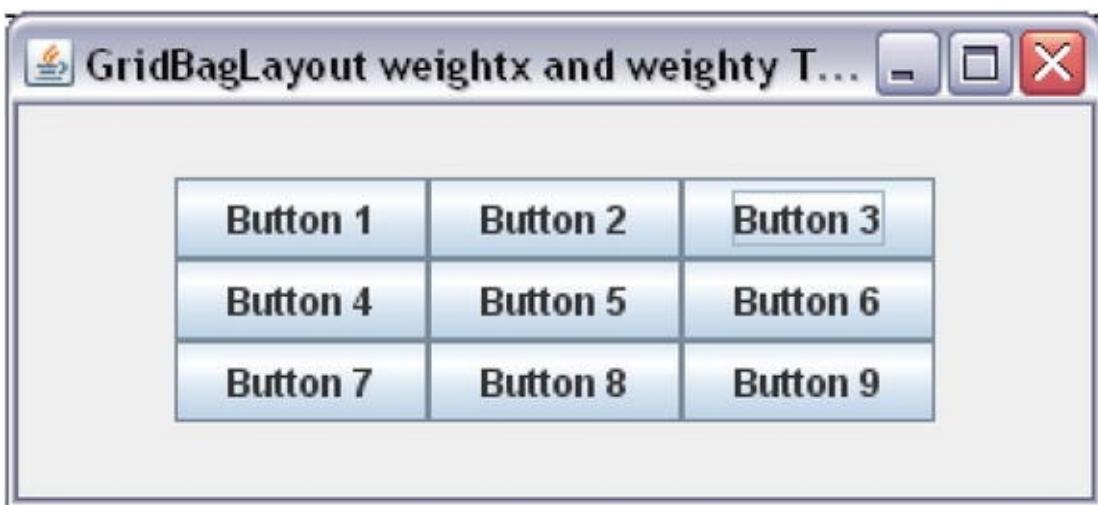


Figure 1-41. A `JFrame` with a `GridBagLayout` having nine buttons after resizing

Notice the extra spaces generated around the group of buttons. You have set the `fill` constraint as `BOTH` for all buttons, so all buttons represent the grid of cells in the `GridBagLayout`. The `weightx` and `weighty` constraints were left to their default values of zero. When all the components have their `weightx` and `weighty` constraints set to zero, any extra space in the container appears between the edge of the container and the edge of the grid of cells.

The `weightx` value determines the distribution of extra horizontal space among the columns, whereas the `weighty` value works on distributing the extra vertical space among rows. If all components have the same `weightx` and `weighty`, extra space is distributed equally among them. [Figure 1-42](#) shows all nine buttons when their `weightx` and `weighty` are set to 1.0. You could have set any positive values for `weightx` and/or `weighty`. As long as they are the same for all components, extra space will be distributed equally among them.



Figure 1-42. A JFrame with a GridBagLayout having nine buttons after resizing. All buttons have their weightx and weighty set to 1. Extra space is distributed among the display area of all buttons equally

Here is how the extra space for each column is computed based on the weightx values. Suppose a container with a GridBagLayout is expanded horizontally to make ES pixels of additional space available. Suppose there are three columns in the grid with three rows. The layout manager will find the maximum value of weightx value for the components in each column. Suppose cwx1, cwx2, and cwx3 are the maximum values for weightx for column 1, column 2, and column 3, respectively. Column 1 will get $(cwx1 * ES) / (cwx1 + cwx2 + cwx3)$ amount of the additional space. Column 2 will get $(cwx2 * ES) / (cwx1 + cwx2 + cwx3)$ amount of the additional space. Column 3 will get $(cwx3 * ES) / (cwx1 + cwx2 + cwx3)$ amount of the additional space. It is necessary to compute the extra space given to a column by using the maximum weightx value in that column to maintain the grid of cells. The computation for distributing extra vertical space among the cells using weighty is similar

Tip The weightx and weighty constraints affect the size of the display area of a component and the size of the component itself. It is customary to use a value between 0.0 and 1.0 for weightx and weighty. However, you can use any non-negative value. The size of the component is affected by other constraints such as fill, gridwidth, gridheight, etc. If you want your component to expand as the extra space becomes available, you need to set its fill constraint to HORIZONTAL, VERTICAL, or BOTH. You can also set the constraints for a component in a GridBagLayout after you have added it to

the container by using the `setConstraints(Component c, GridBagConstraints cons)` method of the `GridLayout` class.

SpringLayout

An instance of the `SpringLayout` class in the `javax.swing` package represents a `SpringLayout` manager. Recall that the job of a layout manager is to compute four properties (x, y, width, and height) of components in a container. In other words, it is responsible for positioning the components inside the container and computing their size. A `SpringLayout` manager represents these four properties of a component in terms of springs. It is cumbersome to code by hand. It is meant for GUI builder tools. I will cover the basics of this layout in this section by hand-coding some simple examples.

What is a spring? In the context of a `SpringLayout` manager, you can think of a spring the same way as a mechanical spring, which can be stretched, compressed, or stay in its normal state. An object of the `Spring` class represents a spring in a `SpringLayout`. A `Spring` object has four properties: minimum, preferred, maximum, and current value. You can think of these four properties as its four types of length. A spring has its minimum value when it is most compressed. In its normal state (neither compressed nor stretched), it has its preferred value. In its most stretched state, it has its maximum value. Its value at any given point in time is its current value. When the minimum, preferred, and maximum values of a spring are the same, it is known as a *strut*.

How do you create a spring? The `Spring` class has no public constructors. It contains factory methods to create springs. To create a spring or strut from scratch, you can use its overloaded `constant()` static method. You can also create a spring using the width or height of a component. The minimum, preferred, and maximum values of the spring are set from the corresponding values of the width or height of the component

```
// Create a strut of 10 pixels
Spring strutPadding = Spring.constant(10);

// Create a spring having 10, 25 and 50 as its
// minimum,
// preferred, and maximum value respectively.
```

```
Spring springPadding = Spring.constant(10, 25, 50);

// Create a spring from the width of a component named c1
Spring s1 = Spring.width(c1);

// Create a spring from the height of a component named c1
Spring s2 = Spring.height(c1);
```

The `Spring` class has some utility methods that let you manipulate spring properties. You can create a new spring by adding two springs using the `sum()` method, like so:

```
// Assuming that s1 and s2 are two springs
Spring s3 = Spring.sum(s1, s2);
```

The computation `sum` is not performed at the time the statement is executed. Rather, the spring `s3` stores the references of `s1` and `s2`. Whenever `s1`, `s2`, or both change, the value for `s3` is computed. In this case, `s3` behaves as if you have connected springs `s1` and `s2` in series.

You can also create a spring by subtracting one spring from another. However, you do not have a method named `subtract()`. There is a method called `minus()` that gives you the negative of a spring. You can use the combination of the `sum()` and `minus()` methods to perform a subtraction, like so:

```
// Perform s1 - s2, which is the same as s1 + (-s2)
Spring s4 = Spring.sum(s1, Spring.minus(s2));
```

To get the maximum of two springs `s1` and `s2`, you can use `Spring.max(s1, s2)`. Note that there is no corresponding method called `min()`. However, you can simulate it by using the combination of the `minus()` and `max()` methods, like so:

```
// Minimum of 2 and 5 is the minus of the maximum of -2 and -5.
// To get the minimum of two spring s1 and s2, you can use minus
// of maximum of -s1 and -s2
```

```
Spring min = Spring.minus(Spring.max(Spring.minus(s1),  
Spring.minus(s2)) );
```

You can also get a fraction of another spring using the `scale()` method. For example, if you have a spring `s1` and you want to create a spring that is 40% of its value, you can do so by passing `0.40f` as the second argument to the `scale()` method, like so:

```
String fractionSpring = Spring.scale(s1, 0.40f);
```

Tip You cannot change the minimum, preferred, and maximum values of a spring after you have created it. You can set its current value by using its `setValue()` method.

You just had a great deal of discussion about springs. It is time to see them in action. How do you add a component to a container with a `SpringLayout`? In the simplest form, you use the `add()` method of the container to add a component. [Listing 1-16](#) sets the layout for the content pane of a `JFrame` to a `SpringLayout` and adds two buttons to it. [Figure 1-43](#) shows the `JFrame` when you run the program.

[Listing 1-16.](#) The Simplest `SpringLayout`

```
// SimplestSpringLayout.java  
package com.jdojo.swing;  
  
import java.awt.Container;  
import javax.swing.JFrame;  
import javax.swing.SpringLayout;  
import javax.swing.JButton;  
  
public class SimplestSpringLayout {  
    public static void main(String[] args) {  
        JFrame frame = new JFrame("Simplest  
SpringLayout");  
        frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);  
        Container contentPane  
= frame.getContentPane();
```

```

        // Set the content pane's layout as
SpringLayout
            SpringLayout springLayout = new
SpringLayout();
            contentPane.setLayout(springLayout);

        // Add two JButtons to the content pane
JButton b1 = new JButton("Button 1");
JButton b2 = new JButton("Little Bigger
Button 2");
            contentPane.add(b1);
            contentPane.add(b2);

            frame.pack();
            frame.setVisible(true);
        }
    }
}

```



Figure 1-43. The JFrame when you run the SimplestSpringLayout class

Figure 1-43 shows that you see only the title bar of the JFrame. When you expand the JFrame, you see the screen as shown in Figure 1-44. Note that both of your buttons are in the JFrame. However, they overlap. The simplest SpringLayout example may be the simplest to code; however, it is not that simple to see the result.



Figure 1-44. After expanding the JFrame when you run the SimplestSpringLayout class

So, what was wrong with your simplest SpringLayout example? I mentioned that a SpringLayout was hard to hand code and you saw it now!

You used the `pack()` method on the frame to give it an optimal size. But your frame is shown with no display area. When you use a `SpringLayout`, you must specify the x, y, width, and height for all components and the container. It is too much work for developers, and this is why I stated that this layout manager is meant for a GUI builder, not for coding by hand.

Let's examine the screens shown in [Figure 1-43](#) and [Figure 1-44](#) one more time. You see that the container got a position (x and y) and the buttons got size (width and height). A `JFrame` is displayed at (0, 0) by default, and this is how you see the position for the container (in fact, your container is a content pane). Buttons get their default minimum, preferred, and maximum size (all set to the same value) and this is how you see the buttons after you expand the screen. By default, a `SpringLayout` positions all components at (0, 0) within the container. In this case, both buttons are positioned at (0, 0). To fix this problem, specify the x, y, width, and height of two buttons and the content pane.

A `SpringLayout` uses constraints to arrange components. An object of the `Constraints` class, which is a static inner class of the `SpringLayout` class, represents constraints for a component and the container. A `Constraints` object lets you specify x, y, width, and height of a component using its methods. All four properties must be specified in terms of a `Spring` object. When you specify these properties, you need to specify them using one of the constants defined in the `SpringLayout` class, listed in [Table 1-5](#).

Table 1-5. List of Constants Defined in the `SpringLayout` Class

Constant Name	Description
NORTH	It is synonymous with <code>y</code> . It is the top edge of the component.
WEST	It is synonymous with <code>x</code> . It is the left edge of the component.
SOUTH	It is the bottom edge of the component. Its value is the same as <code>NORTH + HEIGHT</code> .
EAST	It is the right edge of the component. It is the same as <code>WEST + WIDTH</code> .
WIDTH	The width of the component.
HEIGHT	The height of the component.
	It is the horizontal center of the

HORIZONTAL_CENTER	component. It is the same as WEST + WIDTH/2.
VERTICAL_CENTER	It is the vertical center of the component. It is the same as NORTH + HEIGHT/2.
BASELINE	It is the baseline of the component.

You can set the x and y constraints of a component relative to the container or to another component. An object of the Constraints class specifies the constraints for a component. You need to create an object of the SpringLayout.Constraints class and use its methods to set the constraints' values. When you add a component to a container, pass this constraint object to the add() method. Listing 1-17 sets the x and y constraints for the two buttons. Note that the values (10, 20) and (150, 20) are specified in terms of Spring objects and they are measured from the edges of the content pane. Figure 1-45 shows the screen when you run the program and after you expand the JFrame.

Listing 1-17. Setting x and y Constraints for Components

```
// SpringLayout2.java
package com.jdojo.swing;

import javax.swing.SpringLayout;
import java.awt.Container;
import javax.swing.JFrame;
import javax.swing.JButton;
import javax.swing.Spring;

public class SpringLayout2 {
    public static void main(String[] args) {
        JFrame frame = new
JFrame("SpringLayout2");
        frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
        Container contentPane
= frame.getContentPane();

        // Set the content pane's layout to
a SpringLayout
```

```
        SpringLayout springLayout = new
SpringLayout();
        contentPane.setLayout(springLayout);

        // Add two JButtons to the content pane
JButton b1 = new JButton("Button 1");
JButton b2 = new JButton("Little Bigger
Button 2");

        // Create Constraints objects for b1 and
b2
        SpringLayout.Constraints b1c = new
SpringLayout.Constraints();
        SpringLayout.Constraints b2c = new
SpringLayout.Constraints();

        // Create a Spring object for y value for
b1 and b2
        Spring yPadding = Spring.constant(20);

        // Set (10, 20) for (x, y) for b1
b1c.setX(Spring.constant(10));
b1c.setY(yPadding);

        // Set (150, 20) for (x, y) for b2
b2c.setX(Spring.constant(150));
b2c.setY(yPadding);

        // Use the Constraints object while
adding b1 and b2
        contentPane.add(b1, b1c);
        contentPane.add(b2, b2c);

        frame.pack();
        frame.setVisible(true);
    }
}
```



Figure 1-45. After expanding the JFrame when the (x, y) are set for two buttons

You have not fixed the size of the JFrame yet. When you run the program, the JFrame is still displayed with no display area. At least the two buttons are not overlapping this time. You picked an arbitrary value of 150 pixels as the value of x for b2. That is, the left edge of b2 is 150 pixels from the left edge of the content pane. There is a way to specify that the left edge of b2 should be at a specified distance from the right edge of b1. To achieve this, you need to add b1 to the container first. When you add a component to the container, SpringLayout associates a Constraints object to the component, irrespective of whether you pass a constraints object to the add() method of the container or not. You can get the constraint for any edge for a component using the getConstraint(String edge, Component c) method of the SpringLayout class. The following snippet of code does the same. It sets (x, y) for b1 to (10, 20) and sets (x, y) for b2 to (b1's right edge + 5, 20). If you replace the code for adding two buttons in Listing 1-17 with the following snippet of code, b2 will appear 10 pixels right of b1:

```
// Create a Spring object for y value for b1 and b2
Spring yPadding = Spring.constant(20);

// Set (10, 20) for (x, y) for b1
b1c.setX(Spring.constant(10));
b1c.setY(yPadding);

// Add b1 to the content pane first
contentPane.add(b1, b1c);

// Now query the layout manager for b1's EAST
constraint,
// which is the right edge of b1
Spring b1Right
```

```

= springLayout.getConstraint(SpringLayout.EAST, b1);

// Add a 5-pixel strut to the right edge of b1 to
define the
// left edge of b2 and set it using setX() method on
b2c
Spring b2Left = Spring.sum(b1Right,
Spring.constant(5));
b2c.setX(b2Left);
b2c.setY(yPadding);

// Now add b2 to the content pane
contentPane.add(b2, b2c);

```

There is an easier and more intuitive way to set the constraints for components in a `SpringLayout`. First, add all components to the container without worrying about their constraints and then define the constraints using the `putConstraint()` method of the `SpringLayout` class. Here are two versions of the `putConstraint()` method:

- `void putConstraint(String targetEdge,
Component targetComponent, int padding,
String sourceEdge, Component
sourceComponent)`
- `void putConstraint(String targetEdge,
Component targetComponent, Spring
padding, String sourceEdge, Component
sourceComponent)`

The first version uses a strut. The third argument (`int padding`) defines a fixed spring, which will behave as a strut (a fixed distance) between the edges of two components. The second version uses a spring instead. You can read the method description as, “The `targetEdge` of the `targetComponent` is at a padding distance from the `sourceEdge` of the `sourceComponent`.” For example, if you want the left edge of `b2` to be 5 pixels from the right edge of `b1`, you call this method:

```
// Set b2's left edge 5 pixels from b1's right edge
```

```
springLayout.putConstraint(SpringLayout.WEST, b2, 5,
                           SpringLayout.EAST, b1);
```

To set the left edge of b1 (left edge defines the x value) 10 pixels from the left edge of the content pane, you use

```
springLayout.putConstraint(SpringLayout.WEST, b1, 5,
                           SpringLayout.WEST, contentPane);
```

Let's go back to the sizing problem of your JFrame when you call its `pack()` method. You need to set the position for the bottom and right edges for the content pane so that the `pack()` method will resize it correctly. You set its bottom edge to 10 pixels below the bottom edge of b1 (or b2, whichever is the closest to its bottom edge). In this example, both are at the same distance from the bottom edge of the content pane. You set its right edge 10 pixels from the right edge of b2, which is the rightmost JButton in the content pane. The following snippet of code does this:

```
// Set the bottom edge of the content pane
springLayout.putConstraint(SpringLayout.SOUTH,
contentPane, 10,
                           SpringLayout.SOUTH, b1);

// Set the right edge of the content pane
springLayout.putConstraint(SpringLayout.EAST,
contentPane, 10,
                           SpringLayout.EAST, b2);
```

[Listing 1-18](#) contains the complete program and [Figure 1-46](#) shows the JFrame when you run the program.

Listing 1-18. Using the `putConstraint()` Method of the `SpringLayout` Class

```
// NiceSpringLayout.java
package com.jdojo.swing;

import javax.swing.JFrame;
import java.awt.Container;
import javax.swing.SpringLayout;
import javax.swing.JButton;
```

```
public class NiceSpringLayout {  
    public static void main(String[] args) {  
        JFrame frame = new  
JFrame("SpringLayout2");  
        frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);  
        Container contentPane  
= frame.getContentPane();  
  
        // Set the content pane's layout to  
a SpringLayout  
        SpringLayout springLayout = new  
SpringLayout();  
        contentPane.setLayout(springLayout);  
  
        // Create two JButtons  
        JButton b1 = new JButton("Button 1");  
        JButton b2 = new JButton("Little Bigger  
Button 2");  
  
        // Add two JButtons without using any  
constraints  
        contentPane.add(b1);  
        contentPane.add(b2);  
  
        // Now add constraints to both JButtons  
        // Set x for b1 as 10  
        springLayout.putConstraint(SpringLayout.WEST,  
b1, 10,  
                                SpringLayout.WEST,  
contentPane);  
        // Set y for b1 as 20  
        springLayout.putConstraint(SpringLayout.NORTH,  
b1, 20,  
                                SpringLayout.NORTH,  
contentPane);  
  
        // Set x for b2 as 10 from the right edge  
of b1  
        springLayout.putConstraint(SpringLayout.WEST,  
b2, -10,  
                                SpringLayout.EAST,  
b1);  
    }  
}
```

```
    b2, 10,
                                SpringLayout.EAST,
b1);
        // Set y for b1 as 20
        springLayout.putConstraint(SpringLayout.NORTH,
b2, 20,
                                SpringLayout.NORTH,
contentPane);

        /* Now set height and width for the
content pane as the bottom
edge of b1 + 10 and right edge of b2
+ 10. Note that source
is b1 for content pane's height and b2
for its width
*/
        // Set the bottom edge of the content
pane
        springLayout.putConstraint(SpringLayout.SOUTH,
contentPane, 10,
                                SpringLayout.SOUTH,
b1);

        // Set the right edge of the content pane
        springLayout.putConstraint(SpringLayout.EAST,
contentPane, 10,
                                SpringLayout.EAST,
b2);

        frame.pack();
        frame.setVisible(true);
    }
}
```



Figure 1-46. Nice SpringLayout with the JFrame sized automatically

SpringLayout is a very powerful layout to mimic many complex layouts. The following snippet of code has some more examples. The comments explain what it is supposed to do.

```
// Place a JButton b1 horizontally centered at the top  
of the content pane, you // would set its constraints  
as below. Replace HORIZONTAL_CENTER with  
// VERTICAL_CENTER to center the JButton vertically  
springLayout.putConstraint(SpringLayout.HORIZONTAL_CEN'  
north, 0,  
                           SpringLayout.HORIZONTAL_CENTER,  
                           contentPane);  
  
// You can set the width of two JButtons, b1 and b2,  
to be the same by  
// assigning the maximum width to the both of them.  
Assuming that you have  
// already added b1 and b2 JButtons to the container  
SpringLayout.Constraints b1c  
= springLayout.getConstraints(b1);  
SpringLayout.Constraints b2c  
= springLayout.getConstraints(b2);  
  
// Get a spring that represents the maximum of the  
width of b1 and b2,  
// and set that spring as width for both b1 and b2  
Spring maxWidth = Spring.max(b1c.getWidth(),  
b2c.getWidth());  
b1c.setWidth(maxWidth);  
b2c.setWidth(maxWidth);
```

GroupLayout


The GroupLayout is in the javax.swing package. It is meant to be used by GUI builders. However, it is easy enough to be hand-coded as well.

A GroupLayout uses the concept of a group. A group consists of elements. An element of a group may be a component, a gap, or another group. You can think of a gap as an invisible area between two components.

You must understand the concept of groups before using a GroupLayout. There are two types of groups:

- Sequential group
- Parallel group


When the elements in a group are placed in series, one after another, it is called a *sequential group*. When the elements in a group are placed in parallel, it is called a *parallel group*. A parallel group aligns its elements in one of the four ways—baseline, centered, leading, and trailing. In a GroupLayout, you need to define the layout for each component twice—once along the horizontal axis and once along the vertical axis. That is, you need to specify separately how all components form a group horizontally and vertically. Let's look at some examples of groups. [Figure 1-47](#) shows a group of two components.

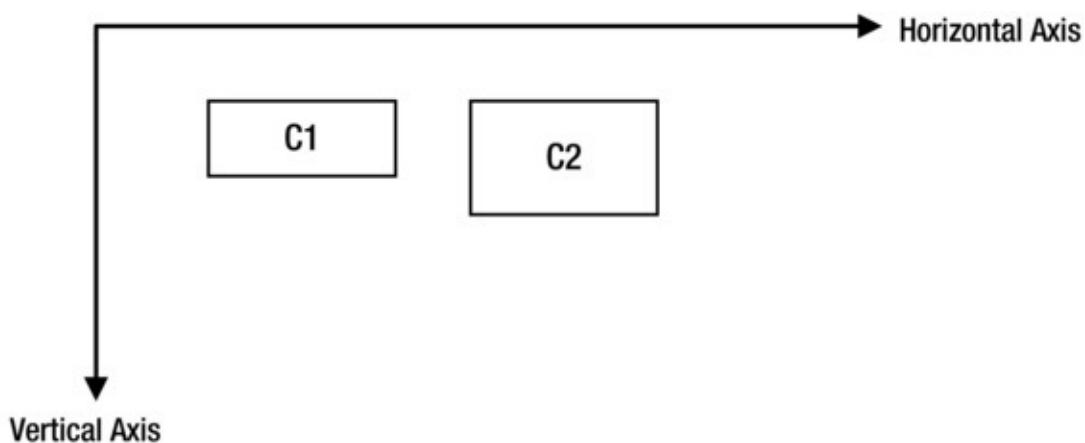

[Figure 1-47](#). Two components, C1 and C2, form a sequential group along the horizontal axis and a parallel group along the vertical axis

In [Figure 1-47](#), the two axes have been shown only for discussion purpose and they are not part of the layout. Components are placed one after another (left to right), forming a sequential group along the horizontal axis. They form a

parallel group along the vertical axis. Along the vertical axis, in the parallel group, the two components are aligned along their top edges. If you have a problem visualizing the sequential and parallel groups along the horizontal and vertical axes, you can redraw [Figure 1-47](#) as [Figure 1-48](#). The two dashed arrows in the horizontal direction (left to right) represent C1 and C2 when you visualize their grouping in the horizontal direction. You can see that two arrows are in series and therefore C1 and C2 form a sequential group along the horizontal axis. The two dashed arrows in the vertical direction (top to bottom placed left of the component C1) represent C1 and C2 when you visualize them along the vertical axis. You can see that these two arrows are not in series. Rather, they are in parallel. Therefore, C1 and C2 form a parallel group along the vertical axis. You need to figure out the alignment for a parallel group. In this case, C1 and C2 are aligned along their top edges, which is called *leading alignment* in the GroupLayout terminology.

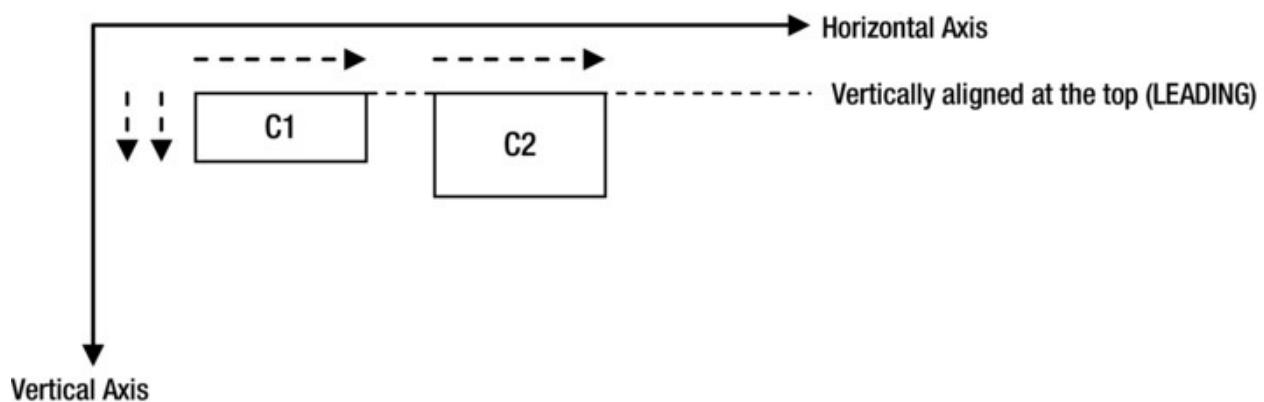

[Figure 1-48](#). Groupings for components C1 and C2

What are the other possible alignments for C1 and C2? There are four possible alignments in a parallel group: baseline, centered, leading, and trailing. If the parallel group occurs along the vertical axis, all four types of alignment are possible. If the parallel group occurs along the horizontal axis, only three alignments (centered, leading, and trailing) are possible. Along the vertical axis, leading is the same as top edge, trailing is the same as bottom edge. Along the horizontal axis, leading is left edge if the component orientation is LEFT_TO_RIGHT, and it is right edge if the component orientation is RIGHT_TO_LEFT. [Figure 1-49](#) and [Figure 1-50](#) show the possible alignments along the vertical and horizontal axes. The alignment is shown by dashed lines. Note that along the vertical axis, the alignment line is horizontal and along horizontal axis, it is vertical. The four constants in the

`GroupLayout.Alignment` enum, LEADING,.TRAILING, CENTER, and BASELINE, are used to represent the four alignment types.

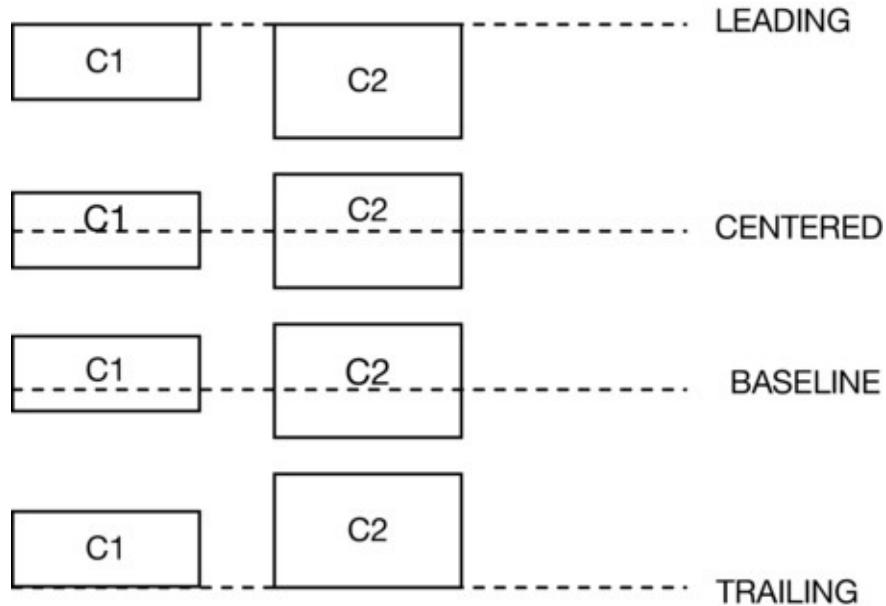


Figure 1-49. The four possible alignments in a parallel group along the vertical axis in a group

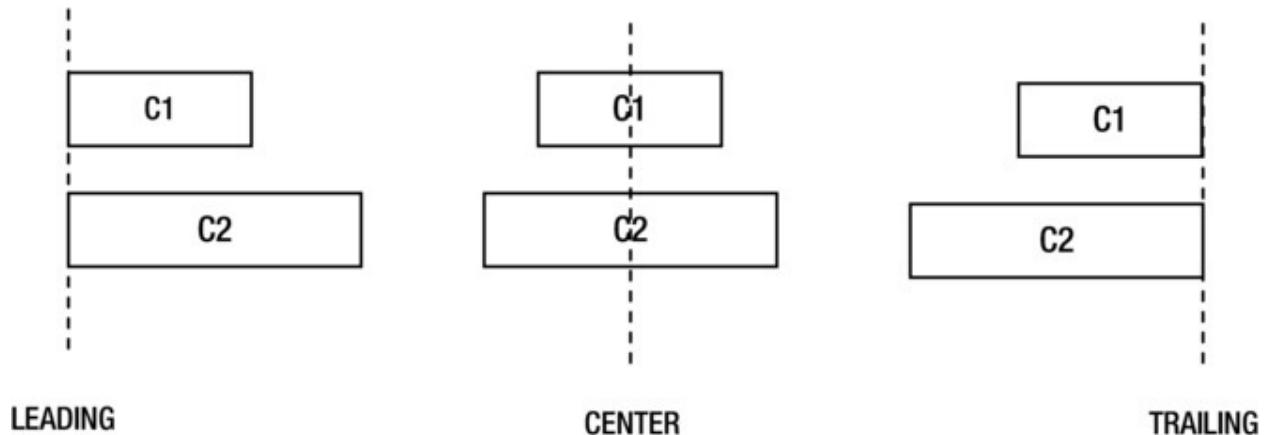


Figure 1-50. The three possible alignments in a parallel group along the horizontal axis in a group for component orientation of `LEFT_TO_RIGHT`. For `RIGHT_TO_LEFT` orientation, LEADING and TRAILING will swap edges

How do you create sequential and parallel groups for a `GroupLayout`? The `GroupLayout` class contains three inner classes: `Group`, `SequentialGroup`, and `ParallelGroup`. `Group` is an abstract class and the other two classes are inherited from the `Group` class. You do not have to create an object of these classes directly. Rather, you use the factory methods of the `GroupLayout` class to create their objects.

The GroupLayout class provides two separate methods to create groups: `createSequentialGroup()` and `createParallelGroup()`. It is obvious from the name of these methods the kind of groups they create. Note that you need to specify the alignment for a parallel group. The `createParallelGroup()` method is overloaded. The version with no arguments defaults the alignment to LEADING. Another version lets you specify the alignment. Once you have a group object, you can add components, gaps, and groups to it using its `addComponent()`, `addGap()`, and `addGroup()` methods, respectively.

How do you use the GroupLayout manager? Here are the steps you need to follow to use a GroupLayout. Assume that you have to place two buttons in a JFrame, as shown in [Figure 1-51](#).



[Figure 1-51.](#) The simplest GroupLayout in which two buttons are placed side by side

Assume that the JFrame is named `frame` and the two JButtons are named `b1` and `b2`. First, you need to create an object of the GroupLayout class. It contains only one constructor that takes the container reference as an argument. This means that you need to get the reference to the container for which you want to create the GroupLayout, before you can create an object of the GroupLayout class.

```
// Get the reference of the container
Container contentPane = frame.getContentPane();

// Create a GroupLayout object
GroupLayout groupLayout = new
GroupLayout(contentPane);

// Set the layout manager for the container
contentPane.setLayout(groupLayout);
```

Second, you need to create the group of components along horizontal axis (called horizontal group) and set that group to the GroupLayout using the

`setHorizontalGroup()` method. Note that a group can be sequential or parallel along any axis—horizontal and vertical. In your case, two buttons, `b1` and `b2`, form a sequential group along the horizontal axis.

```
// Create a sequential group
GroupLayout.SequentialGroup sGroup
= groupLayout.createSequentialGroup();

// Add two buttons to the group
sGroup.addComponent(b1);
sGroup.addComponent(b2);

// Set the horizontal group for the GroupLayout
groupLayout.setHorizontalGroup(sGroup);
```

You can combine all steps into one, like so:

```
groupLayout.setHorizontalGroup(groupLayout.createSeque:
                                .addComponent(b1)
                                .addComponent(b2));
```

Finally, create the group of components along the vertical axis (called vertical group) and set that group to the `GroupLayout` using the `setVerticalGroup()` method. Two buttons form a parallel group along vertical axis. You can accomplish this as follows:

```
groupLayout.setVerticalGroup(
    groupLayout.createParallelGroup(GroupLayout.Alignment.
        .addComponent(b1)
        .addComponent(b2));
```

Tip In a `GroupLayout`, you do not add a component to the container using its `add()` method. Rather, you add a component to a group along the horizontal and vertical axes and add the group to the `GroupLayout` using the `setHorizontalGroup()` and `setVerticalGroup()` methods.

[Listing 1-19](#) demonstrates how to use a `GroupLayout` to display two buttons side by side in a `JFrame`. When you run the program, the `JFrame` is

displayed as shown in [Figure 1-51](#). I will discuss more complex examples shortly.

Listing 1-19. The Simplest GroupLayout

```
// SimplestGroupLayout.java
package com.jdojo.swing;

import java.awt.Container;
import javax.swing.JFrame;
import javax.swing.JButton;
import javax.swing.GroupLayout;

public class SimplestGroupLayout {
    public static void main(String[] args) {
        JFrame frame = new JFrame("Simplest
GroupLayout");
        frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
        Container contentPane
= frame.getContentPane();

        // Create an object of the GroupLayout
        // class for contentPane
        GroupLayout groupLayout = new
GroupLayout(contentPane);

        // Set the content pane's layout to
        // a GroupLayout
        contentPane.setLayout(groupLayout);

        // Add two JButtons to the content pane
        JButton b1 = new JButton("Button 1");
        JButton b2 = new JButton("Little Bigger
Button 2");

        groupLayout.setHorizontalGroup(
            groupLayout.createSequentialGroup()
                .addComponent(b1)
                .addComponent(b2)
        );
    }
}
```

```

        groupLayout.setVerticalGroup(
            groupLayout.createParallelGroup(Gro
                .addComponent(b1)
                .addComponent(b2)) ;

        frame.pack();
        frame.setVisible(true);
    }
}

```

A GroupLayout has two more features that are worth discussing:

- It lets you add a gap between two components.
- It lets you specify the resizing behaviors for the components, gaps, and groups.

You can think of a gap as an invisible component. There are two types of gaps: the gap between two components, and the gap between a component and the container. You can add a gap between two components using the addGap() method of the Group class. You can add a rigid gap as well as a flexible gap (as a spring). A rigid gap is fixed in size. A flexible gap has a minimum, a preferred, and a maximum size, and it acts like a spring when the container is resized. To add a rigid gap of 10 pixels between b1 and b2 in your previous example, you set up your horizontal group like so:

```
groupLayout.setHorizontalGroup(groupLayout.createSequence()
    .addComponent(b1)
    .addGap(10)
    .addComponent(b2));
```

There are three ways to add gaps between two components. They are based on the gap size and their ability to resize.

- You can add a rigid gap between two components using the `addGap(int gapSize)`.
- You can add a flexible (spring-like) gap between two components, which has a minimum, a preferred, and a maximum size, using the `addGap(int min, int pref, int max)` method. To add a flexible gap with 5, 10, and 50 as the minimum, preferred, and maximum size respectively, you set up your horizontal group like so:

```
groupLayout.setHorizontalGroup(groupLayout.createSequence()
    .addComponent(b1)
    .addGap(10, 50)
    .addComponent(b2));
```

- You can add a preferred gap between two components. In this case, you have the option to specify the size of the gap or let the layout manager compute it for you. However, you must specify the way in which these two components are related as far as this gap is concerned. There are three kinds of such gaps: RELATED, UNRELATED, and INDENT. If you are adding a preferred gap between a label and its corresponding field, you add a RELATED gap between them. For example, if you have a login form, and you want to add a preferred gap between “User ID:” and the text field to enter the user id, you add a RELATED gap between them. You use an UNRELATED gap when two components belong to different groups. When you are adding a gap just to indent a component, you add an INDENT gap. Three types of gaps are represented by three constants, RELATED, UNRELATED

and INDENT, defined in the `LayoutStyle.ComponentPlacement` enum. Use the `addPreferredGap()` method to add a preferred gap. The following snippet of code adds a RELATED preferred gap between `b1` and `b2`:

```
groupLayout.setHorizontalGroup(  
    groupLayout.createSequentialGroup()  
        .addComponent(b1)  
  
        .addPreferredGap(LayoutStyle.ComponentPlacemen  
            .addComponent(b2));
```

You need to use the `addContainerGap()` method of the `GroupLayout.SequentialGroup` class to add a gap between edges of a component and a container. The method is overloaded. It also lets you specify the preferred and maximum size of the gap.

Setting hard-coded gaps may create problems when you run your application on different platforms. This is the reason that the `GroupLayout` has two methods that let you specify that you want the `GroupLayout` to compute the preferred gaps depending on the platform your application is running on. To let the `GroupLayout` compute and set the gaps between two components, you need to call its `setAutoCreateGaps(true)` method. To let it compute and set gaps between components and the container edges, you need to call its `setAutoCreateContainerGaps(true)` method. By default, the auto-computing of gaps is disabled. Replace the statement

```
// Create an object of the GroupLayout class  
GroupLayout groupLayout = new  
GroupLayout(contentPane);
```

in [Listing 1-19](#) with the following statements

```
// Create an object of the GroupLayout class and setup  
// gaps  
GroupLayout groupLayout = new  
GroupLayout(contentPane);
```

```
groupLayout.setAutoCreateGaps(true);  
groupLayout.setAutoCreateContainerGaps(true);
```

Now, the JFrame will look as shown in [Figure 1-52](#). You can see that the layout manager added the necessary gaps for you.



[Figure 1-52](#). The simplest GroupLayout with auto gaps enabled

A GroupLayout respects the minimum, preferred, and maximum size of a component. When the container is resized, the layout manager asks the components for their sizes and resizes them accordingly. However, you can override this behavior by using the addComponent (Component c, int min, int pref, int max) method that lets you specify the minimum, preferred, and maximum size of a component. You need to understand the meaning of the two constants defined in the GroupLayout class. They are DEFAULT_SIZE and PREFERRED_SIZE. They can be used for the min, pref, and max arguments in the addComponent () method. DEFAULT_SIZE means that the layout manager should ask the component for this size type and use it. PREFERRED_SIZE means that the manager should use the component's preferred size. For example, if you want the JButton b2 in your previous example to expand (by default, a JButton has the same min, pref, and max size), you add it to the horizontal group like so:

```
groupLayout.setHorizontalGroup(groupLayout.createSequentialGroup()  
    .addComponent(b1)  
    .addComponent(b2,  
        GroupLayout.PREFERRED_SIZE,  
        GroupLayout.PREFERRED_SIZE,  
        Integer.MAX_VALUE));
```

By specifying PREFERRED_SIZE as the minimum size and preferred size, you are telling the layout manager that b2 should not be shortened below its


preferred size. `Integer.MAX_VALUE` as its maximum size tells the layout manager that it can expand it infinitely. To make a component not resizable, you can use all three of its sizes the same as `GroupLayout.PREFERRED_SIZE`.

You can nest groups in a `GroupLayout`. Let's look at a layout of four buttons named `b1`, `b2`, `b3`, and `b4` as shown in [Figure 1-53](#).



[Figure 1-53](#). Nested groups in `GroupLayout`


Let's look at components layout along horizontal axis. You can see two parallel groups (`b1`, `b3`) and (`b2`, `b4`) and these two groups are placed sequentially. Let's use PG and SG to represent parallel and sequential groups, respectively, in the pseudo code. Note that in `PG(b1, b3)`, the components are aligned along the LEADING edge (here, the left edge) and in `PG(b2, b4)`, they are aligned along the TRAILING edge (here, the right edge). Let's insert the alignment to your pseudo code and the groups will look like this:
`PG [LEADING] (b1, b3) and PG [TRAILING] (b2, b4)`. I have made up this syntax for the purpose of discussing this example. You will see the Java code shortly. If you have a problem visualizing the arrangement, you can refer to [Figure 1-54](#), where each button has been shown by an arrow along the horizontal axis.

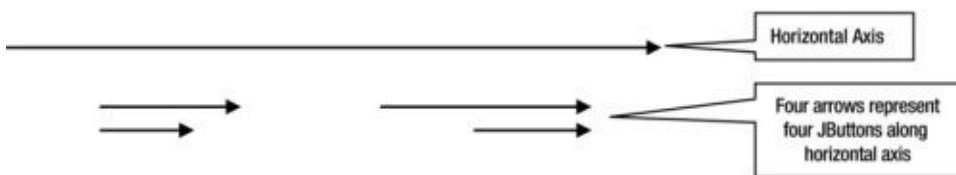

[Figure 1-54](#). Four buttons represented by four arrows along horizontal axis

The arrows are aligned the same as the buttons. You can observe that arrows for `b1` and `b3` are parallel, and that the arrows for `b2` and `b4` are parallel. If you

visualize the two parallel groups, you can observe that these two groups make up one sequential group along the horizontal axis. To help you visualize this final arrangement, the arrow arrangements have been refined in [Figure 1-55](#).

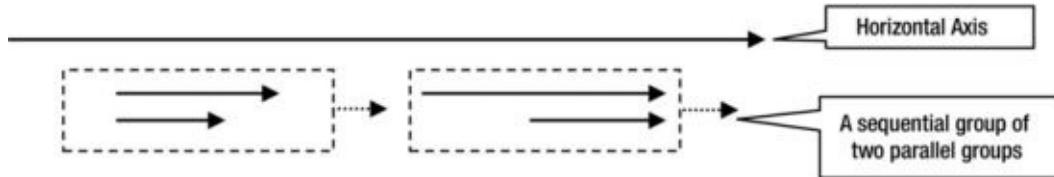

[Figure 1-55.](#) Four buttons represented by four arrows along horizontal axis

Each parallel group is shown inside a dashed rectangle. The arrow coming out of the dashed rectangle shows that these groups are sequential along the horizontal axis. It may take a while to understand these parallel and sequential arrangements of components along an axis. Once you get it, it will be quite easy to use a `GroupLayout` in a complex scenario. Most likely, you will be using a GUI builder tool to arrange your components, and you won't care about the complexity of the groups. However, it always helps to understand the concept behind a layout.

To finalize this discussion along the horizontal axis, the pseudo code looks as follows:

```
Horizontal Group = SG(PG[LEADING] (b1, b3),  
PG[TRAILING] (b2, b4))
```

Similarly, you can visualize the grouping arrangements along the vertical axis. If you have a problem visualizing this, you can draw all four buttons as arrows pointing from top to bottom and see how they form groups along the vertical axis. Here is the vertical groupings arrangement:

```
Vertical Group = SG(PG[BASELINE] (b1, b2), PG[BASELINE]  
(b3, b4))
```

Now, it is easy to translate the pseudo code into Java code, as shown in [Listing 1-20](#).

[Listing 1-20.](#) Nested Groups in GroupLayout

```
// NestedGroupLayout.java  
package com.jdojo.swing;
```



```

        groupLayout.createSequentialGroup()
            .addGroup(groupLayout.createParallelGroup()
                .addComponent(b1)
                .addComponent(b2))
            .addGroup(groupLayout.createParallelGroup()
                .addComponent(b3)
                .addComponent(b4))
    );
}

frame.pack();
frame.setVisible(true);
}
}

```

How do you make the sizes of two components the same? Let's try to make b1 and b3 the same size. You need to consider two things when making a component resizable. First, you need to consider the resizable behavior of the group. Second, you need to consider the resizable behavior of the components inside the group. The size of a parallel group is the size of the largest element. If you consider PG{LEADING] (b1, b3), the width of this group would be the size of b1 because b1 is the largest component in this group. By default, a JButton has a fixed size. To make b3 stretch to the size of the group (which is the size of b1), you must add it to the group specifying that it can expand as addComponent(b3, GroupLayout.DEFAULT_SIZE, GroupLayout.DEFAULT_SIZE, Integer.MAX_VALUE). This will force b3 to stretch to the same size as its group, which in turn is the same as the b1 width. If two components are not in the same parallel group, to make them the same size, you can use the linkSize() method of the GroupLayout class. When you use the linkSize() method to make components the same size, the components become non-resizable irrespective of their minimum, preferred, and maximum size.

```

// Make b1, b2, b3 and b4 the same size
groupLayout.linkSize(b1, b2, b3, b4);

// Make b1 and b3 the same size horizontally
groupLayout.linkSize(SwingConstants.HORIZONTAL, new Component[]{b1, b3});

```

You can also make a group resizable when you create a parallel group using the `createParallelGroup(GridLayout.Alignment a, boolean resizable)` method. If you place resizable components in a resizable group, the group will resize when you resize the container, which in turn makes the components resize.

The null Layout Manager

By now, you may have realized that a layout manager handles the positioning and resizing of components within a container. If a container is resized, the layout manager will take care of repositioning and resizing of the components within it. If you do not want to have a layout manager, you lose this benefit and you are responsible for positioning and resizing of all components within a container. It is simple to tell a container that you do not want a layout manager. Just set the layout manager to `null`, like so:

```
// Do not use a layout manager for myContainer  
myContainer.setLayout(null);
```

You can set the layout manager of a `JFrame`'s content pane to `null`, like so:

```
JFrame frame = new JFrame("No Layout Manager Frame");  
Container contentPane = frame.getContentPane();  
contentPane.setLayout(null);
```

The phrase “null layout manager” simply means that there is no layout manager. It is also known as absolute positioning. Note that your program may run on different platforms. The size of components may differ when they are displayed on different platforms, and your `null` layout manager cannot account for this inconsistency. When you are using a `null` layout manager, make sure that your component's size is big enough to be displayed properly on all platforms.

[Listing 1-21](#) uses a `null` layout manager for the content pane of a `JFrame`. It adds two buttons to it. It also sets the position and size of buttons and `JFrame` using the `setBounds()` method. [Figure 1-56](#) shows the resulting `JFrame`.

[Listing 1-21](#). Using a null Layout Manager

```
// NullLayout.java
package com.jdojo.swing;

import javax.swing.JFrame;
import java.awt.Container;
import javax.swing.JButton;

public class NullLayout {
    public static void main(String[] args) {
        JFrame frame = new JFrame("Null Layout
Manager");
        frame.setDefaultCloseOperation(JFrame.EXIT_
Container contentPane
= frame.getContentPane();
contentPane.setLayout(null);

        JButton b1 = new JButton("Small Button
1");
        JButton b2 = new JButton("Big Big Big
Button 2...");
        contentPane.add(b1);
        contentPane.add(b2);

        // Must set (x, y) and (width, height) of
components
        b1.setBounds(10, 10, 100, 20);
        b2.setBounds(120, 10, 150, 20);

        // Must set the size of JFrame, because
it uses a null layout.
        // Now, you cannot use the pack() method
to compute its size.
        frame.setBounds(0, 0, 350, 100);
        frame.setVisible(true);
    }
}
```



Figure 1-56. A JFrame using a null layout manager

Note that the labels for buttons are not displayed fully. This is one of the problems that you will face when using a null layout manager. If you try to resize the JFrame at runtime, you will notice that the buttons are not resized automatically, as they would have been if you had used a layout manager. A layout manager computes the size of a JButton based on the platform, its text, and font whereas with a null layout manager you are supposed to compute (most of the time, you just guess) the button's size considering all these factors. It is not good practice in Java to use a null layout manager, except when you are prototyping or learning the null layout manager.

Creating a Reusable JFrame

In previous sections, you created a JFrame by instantiating the JFrame class and you used the main() method of the class to write the code to build the GUI. The JFrames in your examples were not reusable. So far, you were fine because the Swing programs were simple and their sole purpose was to display some components in a JFrame. As you start writing more complex Swing programs, this way of programming is not going to work well. For example, suppose you want to make a JButton in a JFrame invisible or disabled after the JFrame is displayed. Since you have been declaring all your JButton as local variables inside the main() method, you will not have access to their references once the main() method has finished executing. To make your JFrame reusable and keep the references of the components added to the JFrame handy, so you can refer to them later, you need to change the approach of creating a JFrame.

Here is your new approach to creating a JFrame. You create your own

class, inheriting it from the `JFrame` class as shown:

```
public class CustomFrame extends JFrame {  
    // Code for CustomFrame goes here  
}
```

All your components are declared as instance variables in your custom class, as shown:

```
public class CustomFrame extends JFrame {  
    // Declare all components in the JFrame as  
    instance variables  
    JButton okButton = new JButton("OK");  
    JButton cancelButton = new JButton("Cancel");  
}
```

You have an `initFrame()` method to add components to the `JFrame`'s content pane. You call this method from the constructor of your custom `JFrame`. The method `initFrame()` is not required by Java. It is just your convention for writing code for your Swing applications. To display your `JFrame`, you instantiate your class and make it visible. This approach has similar code, arranged differently, so you can write some more serious Swing programs. [Listing 1-22](#) accomplishes the same thing as the code in [Listing 1-19](#).

[Listing 1-22](#). Creating a Cutom JFrame

```
// CustomFrame.java  
package com.jdojo.swing;  
  
import javax.swing.JFrame;  
import javax.swing.GroupLayout.Alignment;  
import javax.swing.JButton;  
import java.awt.Container;  
import javax.swing.GroupLayout;  
  
public class CustomFrame extends JFrame {  
    // Declare all components as instance variables  
    JButton b1 = new JButton("Button 1");  
    JButton b2 = new JButton("Little Bigger Button  
2");
```

```
public CustomFrame(String title) {
    super(title);
    initFrame();
}

// Initialize the frame and add components to
it.
private void initFrame() {
    this.setDefaultCloseOperation(JFrame.EXIT_
Container contentPane
= this.getContentPane();
    GroupLayout groupLayout = new
GroupLayout(contentPane);
    contentPane.setLayout(groupLayout);

    groupLayout.setHorizontalGroup(
        groupLayout.createSequentialGroup()
            .addComponent(b1)
            .addComponent(b2)
    );

    groupLayout.setVerticalGroup(
        groupLayout.createParallelGroup(Ali
            .addComponent(b1)
            .addComponent(b2)
    );
}

// Display the CustomFrame
public static void main(String[] args) {
    CustomFrame frame = new
CustomFrame("Custom Frame");
    frame.pack();
    frame.setVisible(true);
}
```

Event Handling

What is an event? The literal meaning of an event is

“An occurrence of something at a specific point in time.”

The meaning of an event in a Swing application is similar. An event in Swing is an action taken by a user at a particular point in time. For example, pressing a button, pressing a key down/up on the keyboard, and moving the mouse over a component are events in a Swing application. Sometimes the occurrence of an event in Swing (or any GUI-based application) is also known as “triggering an event” or “firing an event.” When you say that a clicked event has occurred on a button, you mean that the button has been pressed using the mouse, the spacebar, or by any other means your application allows you to press a button. Sometimes you can use the phrase “clicked event has been triggered or fired on a button” to mean the same that the button has been pressed.

When an event occurs, you want to respond to the event. Taking an action in a program is nothing but executing a piece of code. Taking an action in response to the occurrence of an event is called *event handling*. The piece of code that is executed when an event occurs is called an *event handler*. Sometimes an event handler is also called an *event listener*.

How you write an event handler depends on the type of event and the component that generates the event. Sometimes the event handler is built into a Swing component, and sometimes you need to write the event handler yourself. For example, when you press a JButton, you need to write the event handler yourself. However, when you press a letter key on the keyboard when the focus is in a text field, the corresponding letter is typed in the text field because of the key pressed event has a default event handler that is supplied by Swing.

There are three participants in an event:

- The source of the event
- The event
- The event handler (or the event listener)

The source of an event is the component that generates the event. For example, when you press a JButton, the clicked event occurs on that JButton. In this case, the JButton is the source of the clicked event.

An event represents the action that takes place on the source component. An

event in Swing is represented by an object that encapsulates the details about the event such as the source of the event, when the event occurred, what kind of event occurred, etc. What is the class of the object that represents an event? It depends on the type of the event that occurs. There is a class for every type of event. For example, an object of the `ActionEvent` class in the `java.awt.event` package represents a clicked event for a `JButton`.

I will not discuss all types of events in this chapter. I will list the important events for a component when I discuss components in [Chapter 2](#). This section will explain how to handle any type of event in a Swing application.

An event handler is the piece of code that is executed when an event occurs. Like an event, an event handler is also represented by an object, which encapsulates the event handling code. An object of what class represents an event handler? It depends on the type of event that the event handler is supposed to handle. An event handler is also known as an event listener because it listens for the event to occur in the source component. I will use the phrases “event handler” and “event listener” interchangeably in this chapter. Typically, an event listener is an object that implements a specific interface. The specific interface an event listener has to implement depends on the type of event it will listen for. For example, if you are interested in listening for a clicked event of a `JButton` (to rephrase, if you are interested in handling the clicked event of a `JButton`), you need an object of a class that implements the `ActionListener` interface, which is in the `java.awt.event` package.

Looking at the descriptions of the three participants of an event handling, it seems you need to write a lot of code to handle an event. Not really. Event handling is easier than it seems. I will list the steps to handle an event, followed by an example of how to handle the clicked event of a `JButton`. Here are the steps to handle an event. These steps apply to handle any kind of event on any Swing component.

- Identify the component for which you want to handle the event. Assume that you have named the component as `sourceComponent`. So your event source is `sourceComponent`.
- Identify the event that you want to handle for the source component. Assume that you are interested in handling `Xxx` event. Here `Xxx` is an event name that you will have to replace by an event name that exists for the source

component. Recall that an event is represented by an object. The Java naming convention for event classes comes to your rescue in identifying the name of the class whose object represents Xxx event. The class whose object represents Xxx event is named XxxEvent. Usually the event classes are in the `java.awt.event` and `javax.swing.event` package.

- It is time to write an event listener for the Xxx event. Recall that an event listener is nothing but an object of a class that implements a specific interface. How do you know what specific interface you need to implement in your event listener class? Here again, the Java naming convention comes to your rescue. For Xxx event, there is an XxxListener interface that you need to implement in your event listener class. Usually the event listener interfaces are in the `java.awt.event` and `javax.swing.event` package. The XxxListener interface will have one or more methods. All methods for XxxListener take an argument of type XxxEvent because these methods are meant to handle an XxxEvent. For example, suppose you have an XxxListener interface that has a method named `aMethod()` as

```
public interface XxxListener {  
    void aMethod(XxxEvent event);  
}  
Your event listener class will look as follows.  
Note that you will be creating this class.  
public class MyXxxEventListener  
implements XxxListener {  
    public void aMethod(XxxEvent event) {  
        // Your event handler code goes  
        here  
    }  
}
```

- You are almost done. You have identified the event source, the event you are interested in, and the event listener. There

is only one thing missing. You need to let the event source know that your event listener is interested in listening to its `Xxx` event. This is also known as registering an event listener with the event source. You register an object of your event listener class with the event source. In your case, you will create an object of the

`MyXxxEventListener` class.

```
MyXxxEventListener myXxxListener = new  
MyXxxEventListener();
```

- How do you register an event listener with the event source? Here again, the Java naming convention comes in handy. If a component (an event source) supports an `Xxx` event, it will have two methods, `addXxxListener(XxxListener l)` and `removeXxxListener(XxxListener l)`. When you are interested in listening for an `Xxx` event of a component, you call the `addXxxListener()` method, passing an event listener as an argument. When you do not want to listen for `Xxx` event of a component anymore, you call its `removeXxxListener()` method. To add your `myXxxListener` object as the `Xxx` event listener for `sourceComponent`, you write

```
sourceComponent.addXxxListener(myXxxListener);
```

That is all you need to do to handle an `Xxx` event. It may seem that you have to perform many steps to handle an event. However, that is not the case. You can always avoid writing a new event listener class, which implements the `XxxListener` interface by using an anonymous inner class, which implements the `XxxListener` interface. For example, you could have written the above pieces of code in two statements, like so:

```
// Create an event listener object using an anonymous  
inner class  
XxxListener myXxxListener = new XxxListener() {  
    public void aMethod(XxxEvent event) {  
        // Your event handler code goes here  
    }
```

```

} ;

// Add the event listener to the event source
// component
sourceComponent.addXxxListener(myXxxListener) ;

```

If the listener interface is a functional interface, you can use a lambda expression to create its instance. Your XxxListener is a functional interface because it contains only one abstract method. You can avoid creating the bulky anonymous class and rewrite the above code as follows:

```

// Add the event listener using a lambda expressions
sourceComponent.addXxxListener( (XxxEvent event) -> {
    // Your event handler code goes here
}) ;

```

I have discussed enough theories about handling events. It is time to look at an example. Add an event listener to a JButton, and then add a JButton with text Close to a JFrame. When the JButton is pressed, the JFrame is closed and the application exits. A JButton generates an Action event when it is pressed. Once you know the name of the event, which is Action in this case, you just need to replace Xxx in the previous generic example with the word Action. You will come to know the class and method names you need to use to handle the Action event of JButton. [Table 1-6](#) compares the names of classes/interfaces/method used to handle Action event for a JButton to that of generic names I had used in the discussion.

Table 1-6. A Comparison Between Generic Event Handlers With Action Event Handlers for a JButton

Generic Event Xxx	Action Event for JButton	Comments
XxxEvent	ActionEvent	An object of ActionEvent class in java.awt.event package represents Action event for JButton.
XxxListener	ActionListener	An object of a class that implements ActionListener interface represents Action event handler for a JButton.

The addActionListener()

addXxxListener (XxxListener l)	addActionListener (ActionListener l)	method of a JButton is used to add a listener for its Action event.
-----------------------------------	---	---

removeXxxListener (XxxListener l)	removeActionListener (ActionListener l)	The removeActionListener() method of JButton is used to remove a listener for its Action event.
--------------------------------------	--	---

The ActionListener interface is simple. It has one method called actionPerformed(). The interface declaration is as follows:

```
public interface ActionListener extends EventListener
{
    void actionPerformed(ActionEvent event);
}
```

All event listener interfaces inherit from the EventListener interface, which is in the java.util package. The EventListener interface is a marker interface, and it does not have any methods. It just acts as the ancestor for all event listener interfaces. When a JButton is pressed, the actionPerformed() method of all its registered Action listeners is called.

Using a lambda expression, here is how you add an Action listener to a JButton:

```
// Add an ActionListener to closeButton
closeButton.addActionListener(e -> System.exit(0));
```

[Listing 1-23](#) displays a JFrame that contains a JButton. It adds an Action listener to the JButton. The Action listener simply exits the application. Clicking the Close button in the JFrame will close the application.

[Listing 1-23](#). A JFrame with a Close JButton With an Action

```
// SimplestEventHandlingFrame.java
package com.jdojo.swing;

import java.awt.FlowLayout;
import javax.swing.JFrame;
```

```

import javax.swing.JButton;

public class SimplestEventHandlingFrame extends JFrame
{
    JButton closeButton = new JButton("Close");

    public SimplestEventHandlingFrame() {
        super("Simplest Event Handling JFrame");
        this.initFrame();
    }

    private void initFrame() {
        this.setDefaultCloseOperation(EXIT_ON_CLOSE);

        // Set a FlowLayout for the content pane
        this.setLayout(new FlowLayout());

        // Add the Close JButton to the content
        pane
        this.getContentPane().add(closeButton);

        // Add an ActionListener to closeButton
        closeButton.addActionListener(e ->
            System.exit(0));
    }

    public static void main(String[] args) {
        SimplestEventHandlingFrame frame =
            new SimplestEventHandlingFrame();
        frame.pack();
        frame.setVisible(true);
    }
}

```

Let's have one more example of adding an Action listener to JButton. This time, add two buttons to a JFrame: a Close button and another to display the number of times it is clicked. Every time the second button is clicked, its text is updated to show the number of times it has been clicked. You need to use an instance variable to maintain the click count. [Listing 1-24](#) contains the complete code. [Figure 1-57](#) shows the JFrame when it is displayed and after the counter

button has been clicked three times.

Listing 1-24. A JFrame With Two Buttons With Actions

```
// JButtonClickedCounter.java
package com.jdojo.swing;

import javax.swing.JFrame;
import java.awt.FlowLayout;
import java.awt.event.ActionEvent;
import javax.swing.JButton;
import java.awt.event.ActionListener;

public class JButtonClickedCounter extends JFrame {
    int counter;
    JButton counterButton = new JButton("Clicked
#0");
    JButton closeButton = new JButton("Close");

    public JButtonClickedCounter() {
        super("JButton Clicked Counter");
        this.initFrame();
    }

    private void initFrame() {
        this.setDefaultCloseOperation(EXIT_ON_CLOSE);

        // Set a FlowLayout for the content pane
        this.setLayout(new FlowLayout());

        // Add two JButtons to the content pane
        this.getContentPane().add(counterButton);
        this.getContentPane().add(closeButton);

        // Add an ActionListener to the counter
        JButton
            counterButton.addActionListener(new
ActionListener() {
                public void
actionPerformed(ActionEvent event) {
```

```

        // Increment the counter
and set the JButton text
        counter++;

counterButton.setText("Clicked #" + counter);
    }
}

// Add an ActionListener to closeButton
closeButton.addActionListener(new
ActionListener() {
    public void
actionPerformed(ActionEvent event) {
        // Exit the application,
when this button is pressed
        System.exit(0);
    }
});
}

public static void main(String[] args) {
    JButtonClickedCounter frame = new
JButtonClickedCounter();
    frame.pack();
    frame.setVisible(true);
}
}

```

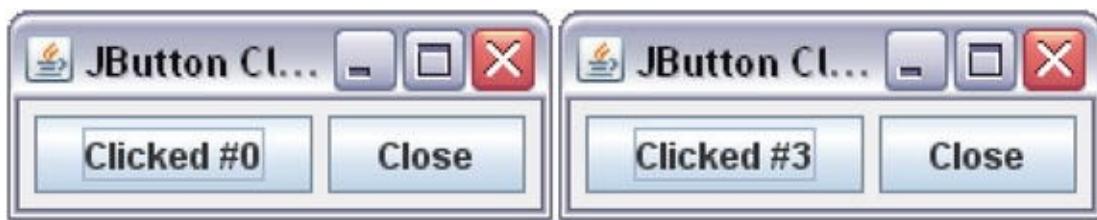


Figure 1-57. A JFrame when it is displayed and after the counter JButton is clicked three times

[Figure 1-58](#) shows the class diagram for the classes and interfaces involved in handling the Action event.

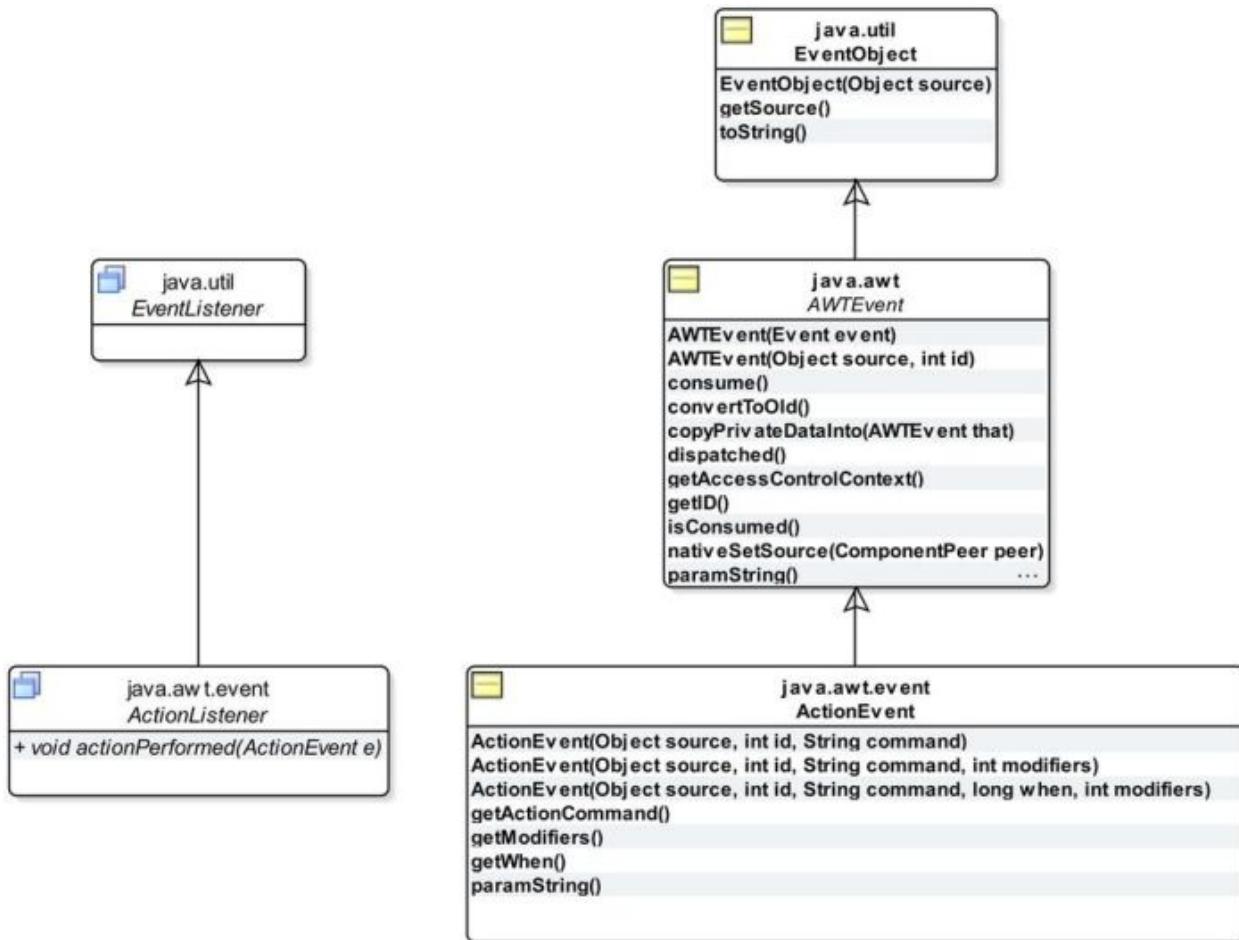


Figure 1-58. A class diagram for classes and interfaces related to Action Event

Note that you do not create an object of the `ActionEvent` class. The `JButton`, when pressed, creates an object of the `ActionEvent` class, and passes it to the `actionPerformed()` method of your event handler object. The `getActionCommand()` method of the `ActionEvent` returns, by default, the text of the `JButton`. You can explicitly set the action command text for a `JButton` using its `setActionCommand()` method. The `getModifiers()` returns the state of the modifier keys such as Shift, Ctrl, Alt held down during the action event. A modifier key is a key on the keyboard that is meaningful only when used in combination with other keys. The `paramString()` method returns a string describing the action event. It is usually used for debugging purposes.

One of the uses of the `getActionCommand()` method is to take some action, depending on the text displayed on the `JButton`. For example, you may have a `JButton` that is used to show or hide some details on the screen.

Suppose you want to display the text of a JButton as Show or Hide. You can write its Action listener as follows:

```
JButton showHideButton = new JButton("Hide");
showHideButton.addActionListener(e -> {
    if (e.getActionCommand().equals("Show")) {
        // Show the details here...
        showHideButton.setText("Hide");
    }
    else {
        // Hide the details here...
        showHideButton.setText("Show");
    } });
}
```

In this section, you learned how to add an event handler for a component. The examples were simple. They added action event handlers to JButtons. The ActionListener interface is a functional interface and you took advantage of lambda expression to write the action event listener. Swing was developed a long time before the lambda expressions. All event listener interfaces are not functional interfaces, so you cannot use lambda expressions for creating their objects. In those cases, you can use an anonymous class, a member inner class, or implement the listener interface in your main class.

Handling Mouse Events

You can handle mouse activities (clicked, entered, exited, pressed, and released) on a component. You will experiment with mouse events using a JButton. An object of the MouseEvent class represents a Mouse event on a component. Now, you can guess that to handle Mouse events, you will need to work with the MouseListener interface. Here is how the interface is declared:

```
public interface MouseListener extends EventListener {
    public void mouseClicked(MouseEvent e);
    public void mousePressed(MouseEvent e);
    public void mouseReleased(MouseEvent e);
    public void mouseEntered(MouseEvent e);
    public void mouseExited(MouseEvent e);
```

```
}
```

The `MouseListener` interface has five methods. You cannot use a lambda expression to create mouse event handler. One of the methods of the `MouseListener` interface is called when a specific mouse event occurs. For example, when a mouse pointer enters a component's boundary, a mouse entered event occurs on the component, and the `mouseEntered()` method of the mouse listener object is called. When the mouse pointer leaves the boundary of the component, a mouse exited event occurs, and the `mouseExited()` method is called. The names of other methods are self-explanatory.

The `MouseEvent` class has many methods that provide the details about a mouse event:

- The `getClickCount()` method returns the number of clicks a mouse made.
- The `getX()` and `getY()` methods return the x and y positions of the mouse with respect to the component when the event occurs.
- The `getXOnScreen()` and `getYOnScreen()` methods return the absolute x and y positions of the mouse at the time the event occurs.

Suppose you are interested in handling only two kinds of mouse events for a `JButton`: the mouse entered and mouse exited events. The text of the `JButton` changes to describe the event. The mouse event handler code is as follows:

```
mouseButton.addMouseListener(new MouseListener() {
    @Override
    public void mouseClicked(MouseEvent e) {
        // Nothing to handle
    }

    @Override
    public void mousePressed(MouseEvent e) {
        // Nothing to handle
    }
})
```

```

@Override
public void mouseReleased(MouseEvent e) {
    // Nothing to handle
}

@Override
public void mouseEntered(MouseEvent e) {
    mouseButton.setText("Mouse has
entered!");
}

@Override
public void mouseExited(MouseEvent e) {
    mouseButton.setText("Mouse has exited!");
}
);

```

In this code, you provided an implementation for all five methods of the `MouseListener` interface even though you were interested in handling only two kinds of mouse events. You left the body of three methods empty.

[Listing 1-25](#) demonstrates the mouse entered and exited event for a `JButton`. When the `JFrame` is displayed, try moving your mouse in and out of the boundary of the `JButton` to change its text to indicate the appropriate mouse event.

Listing 1-25. Handling Mouse Events

```

// HandlingMouseEvent.java
package com.jdojo.swing;

import java.awt.FlowLayout;
import javax.swing.JFrame;
import javax.swing.JButton;
import java.awt.event.MouseListener;
import java.awt.event.MouseEvent;

public class HandlingMouseEvent extends JFrame {
    JButton mouseButton = new JButton("No Mouse
Movement Yet!");

```

```
public HandlingMouseEvent() {
    super("Handling Mouse Event");
    this.initFrame();
}

private void initFrame() {
    this.setDefaultCloseOperation(EXIT_ON_CLOSE);
    this.setLayout(new FlowLayout());
    this.getContentPane().add(mouseButton);

    // Add a MouseListener to the JButton
    mouseButton.addMouseListener(new
MouseListener() {
        @Override
        public void
mouseClicked(MouseEvent e) {
    }

        @Override
        public void
mousePressed(MouseEvent e) {
    }

        @Override
        public void
mouseReleased(MouseEvent e) {
    }

        @Override
        public void
mouseEntered(MouseEvent e) {
            mouseButton.setText("Mouse
has entered!");
    }

        @Override
        public void mouseExited(MouseEvent
e) {
            mouseButton.setText("Mouse
```

```

        has exited!" );
    }
}

public static void main(String[] args) {
    HandlingMouseEvent frame = new
HandlingMouseEvent();
    frame.pack();
    frame.setVisible(true);
}
}

```

Do you always have to provide implementation for all event-handling methods of an event listener interface, even though you are not interested in all of them? No, you do not. Swing designers thought of this inconvenience and devised a way to avoid this. Swing includes a convenience class for some XxxListener interfaces. The class is named XxxAdapter. I will call them *adapter classes*. An XxxAdapter class is declared abstract and it implements the XxxListener interface. The XxxAdapter class provides empty implementation for all methods in the XxxListener interface. The following snippet of code shows the relationship between an XxxListener interface having two methods m1 () and m2 () and its corresponding XxxAdapter class.

```

public interface XxxListener {
    public void m1();
    public void m2();
}

public abstract class XxxAdapter implements
XxxListener {
    @Override
    public void m1() {
        // No implementation provided here
    }

    @Override
    public void m2() {

```

```
        // No implementation provided here
    }
}
```

Not all event listener interfaces have corresponding adapter classes. The event listener interface, which declares more than one method, has a corresponding adapter class. For example, you have an adapter class for the `MouseListener` interface that is called `MouseAdapter`. What good will the `MouseAdapter` do for you? It can save you a few lines of unnecessary code. If you only want to handle a few of the mouse events, you can create an anonymous inner class (or regular inner class) that inherits from the adapter class and overrides the only methods that are of interest to you. The following snippet of code rewrites the event handler used in Listing 1-28 using the `MouseAdapter` class:

```
mouseButton.addMouseListener(new MouseAdapter() {
    @Override
    public void mouseEntered(MouseEvent e) {
        mouseButton.setText("Mouse has
entered!");
    }

    @Override
    public void mouseExited(MouseEvent e) {
        mouseButton.setText("Mouse has exited!");
    }
});
```

You may notice that you did not have to worry about three other methods of the `MouseListener` interface because the `MouseAdapter` class provided empty implementation for you.

There is no adapter class named `ActionAdapter` for the `ActionListener` interface. Can you guess why there is no `ActionAdapter` class? Since the `ActionListener` interface has only one method in it, providing an adapter class will not save any keystrokes for you.

Note that using an adapter class to handle an event has no special advantage, except for saving some keystrokes. However, it does have a limitation. If you want to create an event handler by using the main class itself, you cannot use an adapter class. Typically, your main class is inherited from the `JFrame` class and

Java does not allow you to inherit a class from multiple classes. So you cannot inherit your main class from the `JFrame` class as well as the adapter class. If you are using an adapter class to create an event handler, you must use either an anonymous inner class or a regular inner class.

Summary

Swing is a widget toolkit to develop Java applications with GUIs. Most classes used in developing Swing applications are in the `javax.swing` package. A GUI consists of several parts; each part represents a graphic that displays information to the user and lets them interact with the application. Each part in a Swing-based GUI application is called a component that is a Java object. A component that can contain other components is called a container. Containers and components are arranged to form a parent-child hierarchy. Components are contained within a container that, in turn, can be contained within another container. Two types of containers exist: top-level containers and non-top-level containers. A top-level container is not contained within another container and it can be displayed directly on the desktop. For example, an instance of the `JFrame` class represents a top-level container, which is a window that can have a title bar, a menu bar, a border, and other components. An instance of the `JButton` class represents a component.

A top-level container consists of many layers such as root pane, layered panes, a glass pane, and a content pane. Components are added to the content pane.

Swing provides layout managers that are responsible for laying out components in a container. A layout manager is an object that is responsible for determining the position and size of components to be displayed in a container. Each container has a default layout manager. For example, `BorderLayout` is the default layout manager for a `JFrame`. You can use the `setLayout()` method of the container to set a different layout manager. If the layout manager of a component is set to `null`, no layout manager is used and you are responsible for laying out the components in a container.

`FlowLayout` is the simplest of all layout managers that lays out components horizontally, and then vertically. `BorderLayout` divides the container's space into five areas (north, south, east, west, and center) that can be used to lay out components. `CardLayout` lays out components in a container

as a stack of cards in which only one component is visible at a time. `BoxLayout` arranges components in a container either horizontally in one row or vertically in one column. `GridLayout` arranges components in a rectangular grid of equally sized cells placing each component in exactly one cell. `GridBagLayout` lays out components in a grid of rectangular cells arranged in rows and columns where each component occupies one or multiple cells. `SpringLayout` lays out components by defining constraints between their edges; constraints are defined in terms of springs. `GroupLayout` lays out components by forming sequential and parallel groups of components.

An event indicates a user action, for example, clicking of a button by the user. Users interact with Swing component through events. Taking an action in a program in response to an event is called event handling. There are three participants in an event: the event source, the event, and the event handler. The source of an event is the component that generates the event. The event is represented by an object that encapsulates the details of the user's action that led to the occurrence of the event. The event handler is an instance of a specific interface that is executed in response to the occurrence of the event. Components that let you handle events contain methods to add and remove event handlers. The classes, interfaces, and methods used in event handling follow a naming convention that makes names easy to remember.

CHAPTER 2



Swing Components

In this chapter, you will learn

- What Swing components are
- Different types of Swing components
- How to validate input in a text component
- How to use menus and toolbars
- How to edit tabular and hierarchical data using JTable and JTree components
- How to use custom and standard dialogs
- How to customize a component's properties such as colors, borders, fonts, etc.
- How to paint components and how to draw shapes
- Immediate painting and double buffering

What Is a Swing Component?

Swing provides a huge set of components to build GUIs. In Java programs, a Swing component is an instance of the `JComponent` class. The `JComponent` class is in the `javax.swing` package and it serves as the base class for all Swing components. Its class hierarchy is shown in [Figure 2-1](#).

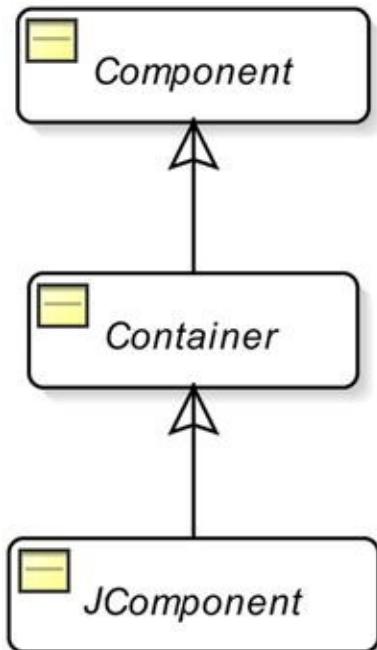


Figure 2-1. The class hierarchy for the `JComponent` class

The `JComponent` class inherits from the `java.awt.Container` class, which in turn inherits from the `java.awt.Component` class. `JComponent` is an abstract class. You cannot instantiate it directly. You must use one of its subclasses, such as `JButton`, `JTextField`, etc.

As the `JComponent` class inherits from the `Container` class, every `JComponent` can also act as a container. For example, a `JButton` can act like a container for another `JButton` or other `JComponents`. You would not use (or need) a `JComponent` as a container unless a `JComponent` such as a `JPanel` has been provided by the Swing library to be used as a container. However, this hierarchy allows you to write code like this:

```

JButton btn = new JButton("Container JButton");
btn.setLayout(new FlowLayout());
btn.add(new JButton("Container JButton. Do not
use."));

```

The `JComponent` class, as a base class for all Swing components, provides the following basic functionalities that are inherited by all Swing components. I will discuss these features in detail later in this chapter.

- It provides support for tool tips. A tool tip is short text that is

displayed when the mouse pointer is paused on a component for a certain period of time.

- It provides support for a pluggable look and feel. All aspects of a component related to how it looks (painting and layout) and how it feels (responding to the user's interaction with a component such as event handling) is handled by a UI delegate object. Like the `JComponent` class, `ComponentUI` in the `javax.swing.plaf` package is the base class used as a UI delegate object. Each descendant of `JComponent` uses a different kind of UI delegate object, which is derived from the `ComponentUI` class. For example, a `JButton` uses `ButtonUI`, a `JLabel` uses `LabelUI`, and a `JToolTip` uses `ToolTipUI` as a UI delegate.
- It provides support for adding a border around a Swing component. The border can be any one of the predefined types (`Line`, `Bevel`, `Titled`, `Etched`, etc.) or a custom border type.
- It provides support for accessibility. Accessibility of an application is the degree to which it can be used by people with varying abilities and disabilities. For example, it has features that can display text in a bigger font size for vision-impaired users. This book does not cover the Java Accessibility API.
- It provides support for double buffering that facilitates smooth on-screen painting. When a component is erased and painted on-screen, a flicker may occur. To avoid any flickering, it provides an off-screen buffer. The erasing and repainting (updating a component) is done in an off-screen buffer, and the off-screen buffer is copied to on-screen.
- It provides binding of a key on the keyboard to a Swing component. You can bind any key on the keyboard with an `ActionListener` object to a component. When that key is pressed, the `actionPerformed()` method of the associated `ActionListener` is called.

- It provides support for laying out the component when a layout manager is used. It contains methods to get and set the minimum, preferred, and maximum size of a component. The three different type size settings for a JComponent serves as a hint to a layout manager in deciding the size of the JComponent.

It allows associating multiple arbitrary properties (key-value pairs) to a Swing component and retrieving those properties. The `putClientProperty()` and `getClientProperty()` methods of the JComponent allows working with component properties.

[Table 2-1](#) lists some of the commonly used methods of the JComponent class that are available to be used in all Swing components.

Table 2-1. Commonly Used Methods of the JComponent Class and Their Descriptions

Method Name	Description
<code>Border getBorder()</code>	Returns the border of the component or <code>null</code> if the component has no border.
<code>void setBorder(Border border)</code>	Sets the border for the component.
<code>Object getClientProperty(Object key)</code>	Returns the value associated with the specified key. The value must have been set using the <code>putClientProperty(Object key, Object value)</code> method.
<code>void putClientProperty(Object key, Object value)</code>	Adds an arbitrary key-value pair to the component.
<code>Graphics getGraphics()</code>	Returns the graphics context object for the component, which can be used to draw on the component.
<code>Dimension getMaximumSize()</code> <code>Dimension getMinimumSize()</code> <code>Dimension getPreferredSize()</code> <code>Dimension getSize(Dimension d)</code>	Gets/sets the maximum, minimum, preferred, and actual size of the component. When you call the <code>getSize()</code>

void setMaximumSize(Dimension d)	method, you can pass a Dimension object and the size will be stored in it and the same object is returned. This way, the method may avoid creating a new Dimension object. If you pass null, it creates a Dimension object, stores the actual size in it, and returns that object.
void setMinimumSize(Dimension d)	
void setPreferredSize(Dimension d)	
void setSize(Dimension d)	
void setSize(int width, int height)	
 String getToolTipText()	Returns the tool tip text for this component.
void setToolTipText(String text)	Sets the tool tip text, which is displayed when mouse pointer pauses on the component for a specified amount of time.
 boolean isDoubleBuffered()	Returns true if the component uses double buffering. Otherwise, it returns false.
void setDoubleBuffered(boolean db)	Sets if the component should use double buffering to paint or not.
 boolean isFocusable()	Returns true if the component can gain focus. Otherwise, it returns false.
void setFocusable(boolean focusable)	Sets if the component can gain focus or not.
 boolean isVisible()	Returns true if the component is visible. Otherwise, it returns false.
void setVisible(boolean v)	Sets the component visible or invisible.
 boolean isEnabled()	Returns true if the component is enabled. Otherwise, it returns false.
void setEnabled(boolean e)	Enables or disables the component. A component is enabled by default. An enabled component responds to the user inputs and generates events.
	Both requestFocus () and requestFocusInWindow ()

boolean requestFocus(boolean temporary)	methods request that the component should get the input focus. You should use the <code>requestFocusInWindow()</code> method instead of the <code>requestFocus()</code> method because its behavior is consistent across all platforms. The boolean argument indicates if the request is temporary. These methods return <code>false</code> if the request is guaranteed to fail. They return <code>true</code> if the request will succeed unless it is vetoed.
boolean requestFocusInWindow()	Returns <code>true</code> if the <code>JComponent</code> is opaque. Otherwise, it returns <code>false</code> .
boolean requestFocusInWindow(boolean temporary)	
boolean isOpaque()	

void setOpaque(boolean opaque)	Sets the opacity of the <code>JComponent</code> . If a <code>JComponent</code> is opaque, it will paint every pixel within its bounds. If it is non-opaque, it may paint some or no pixels in its bounds, allowing the pixels behind it to show through. By default, the <code>JComponent</code> class sets this value to <code>false</code> , making it transparent. However, the default value for opacity for its subclasses depends on the look and feel, and the specific component.
--------------------------------	---

Table 2-2 lists some of the commonly used events that are available for all Swing components. Each Swing component also supports some specialized events. I will explain those specialized events when I discuss those components. Note that all the events listed in the table follow the `XxxEvent` class, `XxxListener` interface, `XxxAdapter` abstract class, and `addXxxListener()` method naming convention unless noted otherwise. That is, to handle `Xxx` event for a component, you need to call its `addXxxListener(XxxListener l)` method and pass object of a class that implements an `XxxListener` interface. All the methods in an `XxxListener` interface accept an argument of the type `XxxEvent`. If there is more than one method in `XxxListener`, there is a corresponding `XxxAdapter` abstract class that implements the `XxxListener` interface and

it provides empty implementations for the XxxListener methods.

Table 2-2. Some Commonly Used Events Available for All Swing Components

Event Class Name	Event Listener Interface	Description
ComponentEvent	ComponentListener <u>Methods:</u> componentShown() componentHidden() componentResized() componentMoved()	The event occurs when a component's visibility, size, or location is changed.
FocusEvent	FocusListener <u>Methods:</u> focusGained() focusLost()	The event occurs when a component gains or loses the focus.
KeyEvent	KeyListener <u>Methods:</u> keyPressed() keyReleased() keyTyped()	The event occurs when the component has the focus and a key on the keyboard is pressed, released, or typed. The key pressed and released events are triggered when you press or release any key on the keyboard. The key typed event is triggered only when a Unicode character is typed. For example, when you type character 'a' on the keyboard, a key pressed, a key typed, and a key released event are triggered in sequence.
MouseEvent	MouseListener <u>Methods:</u> mousePressed() mouseReleased() mouseClicked() mouseEntered() mouseExited()	The mouse pressed, released, and clicked events are triggered when the mouse is pressed, released, and clicked on a component. When a mouse enters the component's bound, a mouse entered event is triggered. A mouse exited event is triggered when a mouse leaves the component's bounds. Note that the MouseAdapter class implements three interfaces: MouseListener, MouseMotionListener, and MouseWheelListener (see two more mouse events below).
	MouseMotionListener	A mouse dragged event is triggered when you drag the mouse over a component by pressing a mouse button.

	Methods: mouseDragged() mouseMoved()	The mouse dragged event continues to trigger even if the mouse leaves the component until the mouse button is released.
MouseEvent	Note: It uses a MouseEvent object as an argument in the event methods. There is no corresponding MouseMotionEvent class.	The mouse moved event is triggered when you move the mouse over a component, but no mouse button is pressed. You can use either the MouseAdapter or MouseMotionAdapter abstract class to write your listener object for this event.
MouseWheelEvent	MouseWheelListener Method: mouseWheelMoved()	A mouse wheel moved event is triggered if the wheel of the mouse is rotated when the component is in focus. If a mouse does not have a wheel, this event is not triggered.

In the beginning, Java provided the AWT (**Abstract Window Toolkit**) for building a GUI. All AWT components were in the `java.awt` package and they used peers to handle how they worked. If you create a button using AWT, there is a corresponding button created by the operating system, which is called the *peer*, to handle most of how the AWT button works. Because of the fact that each AWT component has a peer, AWT components are called *heavyweight* components.

Swing became part of the Java class library in JDK 1.2 as an alternative to AWT. Most of the Swing components do not use peers, and hence, they are called *lightweight* components. For every AWT component, you will find a corresponding Swing component. Swing provides some additional components that are not present in AWT such as `JTabbedPane`. Swing components have their names prefixed with a `J`. For example, to use a button component, AWT provides a `Button` class and Swing provides a `JButton` class. To display a decorated window, AWT provides a `Frame` class and Swing provides a `JFrame` class. Some components in Swing are still heavyweight components. After all, basic GUI capabilities are always provided by the operating system. All top-level containers in Swing (`JFrame`, `JDialog`, `JWindow`, and `JApplet`) are heavyweight components, and they have peers. Swing components, other than top-level containers, are lightweight components. Swing's lightweight components use their heavyweight containers' area to paint. Swing's lightweight components are written in Java.

The main disadvantage of AWT is that a GUI may look different on different operating systems. AWT supports features that are available on all platforms. Because of their dependence on operating system peers, AWT can provide only rectangular components. None of these limitations exist with Swing lightweight components. In Swing, you can have a component of any shape because Swing paints lightweight components using Java code. Swing offers pluggable look and feel, so that you are not limited to seeing GUI components only in the way the operating system paints them. It is not advisable to mix Swing and AWT components in the same application, although it is allowed. Mixing them may result in problems that are hard to debug. This book covers only Swing.

In the next sections, I will discuss several Swing components in detail.

JButton

A JButton is also known as a *push button* or a *command button*. The user presses or clicks a JButton to perform an action. Typically, it displays text that describes the action it performs when it is clicked. The text is also known as the *label*. A JButton also supports displaying an icon. You can use one of the constructors listed in [Table 2-3](#) to create an instance of a JButton.

Table 2-3. Constructors of the JButton Class

Constructor	Description
JButton()	Creates a JButton without any label or icon.
JButton(String text)	Creates a JButton and sets the specified text as its label.
JButton(Icon icon)	Creates a JButton with an icon and no label.
JButton(String text, Icon icon)	Creates a JButton with the specified label and icon.
JButton(Action action)	Creates a JButton with an Action object. You will have an example of using an Action object for a JButton later in this section.

You can create a JButton with its text as Close, like so:


```
JButton closeButton = new JButton("Close");
```

To create a JButton with an icon, you need to have an image file. An icon is a fixed-sized image. An object of a class that implements the javax.swing.Icon interface represents an icon. Swing provides a very useful ImageIcon class that implements the Icon interface. You can create an icon in your program using the ImageIcon class from an image file or a URL that contains a GIF, JPEG, or PNG image. The following snippet of code shows how to create buttons with icons:

```
// Create icons
Icon previousIcon = new
ImageIcon("C:/images/previous.gif");
Icon nextIcon = new ImageIcon("C:/images/next.gif");

// Create buttons with icons
JButton previousButton = new JButton("Previous",
previousIcon);
JButton nextButton = new JButton("Next", nextIcon);
```

It is advised that you use a forward slash (/) in the file path in the constructor of the ImageIcon class. The file path you specify is converted to a URL and the forward slash works on all platforms. This file path example (C:/images/next.gif) is for the Windows platform. [Figure 2-2](#) shows a JFrame with three buttons. Two buttons have icons and one has only text.

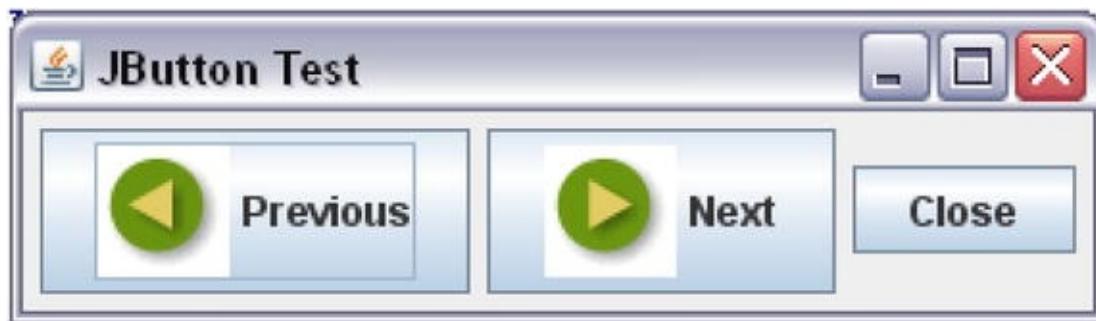

[Figure 2-2](#). Buttons with an icon and text, and with only text

There is only one event for a JButton that you will be using in your Java program most of the time. It is called the ActionEvent. It is triggered when you click the JButton. The ActionListener interface is a functional

interface and it contains only one method called `actionPerformed(ActionEvent e)`. You can use a lambda expression to represent an `ActionListener`. Here is how you add code using a lambda expression for the `ActionEvent` for a `closeButton`:

```
closeButton.addActionListener(() -> {
    // The code to handle the action event goes
here
});
```

A `JButton` supports keyboard *mnemonic*, which is also known as a *keyboard shortcut* or *keyboard indicator*. It is a key that, when pressed, activates the `JButton` if the focus is in the window that contains the `JButton`. The mnemonic key is often pressed in combination with a modifier key such as an `Alt` key. The modifier key is platform-dependent; however, it is usually an `Alt` key. For example, suppose you set the `C` key as a mnemonic for a `Close` `JButton`. When you press `Alt + C`, the `Close` `JButton` is clicked. If the character that is represented by the mnemonic key is found in the `JButton` text, its first occurrence is underlined.

The following snippet of code sets `C` as a mnemonic key for a `Close` `JButton`:

```
// Set the 'C' key as mnemonic key for closeButton
closeButton.setMnemonic('C');

// You can also use the following code to set
a mnemonic key.
// The KeyEvent class is in the java.awt.event
package.
closeButton.setMnemonic(KeyEvent.VK_C);
```

The code shows two methods to set the mnemonic key. The second method can be used when you do not use a character key as a mnemonic key. For example, if you want to set the `F3` key as a mnemonic key, you can use the `KeyEvent.VK_F3` constant using the second method. [Figure 2-3](#) shows the `Close` `JButton` in which the first character of the text is underlined. When you press `Alt + C`, the `Close` `JButton` is activated (the same as if you clicked it with the mouse). Table [2-4](#) shows commonly used method in the `JButton` class.




Figure 2-3. A Close button with C as its keyboard mnemonic

Table 2-4. Commonly Used Methods of the JButton Class

Method	Description
Action getAction()	Returns the Action object associated with the JButton.
void setAction(Action a)	Sets an Action object for the JButton. When this method is called, all properties for the JButton are refreshed from the specified Action object. If there was an Action object already set, the new one replaces the old one. The new Action object is registered as an ActionListener. Any other ActionListener registered with the JButton using addActionListener() method remains registered.
Icon getIcon()	Returns the Icon object associated with the JButton.
void setIcon(Icon icon)	Sets an icon for the JButton.
int getMnemonic()	Returns the keyboard mnemonic for this JButton.
void setMnemonic(int n)	Sets the keyboard mnemonic for the JButton.
void setMnemonic(char c)	Sets the keyboard mnemonic for the JButton.
String getText()	Returns the text for the JButton.
void setText()	Sets the text for the JButton.

Let's use an Action object to create a JButton. So far, you have seen that a JButton has only four commonly used properties: text, icon, mnemonic, and action listener. Using these properties of a JButton is easy and straightforward. How does using an Action object help you deal with a JButton? Let's take an example where you have a button, say Close, placed in different areas of the window, say different tab pages. If the button is placed

four times on a window, and all of them have to look and behave the same, an Action object will help you write the code for the Close button only once and use it at multiple times.

An Action object encapsulates the state and the behavior of a button. You set the text, icon, mnemonic, tool tip text, other properties, and the ActionListener in an Action object, and use the same Action object to create all instance of the JButton. One obvious benefit of doing this is that if you want to enable/disable all four JButtons, you do not need to enable/disable all of them separately. Rather, you set the enabled property in the Action object and it will enable/disable all of them. Let's extend this usage to the menu item and tool bar. It is common to provide a menu item, a tool bar item, and a button to perform the same action in a window. In such cases, you create all three of them (a menu item, a tool bar item and a button) using the same Action object to keep their states synchronized. Now you can realize the benefits of an Action object is in reusing the code and keeping the state of multiple components synchronized.

Action is an interface. The AbstractAction class provides the default implementation for the Action interface. AbstractAction is an abstract class. You need to inherit your class from it. [Listing 2-1](#) defines a CloseAction inner class, which inherits from the AbstractAction class.

[Listing 2-1](#). Using an Action Object to Create and Configure a JButton

```
// ActionJButtonTest.java
package com.jdojo.swing;

import java.awt.FlowLayout;
import javax.swing.JFrame;
import javax.swing.JButton;
import java.awt.event.ActionEvent;
import javax.swing.AbstractAction;
import javax.swing.Action;
import java.awt.Container;

public class ActionJButtonTest extends JFrame {
    // Inner Class starts here
    public class CloseAction extends AbstractAction
{
```

```
public CloseAction() {
    super("Close");
}

@Override
public void actionPerformed(ActionEvent
event) {
    System.exit(0);
}
} // Inner Class ends here

JButton closeButton1;
JButton closeButton2;
Action closeAction = new CloseAction(); // See
inner class above

public ActionJButtonTest() {
    super("Using Action object with
JButton");
    this.initFrame();
}

private void initFrame() {
    this.setDefaultCloseOperation(EXIT_ON_CLOSE);
    this.setLayout(new FlowLayout());
    Container contentPane
= this.getContentPane();

    // Use the same closeAction object to
create both Close buttons
    closeButton1 = new JButton(closeAction);
    closeButton2 = new JButton(closeAction);

    contentPane.add(closeButton1);
    contentPane.add(closeButton2);
}


public static void main(String[] args) {
    ActionJButtonTest frame = new
ActionJButtonTest();
```

```

        frame.pack();
        frame.setVisible(true);
    }
}

```

The ActionJButtonTest class creates an Action object, which is of type CloseAction, and uses it to create two buttons, closeButton1 and closeButton2. The CloseAction class sets the text to Close, and in its actionPerformed() method, it simply exits the application. [Figure 2-4](#) shows the JFrame that you get when you run the program. It shows two Close buttons. Clicking either of them will call the actionPerformed() method of the Action object and that will exit the application.

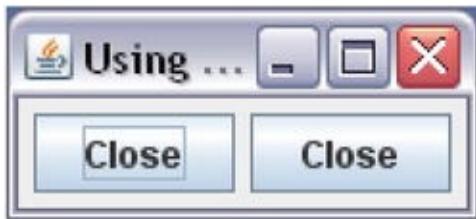

[Figure 2-4](#). Two Close buttons created using the same Action object

If you want to set any property for the JButton while using the Action object, you can do so by using `putValue(String key, Object value)` method of the Action interface. For example, the following snippet of code sets the tool tip text and mnemonic key for the object `closeAction`:

```

// Set the tool tip text for the Action object
closeAction.putValue(Action.SHORT_DESCRIPTION, "Closes
the application");

// Set the mnemonic key for the Action object
closeAction.putValue(Action.MNEMONIC_KEY,
KeyEvent.VK_C);

```

Tip If you use an Action object to configure a JButton, and later change a property for the JButton directly, the changed property will be in effect until you change that property in the Action object again. Suppose you have created two Close buttons using a CloseAction object. If you call

`closeButton1.setText("Exit")`, the first button will display the text as Exit. If you call `closeAction.putValue(Action.NAME, "Close/Exit")`, both buttons will display the text as Close/Exit.

JPanel

A JPanel is a container that can contain other components. You can set its layout manager, border, and background color. Typically, you use a JPanel to group related components and add it to another container such as to a content pane of a JFrame. Note that a JPanel is a container, but not a top-level container, whereas a JFrame is a top-level container. Therefore, you cannot display a JPanel by itself in a Swing application, unless you add it to a top-level container. Sometimes, a JPanel is inserted between two components to create a gap. You can also use a JPanel as a canvas for drawing such as for drawing lines, rectangles, circles, etc.

The default layout manager for a JPanel is FlowLayout. Note that the default layout manager of the content pane of a JFrame is a BorderLayout. You have the option to specify its layout manager in the constructor of the JPanel class. You can change its layout manager after you create it by using its `setLayout()` method. [Table 2-5](#) lists the constructors of the JPanel class.

Table 2-5. Constructors for the JPanel Class

Constructor	Description
<code>JPanel()</code>	Creates a JPanel with FlowLayout and double buffering.
<code>JPanel(boolean isDoubleBuffered)</code>	Creates a JPanel with FlowLayout and the specified double buffering flag.
<code>JPanel(LayoutManager layout)</code>	Creates a JPanel with the specified layout manager and double buffering.
<code>JPanel(LayoutManager layout, boolean isDoubleBuffered)</code>	Creates a JPanel with the specified layout manager and double buffering flag.

The following snippet of code shows how to create a JPanel with a

BorderLayout and add four buttons to it. Note that the buttons are added to the JPanel, which in turn is added to the content pane of a JFrame. You can also add a JPanel to another JPanel to create a nested, complex components layout.

```
// Create a JPanel and four buttons
JPanel buttonPanel = new JPanel(new BorderLayout());
JButton northButton = new JButton("North");
JButton southButton = new JButton("South");
JButton eastButton = new JButton("East");
JButton westButton = new JButton("west");

// Add buttons to the JPanel
buttonPanel.add(northButton, BorderLayout.NORTH);
buttonPanel.add(southButton, BorderLayout.SOUTH);
buttonPanel.add(eastButton, BorderLayout.EAST);
buttonPanel.add(westButton, BorderLayout.WEST);

// Add the buttonPanel to the JFrame's content pane
// assuming that
// the content's pane layout is set to a BorderLayout
contentPane.add(buttonPanel, BorderLayout.SOUTH);
```

JLabel

As the name suggest, a JLabel is a label used to identify or describe another component on the screen. It can display text, an icon, or both. Typically, a JLabel is placed next to (to the right or left) or at the top of the component it describes. [Figure 2-5](#) shows a JLabel with its text set to Name :, which is an indicator for the user that he is supposed to enter a name in the field that is placed next to it.

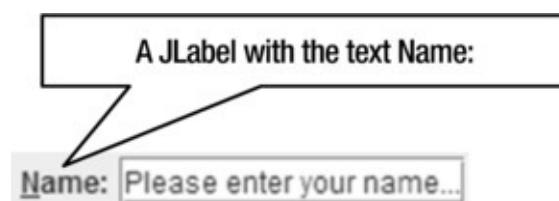


Figure 2-5. A JLabel component with the text *Name:* and the mnemonic set to *N*

Another common use of a JLabel is to display an image. Swing does not include a component such as a JImage to display an image. You need to use a JLabel with an Icon to display an image. [Table 2-6](#) lists the constructors of the JLabel class.

Table 2-6. Constructors of the JLabel Class

Constructor	Description
JLabel()	Creates a JLabel with an empty string as its text and no icon.
JLabel(Icon icon)	Creates a JLabel with an icon and an empty string as its text.
JLabel(Icon icon, int horizontalAlignment)	Creates a JLabel with an icon and the specified horizontal alignment. A JLabel is aligned vertically in the center inside its display area. You can specify its horizontal alignment in its display area as one of the following constants defined in the SwingConstants class: LEFT, CENTER, RIGHT, LEADING, or TRAILING.
JLabel(String text)	Creates a JLabel with the specified text. This is the most commonly used constructor. It is aligned in the center vertically and with the leading edge horizontally inside its display area. The leading edge is determined by the component's orientation.
JLabel(String text, Icon icon, int horizontalAlignment)	Creates a JLabel with the specified text, icon, and horizontal alignment.
JLabel(String text, int horizontalAlignment)	Creates a JLabel with the specified text and horizontal alignment.

The following snippet of code shows some examples of how to create a JLabel:

```
// Create a JLabel with a Name: text
JLabel nameLabel = new JLabel("Name:");

// Display an image warning.gif in a JLabel
JLabel warningImage = new JLabel(new
Icon("C:/images/warning.gif"));
```

A JLabel does not generate any interesting events. However, it has some useful methods that you can use to customize it. You will use three of its

methods very frequently: `setText()`, `setDisplayedMnemonic()`, and `setLabelFor()`. The `setText()` method is used to set the text for the `JLabel`. The `setDisplayedMnemonic()` method is used to set a keyboard mnemonic for the `JLabel`. If the keyboard mnemonic is a character that occurs in the text of the `JLabel`, that character is underlined to give a hint to the user. The `setLabelFor()` method accepts a reference to another component and it indicates that this `JLabel` describes that component. The two methods - `setDisplayedMnemonic()` and `setLabelFor()` work in tandem. When the mnemonic key for the `JLabel` is pressed, the focus is set to the component that was used in the `setLabelFor()` method. The `JLabel` shown in [Figure 2-5](#) has its mnemonic set to the character N and you can see that the character N in its text is underlined. When the user presses Alt + N, the focus will be set to the `JTextField` that is displayed to the right of the `JLabel`. The following snippet of code shows how to create the component arrangements shown in [Figure 2-5](#):

```
// Create a JTextField where the user can enter a name
JTextField nameTextField = new JTextField("Please
enter your name...");


// Create a JLabel with N as its mnemonic and
nameTextField as its label-for component
JLabel nameLabel = new JLabel("Name:");
nameLabel.setDisplayedMnemonic('N');
nameLabel.setLabelFor(nameTextField);

// Add name label and field to a container, say
// a contentPane
contentPane.add(nameLabel);
contentPane.add(nameTextField);
```

There are other methods defined in the `JLabel` class that let you set/get its alignments inside the display area and its text inside its bounds. If you look at a `JLabel` component's features, you will find that it exists only to describe another component—a truly altruistic component!

Text Components

In simple terms, you can define text as a sequence of characters. Swing provides a rich set of features to work with text. [Figure 2-6](#) shows a class diagram for classes representing text components in Swing.

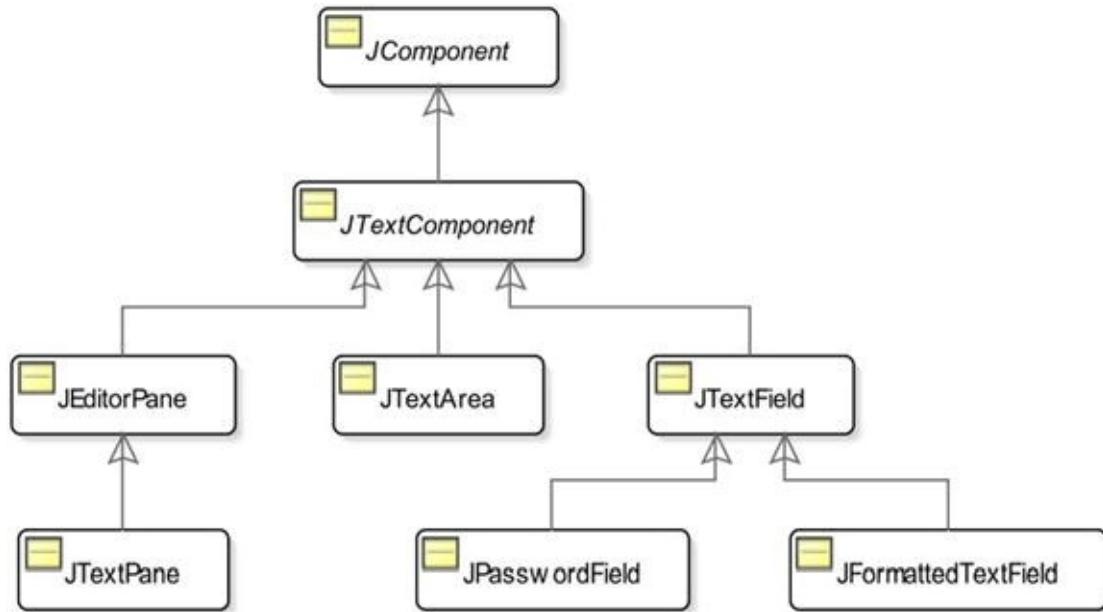

[Figure 2-6](#). A class diagram for text-related components in Swing

Swing provides so many text-related features that it has a separate package, `javax.swing.text`, which contains all text related classes. The `JTextComponent` class is in the `javax.swing.text` package. The rest of the classes are in the `javax.swing` package.

There are different Swing components to work with different kinds of text. We can categorize the text components based on two criteria: the number of lines in text and the type of text they can handle. Based on the number of lines of text that a text component can handle, you can further categorize them as follows:

- Single-line text component
- Multiline text component

A single line text component is designed to handle one line of text, for example, a user name, a password, a birth date etc. Instances of the `JTextField`, `JPasswordField`, and `JFormattedTextField` classes represent single-line text components.

A multiline text component is designed to handle multiple lines of text, for example, comments, the description of an item in a store, a document, etc.

Instances of the `JTextArea`, `JEditorPane`, and `JTextPane` classes represent multiline text components.

Based on the type of the text that a text component can handle, you can categorize text components as follows:

- Plain text component
- Styled text component

The style of text (or parts of text) is the way the text is displayed, such as bold, italic, underlined, etc., font, and color. In the context of a text component, a plain text means that the entire text contained in the text component is displayed using only one style. `JTextField`, `JPasswordField`, `JFormattedTextField`, and `JTextArea` are examples of plain text components. That is, you cannot display multiline text in a `JTextArea` in which some parts of the text is in boldface font and others not. You can display either the entire text in a `JTextArea` in boldface font or the entire text in a regular font. Note that plain text does not mean that text cannot have a style. It means that there is only one style that applies to the entire text (all characters comprising the text).

In styled text, you can apply different styles to different parts of the text. In styled text, some part of the text can be in boldface (or italic, bigger font size, underlined, etc.) and some part not in boldface. `JEditorPane` and `JTextPane` are examples of styled components.

All Swing components, including Swing text components, are based on a model-view-controller (MVC) pattern. An MVC pattern uses three components: a model, a view, and a controller. The model is responsible for storing the contents (the text). The view is responsible for displaying the contents. The controller is responsible for responding to user actions. Swing combines the view and the controller into one object called the UI, which is responsible for displaying the content and reacting to the user's actions. It keeps the model separate and it is represented by an instance of the `Document` interface, which is in the `javax.swing.text` package. The model of a text component is sometimes also referred to as its *document*. [Figure 2-7](#) depicts the different parts of a Swing text component.

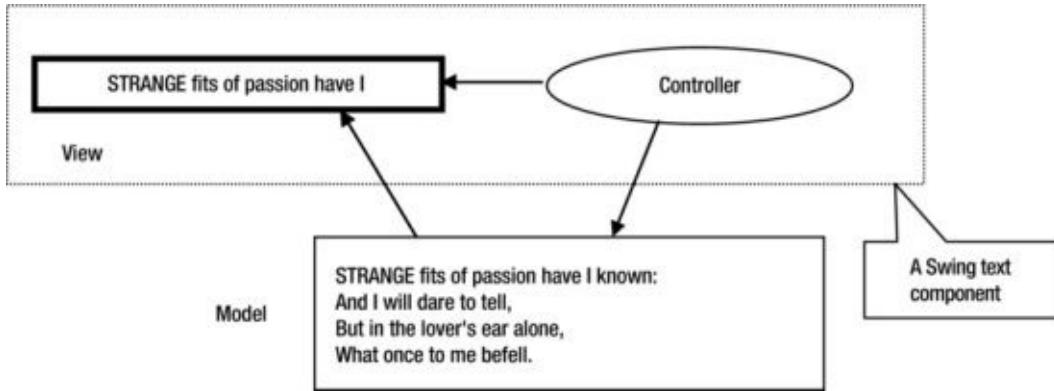


Figure 2-7. Components of the model-view-controller pattern for Swing text components

Note that the view may not always display the entire contents of a text component. In [Figure 2-7](#), the model contains four lines of the part of a poem by William Wordsworth, whereas the view displays only some words from the first line.

Swing provides a default implementation of the `Document` interface, which makes it easy for developers to work with commonly used text types. When you use a text component, it creates an appropriate model (sometimes I will refer to it as a document in the discussion) for you, which is suitable to store the content of the text component. [Figure 2-8](#) shows a class diagram for the `Document` interface, plus related classes and interfaces. All classes and interfaces shown in the figure are in the `javax.swing.text` package.

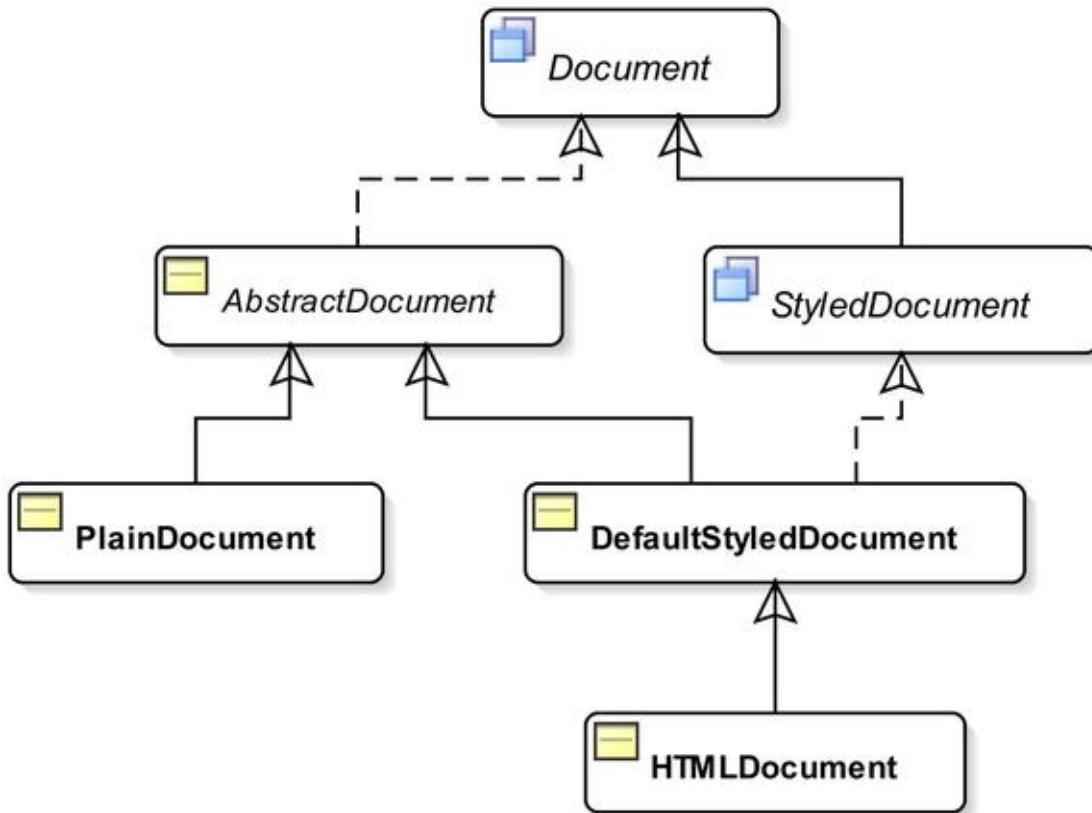


Figure 2-8. A class diagram for the document interface and related interfaces and classes

You can set the model for a text component using the `setDocument (Document doc)` method. The `getDocument ()` method returns the model for a text component.

By default, `JTextField`, `JPasswordField`, `JFormattedTextField`, and `JTextArea` use an instance of the `PlainDocument` class as their models. If you want to customize the models for these text components, you need to create a class inheriting from the `PlainDocument` class and override some of the methods.

The model for `JEditorPane` and `JTextPane` depends on the content type that is being edited and/or displayed. The position of the characters in a text component uses a zero-based index. That is, the first character in the text occurs at index 0.

JTextComponent

`JTextComponent` is an abstract class. It is the ancestor of all Swing text

components. It includes common functionalities that are available to all text components. [Table 2-7](#) lists some commonly used methods of text components that are included in the `JTextComponent` class.

Table 2-7. Commonly Used Methods in the `JTextComponent` Class

Method	Description
<code>Keymap addKeymap(String name, Keymap parentKeymap)</code>	Adds a new keymap to the keymap hierarchy of the component.
<code>void copy()</code>	Copies the selected text to the system clipboard.
<code>void cut()</code>	Moves the selected text to the system clipboard.
<code>Action[] getActions()</code>	Returns the command list for the text editor.
<code>Document getDocument()</code>	Returns the model for the text component.
<code>Keymap getKeymap()</code>	Returns the currently active keymap for the text component.
<code>static Keymap getKeymap(String keymapName)</code>	Returns the keymap associated with this document with the name <code>keymapName</code> .
<code>String getSelectedText()</code>	Returns the selected text in the component. It returns <code>null</code> if there is no selected text or the document is empty.
<code>int getSelectionEnd()</code>	Returns the end position of the selected text.
<code>int getSelectionStart()</code>	Returns the start position of the selected text.
<code>String getText()</code>	Returns the text that is contained in this text component. It returns the text contained in the model of the component and not what is displayed by the view.
<code>String getText(int offset, int length) throws BadLocationException</code>	Returns a portion of the text contained in the text component starting at the <code>offset</code> position and number of characters equal to the <code>length</code> . It throws <code>BadLocationException</code> if <code>offset</code> or <code>length</code> is invalid. For example, if a text component contains <code>Hello</code> as its text, <code>getText(1, 3)</code> will return <code>ell</code> .
<code>TextUI getUI()</code>	Returns the user-interface factory for the text component.
<code>boolean isEditable()</code>	Returns <code>true</code> if the text component is editable. Otherwise, returns <code>false</code> .
<code>void paste()</code>	Transfers the content of the system clipboard to the text component model. If text is selected in the component, the selected text is replaced. If there is no selection, the content is inserted before the current position. If the system clipboard is empty, it does nothing.
	It displays a print dialog and lets you print the content of the text component without a header and footer. This method is

```

void print()

void read(Reader source, Object description) throws IOException

void replaceSelection(String newContent)

void select(int start, int end)

void selectAll()

void setDocument(Document doc)

void setEditable(boolean editable)

void setKeymap(Keymap keymap)

void setSelectionEnd(int end)

void setSelectionStart(int start)

void setText(String newText)

void setUI(TextUI newUI)

void updateUI()

```

overloaded. Other versions of this method provide more functionality to print the content of a text component.

Reads the content from the `source` stream into the text component, discarding the component's old content. The `description` is an object that describes the `source` stream. For example, to read the text of file `test.txt` into a `JTextArea` named `ta` you would write

```

FileReader fr =
new FileReader("test.txt");
ta.read(fr, "Hello");
fr.close();

```

Replaces the selected content with the `newContent`. If there is no selected content, it inserts the `newContent`. If `newContent` is null or an empty string, it removes the selected content.

Selects the text between the `start` and `end` positions.

Selects all text in a text component

Sets the document (that is, the model) for the text component.

Sets a text component as editable if `editable` is true. If `editable` is false, sets the text component as non-editable.

Sets the keymap for the text component.

Sets the end position of selection.

Sets the start position of selection.

Sets the text of the text component.

Sets new UI for the text component.

Reloads the pluggable UI for the text component.

Writes the contents of the text component to a stream defined by `output`. For example, to write the text of a `JTextArea` named `ta` into a file named `test.txt`, you would write

```

void write(Writer output) {
    FileWriter wr = new
        FileWriter("test.txt");
    ta.write(wr);
    wr.close();
}

```

The most commonly used methods of text components are `getText()` and `setText(String text)`. The `getText()` method returns the contents of a text component as a `String`, and the `setText(String text)` method sets the content of a text component specified in the argument.

JTextField

A `JTextField` can handle (display and/or edit) one line of plain text. You can create a `JTextField` in a number of different ways using its constructors. Its constructors accept a combination of

- A string
- The number of columns
- A `Document` object

The string specifies the initial text. The number of columns specifies the width. The `Document` object specifies the model. The default value for the initial text is `null`, the number of columns is zero, and `document` (or model) is an instance of the `PlainDocument` class.

If you do not specify the number of columns, its width is determined by the initial text. Its preferred width will be wide enough to display the entire text. If you specify the number of columns, its preferred width will be wide enough to display as many `m` characters in the current font of the `JTextField` as the specified number of columns. [Table 2-8](#) lists constructors of the `JTextField` class.

Table 2-8. Constructors of the `JTextField` Class

Constructor	Description
<code>JTextField()</code>	Creates a <code>JTextField</code> with default values for initial text,

	number of columns, and document.
JTextField(Document document, String text, int columns)	Creates a JTextField with the specified document as its model, text as its initial text, and columns as its number of columns.
JTextField(int columns)	Creates a JTextField with the specified columns as its number of columns.
JTextField(String text)	Creates a JTextField with the specified text as its initial text.
JTextField(String text, int columns)	Creates a JTextField with the specified text as its initial text and columns as its number of columns.

The following snippet of code creates many instance of JTextField using the different constructors:

```
// Create an empty JTextField
JTextField emptyTextField = new JTextField();

// Create a JTextField with an initial text of Hello
JTextField helloTextField = new JTextField("Hello");

// Create a JTextField with the number of columns of
// 20
JTextField nameTextField = new JTextField(20);
```

How many characters can you enter in a JTextField? There is no limit to the number of characters that you can enter in a JTextField. If you want to limit the number of characters in a JTextField, you need to customize its model. Note that the model of the JTextField stores its contents. Before you see a custom model in action, let's see the power of separating the model and the view for a text component in Swing.

Let's create two instances of JTextField named name and mirroredName. You will set the model for mirroredName to be the same as that of name. You are doing a very simple thing. You are using the same model for both text fields. This makes both fields as mirror fields of each other. If you enter text in one of them, the same text is automatically displayed for you

in the other. How does this happen? When you enter text in a JTextField, its model is updated. Any update in its model sends a notification to its views (in this case, the two components act as views) to update themselves. Since two text fields are two views with the same model, any update in the model (through either of the text fields) will send a notification to both text fields, and both will update their views to display the same text.

[Listing 2-2](#) demonstrates how to share a model between two text fields. Run this program and enter some text in either of the text fields. You will see that the other text field is updated simultaneously with the same text.

Listing 2-2. Mirroring a JTextField by Sharing Its Model With Another JTextField

```
// MirroredTextField.java
package com.jdojo.swing;

import javax.swing.JFrame;
import javax.swing.JTextField;
import javax.swing.JLabel;
import java.awt.GridLayout;
import java.awt.Container;
import javax.swing.text.Document;

public class MirroredTextField extends JFrame {
    JLabel nameLabel = new JLabel("Name:") ;
    JLabel mirrored nameLabel = new JLabel("Mirrored
Name:") ;
    JTextField name = new JTextField(20);
    JTextField mirroredName = new JTextField(20);

    public MirroredTextField() {
        super("Mirrored JTextField");
        this.initFrame();
    }

    private void initFrame() {
        this.setDefaultCloseOperation(EXIT_ON_CLOSE);
        this.setLayout(new GridLayout(2, 0));
        this.add(name, "West");
        this.add(mirroredName, "East");
    }
}
```

```

        Container contentPane
= this.getContentPane();
        contentPane.add(nameLabel);
        contentPane.add(name);
        contentPane.add(mirrored nameLabel);
        contentPane.add(mirroredName);

        // Set the model for mirroredName to be
the same
        // as name's model, so they share their
content's storage.
        Document nameModel = name.getDocument();
        mirroredName.setDocument(nameModel);
    }

    public static void main(String[] args) {
        MirroredTextField frame = new
MirroredTextField();
        frame.pack();
        frame.setVisible(true);
    }
}

```

To have your own model for a `JTextField`, you need to create a new class. The new class can either implement the `Document` interface or inherit from the `PlainDocument` class. The latter approach is easier and most commonly used. [Listing 2-3](#) contains the code for a `LimitedCharDocument` class, which inherits from the `PlainDocument` class. You can use this class as a model for a `JTextField` when you want to limit the number of characters in a `JTextField`. By default, it lets a user enter an unlimited number of characters. You can set the number of allowed characters in its constructor.

[Listing 2-3.](#) A Class That Represents a Plain Document With a Limited Number of Characters

```

// LimitedCharDocument.java
package com.jdojo.swing;

import javax.swing.text.PlainDocument;

```

```

import javax.swing.text.BadLocationException;
import javax.swing.text.AttributeSet;

public class LimitedCharDocument extends PlainDocument
{
    private int limit = -1; // < 0 means an
unlimited characters

    public LimitedCharDocument() {
    }

    public LimitedCharDocument(int limit) {
        this.limit = limit;
    }

    @Override
    public void insertString(int offset, String
str, AttributeSet a)
            throws BadLocationException
{
    String newString = str;
    if (limit >=0 && str != null) {
        // Check for the limit
        int currentLength
= this.getLength();
        int newTextLength = str.length();
        if (currentLength + newTextLength
> limit) {
            newString = str.substring(0,
limit - currentLength);
        }
    }

    super.insertString(offset, newString, a);
}
}

```

The code of interest in the LimitedCharDocument class is the `insertString()` method. The Document interface declares an `insertString()` method. The PlainDocument class provides the default

implementation. The `LimitedCharDocument` class overrides the default implementation and checks whether the inserted string will exceed the number of characters allowed. If the inserted string exceeds the maximum number of characters allowed, it chops off the extra characters. If you set the limit to a negative number, an unlimited number of characters are allowed. At the end, the method simply calls its implementation in the `PlainDocument` class to execute the real action.

The `insertString()` of the model is called every time a text is inserted into the `JTextField`. This method gets the following three arguments:

- `int offset`: It is the position where the string is inserted in the `JTextField`. The first character is inserted at offset 0, the second at offset 1, and so on.
- `String str`: It is the string that is inserted into the `JTextField`. When you enter a text in a `JTextField`, the `insertString()` method is called for each character you enter and this argument will contain only one character. However, when you paste text into a `JTextField` or use its `setText()` method, this argument may contain more than one character.
- `AttributeSet a`: The attributes that have to be associated with the inserted text.

You can use the `LimitedCharDocument` in your code as follows:

```
// Create a JTextField, which will only allow 10 characters
Document tenCharDoc = new LimitedCharDocument(10);
JTextField t1 = new JTextField(tenCharDoc, "your name", 10);
```

There is another way to set a document for a `JTextField`. You need to create a new class inheriting from `JTextField` and override its `createDefaultModel()` method. It is declared `protected` in the `JTextField` class, and by default, it returns a `PlainDocument`. You can return an instance of your custom document class from this method. The code for your custom `JTextField` would look as follows:

```

public class TenCharTextField extends JTextField {
    @Override
    protected Document createDefaultModel() {
        // Return a document object that allows
maximum 10 characters
        return new LimitedCharDocument(10);
    }

    // Other code goes here
}

```

You can use an instance of the `TenCharTextField` class whenever you need a `JTextField` with a capacity of ten characters.

The `createDefaultModel()` method is called from the constructor in the `JTextField` class. Therefore, you should not pass an argument to your custom `JTextField` and use that argument's value to construct the model in the `createDefaultModel()` method in your class. For example, the following snippet of code will not produce the desired result:

```

static class LimitedCharTextField extends JTextField {
    private int maxChars = -1;

    public LimitedCharTextField(int maxChars) {
        this.maxChars = maxChars;
    }

    protected Document createDefaultModel() {
        /* Wrong use of maxChars!!! By the time
this method is called,
            maxChars will have its default value
of zero. This method will be
                called from the constructor of the
JTextField class and at that time
                the constructor for this class would
not start executing.
        */
        return new LimitedCharDocument(maxChars);
    }
}

```

Sometimes, you may want to force the user to enter text in a text field in a specific format, such as entering a date in mm/dd/yyyy format or entering digits only. This is possible using a custom model for the JTextField component. Swing contains another text component called JFormattedTextField that lets you set the format for a text field. A JFormattedTextField makes the job a lot easier if you need a component that should allow a user to add text in a specific format. I will discuss JFormattedTextField shortly.

JPasswordField

A JPasswordField is a JTextField, except that it allows hiding the actual characters being displayed in the field. For example, when you are using a login form to enter your password, you do not want others looking over your shoulders to see your password on the screen. By default, it displays an asterisk (*) character for each actual character in the field. This is called the echo character. The default echo character also depends on the look-and-feel used for the application. You can set your own echo character by using its setEchoChar(char newEchoChar) method.

The JPasswordField class has the same set of constructors as the JTextField class. You can use a combination of the initial text, the number of columns, and a Document object to create a JPasswordField object.

```
// Create a password field 10 characters wide
JPasswordField passwordField = new JPasswordField(10);
```

The getText() method for JPasswordField has been deprecated for security reasons. You should use its getPassword() method instead, which returns an array of char. You should reset all the elements in the char array to zero value after you are done using it. The following snippet of code shows how to validate a password entered in a JPasswordField:

```
// Get the password entered in the field
char c[] = passwordField.getPassword();

// Suppose you have the correct password in a string.
// Usually, you will get it from a file or database
String correctPass = "Hello";
```

```
// Do not convert your password in c[] to a String.  
Rather, convert the correctPass  
// to a char array. Or, better you would have  
correctPass as char array in the first place.  
char[] cp = correctPass.toCharArray();  
  
// Use the equals() method of the java.util.Arrays  
class to compare c and cp for equality  
if (Arrays.equals(c, cp)) {  
    // The password is correct  
}  
else {  
    // The password is incorrect  
}  
  
// Null out the password that you have in the char  
arrays  
Arrays.fill(c, (char)0);  
Arrays.fill(cp, (char)0);
```

You can set an echo character of your choice using the `setEchoChar()` method as follows:

```
// Set # as the echo character  
password.setEchoChar('#');
```

You can use a `JPasswordField` as a `JTextField` by setting its echo character to zero as follows:

```
// Set the echo character to 0, so the actual password  
characters are visible.  
passwordField.setEchoChar((char)0);
```

Tip You need to set the echo character of a `JPasswordField` to a character value whose ASCII value is zero so the `JPasswordField` will show the actual characters. If you set the echo character to '0' (ASCII value of 48), the actual password will not be displayed. Rather, a '0' character will be echoed for each actual character.

JFormattedTextField

A JFormattedTextField is a JTextField with the following two additional capabilities:

- It lets you specify the format in which the text will be edited and/or displayed.
- It also lets you specify a format when the value in the field is null.

In addition to the `getText()` and `setText()` methods, which let you get and set the text in the field, the JFormattedTextField offers two new methods called `getValue()` and `setValue()`, which let you work with any type of data instead of just text.

The JFormattedTextField comes preconfigured to work with three kinds of data: numbers, dates, and strings. However, you have the ability to format any object to be displayed in this field. You can set the format for a JFormattedTextField in many ways using its different constructors, which are listed in [Table 2-9](#).

Table 2-9. Constructors of the JFormattedTextField Class

Constructor	Description
<code>JFormattedTextField()</code>	Creates a JFormattedTextField with no formatter. You need to use its <code>setFormatterFactory()</code> or <code>setValue()</code> method to set a formatter.
<code>JFormattedTextField(Format format)</code>	Creates a JFormattedTextField and it will use the specified format to format the text in the field.
<code>JFormattedTextField(JFormattedTextField.AbstractFormatter formatter)</code>	Creates a JFormattedTextField with the specified formatter.
<code>JFormattedTextField(JFormattedTextField.AbstractFormatterFactory factory)</code>	Creates a JFormattedTextField with the specified factory.

JFormattedTextField(JFormattedTextField.AbstractFormatterFactory factory, Object initialValue)	Creates a JFormattedTextField with the specified factory and the specified an initial value.
JFormattedTextField(Object value)	Creates a JFormattedTextField with the specified value. The field will configure itself to format the value based on the class of the value. If a null is passed as the value, the field has no way to know which type of value it needs to format and it will not attempt to format the value at all.

It is necessary to understand the difference between format, formatter, and formatter factory. A `java.text.Format` object defines the format of an object in a string form. That is, it defines how an object looks as a string; for example, a date object in `mm/dd/yyyy` format would look like `07/09/2008`.

A formatter is represented by a `JFormattedTextField.AbstractFormatter` object and it uses a `java.text.Format` object to format an object. Its job is to convert an object to a string and a string back to an object.

A formatter factory is a collection of formatters. A `JFormattedTextField` uses a formatter factory to get a formatter of a specific type. A formatter factory object is represented by an instance of the `JFormattedTextField.AbstractFormatterFactory` class.

The following snippet of code configures `dobField` to format the text in it as a date in the current locale format:

```
JFormattedTextField dobField = new
JFormattedTextField();
dobField.setValue(new Date());
```

The following snippet of code configures a `salaryField` to display a number in the current locale format:

```
JFormattedTextField salaryField = new
JFormattedTextField();
salaryField.setValue(new Double(11233.98));
```

You can also create a `JFormattedTextField` with a formatter. You need to use the `DateFormatter`, `NumberFormatter`, and `MaskFormatter` classes to format a date, a number, and a string, respectively. These classes are in the `javax.swing.text` package.

```
// Have a field to format a date in mm/dd/yyyy format
DateFormat dateFormat = new
SimpleDateFormat("mm/dd/yyyy");
DateFormatter dateFormatter = new
DateFormatter(dateFormat);
dobField = new JFormattedTextField(dateFormatter);

// Have field to format a number in $#0,000.00 format
NumberFormat numFormat = new
DecimalFormat("$#0,000.00");
NumberFormatter numFormatter = new
NumberFormatter(numFormat);
salaryField = new JFormattedTextField(numFormatter);
```

You need to use a mask formatter to format a string. A mask formatter uses the special characters listed in [Table 2-10](#) to specify a mask.

Table 2-10. Special Characters Used to Specify
a Mask

Character	Description
#	A number
?	A letter
A	A letter or a number
*	Anything
U	A letter, with lowercase characters mapped to their uppercase equivalents
L	A letter, with uppercase characters mapped to their lowercase equivalents
H	A hexadecimal digit (A-F, a-f, 0-9)
'	A single quote. It is an escape character that is used to escape any of the special formatting characters.

To let the user enter a social security number in the #####-##-### format, you create a `JFormattedTextField` as follows. Note that the constructor, `MaskFormatter(String mask)`, throws a `ParseException`.

```
MaskFormatter ssnFormatter = null;
JFormattedTextField ssnField = null;
try {
    ssnFormatter = new MaskFormatter("###-##-###");
    ssnField = new
JFormattedTextField(ssnFormatter);
}
catch (ParseException e) {
    e.printStackTrace();
}
```

When you use a mask formatter, you are forced to use only as many characters as you have specified in the mask. All non-special characters (see [Table 2-10](#) for the list of special characters) are displayed as they appear in the mask. A placeholder (a space by default) is displayed for each special character in the mask. For example, if you specify the mask as "###-##-###", the `JFormattedTextField` displays " - - " as the placeholder. You can also specify a placeholder character for special characters using the `setPlaceholderCharacter(char placeholder)` method of the `MaskFormatter` class. To display 000-00-0000 in a SNN field, you need to use '0' as a placeholder character for the mast formatter, as shown:

```
ssnFormatter = new MaskFormatter("###-##-###");
ssnFormatter.setPlaceholderCharacter('0');
```

You can use the `setFormatterFactory()` method of `JFormattedTextField` to change the formatter after you have created the component. For example, to set a date format to a `JFormattedTextField` named `payDate`, after you have created it, you write

```
DateFormatter df = new DateFormatter(new
SimpleDateFormat("mm/dd/yyyy"));
DefaultFormatterFactory dff = new
DefaultFormatterFactory(df, df, df, df);
```

```
dobField.setFormatterFactory(dff);
```

A JFormattedTextField lets you specify four types of formatters:

- *A null formatter*: It is used when the value in the field is null.
- *An edit Formatter*: It is used when the field has focus.
- *A display Formatter*: It is used when the field does not have focus and it has a non-null value.
- *A default Formatter*: It is used in the absence of any of the above three formatters.

You can specify all four formatters by using a formatter factory in the constructor of the JFormattedTextField class or calling its setFormatterFactory() method. An instance of the JFormattedTextField.AbstractFormatterFactory abstract class represents a formatter factory. The javax.swing.text.DefaultFormatterFactory class is an implementation of the JFormattedTextField.AbstractFormatterFactory class. When you specify a formatter, the same formatter is used in place of four formatters. When you specify a formatter factory, you have the ability to specify different formatters for four different situations.

Suppose you have a JFormattedTextField named dobField to display a date. When this field has focus, you want to let the user edit the date in the format mm/dd/yyyy (e.g. 07/07/2008). When it does not have focus, you want to display a date in the mmmm dd, yyyy (e.g. July 07, 2008) format. The following snippet of code will do the job:

```
DateFormatter df = new DateFormatter(new  
SimpleDateFormat("mmmm dd, yyyy"));  
DateFormatter edf = new DateFormatter(new  
SimpleDateFormat("mm/dd/yyyy"));  
DefaultFormatterFactory ddf = new  
DefaultFormatterFactory(df, df, edf, df);  
dobField.setFormatterFactory(ddf);
```

If you have configured the `JFormattedTextField` to format a date, you can use its `getValue()` method to get a `Date` object. The `getValue()` method's return type is `Object` and you will need to cast the returned value to the type `Date`. You can place the cursor in the month, day, year, hour, minute, and second parts of the date value in the field and use up/down arrow key to change that specific part. If you want to overwrite the value in the field as you type, you need to set the formatter in overwrite mode by using the method `setOverwriteMode(true)`.

Another advantage of using a `JFormattedTextField` is to set a limit on the number of characters that can be entered in a field. Recall that you achieved this by using a custom document for a `JTextField` in the previous section. You can achieve the same by setting a mask formatter. Suppose you want to let the user enter a maximum of two characters in a field. You can accomplish this as follows:

```
JFormattedTextField twoCharField = new  
JFormattedTextField(new MaskFormatter("**"));
```

JTextArea

A `JTextArea` can handle multiline plain text. Most often, when you have multiline text in a `JTextArea`, you will need scrolling capabilities. A `JTextArea` does not provide scrolling by itself. Rather, you need to get help from another Swing component called `JScrollPane` when you need to have scrolling capability for any Swing component.

You can specify the number of rows and columns for a `JTextArea` that are used to determine its preferred size. The number of rows is used to determine its preferred height. If you set the number of rows to N, it means that its preferred height will be set to display N number of lines of text in the current font settings. The number of columns is used to determine its preferred width. If you set the number of columns to M, it means that its preferred width is set to M times the width of the character m (lowercase M) in the current font settings.

A `JTextArea` provides a number of constructors to create a `JTextArea` component using a combination of the initial text, the model, the number of rows, and the number of columns as arguments, as shown in [Table 2-11](#).

Table 2-11. Constructors of the *JTextArea* Class

Constructor	Description
<code>JTextArea()</code>	Creates a <i>JTextArea</i> with a default model, initial string as <code>null</code> , and rows/columns as zero.
<code>JTextArea(Document doc)</code>	Creates a <i>JTextArea</i> with the specified <code>doc</code> as its model. Its initial string is set to <code>null</code> , and rows/columns to zero.
<code>JTextArea(Document doc, String text, int rows, int columns)</code>	Creates a <i>JTextArea</i> with all its properties (model, initial text, rows, and column) as specified in its arguments.
<code>JTextArea(int rows, int columns)</code>	Creates a <i>JTextArea</i> with a default model, initial string as <code>null</code> , and the specified rows/columns.
<code>JTextArea(String text)</code>	Creates a <i>JTextArea</i> with the specified initial text. A default model is set and rows/columns are set to zero.
<code>JTextArea(String text, int rows, int columns)</code>	Creates a <i>JTextArea</i> with the specified text, rows, and columns. A default model is used.

The following snippet of code creates many instances of *JTextArea* using different initial values:

```
// Create a blank JTextArea
JTextArea emptyTextArea = new JTextArea();

// Create a JTextArea with 10 rows and 50 columns
JTextArea commentsTextArea = new JTextArea(10, 50);

// Create a JTextArea with 10 rows and 50 columns with
// an initial text of "Enter resume here"
JTextArea resumeTextArea = new JTextArea("Enter resume
here", 10, 50);
```

It is very important to remember that when you work with a *JTextArea*, most often your text size will be bigger than its size on the screen and you will need a scrolling capability. To add the scrolling capability to a *JTextArea*, you need to add it to a *JScrollPane*, and add the *JScrollPane* to the container, not the *JTextArea*. The following snippet of code demonstrates this concept. It is assumed that you have a *JFrame* named `myFrame` whose content pane's layout is set to `BorderLayout` and you want to add a scrollable

JTextArea in the center region.

```
// Create JTextArea
JTextArea resumeTextArea = new JTextArea("Enter resume
here", 10, 50);

// Add JTextArea to a JScrollPane
JScrollPane sp = new JScrollPane(resumeTextArea);

// Get the reference of the content pane of the JFrame
Container contentPane = myFrame.getContentPane();

// Add the JScrollPane (sp) to the content pane, not
// the JTextArea
contentPane.add(sp, BorderLayout.CENTER);
```

Table 2-12 has some of the commonly used methods of a JTextArea. Most of the time, you will use its setText(), getText(), and append() methods.


Table 2-12. Commonly Used Methods of JTextArea

Method	Description
void append(String text)	Appends the specified text to the end of the JTextArea.
int getLineCount()	Returns the number of lines in the JTextArea.
int getLineStartOffset(int line) throws BadLocationException int getLineEndOffset(int line) throws BadLocationException	Returns the start and end offset (also called position, which is zero based) for a specified line number. Throws an exception if the line number is out of range.
int getLineOffset(int offset) throws BadLocationException	This method is useful when you combine it with the getLineCount() method. You can parse the text contained in the JTextArea line by line using these three methods inside a loop.
boolean getLineWrap()	Returns true if line wrapping has been set. Otherwise, it returns false.
int getTabSize()	Returns the number of characters used for a tab. By default, it returns 8.
boolean	Returns true if word wrapping has been set to true.

<code>getWrapStyleWord()</code>	Otherwise, it returns <code>false</code> .
<code>void insert(String text, int offset)</code>	Inserts the specified <code>text</code> at the specified <code>offset</code> . If the model is <code>null</code> or the specified <code>text</code> is empty or <code>null</code> , calling this method has no effect.
<code>void replaceRange(String text, int start, int end)</code>	Replaces the text between the <code>start</code> and <code>end</code> positions with the specified <code>text</code> .
<code>void setLineWrap(boolean wrap)</code>	Sets the line-wrapping policy for the <code>JTextArea</code> . If line-wrapping is set to <code>true</code> , a line is wrapped if it does not fit into the width of the <code>JTextArea</code> . If it is set to <code>false</code> , lines are not wrapped even though it is longer than the width of the <code>JTextArea</code> . By default, it is set to <code>false</code> .
<code>void setTabSize(int size)</code>	Sets the number of characters that a tab will expand to the specified size.
<code>void setWrapStyleWord(boolean word)</code>	Sets the word-wrapping style when line wrapping is set to <code>true</code> . When it is set to <code>true</code> , the line wraps at a word boundary. Otherwise, the line wraps at a character boundary. By default, it is set to <code>false</code> .

`JTextArea` uses configurable policies for wrapping lines and words in its displayable area. If the line wrapping is set to `true` and a line is longer than the width of the component, the line will be wrapped. By default, the line wrapping is set to `false`. The line wrapping is set using the `setLineWrap(boolean lineWrap)` method.

A line can wrap at a word boundary or at a character boundary, which is determined by the word wrapping policy. The word wrapping policy is set using the `setWrapStyleWord(boolean wordWrap)` method. Calling this method takes effect only if the `setLineWrap(true)` is called. That is, a word wrapping policy defines the details of the line wrapping policy. [Figure 2-9](#) shows three `JTextArea` components displayed in a `JFrame`.

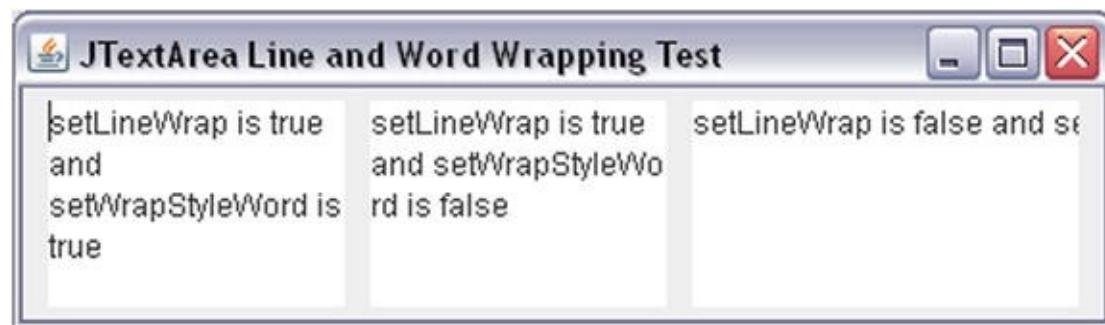

[Figure 2-9](#). The effects of line and word wrapping in a `JTextArea`

For the three `JTextArea` components in the figure (left to right), the line wrapping and word wrapping settings are `(true, true)`, `(true, false)` and `(false, true)`. The first one wrapped the line at the word boundaries. The second one wrapped the lines at a character boundary. The third one did not wrap the line at all and you are not able to view the entire text in its width. Note that each of the three `JTextArea` components were added to the `JFrame` without adding it to a `JScrollPane`.

JEditorPane

A `JEditorPane` is a text component that is designed to handle different kinds of text. By default, it knows how to handle plain text, HTML, and Rich Text Format (RTF). Although it is designed to edit and display many types of content, it is primarily used to display an HTML document, which contains only basic HTML elements. The support for RTF content is very basic.

A `JEditorPane` handles a specific type of content using a specific `EditorKit` object. If you want to handle new types of content in this component, you will need to create a custom `EditorKit` class, which is a subclass of the `javax.swing.text.EditorKit` class. If you are using this component only to display HTML content, you do not need to worry about an `EditorKit`; the component will handle the `EditorKit` related functionalities for you. It takes only one line of code to use a `JEditorPane` to display a HTML page, as shown:

```
// Create a JEditorPane to display yahoo.com web page
JEditorPane htmlPane = new
JEditorPane("http://www.yahoo.com");
```

Note that some of the constructors of the `JEditorPane` class throw an `IOException`. When you specify a URL, you must use the full form of the URL, starting with the protocol. You can let `JEditorPane` know what type of an `EditorKit` it needs to install to handle its content in the following three different ways:

- By calling the `setContentType(String contentType)` method

- By calling the `setPage (URL url)` or `setPage (String url)` method
- By calling the `read (InputStream in, Object description)` method

`JEditorPane` is preconfigured to understand three types of contents: `text/plain`, `text/html`, and `text/rtf`. You can use the following code to display the text `Hello`, using the `<h1>` tag in HTML:

```
htmlPane.setContentType("text/html");
htmlPane.setText("<html><body><h1>Hello</h1></body>
</html>");
```

When you call its `setPage ()` method, it uses an appropriate `EditorKit` to handle the content provided by the URL. In the following snippet of code, the `JEditorPane` uses an `EditorKit` depending on the content type:

```
// Handle an HTML Page
editorPane.setPage("http://www.yahoo.com");

// Handle an RTF file. When you use a file protocol,
// you may use three slashes instead of one
editorPane.setPage("file:///C:/test.rtf");
```

The `JEditorPane` reads the contents from a stream into the editor pane. If its editor kit is already set to handle the HTML content and the specified description is of type `javax.swing.text.html.HTMLDocument`, the content will be read as HTML. Otherwise, the content will be read as plain text.

When you work with an HTML document, you may want to navigate to a different page when you click a hyperlink. In order to use a hyperlink, you need to add a hyperlink listener to the `JEditorPane`, and in the `hyperlinkUpdate ()` method of the event listener, navigate to the new page using the `setPage ()` method. One of the three type of actions, `ENTERED`, `EXITED`, and `ACTIVATED`, on a hyperlink triggers the `hyperlinkUpdate ()` method. The `ENTERED` event occurs when the mouse enters a hyperlink area, the `EXITED` event occurs when the mouse leaves the hyperlink area, and the `ACTIVATED` event occurs when a hyperlink is clicked. Make sure you check for an `ACTIVATED` event in the `hyperlinkUpdate ()`

method in your hyperlink listener when you want to navigate to another page using a hyperlink. The following snippet of code uses a lambda expression to add a `HyperlinkListener` to a `JEditorPane`:

```
editorPane.addHyperlinkListener( (HyperlinkEvent event) -> {
    if (event.getEventType() == HyperlinkEvent.EventType.ACTIVATED) {
        try {
            editorPane.setPage(event.getURL());
        }
        catch (IOException e) {
            e.printStackTrace();
        }
    }
}) ;
```

If you want to know when a new page is loaded in the `JEditorPane`, you need to add a property change listener to listen to its property change event and to check if the property with the name `page` has changed. [Listing 2-4](#) contains the complete code that uses a `JEditorPane` as a browser to view a web page. When you run the program, you can enter a web page address in the URL field and press the Enter key (or press the Go button), and the browser will display the contents of the new URL. You can also click a hyperlink in the contents to navigate to another web page. The code is simple and contains enough comments to assist you in understanding the program logic.

[Listing 2-4](#). An HTML Browser Using the `JEditorPane` Component

```
// HTMLBrowser.java
package com.jdojo.swing;

import javax.swing.JFrame;
import java.awt.Container;
import javax.swing.JLabel;
import javax.swing.JScrollPane;
import javax.swing.Box;
import javax.swing.JEditorPane;
import javax.swing.JTextField;
```

```
import javax.swing.JButton;
import java.awt.BorderLayout;
import java.net.URL;
import javax.swing.event.HyperlinkEvent;
import java.beans.PropertyChangeEvent;
import java.net.MalformedURLException;
import java.io.IOException;

public class HTMLBrowser extends JFrame {
    JLabel urlLabel = new JLabel("URL:");
    JTextField urlTextField = new JTextField(40);
    JButton urlGoButton = new JButton("Go");
    JEditorPane editorPane = new JEditorPane();
    JLabel statusLabel = new JLabel("Ready");

    public HTMLBrowser(String title) {
        super(title);
        initFrame();
    }

    // Initialize the JFrame and add components to it
    private void initFrame() {
        this.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
        Container contentPane
= this.getContentPane();
        Box urlBox = this.getURLBox();
        Box editorPaneBox
= this.getEditPaneBox();

        contentPane.add(urlBox,
BorderLayout.NORTH);
        contentPane.add(editorPaneBox,
BorderLayout.CENTER);
        contentPane.add(statusLabel,
BorderLayout.SOUTH);
    }

    private Box getURLBox() {
        // URL Box consists of a JLabel,
```

```
a JTextField and a JButton
    Box urlBox = Box.createHorizontalBox();
    urlBox.add(urlLabel);
    urlBox.add(urlTextField);
    urlBox.add(urlGoButton);

        // Add an action listener to
urlTextField, so when the user enters a url
        // and presses the enter key, the
application navigates to the new URL.
        urlTextField.addActionListener(e -> {
            String urlString
= urlTextField.getText();
            go(urlString);
        });

        // Add an action listener to the Go
button
        urlGoButton.addActionListener(e -> go());

        return urlBox;
    }

    private Box getEditPaneBox() {
        // To display HTML, you must make the
editor pane non-editable.
        // Otherwise, you will see an editable
HTML page that doesnot look nice.
        editorPane.setEditable(false);

        // URL Box consists of a JLabel,
a JTextField and a JButton
        Box editorBox
= Box.createHorizontalBox();

        // Add a JEditorPane inside a JScrollPane
to provide scolling
        editorBox.add(new
JScrollPane(editorPane));
    }
}
```

```

        // Add a hyperlink listener to the editor
pane, so that it
            // navigates to a new page, when the user
clicks a hyperlink
            editorPane.addHyperlinkListener((Hyperlin]
event) -> {
                if (event.getEventType() ==
HyperlinkEvent.EventType.ACTIVATED) {
                    go(event.getURL());
                }
                else if
(event.getEventType() ==
HyperlinkEvent.EventType.ENTERED) {
                    statusBar.setText("Please
click this link to visit the page");
                }
                else if
(event.getEventType() ==
HyperlinkEvent.EventType.EXITED) {
                    statusBar.setText("Ready");
                }
            });

        // Add a property change listener, so we
can update
            // the URL text field with url of the new
page
            editorPane.addPropertyChangeListener((Prop
e) -> {
                String propertyName
= e.getPropertyName();
                if
(propertyName.equalsIgnoreCase("page")) {
                    URL url
= editorPane.getPage();
                    urlTextField.setText(url.toE>
}
            });

        return editorBox;
    }

```

```
// Navigates to the url entered in the URL
JTextField
    public void go() {
        try {
            URL url = new
URL(urlTextField.getText());
            this.go(url);
        }
        catch (MalformedURLException e) {
            setStatus(e.getMessage());
        }
    }

// Navigates to the specified URL
public void go(URL url) {
    try {
        editorPane.setPage(url);
        urlTextField.setText(url.toExternal
setStatus("Ready");
    }
    catch (IOException e) {
        setStatus(e.getMessage());
    }
}

// Navigates to the specified URL specified as
a string
public void go(String urlString) {
    try {
        URL url = new URL(urlString);
        go(url);
    }
    catch (IOException e) {
        setStatus(e.getMessage());
    }
}

private void setStatus(String status) {
    statusLabel.setText(status);
```

```

    }

    public static void main(String[] args) {
        HTMLBrowser browser = new
HTMLBrowser("HTML Browser");
        browser.setSize(700, 500);
        browser.setVisible(true);

        // Let us visit yahoo.com
        browser.go("http://www.yahoo.com");
    }
}

```

The following are the important parts of the program:

- The `getURLBox()` method packs a `JLabel`, a `JTextField`, and a `JButton` in a horizontal box, and it is added to the north region of the frame. It adds an action listener to the `JTextField` and to the `JButton`, so that when a user presses the Enter key or the Go button after typing the new URL, the browser navigates to the new URL.
- The `getEditPaneBox()` method packs a `JEditorPane` inside a `JScrollPane` and it is added in the center region of the frame. It also adds a hyperlink listener and a property change listener to the `JEditorPane`. The hyperlink listener is used to navigate to a URL when the user clicks a hyperlink. It also displays an appropriate help message in the status bar when the mouse enters and exits a hyperlink area.
- A `JLabel` is used to display a brief message in the south area of the frame.
- The `go()` method has been overloaded and its main job is to navigate to a new page using the `setPage()` method.
- The `main()` method is used for testing. It displays Yahoo's home page in the browser.

As an assignment, you can add the Back and Forward buttons to the

browser to let the user navigate back and forth between the already visited web pages.

Tip In order to display an HTML page in a nice format, you need to make the `JEditorPane` non-editable by calling its `setEditable(false)` method. You should not use a `JEditorPane` to display all kinds of HTML pages because it does not handle all kinds of different things that can be embedded in an HTML page. Rather, you should only use it to display HTML pages that contain basic HTML content, such as an HTML help file for your application.

JTextPane


The `JTextPane` class is a subclass of the `JEditorPane` class. It is a specialized component to handle the styled document with embedded images and components. You can set attributes for characters and paragraphs. If you want to display an HTML, RTF, or plain document, the `JEditorPane` is your best choice. However, if you need the rich set of functionalities provided by a word processor to edit/display styled text, you need to use the `JTextPane`. It is a mini word processor. It always works with a styled document, even if its contents are plain text. It is not possible to discuss all of its features in this section; it deserves a small book by itself. I will touch upon its features, such as setting styled text, embedding images, and components.

A `JTextPane` uses a styled document, which is an instance of the `StyledDocument` interface. The `StyledDocument` interface inherits the `Document` interface. `DefaultStyledDocument` is an implementation class for the `StyledDocument` interface. A `JTextPane` uses a `DefaultStyledDocument` as its default model. A document in a Swing text component consists of elements that are organized in a tree-like structure. The top element is called the root element. An element in a document is an instance of the `javax.swing.text.Element` interface.


A plain document has a root element. The root element can have multiple child elements. Each child element consists of one line of text. Note that in a plain document, all characters in the document have the same attributes (or formatting style).

A styled document has a root element, which is also known as a section. The

root element has branch elements, which are also known as paragraphs. A paragraph has character runs. A character run is a set of contiguous characters that share the same attributes. For example, the “Hello world” string defines one character run. However, the “Hello **world**” string defines two character runs. Note that the word “**world**” is in boldface font and “Hello” is not. That is why they define two different character runs. In a styled document, a paragraph ends with a newline character unless it is the last paragraph, which need not end in a newline. You can define attributes at the paragraph level, such as indenting, line spacing, text alignment, etc. You can define attributes at character run level, such as font size, font family, bold, italics, etc. [Figure 2-10](#) and [Figure 2-11](#) show the structures of a plain document and a styled document, respectively.

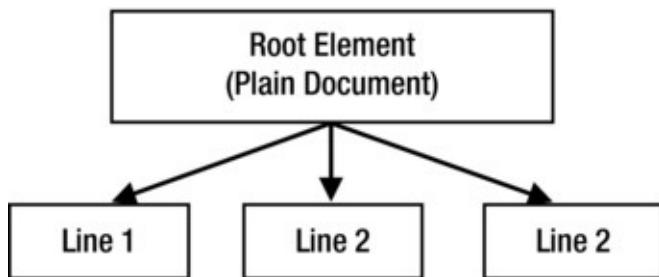

[Figure 2-10](#). Structure of a plain document

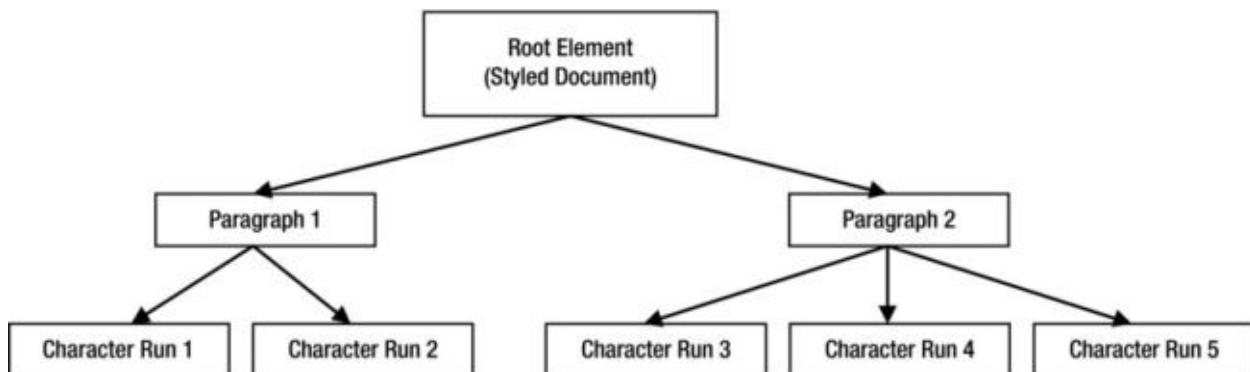

[Figure 2-11](#). Structure of a styled document

The program in [Listing 2-5](#) develops a basic word processor using a `JTextPane`. It lets you edit text and apply styles such as bold, italics, color, and alignment to the text.

[Listing 2-5](#). A Simple Word Processor Using `JTextPane` and `JButtons`

```
// WordProcessor.java
```

```
package com.jdojo.swing;

import javax.swing.JFrame;
import java.awt.Container;
import javax.swing.JTextPane;
import javax.swing.JButton;
import java.awt.BorderLayout;
import javax.swing.JPanel;
import javax.swing.text.StyledDocument;
import javax.swing.text.BadLocationException;
import javax.swing.text.Style;
import javax.swing.text.StyleContext;
import javax.swing.text.StyleConstants;
import java.awt.Color;

public class WordProcessor extends JFrame {
    JTextPane textPane = new JTextPane();

    JButton normalBtn = new JButton("Normal");
    JButton boldBtn = new JButton("Bold");
    JButton italicBtn = new JButton("Italic");
    JButton underlineBtn = new
    JButton("Underline");
    JButton superscriptBtn = new
    JButton("Superscript");
    JButton blueBtn = new JButton("Blue");
    JButton leftBtn = new JButton("Left Align");
    JButton rightBtn = new JButton("Right Align");

    public WordProcessor(String title) {
        super(title);
        initFrame();
    }

    private void initFrame() {
        this.setDefaultCloseOperation(JFrame.EXIT_
        Container contentPane
= this.getContentPane();

        JPanel buttonPanel
```

```
= this.getButtonPanel();
    contentPane.add(buttonPanel,
BorderLayout.NORTH);
    contentPane.add(textPane,
BorderLayout.CENTER);

    this.addStyles(); // Add styles to the
text pane for later use
    insertTestStrings(); // Insert some texts
to the text pane
}

private JPanel getButtonPanel() {
    JPanel buttonPanel = new JPanel();
    buttonPanel.add(normalBtn);
    buttonPanel.add(boldBtn);
    buttonPanel.add(italicBtn);
    buttonPanel.add(underlineBtn);
    buttonPanel.add(superscriptBtn);
    buttonPanel.add(blueBtn);
    buttonPanel.add(leftBtn);
    buttonPanel.add(rightBtn);

    // Add action event listeners to buttons
    normalBtn.addActionListener(e ->
setNewStyle("normal", true));
    boldBtn.addActionListener(e ->
setNewStyle("bold", true));
    italicBtn.addActionListener(e ->
setNewStyle("italic", true));
    underlineBtn.addActionListener(e ->
setNewStyle("underline", true));
    superscriptBtn.addActionListener(e ->
setNewStyle("superscript", true));
    blueBtn.addActionListener(e ->
setNewStyle("blue", true));
    leftBtn.addActionListener(e ->
setNewStyle("left", false));
    rightBtn.addActionListener(e ->
```

```
        setNewStyle("right", false));

        return buttonPanel;
    }

    private void addStyles() {
        // Get the default style
        StyleContext sc
= StyleContext.getDefaultStyleContext();
        Style defaultContextStyle
= sc.getStyle(StyleContext.DEFAULT_STYLE);

        // Add some styles to the document, to
retrieve and use later
        StyledDocument document
= textPane.getStyledDocument();
        Style normalStyle
= document.addStyle("normal", defaultContextStyle);

        // Create a bold style
        Style boldStyle
= document.addStyle("bold", normalStyle);
        StyleConstants.setBold(boldStyle, true);

        // Create an italic style
        Style italicStyle
= document.addStyle("italic", normalStyle);
        StyleConstants.setItalic(italicStyle,
true);

        // Create an underline style
        Style underlineStyle
= document.addStyle("underline", normalStyle);
        StyleConstants.setUnderline(underlineStyle,
true);

        // Create a superscript style
        Style superscriptStyle
= document.addStyle("superscript", normalStyle);
        StyleConstants.setSuperscript(superscriptStyle,
```

```
        true);

                // Create a blue color style
                Style blueColorStyle
= document.addStyle("blue", normalStyle);
                StyleConstants.setForeground(blueColorStyle,
Color.BLUE);

                // Create a left alignment paragraph
style
                Style leftStyle
= document.addStyle("left", normalStyle);
                StyleConstants.setAlignment(leftStyle,
StyleConstants.ALIGN_LEFT);

                // Create a right alignment paragraph
style
                Style rightStyle
= document.addStyle("right", normalStyle);
                StyleConstants.setAlignment(rightStyle,
StyleConstants.ALIGN_RIGHT);
            }

        private void setNewStyle(String styleName,
boolean isCharacterStyle) {
        StyledDocument document
= textPane.getStyledDocument();
        Style newStyle
= document.getStyle(styleName);
        int start = textPane.getSelectionStart();
        int end = textPane.getSelectionEnd();
        if (isCharacterStyle) {
            boolean replaceOld
= styleName.equals("normal");
            document.setCharacterAttributes(sta
end - start,
newStyle,
replaceOld);
        }
        else {

```

```

        document.setParagraphAttributes(sta
end - start, newStyle, false);
    }
}

private void insertTestStrings() {
    StyledDocument document
= textPane.getStyledDocument();
    try {
        document.insertString(0, "Hello
JTextPane\n", null);
    }
    catch (BadLocationException e) {
        e.printStackTrace();
    }
}

public static void main(String[] args) {
    WordProcessor frame = new
WordProcessor("Word Processor");
    frame.setSize(700, 500);
    frame.setVisible(true);
}
}

```

The word processor program is little lengthy. However, it does simple, repetitive things. I have broken the program's logic down into smaller pieces for easier understanding. The intent of this program is to show a JTextPane where a user can edit text and apply styles to the text using some buttons

There are eight buttons. Five of them are used to format text: normal, bold, italic, underline, and superscript. The Blue button is used to set the text color to blue. The last two buttons, Left Align and Right Align, are used to set the paragraph alignment to left and right.

What is a style and how do you set a style to text and a paragraph? In simple terms, a style is a collection of attributes (name-value pairs). It is simple to set the style; however, you need to write a few lines of code to have the style itself. You add styles to the document of a JTextPane and to the JTextPane itself. You need to use the `addStyle(String styleName, Style parent)` method of the `StyledDocument` class. It returns a `Style` object. The

parent argument can be null. If it is not null, unspecified attributes are resolved in the parent style. Once you have a style object, you can use a setXxx() method of the StyleConstants class to set the appropriate attributes in that style. If you are confused, here is a recap.

Think of a style as a table with two columns: name and value. The addStyle() method of the StyledDocument class returns an empty style (meaning an empty table). By using the setXxx() methods of StyleConstants, you are adding new rows to the style (that is, to the table). Once you have at least one row in the table (that is, at least one style attribute defined), you can apply that style to characters or paragraphs depending on the type of the style. Note that you can have an empty style. An empty style may be used to remove all current styles from a range of characters or from a paragraph. The following snippet of code creates two styles: the first one is bold and second one is bold + italic. If you apply the first style to text, it will format the text in boldface font. If you apply the second style to a text, it will format the text in boldface font and italic. Note that you are setting the parent style to null.

```
// Get the styled document from the text pane
StyledDocument document
= textPane.getStyledDocument();

// Add an empty style named "bold" to the document
Style bold = document.addStyle("bold", null);

// Add bold attribute to this style
StyleConstants.setBold(bold, true);

// From this point on, you can use the bold style

// Let's create a bold + italic style called
boldItalic.
// Add an empty style named boldItalic to the document
Style boldItalic = document.addStyle("boldItalic",
null);

// Add bold and italic attributes to the boldItalic
style
StyleConstants.setBold(boldItalic, true);
```

```
StyleConstants.setItalic(boldItalic, true);  
  
// From this point on, you can use the boldItalic  
style
```

You may need the reference of the style object after you add it to a `StyledDocument`. You can retrieve the reference of the same style by using its `getStyle(String styleName)` method.

```
// Get the bold style from document  
Style myBoldStyle = document.getStyle("bold");
```

Once you have a `Style` object, you can use the `setCharacterAttributes(int offset, int length, AttributeSet s, boolean replace)` and `setParagraphAttributes (int offset, int length, AttributeSet s, boolean replace)` methods of the `StyledDocument` class to set the style to a character range or to a paragraph. If the `replace` argument is specified as `true`, any old style for that range will be replaced with the new one. Otherwise, the new style is merged with the old one.

```
// Suppose a text pane has more than five characters  
in it.  
// Make the first three characters bold  
document.setCharacterAttributes(0, 3, bold, false);
```

A `StyleContext` object defines a pool of styles for their efficient use. You can get the default collection of styles as follows:

```
StyleContext sc  
= StyleContext.getDefaultStyleContext();  
Style defaultContextStyle  
= sc.getStyle(StyleContext.DEFAULT_STYLE);  
  
// Let's add a default context style as normal style's  
parent.  
// We do not add any extra attribute to normal styles  
StyledDocument document  
= textPane.getStyledDocument();  
Style normal = document.addStyle("normal",
```

```
defaultContextStyle);
```

Table 2-13 contains a list of important methods with their descriptions, which may assist you in understanding the code in Listing 2-5. Figure 2-12 shows how the simple word processor looks like after you enter $E = mc^2$ in it.

Table 2-13. Methods of the WordProcessor Class With Their Descriptions

Method	Description
initFrame()	Initializes the frame by adding components to it and setting the default behavior of the JFrame.
getButtonPanel()	Returns a JPanel, which contains all JButtons for formatting. It also adds action listeners to all JButtons.
addStyles()	It adds styles to the document. The default context style is named “normal” and it is used as the parent for all other styles. Styles such as bold, italic, etc., are character level styles, whereas left and right are paragraph level styles. These styles are retrieved from the document for using them in the setNewStyle() method.
setNewStyle()	It sets the style to a character range or a paragraph range as indicated by its isCharacterStyle argument. Note that if you set the “normal” style, you replace the entire style by this style. Otherwise, you merge the style. This logic is determined by the following statement: <pre>boolean replaceOld = styleName.equals("normal");</pre>
insertTestStrings()	Inserts a string to the JTextPane’s document using the insertString() method.
main()	Creates and displays the word processor frame.



Figure 2-12. A simple word processor using a JTextPane and JButtons

The word processor does not have a save feature. In a real world application, you would prompt the user for a location and the name of the saved file. The following snippet of code saves the contents of the JTextPane to a file named

`test.rtf` in the current working directory:

```
// Save the contents of the textPane to a file  
FileWriter fw = new java.io.FileWriter("test.rtf");  
textPane.write(fw);  
fw.close();
```

The `write()` method of `JTextPane` writes the text contained in its document as plain text. If you want to save the formatted text, you need to use an `RTFEditorKit` object as its editor kit, and use that editor kit's `write()` method to write to a file. The following snippet of code shows how to save formatted text in a `JTextPane` using an `RTFEditorKit` object. Note that `RTFEditorKit` contains a `read()` method to read the formatted text back to a `JTextPane`.

```
// Set an RTFEditorKit to a JTextPane right after you  
create it  
JTextPane textPane = new JTextPane();  
textPane.setEditorKit(new RTFEditorKit());  
  
// Other code goes here  
  
// Save formatted text from the JTextPane to a file  
String fileName = "test.rtf";  
FileOutputStream fos = new FileOutputStream(fileName);  
RTFEditorKit kit  
= (RTFEditorKit)textPane.getEditorKit();  
StyledDocument doc = textPane.getStyledDocument();  
int len = doc.getLength();  
kit.write(fos, doc, 0, len);  
fos.close();
```

Tip If you want to save icons and components added to a `JTextPane`, you need to serialize the document object of a `JTextPane` to a file, and load it back to display the same contents.

You can add any Swing components and icons to a `JTextPane`. It is just a matter of wrapping a component or an icon in a style, and using that style in the

`insertString()` method. The following snippet of code shows how to add a JButton and an icon to a JTextPane:

```
// Add a Close button to our document
JButton closeButton = new JButton("Close");
closeButton.addActionListener(e -> System.exit(0));

Style cs = doc.addStyle("componentStyle", null);
StyleConstants.setComponent(cs, closeButton);

// Insert the component at the end of the text.
try {
    document.insertString(doc.getLength(), "Close
Button goes", cs);
}
catch (BadLocationException e) {
    e.printStackTrace();
}
```

Adding an icon to a JTextPane is similar to adding a component to it, except that you use the `setIcon()` method of the `StyleConstants` class instead of the `setComponent()` method and an `ImageIcon` object instead of a component, as shown:

```
// Add an icon to a JTextPane
StyleConstants.setIcon(myIconStyle, new
ImageIcon("myImageFile"));
```

Tip You can also use the `insertComponent(Component c)` and `insertIcon(Icon g)` methods of a JTextPane to insert a component and an icon into it, respectively.

You can take a look at the element structures of a JTextPane document by using the `dump(PrintStream p)` method of the `AbstractDocument` class. The following snippet of code displays the dump on the standard output:

```
// Display the document structure on the standard
output
```

```
DefaultStyledDocument doc
= (DefaultStyledDocument)textPane.getStyledDocument();
doc.dump(System.out);
```

The following is the dump of a `JTextPane`'s document with text, as shown in [Figure 2-12](#). It gives you an idea about the structure of a styled document.

```
<section>
  <paragraph
    resolver=NamedStyle:default
    {bold=false, name=default, foreground=sun.swing.PrintCol-
     [r=51, g=51, b=51], family=Dialog, FONT_ATTRIBUTE_KEY=java:
      name=Dialog, style=plain, size=12], size=12, italic=false,
    >
    <content>
      [0,16] [Hello JTextPane
    ]
  <paragraph
    resolver=NamedStyle:default
    {bold=false, name=default, foreground=sun.swing.PrintCol-
     [r=51, g=51, b=51], family=Dialog, FONT_ATTRIBUTE_KEY=java:
      name=Dialog, style=plain, size=12], size=12, italic=false,
    >
    <content>
      [16,17] [
    ]
  <paragraph
    resolver=NamedStyle:default
    {bold=false, name=default, foreground=sun.swing.PrintCol-
     [r=51, g=51, b=51], family=Dialog, FONT_ATTRIBUTE_KEY=java:
      name=Dialog, style=plain, size=12], size=12, italic=false,
    >
    <content
      bold=true
      name=bold
      resolver=NamedStyle:normal
      {name=normal, resolver=AttributeSet, }
    >
    [17,21] [E=mc]
```

```

<content
    bold=true
    name=bold
    resolver=NamedStyle:normal
{name=normal,resolver=AttributeSet,}
    superscript=true
>
[21,22] [2]
<content>
[22,23] [
]
<bidi root>
<bidi level
    bidiLevel=0
>
[0,23] [Hello JTextPane

E=mc2
]

```

Validating Text Input

You have seen examples of validating text input in a text component: using a custom model and using a `JFormattedTextField`. You can attach an input verifier object to any `JComponent`, including a text component. An input verifier object is simply an object of a class, which inherits from the abstract class named `InputVerifier`. The class is declared as shown:

```

public abstract class InputVerifier {
    public abstract boolean verify(JComponent
input);

    public boolean shouldYieldFocus(JComponent
input) {
        return verify(input);
    }
}

```

You need to override the `verify()` method of the `InputVerifier` class. The `verify()` method contains the logic to verify the input in the text field. If the value in the text field is valid, you return `true` from this method. Otherwise, you return `false`. When the text field is about to lose focus, the `verify()` method of its input verifier is called. The text field loses focus only if its input verifier's `verify()` method returns `true`. The `setInputVerifier()` method of a text component is used to attach an input verifier. The following snippet of code sets an input verifier to an area code field. It will keep the focus in this field until the user enters a three-digit numeric area code. It lets the user navigate to another field if the field is empty.

```
// Create an area code JTextField
JTextField areaCodeField = new JTextField(3);

// Set an input verifier to the area code field
areaCodeField.setInputVerifier(new InputVerifier() {
    public boolean verify(JComponent input) {
        String areaCode
= areaCodeField.getText();
        if (areaCode.length() == 0) {
            return true;
        }
        else if
(areaCode.length() != 3) {
            return false;
        }

        try {
            Integer.parseInt(areaCode);
            return true;
        }
        catch (NumberFormatException e) {
            return false;
        }
    }
});
```

You can set an input verifier to any `JComponent` using the `setInputVerifier()` method. Typically, it is used only for text fields. As a good GUI design practice, you should add some visual hints about the valid

input values, so the user can understand what kind of values are expected in the field. For example, you may want to add a label for the area code field with a text “Area Code (three digits):” or display an error message when the user enters an invalid value in the field. If there is no visual clue about the valid values for the field with an input verifier, users will be stuck in the field without knowing what kind of value to enter.

Making Choices

Swing provides the following components that let you make a selection from a list of choices:


- `JToggleButton`
- `JCheckBox`
- `JRadioButton`
- `JComboBox`
- `JList`

The number of choices available to select from a list may vary from 2 to N, where N is a number greater than 2. There are different ways to make a selection from the list of choices:

- The selection may be mutually exclusive. That is, the user can only make one selection from the list of choices. In mutually exclusive choices, if the user changes the current selection, the previous selection is automatically deselected. For example, the list of gender selection with three choices of Male, Female, and Unknown is mutually exclusive. The user must only select one of the three choices, but not two or more of them at the same time.
- There is a special case of selection where the number of choice N is 2. In this case, the choices are of type `boolean`: `true` or `false`. Sometimes they are also referred to as a Yes/No choice, or an On/Off choice.

- Sometimes the user can have multiple selections from a list of choices. For example, you may present the user with a list of hobbies and the user can choose more than one hobby from the list.

Swing components provide you with the ability to present different kinds of choices to the user and let the user select zero, one, or multiple choices. [Figure 2-13](#) shows the Swing components with four season names: Spring, Summer, Fall, and Winter. The figure shows the look of the five different types of Swing components that can be used for selecting choices from a list. Some of the components shown in this figure may not be the appropriate way for the choices it displays. For example, even though it is possible to use a group of checkboxes to display a list of mutually exclusive choices, it is not a good GUI practice. When choices are mutually exclusive, a group of radio buttons is considered more appropriate than a group of checkboxes.

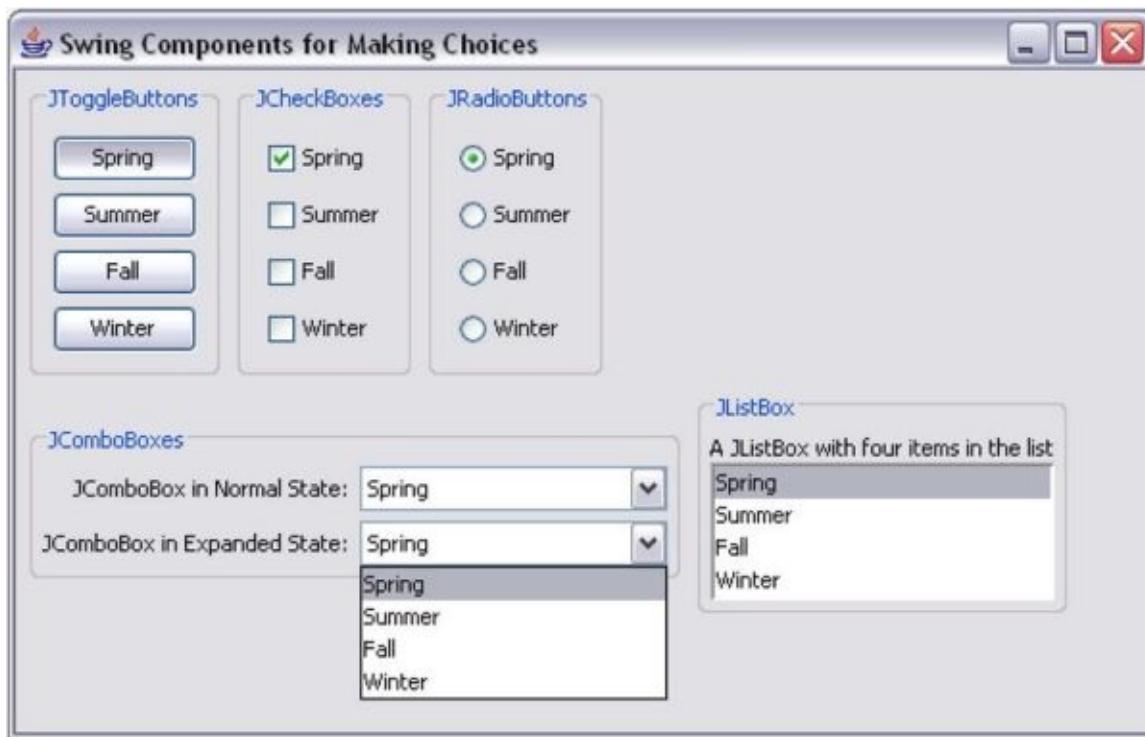

[Figure 2-13](#). Swing components to make a selection from a list of choices

A `JToggleButton` is a two-state button. The two states are *selected* and *unselected*. When you press the toggle button, it toggles between being depressed and undepressed. Depressed is its selected state and undepressed is its unselected state. Note that a `JButton` is different from a `JToggleButton` in

the way it works and in its usage. A JButton is pressed only when mouse is pressed over it, whereas a JToggleButton toggles between depressed and undepressed states. A JButton is used to initiate an action whereas a JToggleButton is used to select a choice from a list of possible choices. Typically, a group of JButtons is used to let the user select one choice from a list of mutually exclusive choices. One JToggleButton is used when the user has a boolean choice where he needs to indicate true or false (or, Yes or No). The depressed state indicates the choice of true and the undepressed state indicates the choice of false.

A JCheckBox also has two states: *selected* and *unselected*. A group of JCheckBoxes is used when the user can select zero or more choices from a list of two or more choices. One JCheckBox is used when the user has a boolean choice to indicate true or false.

A JRadioButton also has two states: *selected* and *unselected*. A group of JRadioButtons is used when there is a list of two or more mutually exclusive choices and the user must select one choice. A JRadioButton is never used as a standalone component for making a choice from two boolean choices of true and false. It is always used in a group of two or more. A JCheckBox (not a JRadioButton) should be used when you have to let the user select between two boolean choices, true or false.

Constructors for JToggleButton, JCheckBox, and JRadioButton let you create them using a combination of different arguments. You can use a combination of an Action object, a string label, an icon, and a boolean flag (to indicate if it is selected by default) to create them. By default, JToggleButton, JCheckBox, and JRadioButton are unselected. The following snippet of code shows some of the ways to create them:

```
// Create them with no label and no image
JToggleButton tb1 = new JToggleButton();
JCheckBox cb1 = new JCheckBox();
JRadioButton rb1 = new JRadioButton();

// Create them with text as "Multi-Lingual"
JToggleButton tb2 = new JToggleButton("Multi-
Lingual");
JCheckBox cb2 = new JCheckBox("Multi-Lingual");
JRadioButton rb2 = new JRadioButton("Multi-Lingual");
```

```
// Create them with text as "Multi-Lingual" and
selected by default
JToggleButton tb3 = new JToggleButton("Multi-Lingual",
true);
JCheckBox cb3 = new JCheckBox("Multi-Lingual", true);
JRadioButton rb3 = new JRadioButton("Multi-Lingual",
true);
```

To select/unselect a `JToggleButton`, `JCheckBox`, and `JRadioButton`, you need to call their `setSelected()` methods. To check if they are selected, use their `isSelected()` methods. The following snippet of code shows how to use these methods:

```
tb3.setSelected(true);           // Select tb3
boolean b1 = tb3.isSelected(); // will store true in
b1
tb3.setSelected(false);        // Unselect tb3
boolean b2 = tb3.isSelected(); // will store false in
b2
```

If the selection is mutually exclusive, you must group all your choices in a button group. In a mutually exclusive group of choices, if you select one choice, all other choices are unselected. Typically, you create a button group for a group of mutually exclusive `JRadioButtons` or `JToggleButtons`. Theoretically, you can also create a button group for `JCheckboxes` to have mutually exclusive choices. However, it is not recommended to use a group of mutually exclusive `JCheckboxes` in a GUI.

An instance of the `ButtonGroup` class represents a button group. You can add and remove a `JRadioButton` or `JToggleButton` to a button group by using its `add()` and `remove()` methods, respectively. Initially all members of a button group are unselected. To form a button group, you need to add all mutually exclusive choice components to an object of the `ButtonGroup` class. You do not add (in fact, you cannot add) a `ButtonGroup` object to a container. You must add all choice components to the container. [Listing 2-6](#) contains the complete code that shows a group of three mutually exclusive `JRadioButtons`.

Listing 2-6. A Group of Mutually Exclusive Three Choices Represented By Three JRadioButtons

```
// ButtonGroupFrame.java
package com.jdojo.swing;

import java.awt.BorderLayout;
import java.awt.Container;
import javax.swing.Box;
import javax.swing.ButtonGroup;
import javax.swing.JFrame;
import javax.swing.JRadioButton;

public class ButtonGroupFrame extends JFrame {
    ButtonGroup genderGroup = new ButtonGroup();
    JRadioButton genderMale = new
JRadioButton("Male");
    JRadioButton genderFemale = new
JRadioButton("Female");
    JRadioButton genderUnknown = new
JRadioButton("Unknown");

    public ButtonGroupFrame() {
        this.initFrame();
    }

    private void initFrame() {
        this.setTitle("Mutually Exclusive
JRadioButtons Group");
        this.setDefaultCloseOperation(EXIT_ON_CLOSE);

        // Add three gender JRadioButtons to
        // a ButtonGroup,
        // so they become mutually exclusive
        choices
        genderGroup.add(genderMale);
        genderGroup.add(genderFemale);
        genderGroup.add(genderUnknown);

        // Add gender radio button to a vertical
```

```

Box
    Box b1 = Box.createVerticalBox();
    b1.add(genderMale);
    b1.add(genderFemale);
    b1.add(genderUnknown);

        // Add the vertical box to the center of
the frame
        Container contentPane
= this.getContentPane();
        contentPane.add(b1, BorderLayout.CENTER);
    }

public static void main(String[] args) {
    ButtonGroupFrame bf = new
ButtonGroupFrame();
    bf.pack();
    bf.setVisible(true);
}
}

```

A `JComboBox<E>` is another type of Swing component that lets you make one selection from a list of choices. Optionally, it can include an editable field that lets you type a new choice value. The type parameter `E` is the type of the elements it contains. You can use a `JComboBox` instead of a group of `JToggleButtons`, `JCheckBoxes`, or `JRadioButtons` when the space on the screen is limited. You save space on the screen using a `JComboBox`. However, the user has to perform two clicks to make a selection. First, the user has to click on the arrow button to display the list of choices in a drop-down list, and then he has to click on a choice from the list. The user can also use up/down arrow keys on the keyboard to scroll through the list of choices and select one when the component is in focus. You can create a `JComboBox` by passing the list of choices in one of its constructors, as shown:

```

// Use an array of String as the list of choices
String[] sList = new String[] {"Spring", "Summer",
"Fall", "Winter"};
JComboBox<String> seasons = new JComboBox<>(sList);

```

```
// Use a Vector of String as the list of choices
Vector<String> sList2 = new Vector<>(4);
sList2.add("Spring");
sList2.add("Summer");
sList2.add("Fall");
sList2.add("Winter");
JComboBox<String> seasons2 = new JComboBox<>(sList2);
```

You can create a `JComboBox` with no choices and afterwards add choices to it by using one of its methods. It also includes methods to remove a choice from the list and get the value of the selected choice. [Table 2-14](#) shows a list of commonly used methods of the `JComboBox` class.

Table 2-14. Commonly Used Methods of the `JComboBox` class

Method	Description
<code>void addItem(E item)</code>	Adds an item as a choice in the list. The <code>toString()</code> method on the added object is called and the returned string is displayed as a choice.
<code>E getItemAt(int index)</code>	Returns the item at the specified <code>index</code> from the list of choices. The index starts at zero and ends at the size of the list minus one. If the specified <code>index</code> is out of bound, it returns <code>null</code> .
<code>int getItemCount()</code>	Returns the number of items in the list of choices.
<code>int getSelectedIndex()</code>	Returns the index of the selected item. It returns <code>-1</code> , if the selected item is not in the list. Note that for an editable <code>JComboBox</code> , you can type in a new value in the field and that may not exist in the list of choices. In this case, this method will return <code>-1</code> . It also returns <code>-1</code> if there is no selection.
<code>Object getSelectedItem()</code>	Returns the currently selected item. Returns <code>null</code> if there is no selection.
<code>void insertItemAt(E item, int index)</code>	Inserts the specified <code>item</code> at the specified <code>index</code> in the list.
<code>boolean isEditable()</code>	Returns <code>true</code> if the <code>JComboBox</code> is editable. Otherwise, it returns <code>false</code> . By default, a <code>JComboBox</code> is non-editable.

<code>void removeAllItems()</code>	Removes all items from the list.
<code>void removeItem(Object item)</code>	Removes the specified item from the list.
<code>void removeItemAt(int index)</code>	Removes the item at the specified index.
<code>void setEditable(boolean editable)</code>	If the specified <code>editable</code> argument is <code>true</code> , the <code>JComboBox</code> is editable. Otherwise, it is non-editable. The user can type in a value in an editable <code>JComboBox</code> , which is not in the list of choices. Note that the new typed in value is not added to the list of choices.
<code>void setSelectedIndex(int index)</code>	Selects the item at the specified <code>index</code> in the list. If the specified <code>index</code> is <code>-1</code> , it clears the selection. If the specified <code>index</code> is less than <code>-1</code> or greater than the size of the list minus 1, it throws an <code>IllegalArgumentException</code> .
<code>void setSelectedItem(Object item)</code>	Selects the item in the field. If the specified <code>item</code> exists in the list, it is always selected. If the specified item does not exist in the list, it is selected in the field only if the <code>JComboBox</code> is editable.

If you want to be notified when an item is selected or deselected in the `JComboBox`, you can add an item listener to it. An item listener is notified whenever an item is selected or deselected. Note that when you change a selection in a `JComboBox`, it fires the deselected item event followed by a selected event. The following snippet of code shows how to add an item listener to a `JComboBox`. You can use the `getItem()` method of the `ItemEvent` class to find out which item has been selected or deselected.

```

String[] sList = new String[] {"Spring", "Summer",
"Fall", "Winter"};
JComboBox<String> seasons = new JComboBox<>(sList);

// Add an item listener to the combobox
seasons.addItemListener((ItemEvent e) -> {
    Object item = e.getItem();
    if (e.getStateChange() == ItemEvent.SELECTED) {
        // Item has been selected
    }
})

```

```

        System.out.println(item + " has been
selected");
    }
    else if (e.getStateChange() ==
ItemEvent.DESELECTED) {
        // Item has been deselected
        System.out.println(item + " has been
deselected");
    }
} );

```

A `JList<T>` is another Swing component that displays a list of choices and lets you select one or more choices from that list. The type parameter `T` is the type of elements it contains. A `JList` differs from a `JComboBox` mainly in the way it displays the list of choices. A `JList` can show multiple choices on the screen whereas a `JComboBox` shows the list of choices when you click the arrow button in it. In this sense, a `JList` is an expanded version of a `JComboBox`. A `JList` can display a list of choices in one column or multiple columns. You can create a `JList` the same way you create a `JComboBox`, as shown:

```

// Create a JList using an array
String[] items = new String[] {"Spring", "Summer",
"Fall", "Winter"};
JList<String> list = new JList<>(items);

// Create a JList using a Vector
Vector<String> items2 = new Vector<>(4);
items2.add("Spring");
items2.add("Summer");
items2.add("Fall");
items2.add("Winter");
JList<String> list2 = new JList<>(items2);

```

A `JList` does not have scrolling capability. You must add it to a `JScrollPane` and add the `JScrollPane` to the container to get the scrolling capability, like so:

```
myContainer.add(new JScrollPane(myJList));
```

You can configure the layout orientation of a `JList` to arrange the list of choices in three ways:

- Vertical
- Horizontal Wrapping
- Vertical Wrapping

In a vertical arrangement, which is the default, all items in a `JList` are displayed using one column and multiple rows.

In a horizontal wrapping, all items are arranged in a row and multiple columns. However, if not all items can fit into a row, new rows are added to display them as necessary. Note that the item can flow horizontally left-to-right or right-to-left depending on the orientation of the component.

In a vertical wrapping, all items are arranged in a column and multiple rows. However, if all items cannot fit into a column, new columns are added to display them as necessary.

You can use the `setVisibleRowCount(int visibleRows)` method of the `JList` class to set the number of visible rows you would prefer to see in the list without a need to scroll. When you set the number of visible rows to zero or less, the `JList` will decide the number of visible rows based on width/height of the field and its layout orientation. You can set its layout orientation using its `setLayoutOrientation(int orientation)` method, where orientation value could be one of the three constants defined in the `JList` class: `JList.VERTICAL`, `JList.HORIZONTAL_WRAP`, and `JList.VERTICAL_WRAP`.

You can configure the mode of selection for a `JList` using its `setSelectionMode(int mode)` method. The mode value could be one of the following three values. The mode values are defined as constants in the `ListSelectionModel` interface.

- `SINGLE_SELECTION`
- `SINGLE_INTERVAL_SELECTION`
- `MULTIPLE_INTERVAL_SELECTION`

In a single selection mode, you can only select one item at a time. If you change your selection, the previously selected item will be deselected.

In a single interval selection mode, you can select multiple items. However, the items selected must always be contiguous. Suppose you have ten items in a `JList` and you have selected the seventh item. Now you can select the sixth item or the eighth item in the list, but not any other items. You can keep selecting more contiguous items. You can use the combination of `Ctrl` key or `Shift` key and the mouse to make contiguous selections.

In a multiple interval section, you can select multiple items without any restrictions. You can use the combination of `Ctrl` key or `Shift` key and the mouse to make selections.

You can add a list selection listener to a `JList`, which will notify you when a selection is changed. The `valueChanged()` method of `ListSelectionListener` is called when a selection is changed. This method may also be called multiple times in the middle of one selection change. You need to use the `getValueIsAdjusting()` method of the `ListSelectionEvent` object to make sure that selection changing is finalized, as shown in following snippet of code:

```
myJList.addListSelectionListener((ListSelectionEvent e) -> {
    // Make sure selection change is final
    if (!e.getValueIsAdjusting()) {
        // The selection changed logic goes here
    }
}) ;
```

[Table 2-15](#) lists the commonly used methods of the `JList` class. Note that a `JList` does not have a direct method to give you the size of the list (the number of choices in a `JList`). As every Swing component uses a model, so does a `JList`. Its model is an instance of the `JListModel` interface. To know the size of the list of choices of a `JList`, you need to call the `getSize()` method of its model, like so:

```
int size = myJList.getModel().getSize();
```


Table 2-15. Commonly Used Methods of the `JList` Class

Method	Description
<code>void clearSelection()</code>	Clears the selection made in the <code>JList</code> .

void ensureIndexIsVisible(int index)	Makes sure the item at the specified <code>index</code> is visible. Note that to make an invisible item visible, the <code>JList</code> must be added in a <code>JScrollPane</code> .
int getFirstVisibleIndex()	Returns the smallest visible index. If there is no visible item or list is empty, it returns <code>-1</code> .
int getLastVisibleIndex()	Returns the largest visible index. If there is no visible item or list is empty, it returns <code>-1</code> .
int getMaxSelectionIndex()	Returns the largest selected index. Returns <code>-1</code> if there is no selection.
int getMinSelectionIndex()	Returns the smallest selected index. Returns <code>-1</code> if there is no selection.
int getSelectedIndex()	Returns the smallest selected index. If <code>JList</code> selection mode is single selection, it returns the selected index. Returns <code>-1</code> if there is no selection.
int[] getSelectedIndices()	Returns the indices of all selected items in an <code>int</code> array. The array will have zero elements if there is no selection.
E getSelectedValue()	Returns the first selected item. If the <code>JList</code> has single selection mode, it is the value of the selected item. Returns <code>null</code> if there is no selection in the <code>JList</code> .
List<E> getSelectedValuesList()	Returns a list of all the selected items in increasing order based on their indices in the list. If there is no selected item, an empty list is returned.
boolean isSelectedIndex(int index)	Returns <code>true</code> if the specified <code>index</code> is selected. Otherwise, it returns <code>false</code> .
boolean isSelectionEmpty()	Returns <code>true</code> if there is no selection in the <code>JList</code> . Otherwise, it returns <code>false</code> .
void setListData(E[] listData) void setListData(Vector<?> listData)	Sets the new list of choices in the <code>JList</code> .
void setSelectedIndex(int index)	Selects an item at the specified <code>index</code> .
void setSelectedIndices(int[] indices)	Selects items at the indices in specified array
void setSelectedValue(Object item, boolean shouldScroll)	Selects the specified item if it exists in the list. Scrolls to the item to make it visible if the second argument is <code>true</code> .

JSpinner

A JSpinner component combines the benefits of a JFormattedTextField and an editable JComboBox. It lets you set a list of choices in a JComboBox, and at the same time, you can also apply a format to the displayed value. It shows only one value at a time from the list of choices. It lets you enter a new value. The name “spinner” comes from the fact that it lets you spin up or down through the list of choices by using up and down arrow buttons. One thing that is special about the list of choices in a JSpinner is that it must be an ordered list. [Figure 2-14](#) shows three JSpinners that are used to select a number, a date, and a season value.

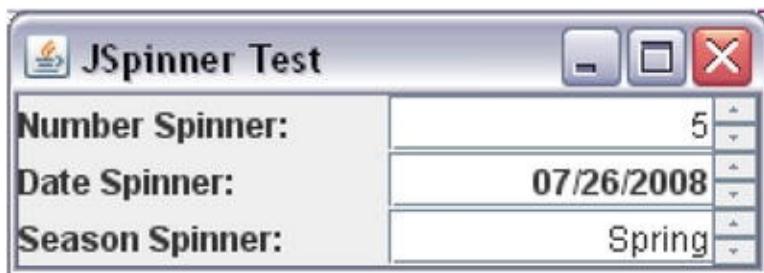

[Figure 2-14.](#) JSpinner components in action

Since a `JSpinner` provides the spinning capability to a variety of list of choices, it depends heavily on its model for its creation. In fact, you must provide a model for the `JSpinner` in its constructor unless you want a trivial `JSpinner` with just a list of integers. It supports three different kinds of ordered lists of choices: a list of numbers, a list of dates, and a list of any other objects. It provides three classes to create a model of three different kinds of lists:

- `SpinnerNumberModel`
- `SpinnerDateModel`
- `SpinnerListModel`

A spinner model is an instance of the `SpinnerModel` interface. It defines the `getValue()`, `setValue()`, `getPreviousValue()`, and `getNextValue()` methods to work with values in the `JSpinner`. All these methods work with objects of the `Object` class.

The `SpinnerNumberModel` class provides a model for a `JSpinner` that lets you spin through an ordered list of numbers. You need to specify the minimum, maximum, and current values in the list. You can also specify the step value that is used to step through the number list when you use up/down buttons of a `JSpinner`. The following snippet of code creates a `JSpinner` with a list of numbers from 1 to 10. It lets you spin through the list in steps of 1. The current value for the field is set to 5. The `SpinnerNumberModel` class also has methods that let you get/set different values for the spinner model after you create it.

```
int minValue = 1;
int maxValue = 10;
int currentValue = 5;
int steps = 1;
SpinnerNumberModel nModel = new
SpinnerNumberModel(currentValue, minValue, maxValue,
steps);
JSpinner numberSpinner = new JSpinner(nModel);
```

The `SpinnerDateModel` class provides a model for a `JSpinner` that lets you spin through an ordered list of dates. You need to specify the start date,

the end date, the current value, and the step. The following snippet of code creates a `JSpinner` to spin through a list of dates from January 1, 1950 to December 31, 2050 in steps of one day at a time. The current system date is set as the current value for the field.

```
Calendar calendar = Calendar.getInstance();
calendar.set(1950, 1, 1);
Date minValue = calendar.getTime();
calendar.set(2050, 12, 31);
Date maxValue = calendar.getTime();
Date currentValue = new Date();
int steps = Calendar.DAY_OF_MONTH; // Must be
a Calendar field
SpinnerDateModel dModel = new
SpinnerDateModel(currentValue, minValue, maxValue,
steps);
dateSpinner = new JSpinner(dModel);
```

Note that the date value will be displayed in the default locale format. The step value is used when you use the `getNextValue()` method on the model. A `JSpinner` with a list of dates lets you spin through any of the displayed date fields by highlighting a part of the date field and using the up/down button. Suppose the date format that your `JSpinner` uses is mm/dd/yyyy. You can place your cursor in the year part of the field (yyyy) and use up/down buttons to step through the list based on the year.

The `SpinnerListModel` class provides a model for a `JSpinner` that lets you spin through an ordered list of objects. You just specify an array of objects or a `List` object, and the `JSpinner` will let you spin through the list as it appears in the array or the `List`. The returned `String` from the `toString()` method of the object in the list is displayed as the value in the `JSpinner`. The following snippet of code creates a `JSpinner` to display a list of four seasons:

```
String[] seasons = new String[] {"Spring", "Summer",
"Fall", "Winter"};
SpinnerListModel sModel = new
SpinnerListModel(seasons);
listSpinner = new JSpinner(sModel);
```

A JSpinner uses an editor object to display the current value. It has the following three static inner classes to display three different kinds of ordered lists:

- JSpinner.NumberEditor
- JSpinner.DateEditor
- JSpinner.ListEditor

If you want to display a number or a date in a specific format, you need to set a new editor for the JSpinner. The editor classes for the number and date editors let you specify the formats. The following snippet of code sets the number format as "00", so numbers 1 to 10 are displayed as 01, 02, 03...10. It sets the date format to mm/dd/yyyy.

```
// Set the number format to "00"
JSpinner.NumberEditor nEditor = new
JSpinner.NumberEditor(numberSpinner, "00");
numberSpinner.setEditor(nEditor);

// Set the date format to mm/dd/yyyy
JSpinner.DateEditor dEditor = new
JSpinner.DateEditor(dateSpinner, "mm/dd/yyyy");
dateSpinner.setEditor(dEditor);
```

Tip You can use the `getValue()` method defined of a JSpinner or SpinnerModel to get the current value in the JSpinner as an Object. SpinnerNumberModel and SpinnerDateModel define the `getNumber()` and `getDate()` method that return the Number and Date objects, respectively.

JScrollBar

If you want to view a component that is bigger than the available space, you want to use a JScrollBar or a JScrollPane component. I will discuss the

JScrollPane in the next section. A JScrollBar has an orientation property that determines whether it is displayed horizontally or vertically. [Figure 2-15](#) depicts a horizontal JScrollBar.



[Figure 2-15.](#) A horizontal JScrollBar

A JScrollBar is made up of four parts: two arrow buttons (one at each end), a knob (also known as a thumb), and a track. When the arrow button is clicked, the knob moves on the track towards the arrow button. You can drag the knob towards either end with the help of a mouse. You can also move the knob by clicking on the track.

You can customize various properties of a JScrollBar by passing their values in its constructor or by setting them after you create it. [Table 2-16](#) lists some commonly used properties and methods to manipulate them.

Table 2-16. Commonly Used Properties of a JScrollBar and Methods to Get/Set Those Properties

Property	Method	Description
Orientation	getOrientation() setOrientation()	Determines whether the JScrollBar is horizontal or vertical. Its value could be one of the two constants, HORIZONTAL or VERTICAL, which are defined in the JScrollBar class.
Value	getValue() setValue()	The position of the knob is its value. Initially, it is set to zero.
		It is the size of the knob. It is expressed in proportion to the

Extent	<code>getVisibleAmount()</code> <code>setVisibleAmount()</code>	size of the track. For example, if the track size represents 150 and you set the extent to 25, the knob size will be one sixth of the track size. Its default value is 10.
Minimum Value	<code>getMinimum()</code> <code>setMinimum()</code>	The minimum value that it represents. The default value is zero.
Maximum Value	<code>getMaximum()</code> <code>setMaximum()</code>	The maximum value that it represents. The default value is 100.

The following snippet of code demonstrates how to create a `JScrollBar` with different properties:

```
// Create a JScrollBar with all default properties.
Its orientation
// will be vertical, current value 0, extent 10,
minimum 0, and maximum 100
JScrollBar sb1 = new JScrollBar();

// Create a horizontal JScrollBar with default values
JScrollBar sb2 = new
JScrollBar(JScrollBar.HORIZONTAL);

// Create a horizontal JScrollBar with a current value
of 50,
// extent 15, minimum 1 and maximum 150
JScrollBar sb3 = new JScrollBar(JScrollBar.HORIZONTAL,
50, 15, 1, 150);
```

The current value of a `JScrollBar` can be set only between its minimum and (maximum – extent) value. A `JScrollBar` by itself does not add any value to a GUI. All it has are some properties. You can add an


AdjustmentListener to a JScrollBar that is notified when its value changes.

```
// Add an AdjustmentListener to a JScrollBar named  
myScrollBar  
myScrollBar.addAdjustmentListener(AdjustmentEvent e)  
-> {  
    if (!e.getValueIsAdjusting()) {  
        // The logic for value changed goes here  
    }  
} );
```

It is not simple to use a JScrollBar to scroll through a component that is bigger in size than its display area. You need to write a significant amount of code to achieve that task if you ever want to use a JScrollBar alone. A JScrollPane makes this task easier. It takes care of the scrolling without writing any extra code.

JScrollPane

A JScrollPane is a container that can hold and display up to nine components, as shown in [Figure 2-16](#). It uses its own layout manager that is an object of the class JScrollPaneLayout.

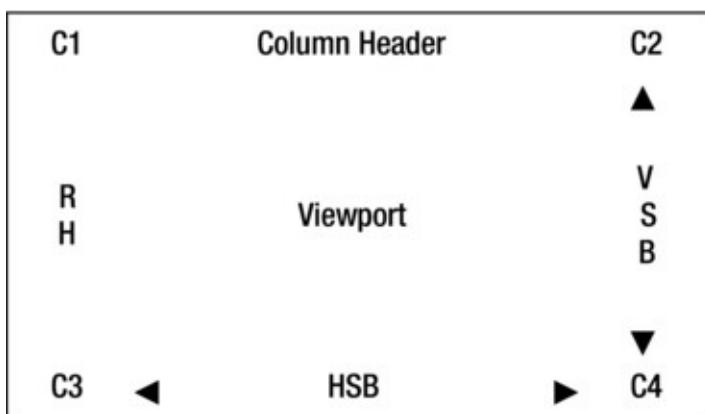

[Figure 2-16](#). The components of a JScrollPane

The nine components that a JScrollPane manages are two

JScrollBars, a viewport, a row header, a column header, and four corners.

- *Two JScrollBars*: In the diagram, the two scrollbars are named HSB and VSB. They are two instances of the `JScrollBar` class: one horizontal and one vertical. A `JScrollPane` will create and manage the two `JScrollBars` for you. You do not need to write any code for that. The only things you need to indicate are whether you want them or not, and when you want them to appear.
- *A Viewport*: The viewport is the area where a `JScrollPane` displays the scrollable component such as a `JTextArea`. You can think of a viewport as a peephole through which you view the component by scrolling up/down and right/left using scrollbars. A viewport is a Swing component. An object of the `JViewport` class represents a viewport component. A `JViewport` is simply a wrapper for a Swing component to implement a scrollable view of that component. The `JScrollPane` creates a `JViewport` object for your component and uses it internally.
- *Row and Column Headers*: The row header is abbreviated as RH in the diagram. Row/Column headers are two optional viewports you can use in a `JScrollPane`. When you use the horizontal scrollbar, the column header scrolls with it horizontally. When you use the vertical scrollbar, the row header scrolls with it vertically. A good use of row/column headers is to display horizontal and vertical rulers for a picture or drawing in the viewport. Typically, you do not use row/column headers.
- *Four Corners*: Four corners can exist in a `JScrollPane`. A corner exists when two components meet vertically. The four corners are named C1, C2, C3, and C4 in the diagram. These are not the names given to the corners by the `JScrollPane`. I gave them a name for the discussion purpose. The corner C1 exists if you add a row header and a column header. The corner C2 exists if you add a column

header and the vertical scrollbar is visible. The corner C3 exists if you add a row header and the horizontal scrollbar is visible. The corner C4 exists if both horizontal and vertical scrollbars are visible. You can add any Swing component as a corner component. The only limitation is that you cannot add the same component in more than one corner. Note that adding a corner component does not guarantee that it will be visible. A corner component will be visible in a corner only if that corner exists according to the rules discussed. For example, if you add a corner component for the C4 corner, it will be visible only if both scrollbars, horizontal and vertical, are visible. If either or both scrollbars are not visible, the corner C4 does not exist and the component that you add for that corner will not be visible.

A scrollbar in a direction (horizontal or vertical) is needed to view the component in the viewport when the component's size is bigger than the `JScrollPane` size. A `JScrollPane` lets you set a scrollbar policy for the vertical and horizontal scrollbars. A scrollbar policy is a rule to control when it should appear. You can set one of the following three scrollbar policies:

- *Show as needed*: It means that a `JScrollPane` should show the scrollbar when it is needed. A scrollbar is needed when the component in the viewport in a direction, horizontal or vertical, is bigger than its display area. It is up to the `JScrollPane` to decide when a scrollbar is needed, and if it is needed, it will make the scrollbar visible. Otherwise, it will make the scrollbar invisible.
- *Show Always*: It means that a `JScrollPane` should always show the scrollbar.
- *Show Never*: It means that a `JScrollPane` should never show the scrollbar.

The scrollbar polices are defined by six constants in the `ScrollPaneConstants` interface. Three constants are for a vertical scrollbar and three are for a horizontal scrollbar. The `JScrollPane` class implements the `ScrollPaneConstants` interface. So you can also access

these constants using the `JScrollPane` class. The constants that define scrollbar policies are `XXX_SCROLLBAR_AS_NEEDED`, `XXX_SCROLLBAR_ALWAYS`, and `XXX_SCROLLBAR_NEVER`, where you need to replace `XXX` with `VERTICAL` or `HORIZONTAL`, depending on which scrollbar's policy you are referring to. The default value of the scrollbar policy for both vertical and horizontal scrollbars is "Show as needed". The following snippet of code demonstrates how to create a `JScrollPane` with different options:

```
// Create a JScrollPane with no component as its
viewport and
// with default scrollbars policy as "As Needed"
JScrollPane sp1 = new JScrollPane();

// Create a JScrollPane with a JTextArea as its
viewport and
// with default scrollbars policy as "As Needed"
JTextArea description = new JTextArea(10, 60);
JScrollPane sp2 = new JScrollPane(description);

// Create a JScrollPane with a JTextArea as its
viewport and
// both scrollbars policy set to "show always"
JTextArea comments = new JTextArea(10, 60);
JScrollPane sp3 = new JScrollPane(comments,
                                JScrollPane.VERTICAL_SCROLLBAR_ALWAYS,
                                JScrollPane.HORIZONTAL_SCROLLBAR_ALWAYS);
```

As noted before, when you add a component to a `JScrollPane`, you add the `JScrollPane` to the container, not the component. The viewport of a `JScrollPane` keeps the reference to the component you add to the `JScrollPane`. You get the reference of the component in a `JScrollPane` by querying its viewport as shown:

```
// Get the reference to the viewport of the
JScrollPane sp3
JViewport vp = sp3.getViewport();

// Get the reference to the comments JTextArea added
```

```
// to the JScrollPane, sp3, using its viewport  
reference  
JTextArea comments1 = (JTextArea) vp.getView();
```

If you create a `JScrollPane` without specifying the component for its `viewport`, you can add a component to its `viewport` later using its `setViewportView()` method as shown:

```
// Set a JTextPane as the viewport component for sp3  
sp3.setViewportView(new JTextPane());
```

JProgressBar

A `JProgressBar` is used to display the progress of a task. It has an orientation, which can be horizontal or vertical. It has three values associated with it: the current value, the minimum value, and the maximum value. You can create a progress bar as shown:

```
// Create a horizontal progress bar with current,  
minimum, and maximum values  
// set to 0, 0, and 100, respectively.  
JProgressBar hpBar1 = new JProgressBar();  
  
// Create a horizontal progress bar with current,  
minimum, and maximum values  
// set to 20, 20, and 200, respectively.  
JProgressBar hpbar2 = new  
JProgressBar(SwingConstants.HORIZONTAL, 20, 200);  
  
// Create a vertical progress bar with current,  
minimum, and maximum values  
// set to 5, 5 and 50, respectively.  
JProgressBar vpBar1 = new  
JProgressBar(SwingConstants.VERTICAL, 5, 50);
```


As the task progresses, you need to set the current value for the progress bar using its `setValue(int value)` method to indicate the progress. The component will update itself visually to reflect the new value. The progress is

reflected differently depending on the look and feel of the application. Sometimes a solid bar is used to show the progress and sometimes solid rectangles are used to show the progress. You can use the `getValue()` method to get the current value.

You can also display a string that describes the progress bar's current value using the `setStringPainted()` method. Passing `true` to this method displays the string value and passing `false` does not display the string value. The string to be painted is specified by calling the `setString(String s)` method.

Sometimes the current value of the progress of a task is unknown or indeterminate. In such cases, you cannot set the current value for the progress bar. Rather, you can indicate to the user that the task's execution is in progress. You can set a progress bar in an indeterminate mode using its `setIndeterminate()` method. Passing `true` to this method places the progress bar in an indeterminate mode and passing `false` places the progress bar in a determinate mode. A `JProgressBar` component displays an animation to indicate its indeterminate state.

[Figure 2-17](#) shows a `JFrame` with two `JProgressBars`. The horizontal `JProgressBar` is in determinate mode and it displays a string to describe the progress. The vertical `JProgressBar` has been placed in an indeterminate mode; note the solid rectangular bar in the middle that is displayed as an animation.

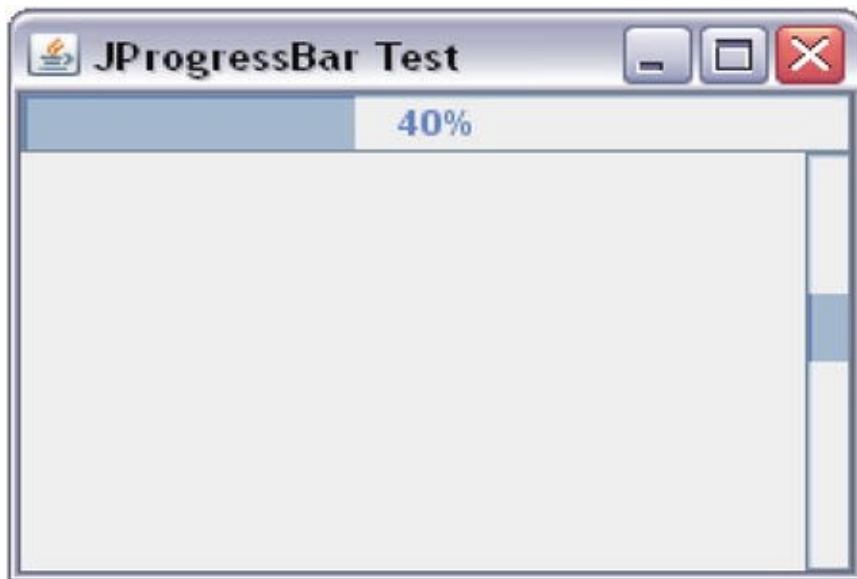

[Figure 2-17](#). `JProgressBars` in action

JSlider

A `JSlider` lets you select a value graphically from a set of values between two integers by sliding a knob along a track. It has four important properties: an orientation, a minimum value, a maximum value, and a current value. The orientation determines whether it is displayed horizontally or vertically. You can use `SwingConstants.VERTICAL` and `SwingConstants.HORIZONTAL` as valid values for its orientation. The following snippet of code creates a horizontal `JSlider` with the minimum value of 0, the maximum value of 10, and the current value set to 5:


```
JSlider points = new JSlider(0, 10, 5);
```

You can get the current value of a `JSlider` using its `getValue()` method. Typically, the user sets the current value of a `JSlider` by sliding the knob right/left for the horizontal `JSlider` and up/down for the vertical one. You can also set its value programmatically by using its `setValue(int value)` method.

You can display the minor and major ticks on a `JSlider`. You need to set the interval at which these ticks need to be displayed, and call its method to enable the tick paintings, as shown:

```
points.setMinorTickSpacing(1);
points.setMajorTickSpacing(2);
points.setPaintTicks(true);
```

You can also display the labels showing values along the track in a `JSlider`. You can display standard labels or custom labels. The standard labels will display the integer values along the track. You can call its `setPaintLabels(true)` method to display the integer values at major tick spacing. [Figure 2-18](#) shows a `JSlider` with ticks and standard labels.

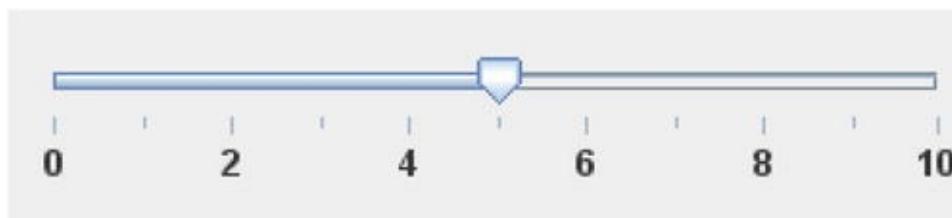


[Figure 2-18](#). A `JSlider` component with `minimum = 0`, `maximum = 10`, `current value = 5`, `minor tick spacing = 1`, `major tick spacing = 2`, and `paint labels = true`.

2, tick painting enabled, and showing standard labels

JSlider also lets you set custom labels. A label on a JButton is displayed using a JLabel component. You need to create a Hashtable with value-label pairs and use its setLabelTable() method to set the labels. A value-label pair consists of an Integer-JLabel pair. The following snippet of code sets the label Poor for value 0, Average for value 5, and Excellent for value 10. Setting a label table does not display the labels. You must call the setPaintLabels(true) method to display them. [Figure 2-19](#) shows a JButton with custom labels produced by the following snippet of code:

```
// Create the value-label pairs in a Hashtable  
Hashtable labelTable = new Hashtable();  
labelTable.put(new Integer(0), new JLabel("Poor"));  
labelTable.put(new Integer(5), new JLabel("Average"));  
labelTable.put(new Integer(10), new  
JLabel("Excellent"));  
  
// Set the labels for the JButton and make them  
visible  
points.setLabelTable(labelTable);  
points.setPaintLabels(true);
```

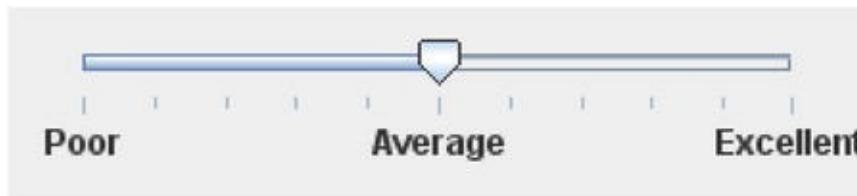

[Figure 2-19](#). A JButton with custom labels

JSeparator

A JSeparator is a handy component when you want to add a separator between two components or two groups of components. Typically, a JSeparator is used in a menu to separate groups of related menu items. You can create a horizontal or a vertical JSeparator by specifying its orientation.

You can use it anywhere you would use a Swing component.

```
// Create a horizontal separator  
JSeparator hs = new JSeparator(); // By default, the  
type is horizontal  
  
// Create a vertical separator  
JSeparator vs = new  
JSeparator(SwingConstants.VERTICAL);
```

A `JSeparator` will extend itself to fill the size provided by the layout manager. You can use the `setOrientation()` and `getOrientation()` methods to set and get the orientation of the `JSeparator`.

Menus

A menu component is used to provide a list of actions to the user in a compact form. You can also provide a list of actions by using a group of `JButtons`, where each `JButton` represents an action. It is a matter of preference to use a menu or a group of `JButtons` to present a list of actions. However, there is a noticeable advantage to using a menu; it uses much less space on the screen compared to a group of `JButtons`. A menu uses less space by folding (or nesting) a group of options under another option. For example, if you have used a file editor, the options such as New, Open, Save, and Print are nested under a top-level `File` menu option. A user needs to click the `File` menu to see the list of options that are available under it. Typically, in case of a group of `JButtons`, all `JButtons` are visible to the user all the time, and it is easy for users to know what actions are available. Therefore, there is a little tradeoff between the amount of space and usability when you decide to use a menu or `JButtons`.

There is another kind of menu called a *pop-up menu*. It does not take any space on the screen at all. Usually, it is displayed when the user clicks the right mouse button. It disappears as soon as the user makes a choice or clicks the mouse outside the displayed pop-up menu area. It is a super compact menu component. However, it makes it difficult for the user to know that any options are available. Sometimes, a text message is displayed on the screen stating that the user needs to right click to view the list of available options. An object of the

`JPopupMenu` class represents a pop-up menu in Swing. Now let's see menus in action.

Creating and adding a menu to a `JFrame` is a multistep process. The following steps describe the process in detail.

Create an object of the `JMenuBar` class and add it to a `JFrame` using its `setJMenuBar()` method. A `JMenuBar` is an empty container that will hold a list of menu options, and each option in a `JMenuBar` represents a list of options.

```
// Create a JMenuBar and set it to a JFrame
JMenuBar menuBar = new JMenuBar();
myFrame.setJMenuBar(menuBar);
```

At this point, you have an empty `JMenuBar` associated with a `JFrame`. Now, you need to add the list of options, also called top-level menu options, to the `JMenuBar`. An object of the `JMenu` class represents a list of options. A `JMenu` is also an empty container that can hold menu items that represent the options. You will need to add menu options to a `JMenu`. A `JMenu` does not always display the options that are added to it. Rather, it displays them when the user selects the `JMenu`. This is where you get the compactness when you use menus. When you select a `JMenu`, it pops up a window that displays the options contained in it. Once you select an option from the pop-up window or click somewhere outside the `JMenu`, the pop-up window disappears.

```
// Create two JMenu (or two top-level menu options):
// File and Help, and add them to the JMenuBar
JMenu fileMenu = new JMenu("File");
JMenu helpMenu = new JMenu("Help");
menuBar.add(fileMenu);
menuBar.add(helpMenu);
```

At this point, your `JFrame` will display a menu bar at its top area with two options called `File` and `Help`, as shown in [Figure 2-20](#). If you select or click `File` or `Help`, nothing happens at this point.



[Figure 2-20](#). A `JMenuBar` With Two `JMenu` Options

Let's add some options to your `JMenu`. You want to display three menu options under `File` and they are `New`, `Open`, and `Exit`. You want to add a separator (a horizontal line as a divider) between the `Open` and `Exit` options. An object of the `JMenuItem` class represents an option inside a `JMenu`.

```
// Create menu items
JMenuItem newMenuItem = new JMenuItem("New");
JMenuItem openMenuItem = new JMenuItem("Open");
JMenuItem exitMenuItem = new JMenuItem("Exit");

// Add menu items and a separator to the menu
fileMenu.add(newMenuItem);
fileMenu.add(openMenuItem);
fileMenu.addSeparator();
fileMenu.add(exitMenuItem);
```

At this point, you have added three `JMenuItem`s to the `File` menu. When you click the `File` menu, it will display the options shown in [Figure 2-21](#). You can scroll through options under the `File` menu by using down/up arrow key on the keyboard or select one of them by using the mouse. When you select any one of the options under the `File` menu, nothing happens because you have not added any actions to them.



[Figure 2-21](#). A `File` `JMenu` with three options

You may want to have two suboptions under a menu item such as under the `New` option. That is, the user can create two different things, `Policy` and `Claim`, and you want those two options available under the `New` option. You are not trying to nest options within an option. The `File` menu is an instance of the `JMenu` class, which represents a list of options, and you want to add a `New` menu that should also display a list of options. You can do this easily. The only

thing you need to understand is that a `JMenu` represents a list of options, whereas a `JMenuItem` represents only one option. You can add a `JMenuItem` or `JMenu` to a `JMenu`. To achieve this, you need to make a little modification to the snippet of code shown earlier. Now the `New` menu will be an instance of the `JMenu` class, not the `JMenuItem` class. You will add two `JMenuItems` to the `New` menu. The following snippet of code will do the job:

```
// New is a JMenu - a list of options
JMenu newMenu = new JMenu("New");
JMenuItem policyMenuItem = new JMenuItem("Policy");
JMenuItem claimMenuItem = new JMenuItem("Claim");
newMenu.add(policyMenuItem);
newMenu.add(claimMenuItem);

JMenuItem openMenuItem = new JMenuItem("Open");
JMenuItem exitMenuItem = new JMenuItem("Exit");

fileMenu.add(newMenu);
fileMenu.add(openMenuItem);
fileMenu.addSeparator();
fileMenu.add(exitMenuItem);
```

Now, the menu is displayed as shown in [Figure 2-22](#). When you select the `File` menu, the `New` menu displays an arrow next to it indicating that it has sub menus. When you select the `New` menu, it displays the two submenus labeled `Policy` and `Claim`.



[Figure 2-22](#). Nesting menus

There is no limit on the number of levels a menu can be nested. However, more than two levels of nesting is not considered good GUI practice because the user would have to drill down several levels just to get to the available options.

The final piece to make menus work is to add actions to the menu items. You

can add action listeners to a `JMenuItem`. The associated action listener is notified when the user selects the `JMenuItem`. The following snippet of code adds an action listener to the `Exit` menu item that will exit the application:

```
// Add an action listener to the Exit menu item  
exitMenuItem.addActionListener(e -> System.exit(0));
```

Now you have added an action to the `Exit` menu item. If you select it, the application will exit. Similarly, you can add action listeners to other menu items to perform actions when they are selected.

You can enable/disable a menu using the `setEnabled()` method. Although it is possible to make a menu visible/invisible, it is not good practice to do it. It makes it hard for a user to learn an application. If you keep all menu options available (either in an enabled or disabled state) all the time, the user will be able to work with the application faster by knowing where the menu options are located. If you make menu options visible/invisible, the locations of the menu options keep changing and the user will have to pay more attention to the location of menu options each time he wants to use them.

You can also assign shortcuts to menu options. You can use the `setMnemonic()` method to add a shortcut to a menu item by specifying a shortcut key. You can invoke the action represented by that menu item by pressing a combination of the `Alt` key and the shortcut key. Note that the menu item must be visible for its mnemonic to work. For example, if you have a mnemonic (the `N` key) set for a `New` menu option, you must select the `File` menu so the `New` menu option is visible, and press `Alt + N` to invoke the action represented by the `New` menu item.

If you want to invoke the associated action to a menu item irrespective of whether it is visible or not, you need to set its accelerator key by using the `setAccelerator()` method. The following snippet of code sets the `E` key as a mnemonic and `Ctrl + E` as an accelerator for the `Exit` menu option:

```
// Set E as mnemonic for Exit menu and Ctrl + E as its  
accelerator  
exitMenuItem.setMnemonic(KeyEvent.VK_E);  
KeyStroke cntrlEKey  
= KeyStroke.getKeyStroke(KeyEvent.VK_E,  
ActionEvent.CTRL_MASK);  
exitMenuItem.setAccelerator(cntrlEKey);
```

Now you can invoke the `Exit` menu option in two ways: you can press `Alt + E` key combination when it is visible, or you can press `Ctrl + E` keys combination any time.

You can use a pop-up menu, which is displayed on demand. The creation of a pop-up menu is similar to a `JMenu`. You need to create an instance of the `JPopupMenu` class, which represents an empty pop-up menu container, and then add instances of `JMenuItem` to it. You can also have nested menus in a pop-up menu, as you had in a `JMenu`.

```
// Create a popup menu
JPopupMenu popupMenu = new JPopupMenu();

// Create three menu items for our popup menu
 JMenuItem popup1 = new JMenuItem("Pouup1");
 JMenuItem popup2 = new JMenuItem("Pouup2");
 JMenuItem popup3 = new JMenuItem("Pouup3");

// Add menu items to the popup menu
popupMenu.add(popup1);
popupMenu.add(popup2);
popupMenu.add(popup3);
```

Since a pop-up menu does not have a fixed location and it is displayed on demand, you need to know where to display it and when to display it. You need to use its `show()` method to display it at a location. The `show()` method takes three arguments: the invoker component whose space will be used to display the pop-up menu, plus x and y coordinates on the invoker component where it will be displayed.

```
// Display the popup menu
popupMenu.show(myComponent, xPos, yPos);
```

Typically, you display a pop-up menu when the user clicks the right mouse button. Different look and feel options use a different key event to display the pop-up menu. For example, one look and feel scenario displays it when a right mouse button is released, whereas another displays it when a right mouse button is pressed. Swing makes this job easy for you to display the pop-up menu by providing a `isPopupTrigger()` method in the `MouseEvent` class. In a mouse pressed or released event, you need to call this method. If this method

returns `true`, display the pop-up menu. The following snippet of code associates a mouse listener to a component and displays the pop-up menu:

```
// Create a mouse listener
MouseListener ml = new MouseAdapter() {
    @Override
    public void mousePressed(MouseEvent e) {
        if (e.isPopupTrigger()) {
            popupMenu.show(e.getComponent(),
e.getX(), e.getY());
        }
    }

    @Override
    public void mouseReleased(MouseEvent e) {
        if (e.isPopupTrigger()) {
            popupMenu.show(e.getComponent(),
e.getX(), e.getY());
        }
    }
};

// Add a mouse listener to myComponent
myComponent.addMouseListener(ml);
```

Whenever the user right clicks on `myComponent`, a pop-up menu will appear. Note that you need to add the same code in both `mousePressed()` and `mouseReleased()` methods. It is decided by the look and feel which event should display the popup menu.

[Listing 2-7](#) contains a complete program showing how to use menus. The program is long. It does the repetitive work of creating and adding menu items and adding action listeners to them.

[Listing 2-7.](#) Working With Menus and Pop-up Menus

```
// JMenuFrame.java
package com.jdojo.swing;

import javax.swing.JFrame;
```

```
import java.awt.Container;
import javax.swing.JMenuBar;
import javax.swing.JMenu;
import javax.swing.JMenuItem;
import javax.swing.JLabel;
import java.awt.event.ActionListener;
import javax.swing.JTextArea;
import java.awt.BorderLayout;
import java.awt.event.KeyEvent;
import javax.swing.KeyStroke;
import javax.swing.JPopupMenu;
import java.awt.event.MouseAdapter;
import java.awt.event.MouseEvent;
import java.awt.event.MouseListener;
import javax.swing.JScrollPane;

public class JMenuFrame extends JFrame {
    JLabel msgLabel = new JLabel("Right click to
see popup menu");
    JTextArea msgText = new JTextArea(10, 60);
    JPopupMenu popupMenu = new JPopupMenu();

    public JMenuFrame(String title) {
        super(title);
        initFrame();
    }

    // Initialize the JFrame and add components to
it
    private void initFrame() {
        this.setDefaultCloseOperation(JFrame.EXIT_
        Container contentPane
= this.getContentPane();

        // Add the message label and text area
        contentPane.add(new JScrollPane(msgText),
BorderLayout.CENTER);
        contentPane.add(msgLabel,
BorderLayout.SOUTH);
```

```
// Set the menu bar for the frame
JMenuBar menuBar = getCustomMenuBar();
this.setJMenuBar(menuBar);

// Create a popup menu and add a mouse
listener to show it
createPopupMenu();
}

private JMenuBar getCustomMenuBar() {
    JMenuBar menuBar = new JMenuBar();

    // Get the File and Help menus
    JMenu fileMenu = getFileMenu();
    JMenu helpMenu = getHelpMenu();

    // Add the File and Help menus to the
menu bar
    menuBar.add(fileMenu);
    menuBar.add(helpMenu);

    return menuBar;
}

private JMenu getFileMenu() {
    JMenu fileMenu = new JMenu("File");

    // Set Alt-F as mnemonic for the File
menu
    fileMenu.setMnemonic(KeyEvent.VK_F);

    // Prepare a New Menu item. It will have
sub menus
    JMenu newMenu = getNewMenu();
    fileMenu.add(newMenu);

    JMenuItem openMenuItem = new
JMenuItem("Open", KeyEvent.VK_O);
    JMenuItem exitMenuItem = new
JMenuItem("Exit", KeyEvent.VK_E);
```

```

        fileMenu.add(openMenuItem);

        // You can add a JSeparator or just call
the convenience method
        // addSeparator() on fileMenu. You can
replace the following statement
        // with fileMenu.add(new JSeparator());
        fileMenu.addSeparator();
        fileMenu.add(exitMenuItem);

        // Add an ActionListener to the Exit menu
item
        exitMenuItem.addActionListener(e ->
System.exit(0));

        return fileMenu;
    }

private JMenu getNewMenu() {
    // New menu will have two sub menus
- Policy and Claim
    JMenu newMenu = new JMenu("New");

    // Add submenus to New menu
    JMenuItem policyMenuItem = new
JMenuItem("Policy", KeyEvent.VK_P);
    JMenuItem claimMenuItem = new
JMenuItem("Claim", KeyEvent.VK_C);
    newMenu.add(policyMenuItem);
    newMenu.add(claimMenuItem);

    return newMenu;
}

private JMenu getHelpMenu() {
    JMenu helpMenu = new JMenu("Help");
    helpMenu.setMnemonic(KeyEvent.VK_H);

    JMenuItem indexMenuItem = new
JMenuItem("Index", KeyEvent.VK_I);

```

```

        JMenuItem aboutMenuItem = new
JMenuItem("About", KeyEvent.VK_A);

        // Set F1 as the accelerator key for the
Index menu item
        KeyStroke f1Key
= KeyStroke.getKeyStroke(KeyEvent.VK_F1, 0);
        indexMenuItem.setAccelerator(f1Key);

        helpMenu.add(indexMenuItem);
        helpMenu.addSeparator();
        helpMenu.add(aboutMenuItem);

        // Add an action listener to the index
menu item
        indexMenuItem.addActionListener(e ->
            msgText.append("You have selected
Help >>Index menu item.\n"));

        return helpMenu;
    }

    private void createPopupMenu() {
        // Create a popup menu and add a mouse
listener to the frame,
        // so a popup menu is displayed when the
user clicks a right mouse button
        JMenuItem popup1 = new
JMenuItem("Popup1");
        JMenuItem popup2 = new
JMenuItem("Popup2");
        JMenuItem popup3 = new
JMenuItem("Popup3");

        // Create an action listener
        ActionListener al = e -> {
            JMenuItem menuItem
= (JMenuItem)e.getSource();
            String menuText
= menuItem.getText();

```

```

        String msg = "You clicked "
+ menuText + " menu item.\n";
        msgText.append(msg);
    };

    // Add the same action listener to all
popup menu items
    popup1.addActionListener(al);
    popup2.addActionListener(al);
    popup3.addActionListener(al);

    // Add menu items to popup menu
popupMenu.add(popup1);
popupMenu.add(popup2);
popupMenu.add(popup3);

    // Create a mouse listener to show
a popup menu
MouseListener ml = new MouseAdapter() {
    @Override
    public void
mousePressed(MouseEvent e) {
    displayPopupMenu(e);
}

    @Override
    public void
mouseReleased(MouseEvent e) {
    displayPopupMenu(e);
}
};

    // Add a mouse listener to the msg text
and label
msgText.addMouseListener(ml);
msgLabel.addMouseListener(ml);
}

private void displayPopupMenu(MouseEvent e) {

```

```

        // Make sure this mouse event is supposed
        to show the popup menu.
        // Different platforms show the popup
        menu in different mouse events
        if (e.isPopupTrigger()) {
            this.popupMenu.show(e.getComponent(
e.getX(), e.getY()));
        }
    }

    // Display the CustomFrame
    public static void main(String[] args) {
        JMenuFrame frame = new JMenuFrame("JMenu
and JPopupMenu Test");
        frame.pack();
        frame.setVisible(true);
    }
}

```

You can also use `JRadioButtonMenuItem` and `JCheckBoxMenuItem` as menu items in a menu. As the names suggest, they are displayed as radio buttons and checkboxes, and work the same as radio buttons and checkboxes. You can add any swing component to a `JMenu`. To use radio button-type menu items, you need to group multiple `JRadioButtonMenuItem` components into a button group so they represent exclusive choices. To handle the radio button selection change, you can add an `ActionListener` or `ItemListener` to the `JRadioButtonMenuItem`. To handle a change of state in `JCheckBoxMenuItem`, you need to use an `ItemListener`.

Tip I'll finally reveal the secret of menus in Swing. A menu item in Swing is a button. Aha! You were working with buttons and calling them menus. Yes, that is correct. A `JMenuBar` and a `JPopupMenu` are simply containers with a `BoxLayout`. Go ahead and play with these containers by setting their properties and adding different Swing components to them. A `JMenuItem` is a simple button. A `JMenu` is a button and it has an associated container that is displayed when you select it.

JToolBar

A toolbar is a group of buttons that provides commonly used actions to the user in a `JFrame`. Typically, you provide a toolbar along with a menu. The toolbar contains small buttons with small icons. Typically, it only contains a subset of options available in the menu.

An object of the `JToolBar` class represents a toolbar. It acts as a container for the toolbar buttons. It is a little smarter container than other containers such as a `JPanel`. It can be moved around at runtime. It can be floatable. If it is floatable, it displays a handle that you can use to move it around. You can also use the handle to pop it out in a separate window. The following snippet of code creates some toolbar components:

```
// Create a horizontal JToolBar
JToolBar toolBar = new JToolBar();

// Create a horizontal JToolBar with a title. The
title is
// displayed as a window title, when it floats in
a separate window.
JToolBar toolBarWithTitle = new JToolBar("My ToolBar
Title");

// Create a Vertical toolbar
JToolBar vToolBar = new JToolBar(JToolBar.VERTICAL);
```

Let's add some buttons to the toolbar. The buttons in a toolbar need to be smaller in size than usual buttons. You make a `JButton` smaller in size by setting its margin to zero. You should also add a tool tip to each toolbar button to give a quick hint to the user about its usage.

```
// Create a button for the toolbar
JButton newButton = new JButton("New");

// Set the margins to 0 to make the button smaller
newButton.setMargin(new Insets(0, 0, 0, 0));

// Set a tooltip for the button
newButton.setToolTipText("Add a new policy");
```

```
// Add the New button to the toolbar  
toolBar.add(newButton);
```

Typically, you display only small icons in a toolbar button. You can use another constructor of the JButton that only accepts an Icon object as an argument. Finally, you need to add action listeners to the buttons, as you have been adding to other JButtons. When a user clicks a button in a toolbar, the action listener is notified, and the specified action is performed.

You can set the toolbar floatable/non-floatable using its `setFloatable(boolean floatable)` method. By default, a toolbar is floatable. Its `setRollover(boolean rollOver)` method lets you specify if you want to draw the border of the toolbar buttons only when the mouse hovers on them.

A toolbar should be added to the north, south, east, or west region in a BorderLayout to make it nicer to move the toolbar around in different regions. [Listing 2-8](#) displays a JToolBar in a JFrame. [Figure 2-23](#) shows a JFrame with a toolbar in its north region. [Figure 2-24](#) shows the same JFrame with the toolbar floating in a separate window.

[Listing 2-8](#). Using a JToolBar in a JFrame

```
// JToolBarFrame.java  
package com.jdojo.swing;  
  
import java.awt.Container;  
import javax.swing.JFrame;  
import javax.swing.JToolBar;  
import javax.swing.JButton;  
import java.awt.Insets;  
import java.awt.BorderLayout;  
import javax.swing.JTextArea;  
import javax.swing.JScrollPane;  
  
public class JToolBarFrame extends JFrame {  
    JToolBar toolBar = new JToolBar("My JToolBar");  
    JTextArea msgText = new JTextArea(3, 45);  
  
    public JToolBarFrame(String title) {
```

```
        super(title);
        initFrame();
    }

    // Initialize the JFrame and add components to
it
    private void initFrame() {
        this.setDefaultCloseOperation(JFrame.EXIT_
Container contentPane
= this.getContentPane();
        prepareToolBar();

            // Add the toolbar in the north and
a JTextArea in the center
            contentPane.add(toolBar,
BorderLayout.NORTH);
            contentPane.add(new JScrollPane(msgText),
BorderLayout.CENTER);
            msgText.append("Move the toolbar around
using its" +
                    " handle at the left end");
    }

    private void prepareToolBar() {
        Insets zeroInset = new Insets(0, 0, 0,
0);

        JButton newButton = new JButton("New");
        newButton.setMargin(zeroInset);
        newButton.setToolTipText("Add a new
policy");

        JButton openButton = new JButton("Open");
        openButton.setMargin(zeroInset);
        openButton.setToolTipText("Open
a policy");

        JButton exitButton = new JButton("Exit");
        exitButton.setMargin(zeroInset);
        exitButton.setToolTipText("Exit the
```

```

application");

        // Add an action listener to the Exit
        toolbar button
        exitButton.addActionListener(e ->
System.exit(0));

        toolBar.add(newButton);
        toolBar.add(openButton);
        toolBar.addSeparator();
        toolBar.add(exitButton);

        toolBar.setRollover(true);
    }

    // Display the frame
public static void main(String[] args) {
    JToolBarFrame frame = new
JToolBarFrame("JToolBar Test");
    frame.pack();
    frame.setVisible(true);
}
}

```



Figure 2-23. A JToolBar with three JButton placed in the north region of a JFrame



Figure 2-24. A JToolBar floating in a separate window

JToolBar Meets the Action Interface

What is common in all three components: JButton, JMenuItem, and an item in a JToolBar? All of them represent an action. Sometimes you give the user the same option as a menu item, as a toolbar item, and as a JButton. How would you disable an option that you had provided using three components? Don't you think that you need to disable them separately at least in three places because they are three different components representing the same option? You may be right. However, there is an easier way to handle this kind of situation in Swing. Whenever you have to provide an option for an action in different ways, you should work with the Action interface. You need to wrap your option's logic and properties in an Action object and use that object to construct the JButton, the JMenuItem, and the item in the toolbar. If you need to disable the option, you just need to call `setEnabled(false)` on the Action object only once and all options will be disabled. In such situations, the use of an Action object makes your programming life easier. Let's see it in action. Let's create an ExitAction class that is inherited from the AbstractAction class. Its `actionPerformed()` method simply exits the application. You set some properties in its constructor using its `putValue()` method, as shown:

```
public class ExitAction extends AbstractAction {
    public ExitAction(String action) {
        super(action);

        // Set tooltip text for the toolbar
        this.putValue(SHORT_DESCRIPTION, "Exit
the application");

        // Set a mnemonic key
        this.putValue(MNEMONIC_KEY,
KeyEvent.VK_E);
    }

    @Override
    public void actionPerformed(ActionEvent e) {
        System.exit(0);
    }
}
```

If you want to add an Exit menu item, a JButton, and a toolbar button, you can do so by first creating an object of the ExitAction class, and using it to create all your option items, as shown:

```
ExitAction exitAction = new ExitAction("Exit");
JButton exitButton = new JButton(exitAction);
JMenuItem exitMenuItem = new JMenuItem(exitAction);

JButton exitToolBarButton = new JButton(exitAction);
exitToolBarButton.setMargin(new Insets(0,0,0,0));
```

Now you can add the exitButton to your JFrame, the exitMenuItem to your menu, and the exitToolBarButton to your toolbar. They all behave the same way because they are sharing the same exitAction object. If you want to disable the exit option in all three places, you can do so by calling exitAction.setEnabled(false) only once.

JTable

Swing lets you display and edit data in a tabular form using the JTable component. A JTable displays data using rows and columns. You can set the labels for column headers. You can also sort the table's data at runtime. Working with a JTable can be as simple as writing a few lines of code, or it can be as complex as writing a few hundred lines of code. A JTable is a complex and powerful Swing component that it deserves a chapter by itself. This section explains the basics of working with a JTable and provides you with some hints about its powerful features. A JTable uses many other classes and interfaces, which are in the javax.swing.table package. The JTable class itself is in the javax.swing package.

Let's start with the simplest JTable example. You can create a JTable by using its no-args constructor.

```
JTable table = new JTable();
```

Well, that was easy. However, what happens to its columns, rows, and data? All you got is an empty table with no visual components. You will fix these problems in a minute.

A `JTable` does not store data. It only displays data. It uses a model that stores the data, the number of columns, and the number of rows. An instance of the `TableModel` interface represents the model for a `JTable`. The `DefaultTableModel` class is an implementation of the `TableModel` interface. When you use the default constructor of the `JTable` class, Java sets an instance of the `DefaultTableModel` class as its model. If you want to add or remove columns/rows, you must work with its model. You can get the reference of the model of a `JTable` using its `getModel()` method. Let's add two rows and three columns to the table.

```
// Get the reference of the model of the table
DefaultTableModel tableModel
= (DefaultTableModel)table.getModel();

// Set the number of rows to 2
tableModel.setRowCount(2);

// Set the number of columns to 3
tableModel.setColumnCount(3);
```

Let's set the value for a cell in the table. You can use the `setValueAt(Object data, int row, int column)` method of the table's model or the table to set a value in its cell. You will set "John Jacobs" as the value in the first row and the first column. Note that the first row and the column start at 0.

```
// Set the value at (0, 0) in the table's model
tableModel.setValueAt("John Jacobs", 0, 0);

// Set the value at (0, 0) in the table
// Works the same as setting the value using the
// table's model
table.setValueAt("John Jacobs", 0, 0);
```

If you add the table to a container, it will look as shown in [Figure 2-25](#).

A	B	C
John Jacobs		

Figure 2-25. A JTable with two rows and three columns with default column header labels

Make sure that you add the table inside a JScrollPane. Note that you get two rows and three columns. The labels for the column headers are set as A, B, and C. You can double-click any cell to start editing the value in the cell. To get the value contained in a cell, you can use the `getValueAt(int row, int column)` method of the table's model or the JTable. It returns an Object. You can also add more columns or rows to the JTable by using the `addColumn()` and `addRow()` methods of the DefaultTableModel class. You can use the `removeRow(int row)` method of the its model class to remove a row from the model and thus from the JTable.

You can set custom labels for column headers using the model's `setColumnIdentifiers()` method as follows:

```
// Store the column headers in an array
Object[] columnHeaderLabels = new Object[] {"Name",
"DOB", "Gender"};

// Set the column headers for the table using its
model
tableModel.setColumnIdentifiers(columnHeaderLabels);
```

With the custom column headers, the table looks as shown in [Figure 2-26](#).

Name	DOB	Gender
John Jacobs		

Figure 2-26. A JTable with two rows, three columns, and custom column header labels

You must add a JTable to a JScrollPane if you want the column headers to be visible all the times. If you do not add it to a JScrollPane, the column headers will not be visible when the number of rows exceeds the height available for the component. You can get the column headers component using JTable's `getTableHeader()` method and display it yourself (e.g. in the north region of a BorderLayout if the JTable is in the center region). You can select a row by clicking on the row. By default, a JTable lets you select multiple rows. You can use the `getSelectedRow()` method of a JTable to

get the first selected row number, and the `getSelectedRows()` method to get the row numbers of all selected rows. The `getSelectedRowCount()` method returns the selected row count.

You started with the simplest `JTable`. It was not, however, an easy experience working with the so-called simplest `JTable`, but now you know the basics of working with a `JTable`.

Let's repeat the example by creating the `JTable` using another constructor. The `JTable` class has another constructor that accepts the number of rows and columns as arguments. You can create a `JTable` with two rows and three columns as shown:

```
// Create a JTable with 2 rows and 3 columns
JTable table = new JTable(2, 3);
```

If you want to set the value for the first row and the first column to "John Jacobs", you do not need to use the table's model. You can use the `setValueAt()` method of the `JTable` to do the same.

```
table.setValueAt("John Jacobs", 0, 0);
```

This one was a little easier than the previous one. However, you will still get the default column header's labels set to A, B, and C. Two other constructors for the `JTable` let you set the number of rows and columns, and data in one go. They differ only in argument types: one lets you use an array of `Object` and another lets you use a `Vector` object. They are declared as follows:

- `JTable(Object[][] rowData, Object[] columnNames)`
- `JTable(Vector rowData, Vector columnNames)`

If you use a two-dimensional array of `Object` to set the row data, the number of the first dimension of the array decides the number of rows. If you use a `Vector`, the number of elements in the `Vector` decides the number of rows in the table. Each element in the `Vector` should be a `Vector` object that contains the data for a row. Here is how you construct a `JTable` using a two-dimensional array of `Object`. [Figure 2-27](#) shows the table displaying all the data set in the code.

ID	Name	Gender
100	John Jacobs	Male
101	Barbara Gentry	Female

Figure 2-27. A JTable with two rows, three columns, and data

```
// Prepare the column headers
Object[] columnNames = {"ID", "Name", "Gender"} ;

// Create a two-dimensioanl array to contain the
// table's data
Object[][] rowData = new Object[][] {
    {new Integer(100), "John Jacobs", "Male"} ,
    {new Integer(101), "Barbara Gentry", "Female"} }
;

// Create a JTable with the data and the column
// headers
JTable table = new JTable(rowData, columnNames) ;
```

So far, your table's data were hard-coded. The `JTable` treated all data as `String` and all cells in the table were editable. For example, you set the values for the ID column as integers and they were still displayed as left-justified text. A number should be right-justified in a cell. If you want to customize a `JTable`, you need to use your own model for the table. Recall that the `TableModel` interface defines the model for a `JTable`. Here is the declaration of the `TableModel` interface:

```
public interface TableModel
    public int getRowCount();
    public int getColumnCount();
    public String getColumnName(int columnIndex);
    public Class<?> getColumnClass(int
columnIndex);
    public boolean isCellEditable(int rowIndex, int
columnIndex);
    public Object getValueAt(int rowIndex, int
columnIndex);
    public void setValueAt(Object aValue, int
```

```

        rowIndex, int columnIndex);
    public void
addTableModelListener(TableModelListener l);
    public void
removeTableModelListener(TableModelListener l);
}

```

The `AbstractTableModel` class implements the `TableModel` interface. It provides an empty implementation for the methods of the `TableModel` interface. It does not mention the way data should be stored. If you want to implement your own table model, you need to inherit your class from the `AbstractTableModel` class. If you implement at least the following three methods in your custom table model class, you will get a read-only table model:

- `public int getRowCount();`
- `public int getColumnCount();`
- `public Object getValueAt(int row, int column);`

The `DefaultTableModel` class inherits from the `AbstractTableModel` class. It provides a default implementation for all methods in the `TableModel` interface. It uses a `Vector` of `Vectors` to store the table's data.

You have greater control over workings of a `JTable` if you use your own table model. [Listing 2-9](#) implements a simple table model using an array of arrays to store data.

[Listing 2-9](#). Implementing a Simple Table Model

```

// SimpleTableModel.java
package com.jdojo.swing;

import javax.swing.table.AbstractTableModel;

public class SimpleTableModel extends
AbstractTableModel {
    private Object[][] data = {};

```

```
    private String[] columnNames = {"ID", "Name",
"Gender"};
    private Class[] columnClass = {Integer.class,
String.class, String.class};
    private Object[][][] rowData = new Object[][][] {
        {new Integer(100), "John Jacobs",
"Male"},
        {new Integer(101), "Barbara Gentry",
"Female"}
    };

    public SimpleTableModel() {
}

@Override
public int getRowCount() {
    return rowData.length;
}

@Override
public int getColumnCount() {
    return columnNames.length;
}

@Override
public String getColumnName(int columnIndex) {
    return columnNames[columnIndex];
}

@Override
public Class getColumnClass(int columnIndex) {
    return columnClass[columnIndex];
}

@Override
public boolean isCellEditable(int rowIndex, int
columnIndex) {
    boolean isEditable = true;
    if (columnIndex == 0) {
        isEditable = false; // Make the ID
```

```

        column non-editable
    }
    return isEditable;
}

@Override
public Object getValueAt(int rowIndex, int
columnIndex) {
    return rowData[rowIndex] [columnIndex];
}

@Override
public void setValueAt(Object aValue, int
rowIndex, int columnIndex) {
    rowData[rowIndex] [columnIndex] = aValue;
}
}

```

In the `getColumnClass()` method, you specify the class of the column's data; the `JTable` will use this information to display the column's data appropriately. For example, it will display numbers in a column as right-justified. If you specify the type `Boolean` for a column, the `JTable` will use a `JCheckBox` in each cell of that column to display the `Boolean` value. Note that you have made the ID column non-editable by returning `false` from the `isEditable()` method for the `columnIndex` of 0. In the example, you have again hard-coded the table's data. However, you can read data from a database, a data file, network, or any other data source. The following snippet of code uses the custom model to create a `JTable`:

```
// Use the SimpleTableModel as the model for the table
JTable table = new JTable(new SimpleTableModel());
```

Note that your table model does not allow adding and deleting rows/columns. If you want these extended functionalities, you are better off inheriting the model class from the `DefaultTableModel` class and customizing the behavior you want to change.

You can have data sorting capability added to your `JTable` by calling its method `setAutoCreateRowSorter(true)`. You can sort data in a column by clicking the column's header. After you call this method, a `JTable` will

display an up/down arrow as part of a column header to indicate that a column is sorted in ascending or descending order. You can also use a row filter that will hide rows in a `JTable` based on some criteria, as shown:

```
// Set a row sorter for the table
TableRowSorter sorter = new
TableRowSorter(table.getModel());
table.setRowSorter(sorter);

// Set an ID filter for the table
RowFilter<SimpleTableModel, Integer> IDFfilter = new
RowFilter<SimpleTableModel, Integer> () {

    @Override
    public boolean include(Entry<? extends
SimpleTableModel,
                        ? extends
Integer> entry) {
        SimpleTableModel model
= entry.getModel();
        int rowIndex
= entry.getIdentifier().intValue();
        Integer ID = (Integer)
model.getValueAt(rowIndex, 0);
        if (ID.intValue() <= 100) {
            return false; // Do not show rows
with an ID <= 100
        }
        return true;
    }
};

sorter.setRowFilter(IDFfilter);
```

The above snippet of code sets a filter for a `JTable`, which is named `table`, so that rows with IDs less than or equal to 100 are not shown. The `RowFilter` is an abstract class; you must override its `include()` method to specify your filter criteria. It also has several static methods that return `RowFilter` objects of different kinds that you can use directly with a

RowSorter object. The following are some examples of creating row filters:

```
// Create a filter that will show only rows that
starts
// with "John" in the second column (column index = 1)
RowFilter nameFilter = RowFilter.regexFilter("^John*", 1);

// Create a filter that will show only rows that has a
// "Female" value in its third column (column index
= 2)
RowFilter genderFilter
= RowFilter.regexFilter("^Female$", 2);

// Create a filter that will show only rows that has
3rd,
// 5th and 7th columns values starting with "A"
RowFilter anyFilter1 = RowFilter.regexFilter("^A*", 3, 5, 7);

// Create a filter that will show only rows that has
any
// column whose value starts with "A"
RowFilter anyFilter2 = RowFilter.regexFilter("^A*");
```

You can add a TableModelListener to a TableModel to listen for any changes that are made to the table's model.

Tip A JTable has many features that cannot be described in this section because of space limitation. It also lets you set a custom cell rendered to display a value in a cell. For example, you can display radio buttons in a cell that user can choose from instead of letting them edit plain text values.

JTree

A JTree is used to display hierarchical data in a tree-like structure as shown in

Figure 2-28. You can think of a JTree as displaying a real tree upside down.

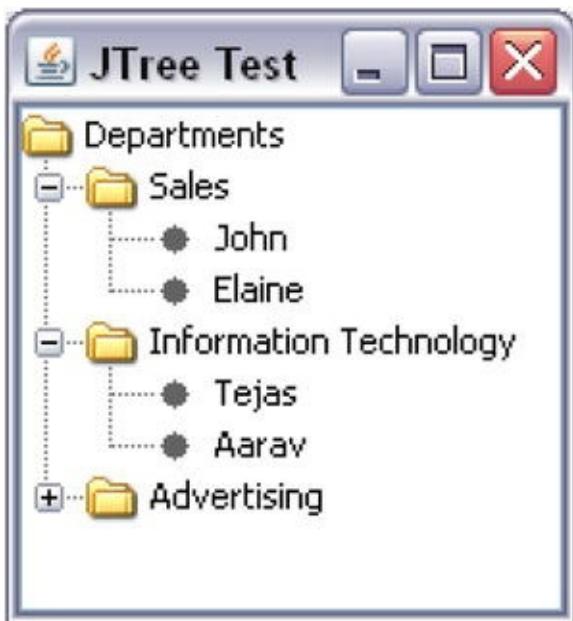


Figure 2-28. A JTree showing departments and a list of employees in the departments

Each item in a JTree is called a node. In the figure, Departments, Sales, John, etc. are nodes. A node is further categorized as a branch node or a leaf node. If a node can have other nodes underneath, which are called its children, it is called a branch node. If a node does not have children, it is called a leaf node. Departments, Sales, and Information Technology are examples of branch nodes, whereas John, Elaine, and Aarav are examples of leaf nodes. There is always a special branch in a real-world tree called the root. Similarly, a JTree always has a special branch node that is called the root node. Your JTree has a root node called Departments. In a JTree, you have the ability to make the root node visible or invisible by using its `setRootVisible(boolean visibility)` method.

A branch node is called a parent node for its children. Note that a child node can also be a branch node. Sales, Information Technology, and Advertising are child nodes of the Departments node. The Sales node has two children: John and Elaine. Both John and Elaine have the same parent node, which is the Sales node.

Nodes at the same level are called siblings. In other words, nodes that have the same parent node are called siblings. Sales, Information Technology, and Advertising are siblings; John and Elaine are siblings; Tejas and Aarav are siblings. Two terms, *ancestor* and *descendant*, are used frequently in the context

of nodes. Nodes that are the parent of the parent of the parent and so on are all called ancestors. That is, nodes starting from grandpa and up are all ancestor nodes. Nodes starting from grandchild and down are all called descendants. For example, the Departments node is an ancestor of the Elaine node, and the Elaine node is a descendant of the Departments node.

You have learned enough terms related to a JTree. It's time to see a JTree in action. Classes related to JTree are the in javax.swing and javax.swing.tree packages. A JTree is composed of nodes. An instance of the TreeNode interface represents a node. The TreeNode interface declares methods that give you basic information about a node, such as its node type (branch or leaf), its parent node, its children nodes, etc.

MutableTreeNode is an interface that extends the TreeNode interface. It declares additional methods that allow you to change a node by inserting/removing child nodes or by changing the node object. The DefaultMutableTreeNode class is an implementation of the MutableTreeNode interface.

Before you start creating a node, you need to understand that a node is a visual representation (usually one line of text) of a Java object. In other words, a node wraps an object and usually displays a one-line text representation of that object. The object that a node represents is called the user object of that node. Therefore, before you build a node, you must have an object that your node will represent. Don't worry about creating a new class to build a node. You can just use a String to build your nodes. The following snippet of code creates some nodes that can be used in a JTree:

```
// Create a Departments node
DefaultMutableTreeNode root = new
DefaultMutableTreeNode("Departments");

// Create a Sales node
DefaultMutableTreeNode sales = new
DefaultMutableTreeNode("Sales");

// Create a John node
DefaultMutableTreeNode john = new
DefaultMutableTreeNode("John");

// Create a customer node, assuming you have
a Customer class.
```

```
// In this case, the node will wrap a Customer object
Customer cust101 = new Customer(101, "Joe");
DefaultMutableTreeNode c101Node = new
DefaultMutableTreeNode(cust101);

// If you want to get the user object that a node
wraps, you would
// use the getUserObject() method of the
DefaultMutableTreeNode class
Customer c101Back
= (Customer)c101Node.getUserObject();
```

Once you have a node, it is easy to add children to it using the `add()` or `insert()` method. The `add()` method appends the node to the end; the `insert()` method lets you specify the position of the new node. For example, to add a Sales node as a child node to the Departments root node you write

```
root.add(sales);
```

To add John as a child node to sales, you write

```
sales.add(john);
```

Once you have your nodes ready, it is easy to put them in a JTree. You need to create a JTree by specifying its root node.

```
JTree tree = new JTree(root);
```

Other constructors for the JTree class let you create a JTree in different ways. The no-args constructor is not very useful unless you are learning JTree. It creates a JTree with some nodes added to it, which are good in terms of saving you the hassle of adding nodes if you want to experiment with a JTree. You can also create a JTree by passing an array of Object or a Vector of Object to its constructors as the child nodes for the root of the JTree. A root will be added to the new JTree before adding the passed in objects as its child nodes. For example,

```
// Create a JTree. It will create a default root node
called Root
// and it will add two, "One" and "Two", child nodes
```

```
for Root.  
// The Root node is not displayed by default.  
JTree tree = new JTree(new Object[] {"One", "Two"});
```

Once you get your `JTree` component created, it is time to display it in a Swing container. Typically, you add a `JTree` to a `JScrollPane`, so it will have scrolling capability.

```
myContainer.add(new JScrollPane(tree));
```

How do you access or navigate through `JTree` nodes? There are two ways to access a node in a `JTree`: using a row number and using a tree path.

A `JTree` consists of nodes. How does a `JTree` display nodes? Recall that a node is an instance of the `TreeNode` class and it wraps an object of any type. Therefore, you may say that a node is a wrapper for an object. By default, a `JTree` calls the `toString()` method of the node object to get the text for the node to be displayed. If your node wraps an object whose `toString()` method does not return a meaningful string to be displayed in a `JTree` node, you can supply a custom string for that node by creating a custom `JTree` and overriding its `convertValueToText()` method. In the examples, you have wrapped a `String` object inside a node and the `toString()` method of a `String` object returns the string itself. Suppose you want to create a node for `Customer` objects. Make sure to override the `toString()` method of the `Customer` class and return a meaningful string to display in the `Customer` nodes such as customer name and id.

If you look at `JTree` nodes from top to bottom, each node is displayed in a separate horizontal row. The very first node (the root node, if the root node is visible) is row number zero. The second one is at row number 1, and so on. In [Figure 2-28](#), the row numbers for Departments, Sales, John, Elaine, and Information Technology are 0, 1, 2, 3, and 4, respectively. Note that a row number is assigned to a node only if it is displayed. A node may not be displayed when its parent is collapsed. For example, the Advertising node has some child nodes that are not displayed and they do not have a row number assigned to them because Advertising node, which is their parent node, is collapsed. The `getRowCount()` method of a `JTree` returns the number of viewable nodes. Note that the number of viewable nodes changes as you expand and collapse nodes in a `JTree`.

An object of the `TreePath` class represents a node uniquely in a `JTree`.

Its structure is similar to the path used to represent a file in a file-system. A file path represents a file uniquely by specifying its path starting from the root folder such as /Departments/Sales/John represents a file named John, which is under a Sales folder, which is under a Departments folder, which is under the root. A TreePath object encapsulates the same kind of information to represent a node in a JTree. It consists of an ordered array of nodes starting from the root. For example, if you need to construct a TreePath object for the node John in the example, you can do it as follows:

```
Object[] path = new Object[] {root, sales, john};  
TreePath johnNodePath = new TreePath(path);
```

The getPath() method of the TreePath class returns the Object array and the getLastPathComponent() method returns the last element of the array, which is the reference to the node, which the TreePath object represents the path to. Typically, you will not construct a TreePath object when you work with a JTree. Rather, a TreePath object will be available to you in the JTree events. If you work with a JTree, each element of the array object that represents a TreePath object is an instance of TreeNode. If you are using the default tree model, the TreePath will consist of an array of DefaultMutableTreeNode objects. Having a TreePath to a node, you can get to the object that the node wraps as follows:

```
// Suppose path is an instance of the TreePath class  
// and it represents a node  
DefaultMutableTreeNode node  
= (DefaultMutableTreeNode)path.getLastPathComponent();  
Object myObject = node.getUserObject();
```

A JTree provides two methods called getRowForPath() and getPathForRow() to convert a row number to a TreePath and vice versa. You will work with a TreePath when you learn about the JTree events shortly.

If you are not writing the code for an event of a JTree, you will not have a TreePath for a node (unless you stored the node reference itself, which is not required). In such cases, you can always start from the root node and keep navigating down the tree. A model for a JTree is an instance of the TreeModel class, which has a getRoot() method. Once you get the handle

of the root node, you can use the `children()` method of the `TreeNode` class that returns an enumeration of all child nodes of a `TreeNode`. The following snippet of code defines a method `navigateTree()` that traverses all tree nodes, if you pass it the reference to the root node:

```
public void navigateTree(TreeNode node) {  
    if (node.isLeaf()) {  
        System.out.println("Got a leaf node: "  
+ node);  
        return;  
    }  
    else {  
        System.out.println("Got a branch node: "  
+ node);  
        Enumeration e = node.children();  
  
        while(e.hasMoreElements()) {  
            TreeNode n =  
(TreeNode)e.nextElement();  
            navigateTree(n); // Recursive  
method call  
        }  
    }  
}
```

You can select a tree node by clicking it. A `JTree` uses a selection model to keep track of the selected nodes. You need to interact with its selection model to select nodes or get information about the selected nodes. The selection model is an instance of the `TreeSelectionModel` interface. A `JTree` allows the user to select nodes in three different modes. They are represented by three constants defined in the `TreeSelectionModel` interface:

- `SINGLE_TREE_SELECTION`: It allows users to select only one node at a time.
- `CONTIGUOUS_TREE_SELECTION`: It allows users to select any number of contiguous nodes.
- `DISCONTIGUOUS_TREE_SELECTION`: It allows users to select any number of nodes without any restrictions.

The following snippet of code demonstrates how to use some of the methods of the selection model of a JTree:

```
// Get selection model for JTree
TreeSelectionModel selectionModel
= tree.getSelectionModel();

// Set the selection mode to discontinuous
selectionModel.setSelectionMode(TreeSelectionModel.DISCONTINUOUS_SELECTION);

// Get the selected number of nodes
int selectedCount
= selectionModel.getSelectionCount();

// Get the TreePath of all selected nodes
TreePath[] selectedPaths
= selectionModel.getSelectionPaths();
```

You can add a TreeSelectionListener to a JTree, which will be notified when a node is selected or deselected. The following snippet of code demonstrates how to add a TreeSelectionListener to a JTree:

```
// Create a JTree. Java will add some nodes
JTree tree = new JTree();

// Add selection listener to the JTree
tree.addTreeSelectionListener((TreeSelectionEvent event) -> {
    TreeSelectionModel selectionModel
    = tree.getSelectionModel();
    TreePath[] paths = event.getPaths();
    for (TreePath path : paths) {
        Object node
        = path.getLastPathComponent();
        if (selectionModel.isPathSelected(path))
    {
        System.out.println("Selected: "
+ node);
    }
})
```

```

        else {
            // Node is deselected
            System.out.println("DeSelected: "
+ node);
        }
    }
} );

```

You can expand a node by clicking the plus sign or by clicking the node itself. You can collapse a node by clicking its minus sign or by clicking the node itself. A JTree triggers two events when a node expands or collapses. It triggers a tree-will-expand event and a tree-expansion event in sequence. The tree-will-expand event is triggered just before a node is expanded or collapsed. If you throw an ExpandVetoException from this event, expansion (or collapse) is stopped. Otherwise, a tree-expansion event is triggered. The following snippet of code demonstrates how to write code for these events:

```

// Add a TreeWillExpandListener
tree.addTreeWillExpandListener(new
TreeWillExpandListener() {
    @Override
    public void treeWillExpand(TreeExpansionEvent
event)
        throws ExpandVetoException {
        System.out.println("Will Expand: "
+ event.getPath());
    }

    @Override
    public void treeWillCollapse(TreeExpansionEvent
event) throws ExpandVetoException {
        System.out.println("Will Collapse: "
+ event.getPath());
    }
});

// Add TreeExpansionListener
tree.addTreeExpansionListener(new
TreeExpansionListener() {
    @Override

```

```
        public void treeExpanded(TreeExpansionEvent event) {
            System.out.println("Exapanded: "
+ event.getPath());
        }

    @Override
    public void treeCollapsed(TreeExpansionEvent event) {
        System.out.println("Collapsed: "
+ event.getPath());
    }
}
```

Tip A `JTree` is a powerful and complex Swing component. It lets you customize almost everything in it. Each node is displayed in a `JLabel`. The icons that are displayed are different for branch and leaf nodes. The default icons depend on the look-and-feel. You can customize the default icons by creating your own tree cell renderer. You can also add a `TreeModelListener` to a `JTree`, which will notify you of any changes in its model. You can make a `JTree` editable by using its `setEditable(true)` method. You can edit a node's labels by double-clicking it.

JTabbedPane and JSplitPane

Sometimes, because of space limitation, it is not possible to display all pieces of information in a window. You can group and separate pieces of information in a window using a `JTabbedPane`. [Figure 2-29](#) shows a `JFrame` that has a tabbed pane with two tabs titled `General Information` and `Contacts` to display the general and contact information of a person.



Figure 2-29. A JTabbedPane with two tabs

A JTabbedPane component acts like a container for other Swing components, arranging them in a tabbed fashion. It can display tabs using a title, an icon, or both. The user needs to click on a tab to view the tab's contents. The greatest advantage of using a JTabbedPane is space sharing. The contents of only one tab in a JTabbedPane are visible at a time. Users can switch between tabs to view the contents of another tab.

A JTabbedPane also lets you specify where to display the tabs. You can specify the tabs to be placed at the top, bottom, left, or right. [Figure 2-29](#) displays the tabs at the top. If you have a JFrame named a frame, the following snippet of code produces the frame shown in [Figure 2-29](#). The code adds a JLabel to the both tabs represented by two JPanels.

```
JPanel generalInfoPanel = new JPanel();
JPanel contactInfoPanel = new JPanel();
JTabbedPane tabbedPane = new JTabbedPane();
generalInfoPanel.add(new JLabel("General info
components go here..."));
contactInfoPanel.add(new JLabel("Contact info
components go here..."));

tabbedPane.addTab("General Information",
generalInfoPanel);
tabbedPane.addTab("Contacts", contactInfoPanel);
frame.getContentPane().add(tabbedPane,
BorderLayout.CENTER);
```

The getTabCount() method returns the number of tabs in a JTabbedPane. Every tab inside a JTabbedPane has an index. The first tab

has an index of 0, the second tab has an index of 1, and so on. You can get the component that represents a tab using its index.

```
// Get the reference of the component for the Contact  
tabs  
JPanel contactsPanel  
= tabbedPane.getTabComponentAt(1);
```

A JSplitPane is a splitter that can be used to split space between two components. The splitter bar can be displayed horizontally or vertically. When the available space is less than the space needed to display the two components, the user can move the splitter bar up/down or left/right, so one component gets more space than the other. If there is enough space, both components can be shown fully.

The JSplitPane class provides many constructors. You can create it using its default constructor and add two components using its `setXxxComponent(Component c)`, where Xxx could be Top, Bottom, Left, or Right. It also lets you specify the way redrawing of components occurs when you change the position of the splitter bar. It could be continuous or non-continuous. If it is continuous, components are redrawn as you move the splitter bar. If it is non-continuous, the components are redrawn when you stop moving the splitter bar.

The following snippet of code shows two instances of the JPanel class added to a JSplitPane, which in turn is added to the content pane of a JFrame named frame. [Figure 2-30](#) shows the resulting JFrame.

```
// Create two JPanels and a JSplitPane  
JPanel generalInfoPanel = new JPanel();  
JPanel contactInfoPanel = new JPanel();  
JSplitPane splitPane = new JSplitPane();  
generalInfoPanel.add(new JLabel("General info  
components go here..."));  
contactInfoPanel.add(new JLabel("Contact info  
components go here..."));  
  
// Add two JPanels to the JSplitPane and the  
JSplitPane  
// to the content pane of the JFrame  
splitPane.setLeftComponent(generalInfoPanel);
```

```
splitPane.setRightComponent(contactInfoPanel);  
frame.getContentPane().add(splitPane,  
BorderLayout.CENTER);
```



Figure 2-30. Using a JSplitPane to split space between two components

Custom Dialogs

A `JDialog` is a top-level Swing container. It is used as a temporary top-level container (or as a popup window) to aid in the working of the main window to get the user's attention. I am using the term *window* loosely to mean a Swing top-level container. Suppose you have a `JFrame` in which you have to display information about a person. You may not have enough room in the `JFrame` to display all details about a person. In this case, you can only display the basic personal minimum information on a `JFrame` and provide a button labeled "Person Details". When the user clicks this button, you can open a `JDialog` that displays detailed information about that person. This is an example of using a `JDialog` to display information to users. Another example of using a dialog window is to let the user choose a file from a file system. You can display a dialog to the user that would let him navigate through the file system and let him choose a file. You can also use a `JDialog` in other occasions as listed:

- *When you want to confirm an action from the user:* This is called a *confirmation dialog*. For example, when the user selects a person record in a window and tries to delete the person record, you display a confirmation message of "Are you sure you want to delete this person?" The dialog box

displays two buttons labeled Yes and No' to indicate the user's choice.

- *When you want some input from the user:* This is referred to as an *input dialog*. For example, when focus moves to a date field, you may display a calendar in a `JDialog` and want the user to select a date. An input dialog can be as simple as entering/selecting one value or entering multiple values, such as a person's details.
- *When you want to display some message to the user:* This is called a *message dialog*. For example, when a user saves some information to a database, you want to inform the user with a message that indicates the status of the database transaction.

Creating a dialog window is very simple: just create a new class that inherits from the `JDialog` class. You can add any number of Swing components to your custom `JDialog` as you have been adding to a `JFrame`. A `JDialog` makes it a little easier to add components to it. You do not need to get the reference to its content pane to set its layout manager and add components. Rather, you can invoke the `setLayout()` and `add()` methods on the `JDialog` itself. These methods route the calls to its content pane. By default, a `JDialog` uses a `BorderLayout` as the layout manager.

[Listing 2-10](#) lists a custom `JDialog` that displays current date and time in a `JLabel` and an `OK JButton`. When the user clicks the `JButton`, the `JDialog` is closed.

[Listing 2-10](#). A Custom `JDialog` That Displays Current Date and Time

```
// DateTimeDialog.java
package com.jdojo.swing;

import java.awt.BorderLayout;
import java.time.LocalDateTime;
import java.time.format.DateTimeFormatter;
import javax.swing.JButton;
import javax.swing.JDialog;
import javax.swing.JLabel;
```

```
public class DateTimeDialog extends JDialog {  
    JLabel dateTextLabel = new JLabel("Datetime  
placeholder");  
    JButton okButton = new JButton("OK");  
  
    public DateTimeDialog() {  
        initFrame();  
    }  
  
    private void initFrame() {  
        // Release all resources when JDialog is  
closed  
        this.setDefaultCloseOperation(JFrame.DISPOSE_ON_CLOSE);  
        this.setTitle("Current Date and Time");  
        this.setModal(true);  
  
        String currentDateTimeString  
= getCurrentDateTimeString();  
        dateTextLabel.setText(currentDateTimeString);  
  
        // There is no need to add components to  
the content pane.  
        // You can directly add them to the  
JDialog.  
        this.add(dateTextLabel,  
BorderLayout.NORTH);  
        this.add(okButton, BorderLayout.SOUTH);  
  
        // Add an action listener to the OK  
button  
        okButton.addActionListener(e ->  
DateTimeDialog.this.dispose());  
    }  
  
    private String getCurrentDateTimeString() {  
        LocalDateTime ldt = LocalDateTime.now();  
        DateTimeFormatter formatter =  
            DateTimeFormatter.ofPattern("EEEE
```

```

        MMMM dd, yyyy hh:mm:ss a");
        String dateString
= ldt.format(formatter);
        return dateString;
    }
}

```

The `DateTimeDialog` class is a simple example of a custom `JDialog`. To use it in your application, you need to create an instance of this `JDialog`, pack it, and make it visible, as shown:

```

DateTimeDialog dateTimeDialog = new DateTimeDialog();
dateTimeDialog.pack();
dateTimeDialog.setVisible(true);

```

If you are displaying a `JDialog` from another top-level container, say a `JFrame` or another `JDialog`, you may want to display it in the center of the top-level container. Sometimes you may want to display it in the center of the screen. You can place a `JDialog` in the center of a top-level container or a screen by using its `setLocationRelativeTo(Component c)` method. If you pass `null` as its argument, the `JDialog` is centered on the screen. Otherwise, it will be centered within the component that you pass as the argument.

```

// Center the JDialog within a frame, assuming that
myFrame exists
dateTimeDialog.setLocationRelativeTo(myFrame);

// Place the JDialog in the center of screen
dateTimeDialog.setLocationRelativeTo(null);

```

You can create a `JDialog` with an owner, which could be another `JDialog`, a `JFrame`, or a `JWindow`. By specifying an owner for a `JDialog`, you are creating a parent-child relationship. When the owner (or the parent) of a `JDialog` is closed, the `JDialog` is also closed. When the owner is minimized or maximized, the `JDialog` is also minimized or maximized. A `JDialog` with an owner is always displayed on top of its owner. You can specify an owner of a `JDialog` in its constructors. When you create a `JDialog` using its no-args constructor, a hidden `Frame` is created as its owner. Note that it is a

`java.awt.Frame`, not `javax.swing.JFrame`. The `JFrame` class inherits from the `Frame` class. You can also create a `JDialog` with `null` as its owner, and in that case, it does not have an owner.

By default, a `JDialog` is resizable. If you do not want users to resize your `JDialog`, you can do so by calling its `setResizable(false)` method.

Based on focus behavior of a `JDialog`, it can be categorized as

- Modal
- Modeless

When a modal `JDialog` is displayed, it blocks other displayed windows in the application. In other words, if a modal `JDialog` is displayed, you must close it before you can work with any other windows in that application. To make a `JDialog` modal, you can use its `setModal(true)` method. Some of the constructors of the `JDialog` class also let you specify whether the `JDialog` should be modal or modeless.

A modeless `JDialog` does not block any other displayed windows in the application. You can switch focus between other windows and the instances of modeless `JDialog`. By default, a `JDialog` is modeless.

You can also set the scope of modality for a modal `JDialog`. A `JDialog` can have one of the four types of modalities. They are defined by the four constants in `java.awt.Dialog.ModalityType` enum:

- MODELESS
- DOCUMENT_MODAL
- APPLICATION_MODAL
- TOOLKIT_MODAL

You can specify the modality type of a `JDialog` in its constructor or by using its `setModalityType()` method.

The modality type of `MODELESS` means that the `JDialog` will not block any windows.

The modality type of `DOCUMENT_MODAL` means that the `JDialog` will block any windows in its parent hierarchy (its owner, owner of owner and so on). It will not block any window in its child hierarchy (its child, child of child, and

so on). Suppose you have three windows displayed: `frame` is a `JFrame`; `dialog1` is a `JDialog` whose owner is `frame`; `dialog2` is another `JDialog` whose owner is `dialog1`. If you specify the modality type of `DOCUMENT_MODAL` for `dialog1`, you can work with `dialog2`, but not with `frame`. If `dialog2` has a modality type of `MODELESS`, you can work with both `dialog1` and `dialog2`, because `dialog2` will not block any windows.

The modality type of `APPLICATION_MODAL` means that the `JDialog` will block any windows in that Java application, except those in its child hierarchy.

The modality type of `TOOLKIT_MODAL` means that the `JDialog` will block any windows run from the same toolkit, except those in its child hierarchy. In a Java application, it is the same as `APPLICATION_MODAL`. It is useful when you use it in applets or applications started using Java Web Start. You can think of a browser as an application, and multiple applets as top-level windows. All applets are loaded by the same toolkit. If you display a `JDialog` with its modality type as `TOOLKIT_MODAL` in one applet, it will block inputs to any other applets in the same browser. You must grant “`toolkitModality`” `AWTPermission` to for the applet to use a `TOOLKIT_MODAL` modality. The same behavior goes with multiple applications started with Java Web Start.

[Listing 2-11](#) contains a program to experiment with modality types of `JDialog`. Use different values for the `dialog1Modality` and `dialog2Modality` variables and see how it affects blocking input in other windows.

Listing 2-11. Experimenting With Modality Types of `JDialog`

```
// JDialo gModalityTest.java
package com.jdojo.swing;

import javax.swing.JButton;
import javax.swing.JDialog;
import javax.swing.JFrame;
import java.awt.Dialog.ModalityType;

public class JDialo gModalityTest {
    public static void main(String[] args) {
        JFrame frame = new JFrame("My JFrame");
```

```

        frame.setBounds(0, 0, 400, 400);
        frame.setVisible(true);

        final ModalityType dialog1Modality
= ModalityType.DOCUMENT_MODAL;
        final ModalityType dialog2Modality
= ModalityType.DOCUMENT_MODAL;
        final JDialog dailog1 = new
JDialog(frame, "JDialog 1");

        JButton openBtn = new JButton("Open
JDialog 2");
        openBtn.addActionListener(e -> {
            JDialog d2 = new JDialog(dailog1,
"JDialog 2");
            d2.setBounds(200, 200, 200, 200);
            d2.setModalityType(dialog2Modality)
            d2.setVisible(true);
        });

        dailog1.add(openBtn);
        dailog1.setBounds(20, 20, 200, 200);
        dailog1.setModalityType(dialog1Modality);
        dailog1.setVisible(true);
    }
}

```

A JDialog is used frequently in a Swing application, for example, to display an error message to users. It is time consuming to create a custom JDialog every time you need a dialog window. The Swing designers realized this. They gave us the JOptionPane class that makes our life easier when using the frequently used JDialog types. I will discuss JOptionPane in the next section.

Standard Dialogs

The JOptionPane class makes it easy for you to create and show standard

modal dialogs. It contains many static methods to create different kinds of `JDialog`, fill them with details, and show them as a modal `JDialog`. When a `JDialog` is closed, the method returns a value to indicate the user's action on the `JDialog`. Note that the `JOptionPane` class is inherited from the `JComponent` class. The `JOptionPane` class is not related to the `JDialog` class in any way, except that it is used as a factory to create standard dialogs. It also contains methods that return a `JDialog` object, which you can customize and use in your application. You can display the following four kinds of standard dialogs:

- Message Dialog
- Confirmation Dialog
- Input Dialog
- Option Dialog

The static methods of the `JOptionPane` class to display a standard `JDialog` has name like `showXxxDialog()`. The `Xxx` can be replaced with `Message`, `Confirm`, `Input`, and `Option`. You also have another version of the same method as `showInternalXxxDialog()`, which uses a `JInternalFrame` to display the dialog details instead of a `JDialog`. All four types of standard dialogs accept different types of arguments and return different types of values. [Table 2-17](#) shows the list of arguments of these methods and their descriptions.

Table 2-17. List of Standard Argument Types and Their Values Used With `JOptionPane`

Argument Name	Argument Type	Description
<code>parentComponent</code>	<code>Component</code>	The <code>JDialog</code> is centered on the specified parent component. The top-level container that contains this component becomes the owner of the displayed <code>JDialog</code> . If it is <code>null</code> , the <code>JDialog</code> is centered on the screen.
<code>message</code>	<code>Object</code>	Typically, it is a string that needs to be displayed as a message in the dialog box. However, you can pass any object. If you pass a Swing component, it is simply displayed in the dialog box. If you pass an <code>Icon</code> , it is displayed in a <code>JLabel</code> . If you pass any other object,

		the <code>toString()</code> method is called on that object and the returned string is displayed. You can also pass an array of objects (typically an array of strings) and each element of the array will be displayed vertically one after another.
		It denotes the type of the message you want to display. Depending on the type of message, a suitable icon is displayed in the dialog box. The available message types are defined by the following constants in the <code>JOptionPane</code> class:
<code>messageType</code>	<code>Int</code>	<code>ERROR_MESSAGE,</code> <code>INFORMATION_MESSAGE,</code> <code>WARNING_MESSAGE,</code> <code>QUESTION_MESSAGE,</code> <code>PLAIN_MESSAGE.</code>
		The <code>PLAIN_MESSAGE</code> type does not display any icon. Another argument, which is of the <code>Icon</code> type, lets you specify your own icon to be displayed in the dialog box.
		It denotes the buttons that need to be displayed in the dialog box. The following is the list of constants defined in the <code>JOptionPane</code> class that you can use to get the standard buttons in a dialog box:
<code>optionType</code>	<code>Int</code>	<code>DEFAULT_OPTION,</code> <code>YES_NO_OPTION,</code> <code>YES_NO_CANCEL_OPTION,</code> <code>OK_CANCEL_OPTION</code>
		The <code>DEFAULT_OPTION</code> displays an <code>OK</code> button. Other options display a set of buttons, as their names suggest. You can customize the number of buttons and their text by supplying the <code>options</code> arguments to the <code>showOptionDialog()</code> method.
<code>options</code>	<code>Object[]</code>	This argument lets you customize the set of buttons that are displayed in a dialog box. If you pass a <code>Component</code> object in the array, that component is displayed in the row of buttons. If you specify an <code>Icon</code> object, the icon is displayed in a <code>JButton</code> . For any other types of objects that you pass, a <code>JButton</code> is displayed and the text of the <code>JButton</code> is the string returned from the <code>toString()</code> method of that object. Typically, you pass an array of strings as this argument to display a custom set of buttons in the dialog box.
<code>title</code>	<code>String</code>	It is the text that is displayed as the title of the dialog box. A default title is supplied if you do not pass this argument.
<code>initialValue</code>	<code>Object</code>	This argument is used in input dialogs. It denotes the initial value that is displayed in the input dialog.

Typically, when the user closes a dialog box, you want to check what button the user used to close the dialog box. There is an exception, though, when the dialog box has only one button, say an OK button. In such a case, either the method you use to display the dialog box does not return a value, or you simply ignore the returned value. Here is the list of constants that you can use to check for equality with the returned value:

- OK_OPTION
- YES_OPTION
- NO_OPTION
- CANCEL_OPTION
- CLOSED_OPTION

The CLOSED_OPTION indicates that the user closed the dialog box using the close (X) menu button on the title bar or using other means such as by pressing Ctrl + F4 keys on the keyboard on the Windows platform. Other constants denote the normal button usage on the dialog box; for example, OK_OPTION denotes that the user clicked the OK button on the dialog box to close it.

JOptionPane also lets you customize the labels for the buttons that it shows. You are not limited to the standard set of buttons either. That is, you can display any number of buttons in the dialog box. In such cases, the JOptionPane's method used to display the dialog box will return 0 for the first button click, 1 for the second button click, 2 for the third button click, and so on. You will see an example of this type, when the showOptionDialog () method of the JOptionPane class is discussed shortly.

You can show a message dialog by using one of the showMessageDialog () static methods of the JOptionPane class. A message dialog always shows some kind of information to the user with one button, usually the OK button. The method does not return any value because all the user can do is click the OK button to close the dialog box. Signatures of the showMessageDialog () methods are as shown:

- showMessageDialog (Component parentComponent, Object message)

- `showMessageDialog(Component parentComponent, Object message, String title, int messageType)`
- `showMessageDialog(Component parentComponent, Object message, String title, int messageType, Icon icon)`

The following snippet of code shows a message dialog, as shown in [Figure 2-31](#).

```
// Show an information message dialog
JOptionPane.showMessageDialog(null, " JOptionPane is
cool!", "FYI",
JOptionPane.INFORMATION_MESSAGE);
```



[Figure 2-31.](#) An information message dialog using the `JOptionPane.showMessageDialog()` method

You can display a confirmation dialog box by using the `showConfirmDialog()` method. When you use this method, you are interested in knowing the user's response, which is indicated by the return value of the method. The following snippet of code displays a confirmation dialog, as shown in [Figure 2-32](#), and handles the user's response:

```
// Show a confirmation dialog box
int response = JOptionPane.showConfirmDialog(null,
    "Are you sure you want to save the
changes?", "Confirm Save Changes",
    JOptionPane.YES_NO_CANCEL_OPTION,
```

```

JOptionPane.QUESTION_MESSAGE);

switch (response) {
    case JOptionPane.YES_OPTION:
        System.out.println("You chose
yes");
        break;
    case JOptionPane.NO_OPTION:
        System.out.println("You chose
no");
        break;
    case JOptionPane.CANCEL_OPTION:
        System.out.println("You chose
cancel");
        break;
    case JOptionPane.CLOSED_OPTION:
        System.out.println("You closed the
dialog box.");
        break;
    default:
        System.out.println("I do not know
what you did ");
}

```


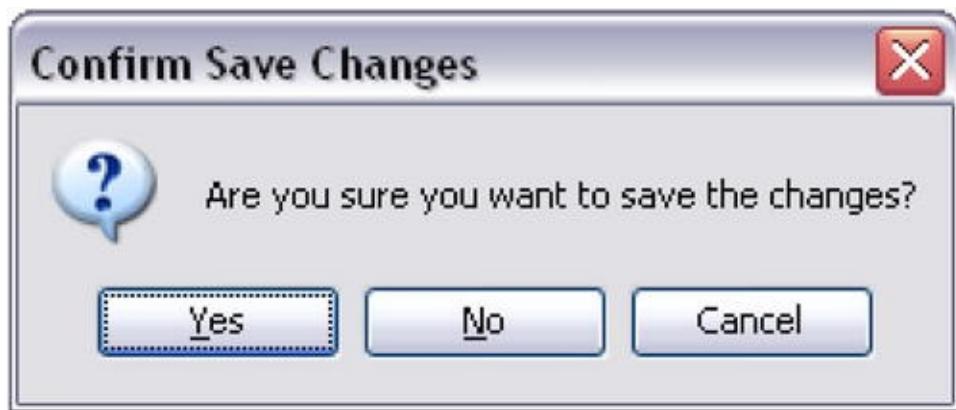


Figure 2-32. A confirmation dialog box using the `JOptionPane.showConfirmDialog()` method

You can ask the user for an input using the `showInputDialog()` method. You can specify an initial value for the user's input. If you want the user to select a value from a list, you can pass an object array that contains the list. The UI will

display the list in a suitable component such as a JComboBox or a JList. The following snippet of code displays an input dialog, as shown in [Figure 2-33](#).

```
// Ask the user to enter some text about JOptionPane  
String response = JOptionPane.showInputDialog("Please  
enter your opinion about input dialog.");  
  
if (response == null) {  
    System.out.println("You have cancelled the  
input dialog.");  
}  
else {  
    System.out.println("You entered: " + response);  
}
```

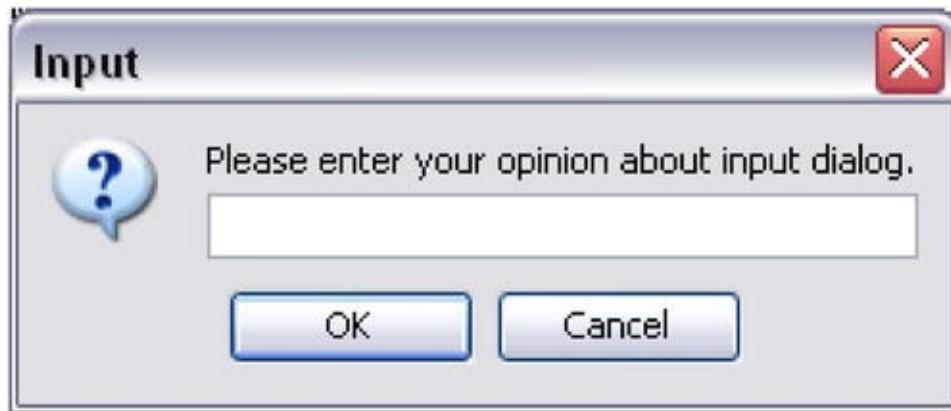

[Figure 2-33](#). A simple input dialog

The version of the showInputDialog() method that you have used returns a String, which is the text the user enters in the input field. If the user cancels the input dialog, it returns null.

The following snippet of code displays an input dialog with a list of choices. The user may select one of the choices from the list. The dialog box is shown in [Figure 2-34](#). This version of the showInputDialog() method returns an Object, not a String.

```
// Show an input dialog that shows the user three  
options: "Cool!", "Sucks", "Don't know".  
// The default selected value is "Don't know".  
JComponent parentComponent = null;
```

```

Object message = "Please select your opinion about
JOptionPane";
String title = "JOptionPane Input Dialog";
int messageType = JOptionPane.INFORMATION_MESSAGE;
Icon icon = null;
Object[] selectionValues = new String[] {"Cool!",
"Sucks", "Don't know"};
Object initialValue = selectionValues[2];
Object response
= JOptionPane.showInputDialog(parentComponent,
message,
title, messageType, icon, selectionValues,
initialSelectionValue);

if (response == null) {
    System.out.println("You have cancelled the
input dialog.");
}
else {
    System.out.println("You entered: " + response);
}

```

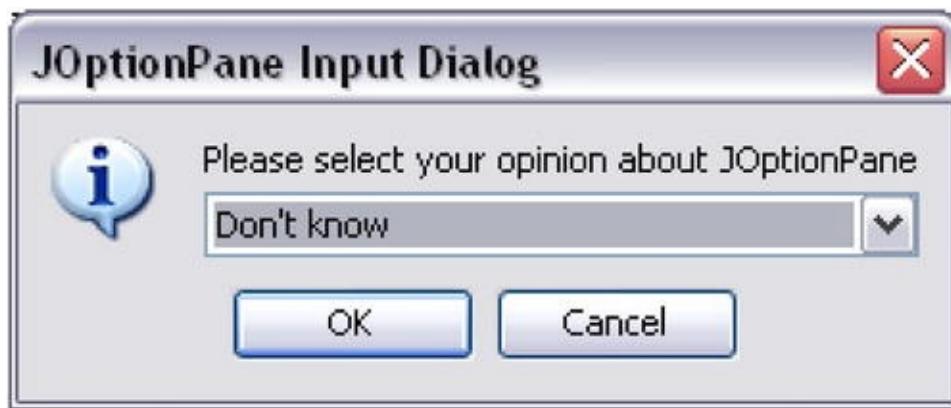


Figure 2-34. An input dialog with a list of choices

Finally, you can customize the option buttons using the `showOptionDialog()` method that is declared as follows:

```

int showOptionDialog(Component parentComponent, Object
message,
String title, int optionType, int messageType, Icon

```

```
icon, Object[] options,  
Object initialValue)
```

The options parameter specifies the user's options. If you pass components in the options parameter, the components are displayed as options. If you pass any other objects such as strings, a button is displayed for each element in the options array.

The following snippet of code shows how to display custom buttons in a dialog box. It asks the user his opinion about a JOptionPane. The resulting dialog box is shown in [Figure 2-35](#).

```
JComponent parentComponent = null;  
Object message = "How is JOptionPane?";  
String title = "JOptionPane Option Dialog";  
int messageType = JOptionPane.INFORMATION_MESSAGE;  
Icon icon = null;  
Object[] options = new String[] {"Cool!", "Sucks",  
"Don't know" };  
Object initialOption = options[2];  
int response = JOptionPane.showOptionDialog(null,  
message, title,  
JOptionPane.DEFAULT_OPTION,  
JOptionPane.QUESTION_MESSAGE,  
icon, options,  
initialOption);  
switch(response) {  
    case 0:  
    case 1:  
    case 2:  
        System.out.println("You selected:"  
+ options[response]);  
        break;  
    case JOptionPane.CLOSED_OPTION:  
        System.out.println("You closed the dialog  
box.");  
        break;  
    default:  
        System.out.println("I don't know what you  
did.");
```

}



Figure 2-35. Customizing the Option buttons using the `JOptionPane.showOptionDialog()` method

By default, all dialog boxes, which you have displayed in this section, are not resizable. You want to customize them so that they are resizable. You can customize the dialog box displayed by the static methods of the `JOptionPane` by using the `createDialog()` methods of `JOptionPane` and performing a sequence of steps.

1. Create an object of `JOptionPane`.
2. Optionally, customize the properties of `JOptionPane` using its methods.
3. Use `createDialog()` method to get the reference of the dialog box.
4. Customize the dialog box.
5. Display the dialog box using its `setVisible(true)` method.

The following snippet of code displays the custom resizable dialog box shown in [Figure 2-36](#).

```
// Show a custom resizable dialog box using
JOptionPane pane = new JOptionPane("JOptionPane is
cool!", JOptionPane.INFORMATION_MESSAGE);
String dialogTitle = "Resizable Custom Dialog Using
JOptionPane";
```

```
JDialog dialog = pane.createDialog(dialogTitle);  
dialog.setResizable(true);  
dialog.setVisible(true);
```



Figure 2-36. A custom dialog box using the `JOptionPane.createDialog()` method

File and Color Choosers

Swing has two built-in JDialogs that makes it easier to select a file/directory from the file system or a color graphically. A `JFileChooser` lets the user select a file from the file system. It provides non-static methods, unlike those you have seen in a `JOptionPane`, which create and show a file chooser component in a `JDialog`.

A `JColorChooser` is a Swing component that lets you choose a color graphically in a `JDialog`. It provides a static method, as you have seen in a `JOptionPane`, which creates and shows a color chooser component in a `JDialog`.

Tip The `JFileChooser` class provides non-static methods to create and show `JDialogs`, whereas the `JColorChooser` class provides a static method for the same purpose. The implication of having a static or a non-static method is that a non-static method lets you customize the `JDialog` whereas a static method lets you customize the `JDialog` only through its arguments. It means that you can customize the `JDialog` being displayed by a `JFileChooser`, but not the `JColorChooser`. Another difference is that you must create an object of the `JFileChooser` class to use it. It is preferred to reuse the same

`JFileChooser` object because it remembers the last visited directory, so when you reuse it, it navigates you to the last visited directory by default.

JFileChooser

Here are the steps you need to perform to display a file chooser in a `JDialog`.

1. Create an object of the `JFileChooser` class.
2. Optionally, customize its properties using its methods.
You can customize properties such as should it let the user choose only files, only directories, or both; should it let the user select multiple files; apply a file filter criteria to show files based on your criteria, etc.
3. Use one of the three non-static methods,
`showOpenDialog()`, `showSaveDialog()`, or
`showDialog()`, to display it in a `JDialog`.
4. Check for the return value, which is an `int`, from the method call in the previous step. If it returns `JFileChooser.APPROVE_OPTION`, the user made a selection. The other two possible return values are `JFileChooser.CANCEL_OPTION` and `JFileChooser.ERROR_OPTION`, which indicate that either user cancelled the dialog box or some kind of error occurred. To get the selected file, call the `getSelectedFile()` or `getSelectedFiles()` method, which returns a `File` object and a `File` array, respectively. Note that a `JFileChooser` component only lets you select a file from a file system. It does not save or read a file. You can do whatever you like with the file reference returned from it.
5. You can reuse the file chooser object. It remembers the last visited folder.

By default, a `JFileChooser` starts displaying files from the user's default

directory. You can specify the initial directory in its constructor or using its `setCurrentDirectory()` method.

```
// Create a file chooser with the default initial
// directory
JFileChooser fileChooser = new JFileChooser();

// Create a file chooser, with an initial directory of
// C:\myjava.
// You can specify a directory path according to your
// operating system syntax.
// C:\myjava is using Windows file path syntax.
JFileChooser fileChooser = new
JFileChooser("C:\\myjava");
```

By default, a file chooser only allows files to be selected. Let's customize it so you can select a file or a directory. It should also allow multiple selections. The following snippet of code does this customization:

```
// Let the user select files and directories
fileChooser.setFileSelectionMode(JFileChooser.FILES_AND_DIRECTORIES);

// Allow multiple selection
fileChooser.setMultiSelectionEnabled(true);
```

Let's display an open file chooser dialog box and check if the user selected a file. If the user makes a selection, print the file path on the standard output. The following snippet of code displays the dialog box shown in [Figure 2-37](#).

```
// Display an open file chooser
int returnValue = fileChooser.showOpenDialog(null);

if(returnValue == JFileChooser.APPROVE_OPTION) {
    File selectedFile
= fileChooser.getSelectedFile();
    System.out.println("You selected: "
+ selectedFile);
}
```

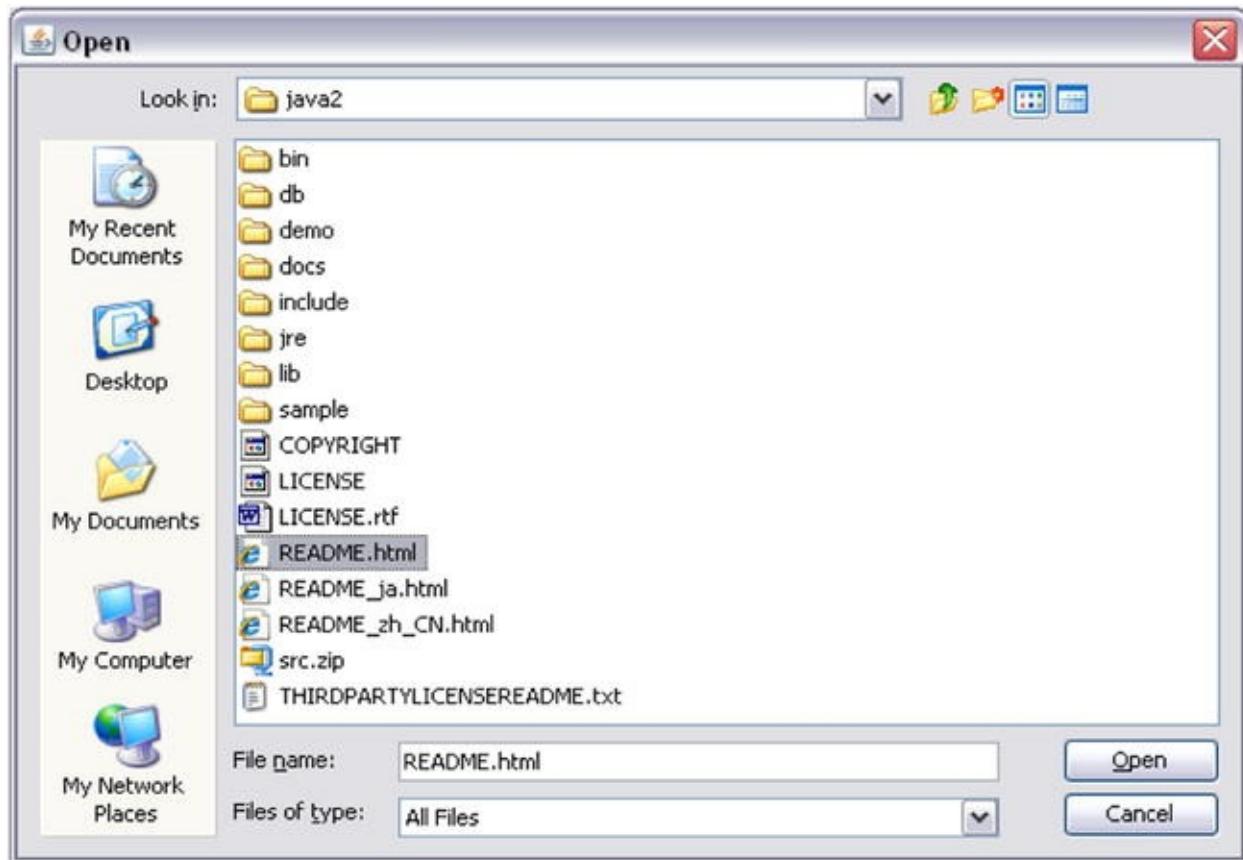


Figure 2-37. An open file chooser dialog box using a `JFileChooser`

All the three methods of the `JFileChooser` class accept a `Component` argument. It is used as the owner for the `JDialog` it displays and for centering the dialog box. Pass `null` as its parent component to center it on the screen.

Note that, in [Figure 2-37](#), there are two buttons. One is labeled `Open` and another `Cancel`. The `Open` button is called the approve button. The title of the dialog box is `Open`. When you use the `showSaveDialog()` method of `JFileChooser`, you get the same dialog box, except that the text `Open` for the button and the title are replaced with the text `Save`. You can customize the dialog box title and the approve button text before displaying it as follows:

```
// Change the dialog's title  
fileChooser.setDialogTitle("Open a picture file");  
  
// Change the button's text  
fileChooser.setApproveButtonText("Open File");
```

The third method, `showDialog()`, lets you specify the approve button text

and dialog title as shown:

```
// Open a file chooser with Attach as its title and
approve button's text
int returnValue = fileChooser.showDialog(null,
"Attach");
if (returnValue == JFileChooser.APPROVE_OPTION) {
    File selectedFile
= fileChooser.getSelectedFile();
    System.out.println("Attaching file: "
+ selectedFile);
}
```

Note that setting the approve button's text does not change the return value of the method. You still need to check if it returned a `JFileChooser.APPROVE_OPTION` so you can proceed with getting the selected file.

Tip The default text for the approve button, when you use the `showOpenDialog()` and `showSaveDialog()` methods, depends on the look-and-feel. On Windows, they are `Open` and `Save`, respectively.

A `JFileChooser` lets you set a file filter. A file filter is a set of criteria that it applies before it shows a file in the dialog box. A file filter is an object of the `FileFilter` class, which is in the `javax.swing.filechooser` package. The `FileFilter` class is an abstract class. To create a file filter, you need to create a class inheriting it from the `FileFilter` class and override the `accept()` and `getDescription()` methods. The `accept()` method is called with a file reference when the file chooser wants to show a file. If the `accept()` method returns `true`, the file is shown. Otherwise, the file is not shown. The following snippet of code creates and sets a file filter to only show either a directory or a file with a `.doc` extension. Keep in mind that user needs to navigate to the file system and you must show the directories.

```
// Create a file filter to show only a directory or
.doc files
FileFilter filter = new FileFilter() {
```

```

@Override
public boolean accept(File f) {
    if (f.isDirectory()) {
        return true;
    }

    String fileName
= f.getName().toLowerCase();
    if (fileName.endsWith(".doc")) {
        return true;
    }

    return false; // Reject any other files
}

@Override
public String getDescription() {
    return "Word Document";
}
};

// Set the file filter
fileChooser.setFileFilter(filter);

int returnValue = fileChooser.showDialog(null,
"Attach");
if (returnValue == JFileChooser.APPROVE_OPTION) {
    // Process the file
}

```

Setting a file filter based on a file extension is so common that there is a direct support for it through the `FileNameExtensionFilter` class that inherits from the `FileFilter` class. Its constructor accepts the file extensions and its description. The second argument is a variable length argument. Note that a file extension is the part of the file name after the last dot. If a file name does not have a dot in its name, it does not have an extension. After you create an object of the `FileNameExtensionFilter` class, you need to call the `addChoosableFileFilter()` method of the file chooser to set a filter. The following snippet of code adds “java” and “jav” as file name extension filters.

```
FileNameExtensionFilter extFilter =  
    new FileNameExtensionFilter("Java Source File",  
"java", "jav");  
fileChooser.addChoosableFileFilter(extFilter);
```

You can add multiple file name extension filters to a file chooser. They are shown in a file chooser drop-down list as file types. If you want to restrict users to selecting only the files that you have set as the file filter, you need to remove the one file filter that lets the user select any files, which is called “accept all files filter”. It is displayed as “All Files (*.*)” as file type on Windows.

```
// Disable "accept all files filter"  
fileChooser.setAcceptAllFileFilterUsed(false);
```

You can check if “accept all files filter” is enabled by using the `isAcceptAllFileFilterUsed()` method, which returns `true` if a file chooser is using this filter. You can get the reference of “accept all files filter” using the `getAcceptAllFileFilter()` method. The following snippet of code sets the “accept all files filter” if it is not already set.

```
if (!fileChooser.isAcceptAllFileFilterUsed()) {  
    fileChooser.setAcceptAllFileFilterUsed(true);  
}
```

Tip A `JFileChooser` has many features that you can use in your application. Sometimes you may want to get the associated icon for a file type. You can get the associated icon for a file type by using the file chooser’s `getIcon(java.io.File file)` method, which returns an `Icon` object. Note that you can display an `Icon` object using a `JLabel` component. It also provides a mechanism to listen for selection changes and other actions performed by the user when it is shown in the dialog box.

JColorChooser

A `JColorChooser` lets you select a color using a dialog box. It is customizable. You can add more panels to the default color chooser. You can also embed the color chooser component in a container. It provides ways to

listen to the user actions on the color chooser component. Its common use is very simple. You need to call its `showDialog()` static method, which will return a `java.awt.Color` object that represents the color that the user selects. Otherwise, it returns `null`. I will cover the `Color` class later in this chapter.

The `showDialog()` method's signature is as follows. It lets you specify the parent component and the title for the dialog box. You can also set the initial color, which will be displayed in the dialog box.

- `static Color showDialog(Component parentComponent, String title, Color initialColor)`

The following snippet of code lets the user select a color using a `JColorChooser` and prints a message on the standard output:

```
// Display a color chooser dialog
Color color = JColorChooser.showDialog(null, "Select
a color", null);

// Check if user selected a color
if (color == null) {
    System.out.println("You cancelled or closed the
color chooser");
}
else {
    System.out.println("You selected color: "
+ color);
}
```

JWindow

Like a `JFrame`, a `JWindow` is another top-level container. It is as an undecorated `JFrame`. It does not have features like a title bar, windows menu, etc. It is not a very commonly used top-level container. You can use it as a splash window that displays once when the application is launched and then automatically disappears after a few seconds. Please refer to the API

documentation of the `java.awt.SplashScreen` class for more details on how to display a splash screen in a Java application. Like a `JFrame`, you can add Swing components to a `JWindow`.

Working with Colors

An object of the `java.awt.Color` class represents a color. You can create a `Color` object using its RGB (Red, Green, and Blue) components. RGB values can be specified as `float` or `int` values. As a `float` value, each component in RGB ranges from 0.0 to 1.0. As an `int` value, each component in RGB ranges from 0 to 255. There is another component called *alpha* that is associated with a color. The alpha value of a color defines the transparency of the color. As a `float`, its value ranges from 0.0 to 1.0, and as an `int`, its value ranges from 0 to 255. The value of 0.0 or 0 for alpha indicates that a color is fully transparent, whereas the value of 1.0 or 255 indicates that it is fully opaque.

You can create a `Color` object as follows. Note the value of the RGB components in the constructor `Color(int red, int green, int blue)`.

```
// Create red color
Color red = new Color(255, 0, 0);

// Create green color
Color green = new Color(0, 255, 0);

// Create blue color
Color blue = new Color(0, 0, 255);

// Create white color
Color white = new Color(255, 255, 255);

// Create black color
Color black = new Color(0, 0, 0);
```

The alpha component is implicitly set to 1.0 or 255, which means that if you do not specify the alpha component for a color, the color is opaque. The following snippet of code creates a red transparent color by specifying the alpha

component as 0:

```
// Create a transparent red color. The last argument  
of 0 is the alpha value.  
Color transparentRed = new Color(255, 0, 0, 0);
```

The `Color` class defines many color constants for commonly used colors. For example, you do not need to create a red color. Rather, you can use `Color.red` or `Color.RED` constant. The `Color.red` constant exists since Java 1.0. The uppercase version of the same constants `Color.RED` has been added in Java 1.4 to follow the naming convention for constants (a constant's name should be in uppercase). Similarly, you have `Color.black`, `Color.BLACK`, `Color.green`, `Color.GREEN`, `Color.darkGray`, `Color.DARK_GRAY`, etc. If you have a `Color` object, you can obtain its red, green, blue, and alpha components using its `getRed()`, `getGreen()`, `getBlue()`, and `getAlpha()` methods, respectively.

There is another way to specify a color, and that is by using HSB (Hue, Saturation, and Brightness) components. The `Color` class has two methods called `RGBtoHSB()` and `HSBtoRGB()` that let you convert from the RGB model to the HSB model and vice versa.

A `Color` object is used with the `setBackground(Color c)` and `setForeground(Color c)` methods of the Swing components. All Swing components inherit these methods from `JComponent`. These method calls may be ignored by a look-and-feel. The background color is the color with which a component is painted, whereas the foreground color is usually the color of the text displayed in the component. There is one important thing, called transparency, to consider when you set the background color of a component. If a component is transparent, it does not paint pixels in its bounds. Rather, it lets the container's pixels show through. In order for the background color to take effect, you must make the component opaque by calling its `setOpaque(true)` method. The following code creates a `JLabel` and sets its background color to red and foreground (or text) color to black:

```
JLabel testLabel = new JLabel("Color Test");  
  
// First make the JLabel opaque. By default, a JLabel  
is transparent.  
testLabel.setOpaque(true);
```

```
testLabel.setBackground(Color.RED);  
testLabel.setForeground(Color.BLACK);
```

Tip The object of the `Color` class is immutable. It does not have any method that will let you set the color component values after you create a `Color` object. This makes it possible to share `Color` objects.

Working with Borders

Swing gives you the ability to draw a border around the edges of components. There are different kinds of borders:

- Bevel Border
- Soft Bevel Border
- Etched Border
- Line Border
- Titled Border
- Matte Border
- Empty Border
- Compound Border

[Figure 2-38](#) shows how the different kinds of borders appear using the Windows look-and-feel.

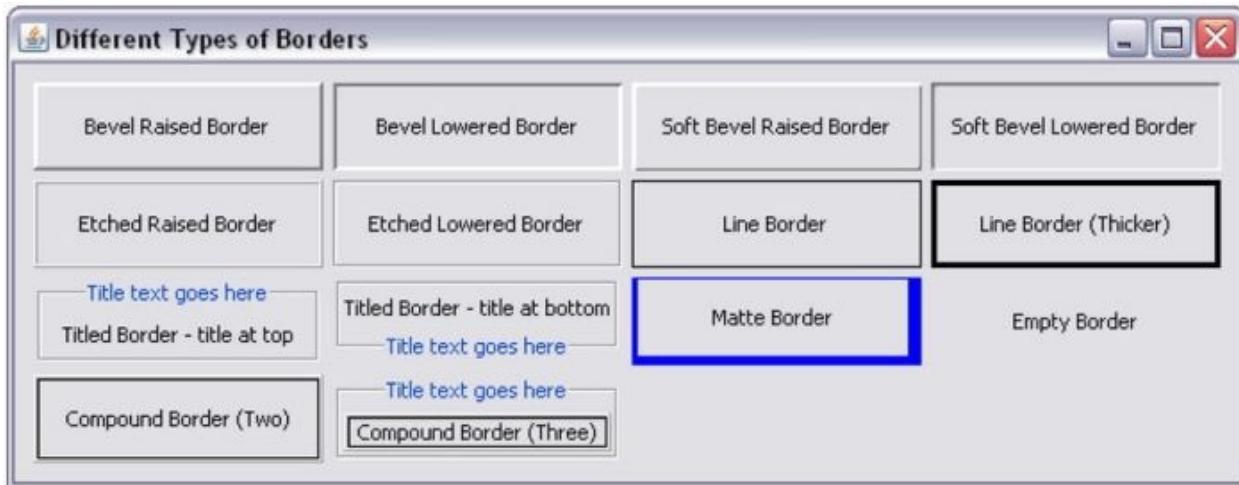


Figure 2-38. Different types of borders

Although you can set a border for any Swing component, the implementation of the Swing component may ignore it. It is very common to use a titled border with a JPanel to give a grouping effect. Many GUI tools have a group box GUI component to group the related components. Java does not have a group box component. If you need a grouping effect, you need to place your related components inside a JPanel, and set a titled border to it. [Figure 2-39](#) shows a JPanel that has five address related fields, with a titled border with a title set to Address.

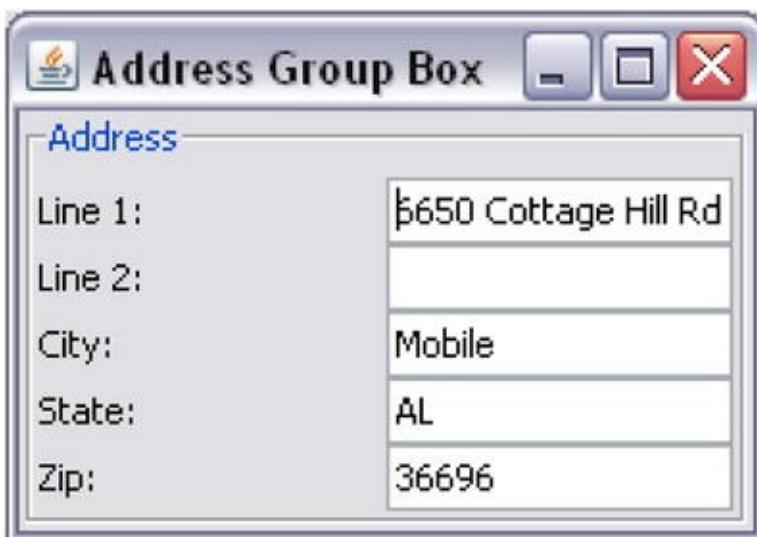


Figure 2-39. Creating a group box effect using a JPanel with a titled border

Setting a border for a Swing component is easy: you need to create a border

object and use the `setBorder(Border b)` method of the component. `Border` is an interface that is implemented by all classes whose instances represent a specific kind of border. There is one class for each kind of border. You can also create a custom border by inheriting a class from the `AbstractBorder` class. All border-related classes and the `Border` interface are in the `javax.swing.border` package.

Border objects are designed to be shared. Although you can create a border object using the `Border` class directly, it is advisable to use the `javax.swing.BorderFactory` class to create a border so that the border objects can be shared. The `BorderFactory` class takes care of caching and sharing of border objects. You just need to use its `createXXXBorder()` method to create a specific type of border, where `Xxx` is a border type. [Table 2-18](#) lists the border classes for all border types.

Table 2-18. Available Border Classes

Type of Border	Border Class
Bevel Border	<code>BevelBorder</code>
Soft Bevel Border	<code>SoftBevelBorder</code>
Etched Border	<code>EtchedBorder</code>
Line Border	<code>LineBorder</code>
Titled Border	<code>TitledBorder</code>
Matte Border	<code>MatteBorder</code>
Empty Border	<code>EmptyBorder</code>
Compound Border	<code>CompoundBorder</code>

The following snippet of code creates different kinds of borders:

```
// Create bevel borders
```

```
Border bevelRaisedBorder
= BorderFactory.createBevelBorder(BevelBorder.RAISED) ;
Border bevelLoweredBorder
= BorderFactory.createBevelBorder(BevelBorder.LOWERED)

// Create soft bevel borders
Border softBevelRaisedBorder
= BorderFactory.createSoftBevelBorder(BevelBorder.RAISED)
Border softBevelLoweredBorder
= BorderFactory.createSoftBevelBorder(BevelBorder.LOWERED)

// Create etched borders
Border etchedRaisedBorder
= BorderFactory.createEtchedBorder(EtchedBorder.RAISED)
Border etchedLoweredBorder
= BorderFactory.createEtchedBorder(EtchedBorder.LOWERED)

// Create line borders
Border lineBorder
= BorderFactory.createLineBorder(Color.BLACK) ;
Border lineThickerBorder
= BorderFactory.createLineBorder(Color.BLACK, 3);

// Create titled borders
Border titledBorderAtTop =
    BorderFactory.createTitledBorder(etchedLoweredBorder,
                                    "Title text goes
here",
                                    TitledBorder.CENTER,
                                    TitledBorder.TOP);
Border titledBorderAtBottom =
    BorderFactory.createTitledBorder(etchedLoweredBorder,
                                    "Title text goes
here",
                                    TitledBorder.CENTER,
                                    TitledBorder.BOTTOM);

// Create a matte border
Border matteBorder
= BorderFactory.createMatteBorder(1,3,5,7,
```

```
Color.BLUE);  
  
// Create an empty border  
Border emptyBorder  
= BorderFactory.createEmptyBorder();  
  
// Create compound borders  
Border twoCompoundBorder  
= BorderFactory.createCompoundBorder(etchedRaisedBorder,  
    lineBorder);  
Border threeCompoundBorder =  
    BorderFactory.createCompoundBorder(titledBorderA  
    twoCompoundBorder);
```

You can set a border to a component as follows:

```
myComponent.setBorder(matteBorder);
```

A bevel border gives you a three-dimensional effect by using shadows and highlights to the inside and outside edges of the border. You can have a raised or lowered effect. A soft bevel border is a bevel border with softer corners.

An etched border gives you a carved effect. It comes in two flavors: raised and lowered.

A line border simply draws a line. You can specify the color and thickness of the line.

You can supply a title to any border type. The title of a border is text that can be displayed at a specified position in the border, such as in the middle of the top/bottom border or above top/below bottom. You can also specify the justification of the title text, its color, and font. Note that you must have another border object to use a title border. A title border just lets you supply the title text to another kind of border.

A matte border lets you decorate a border with an icon. If you do not have an icon, you can specify the border's thickness.

An empty border, as the name implies, doesn't display anything. Can you guess why you need an empty border? A border adds spaces around a component. If you just want to add spaces around a component, you can use an empty border. An empty border lets you specify the spacing to be used for all four sides separately.

A compound border is a composite border that lets you combine any two

kinds of borders into one border object. There are no restrictions on the number of levels of nesting. You can combine three borders by creating a compound border with the first two borders, and then combine the compound border with the third border to create the final compound border.

Working with Fonts

A font is used to represent text visually such as on a computer screen, printed paper, or any other device. An object of the `java.awt.Font` class represents a font in a Java program. You have been using the `Font` object in almost every program without referring to the `Font` class directly. Java took care of displaying the text in a specific font for you. For example, you have been using buttons, which display a label. To display the button's label, Java has been using a default font. You can specify a font for any text that you display in a Java program using a `Font` object. Using a `Font` object in code is easy: create an object of the `Font` class, and use the `setFont(Font f)` method of the component. Let's define the term "font" and related terms before using the `Font` class.

In the computer's memory, everything is a number represented in terms of 0s and 1s. So a character is also represented by 0s and 1s in memory. How do you represent a character on a computer screen or a piece of paper? A character is presented on a screen or a paper using a symbol. The shape of the symbol that represents a character is called a *glyph*. You can think of a glyph as a graphic representation (or image) of a character. The relationship between a character and a glyph is not always one-to-one.

A specific design of glyphs for a set of characters is called a *typeface*. Note that a typeface is the design aspect of the visual representation of characters (glyphs) and it does not refer to a specific implementation of glyphs. [Table 2-19](#) lists some of the categories of typefaces with their descriptions and sample texts. The sample text in the table may not show in the same typeface if this is viewed on a device (e.g. a Kindle) that does not support all typefaces. Some names of typefaces are Times, Courier, Helvetica, Garamond, etc.

Table 2-19. Examples of Typefaces

Typeface	Description	Sample Text
	Glyphs have finishing strokes at the end of the line.	

Serif	Note the difference in how the ending stroke of each character ends for serif and sans serif. On Windows, it is called Roman. Example: Times New Roman.	The quick brown fox...
Sans serif	Unlike serif, glyphs have no ending strokes. Compare the text sample for this category and for serif. You will find that glyphs for sans serif are made up of plain lines. On Windows, it is called Swiss. Example: Arial.	The quick brown fox...
Cursive	It looks like handwritten text where subsequent glyphs in a word are often joined. It is typically used in calligraphy. On Windows, it is called Script. Example: Mistral AV.	<i>The quick brown fox...</i>
Fantasy	It is a decorative typeface. On Windows, it is called Decorative. Example: Impact.	The quick brown fox...
Monospace	All glyphs that represent all characters are of the same width. On Windows, it is called Modern. Typically, it is used in computer programs.	The quick brown fox...

Apart from its shape design, the visual representation of a character has two other components: a style and a size. The style refers to its characteristics such as bold (blackness or lightness), italic, and regular (or roman). The size is measured in 10, 12, 14, etc. The height of a character is specified in *points*, where a point is 1/72 of an inch. The width of a character is specified in a *pitch*. A pitch determines how many characters can be shown in an inch. A typical value for a pitch ranges from 8 to 14.

Now let's define the term "font." A font is a set of glyphs in a specific typeface, style, and size to represent a set of characters. You can have fonts that use the same typeface, but they are of different styles and sizes. This collection of such fonts (the same typeface but different styles and sizes) is known as a font family. For example, Times is a font family name that contains fonts like Times Roman, Times Bold, Times Bold Italic, etc.

A font may be categorized as a bitmapped font or a vector font (also known as an object-oriented font or outline font) depending on the way it is stored and rendered. In a bitmapped font, each character is stored in a bitmap form (representing every bit) of a particular style and size. When you need to render a character on a screen or print it on a piece of paper, you need to locate the bitmap of the character of that style and size and render it. In a vector font, a geometrical algorithm defines each character's shape without referring to a specific size. When a character needs to be rendered in a vector font in a specific size, the algorithm is applied for that size. This is the reason a vector font is also

known as a scalable font. TrueType and PostScript are the font technologies that use vector fonts. All Java implementation are required to support a TrueType font.

The number of fonts available on a computer may vary considerably. Your operating system may install some fonts, you may add some fonts, or you may delete some fonts. Since Java was designed to work on various operating systems, it lets you use a logical font family name of a font and it will figure out the best physical (the real one) font for you. This way, you do not have to worry about the actual font names, and if they will be available on all computers on which your programs will be executed. Java defines five logical font family names and maps them to physical font family names depending on the computer it is running on. The five logical font family names are as follows:

- Serif
- SansSerif
- Dialog
- DialogInput
- Monospace

You need to specify three elements when you create a font object: the logical family name, the style, and the size. The following snippet of code creates some Font objects:

```
// Create serif, plain font of size 10
Font f1 = new Font(Font.SERIF, Font.PLAIN, 10);

// Create SansSerif, bold font of size 10
Font f2 = new Font(Font.SANS_SERIF, Font.BOLD, 10);

// Create dialog, bold font of size 15
Font f3 = new Font(Font.DIALOG, Font.BOLD, 15);

// Create dialog input, bold and italic font of size
15
Font f4 = new Font(Font.DIALOG_INPUT,
Font.BOLD|Font.ITALIC, 15);
```

The Font class contains constants for the logical font family names. If you

want to apply more than one style to a font object, such as bold as well as italic, you need to use a bit mask union of `Font.BOLD` and `Font.ITALIC` as in `Font.BOLD | Font.ITALIC`.

To set the font for a Swing component, you need to use its `setFont()` method of the component, like so:

```
 JButton closeButton = new JButton("Close");  
closeButton.setFont(f4);
```

The `Font` class has several methods that let you work with a font object. For example, you can use the `getFamily()`, `getStyle()`, and `getSize()` methods to get the family name, style and size of a font object, respectively.

Validating Components

A component can be valid or invalid. The phrase “component” in this section also includes containers, unless specified otherwise. You can use the `isValid()` method to check if a component is valid. The method returns `true` if the component is valid. Otherwise, it returns `false`. A component is said to be valid if its size and position have been computed and its children are also valid. If a component is invalid, it means that its size and position need to be recomputed and it needs to be laid out again in its container.

When you add/remove a component to/from a container, the container is marked invalid. Before the container is made visible for the first time, the container is validated. The validation process of a container computes the size and location of all children in its containment hierarchy. Consider the following snippet of code to show a frame:

```
MyFrame frame = new MyFrame("Test Frame");  
frame.pack();  
frame.setVisible(true);
```

The `pack()` method does two things:

- First, it computes the size and position of all children of the frame (that is, validates the frame).
- Second, it resizes the frame, so its children just fit into it.

The `setVisible()` method in the code is smart enough not to validate the frame again because the `pack()` method has already validated the frame. If you do not call the `pack()` method, before calling the `setVisible()` method, the `setVisible()` method will validate the frame.

So, a component is valid before it is displayed for the first time. How does a component become invalid? Adding/removing a component to/from a container makes a container invalid. Setting some properties such as the size of a component will also make that component invalid. When a component becomes invalid, its invalidity is propagated up the containment hierarchy. You can also invalidate a component or container by calling its `invalidate()` method. Note that calling the `invalidate()` method will make the component invalid, and it propagates the invalidity up the containment hierarchy. The reason it needs to mark all containers up the containment hierarchy as invalid is that if a component is laid out again (by recomputing its size/location), it will also affect the other component's size/position. So, if a component is invalidated, all components and containers up the containment hierarchy are also marked invalid.

What can you do to validate a component again? You need to use the `validate()` method of the component or the container. Unlike the `invalidate()` method, the `validate()` method propagates down the containment hierarchy and it validates all child components/containers of the component on which it is called. You may need to call the `repaint()` method

after you call the `validate()` method so that the screen is repainted.

You can also revalidate a component. Note that the revalidation option is only available for a `JComponent` and it is not applicable to a container. You can revalidate a component by calling its `revalidate()` method. It schedules a `validate()` method call on the parent container. Which parent container of the component is validated? Is it the immediate parent, grandparent, or great-grandparent, etc.? A container can be a validation root. You can test if a container is a validation root by using the `isValidRoot()` method. If this method returns `true`, the container is a validation root. When you call the `revalidate()` method on a component, it keeps going up in the containment hierarchy until it finds a container that is a validation root. `JRootPane` and `JScrollPane` are validation roots. The call to the `validate()` method for the validation root is scheduled on the event dispatching thread. If there are multiple calls to `revalidate()`, they are all combined and a component is revalidated only once.

Painting Components and Drawing Shapes

The painting mechanism is central to any GUI. Do you know what it takes to show you a `JFrame` on the screen? It is a very complex process. It is done through painting an image, which you see on the screen as a `JFrame`. When you press a `JButton` inside a `JFrame`, the region occupied by that `JButton` is repainted using different shades and colors to give you an impression that the button has been pressed. Most of the time, Swing paints the appropriate region of the screen at the appropriate time. You may encounter situations where it is necessary for you to repaint a region of your Swing component. For example, when you add or remove a component from a Swing container after it is visible, you need to validate and repaint the container so that the modified area on the screen is repainted properly.

There is a manager for everything in Swing! You also have a repaint manager that is an instance of the `RepaintManager` class. It provides the painting service. You can request to repaint a component by calling the `repaint()` method on the component. The `repaint()` method is

overloaded. You can also repaint only a part of the component instead of the entire component. The calls to the `repaint()` method are queued to the event dispatching thread. The repaint manager will repaint the component only once if many requests for repainting are pending when it starts repainting the component.

How would you perform custom painting on a Swing component? Swing lets you perform custom painting on a component using a callback mechanism. The `JComponent` class has a callback method called

`paintComponent(Graphics g)`. The `Graphics` class is in the `java.awt` package. It is used to draw on a component. Note that drawing can be realized on various devices such as on a computer screen, an off-screen image, or a printer. To implement a custom painting for a component, override its `paintComponent()` method. The `paintComponent()` method in the `JComponent` class takes care of painting the background of the component. To make sure that the component's background is painted properly, you need to invoke the `JComponent`'s `paintComponent()` method from the `paintComponent()` method of your component. Typical code for the `paintComponent()` method is as follows:

```
import java.awt.Graphics;

public class YourCustomSwingComponent extends
ASwingComponent {
    @Override
    public void paintComponent(Graphics g) {
        // Paint the background
        super.paintComponent(g);

        // Your custom painting code goes here
    }
}
```

The `paintComponent()` method of a component is called whenever repainting is needed or when the program calls the `repaint()` method.

When you call the `repaint()` method on a Swing component, the repaint manager may paint more than just the component that you requested to paint. There are many things to consider before a component is painted. When painting a component, the background of a component and its overlapping area with other

components are the two most important things to consider. If a component is not opaque, the component's container must be painted before this component is painted. This is necessary so you do not see through the component's garbage background. If a component overlaps another component, at least the overlapping area must be painted with a consideration that shows the proper color and shape for the overlapping area. The painting of the overlapping area will include painting of all overlapped components.

A `Graphics` object has many methods that you can use to draw geometrical shapes and strings. You can draw different shapes such as rectangles, ovals, arcs, etc. A `Graphics` object has many drawing properties, such as a font, a color, a coordinate system (called translation), a clip (defines the area for drawing), a component on which to draw, etc. A `Graphics` object in the `paintComponent()` method argument has many properties already set. For example,

- The font is set to the font of the component.
- The color is set to the foreground color of the component.
- The translation is set to the upper-left corner of the component. The upper-left corner of the component represents the origin, that is, coordinate (0, 0).
- The clip is set to the area of the component that needs to be painted.

You can change these properties of the `Graphics` object inside the `paintComponent()` method. However, you need to be careful if you want to change the translation or clip. You should create a copy of the `Graphics` object and use the copy for drawing instead of changing the original `Graphics` object's properties. You can use the `create()` method of the `Graphics` class to create a copy of a `Graphics` object. Make sure that you call the `dispose()` method on the copy of the `Graphics` object to release the system resources that it used up. A typical logic to copy and use the `Graphics` objects is as shown:

```
public void paintComponent(Graphics g) {  
    // Create a copy of the passed in Graphics  
    object  
    Graphics gCopy = g.create();
```

```


        // Change the properties of gCopy and use it
        for drawing here

        // Dispose the copy of the Graphics object
        gCopy.dispose();
    }

```

There are few things to note when you use a `Graphics` object for a component that is passed in to the `paintComponent()` method.

- It uses a Cartesian coordinate system with its origin at the upper-left corner of the component.
- The x-axis extends to the right and y-axis extends down, as shown in [Figure 2-40](#).

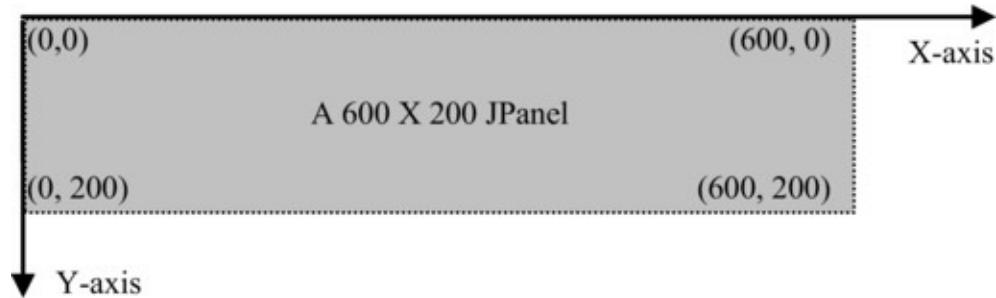

[Figure 2-40](#). The coordinate system used by a `Graphics` object inside the `paintComponent()` method of a component. It shows the coordinates of four corners of a 600 X 200 JPanel

- When you draw using a `Graphics` object, your drawings may extend outside the boundary of the component. However, any drawing that is outside of the clip area set in a `Graphics` object by the repaint manager will be ignored. In fact, the repaint manager will use only the clip area of the painted component to show it on the screen after the `paintComponent()` method returns. This is the reason why you should not change the clip property of the `Graphics` object inside a `paintComponent()` method. The clip property is set to the area of the component that needs to be painted.
- The translation property of a `Graphics` object is used to

set up a coordinate system for drawing. The `Graphics` object that is passed in to the `paintComponent()` method already has the translation property set up, so the upper-left corner of the component represents the origin (0,0) of the coordinate system. If you change the translation property of the `Graphics` object inside the `paintComponent()` method, you better know what you are trying to do.

- The drawing is performed using the current color and font of the `Graphics` object.

There are numerous methods in the `Graphics` class to let you draw different kinds of shapes, such as a round rectangle, an arc, a polygon, etc. [Table 2-20](#) lists a few of those methods. For the complete list of the methods, please refer to the API documentation of the `Graphics` class.

Table 2-20. Methods of the `Graphics` Class

Method	Description
<code>void drawLine(int x1, int y1, int x2, int y2)</code>	Draws a straight line from point (x_1 , y_1) to point (x_2 , y_2).
<code>void drawRect(int x, int y, int width, int height)</code>	Draws a rectangle whose upper-left corner's coordinate is (x , y). The specified <code>width</code> and <code>height</code> are the width and height of the rectangle, respectively.
<code>void fillRect(int x, int y, int width, int height)</code>	It is the same as <code>drawRect()</code> method with two differences. It fills the area with the current color of the <code>Graphics</code> object. Its <code>width</code> and <code>height</code> are one pixel less than the specified <code>width</code> and <code>height</code> .
<code>void drawOval(int x, int y, int width, int height)</code>	Draws an oval that fits into a rectangle defined with point (x , y) as its upper left corner and the specified <code>width</code> and <code>height</code> . If you specify the same <code>width</code> and <code>height</code> , it will draw a circle.
<code>void fillOval(int x, int y, int width, int height)</code>	It draws an oval and fills the area with the current color.

```
height)

void drawstring(String str, int x, int y) It draws the specified string str. The baseline of the leftmost character is at point (x, y).
```

Typically, you use a `JPanel` as a canvas for custom drawing. [Listing 2-12](#) has the code that shows a class called `DrawingCanvas`, which is inherited from the `JPanel` class. In its constructor, it sets its preferred size. It overrides the `paintComponent()` method to draw some custom shapes and strings. [Figure 2-41](#) shows the screen when a `DrawingCanvas` class is run.

[Listing 2-12](#). A Custom JPanel Used as a Canvas for Drawing

```
// DrawingCanvas.java
package com.jdojo.swing;

import javax.swing.JPanel;
import java.awt.Graphics;
import java.awt.Dimension;
import java.awt.Graphics2D;
import java.awt.BasicStroke;
import javax.swing.JFrame;

public class DrawingCanvas extends JPanel {
    public DrawingCanvas() {
        this.setPreferredSize(new Dimension(600,
75));
    }

    @Override
    public void paintComponent(Graphics g) {
        // Paint its background
        super.paintComponent(g);

        // Draw a line
        g.drawLine(10, 10, 50, 50);

        // Draw a rectangle
        g.drawRect(80, 10, 40, 20);
    }
}
```

```

        // Draw an oval
        g.drawOval(140, 10, 40, 20);

        // Fill an oval
        g.fillOval(200, 10, 40, 20);

        // Draw a circle
        g.drawOval(250, 10, 40, 40);

        // Draw an arc
        g.drawArc(300, 10, 50, 50, 60, 120);

        // Draw a string
        g.drawString("Hello Swing!", 350, 30);

        // Draw a thicker rectangle using
Graphics2D
{
    Graphics2D g2d = (Graphics2D)g;
    g2d.setStroke(new BasicStroke(4));
    g2d.drawRect(450, 10, 50, 50);
}

public static void main(String[] args) {
    JFrame frame =
        new JFrame("Sample Drawings Using
a Graphics Object");
    frame.getContentPane().add(new
DrawingCanvas());
    frame.pack();
    frame.setVisible(true);
}
}

```

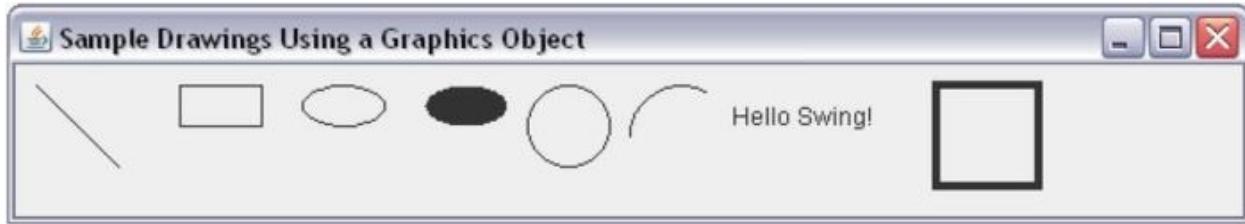


Figure 2-41. Drawing shapes on a custom JPanel using a graphics object

At runtime, you get an instance of `Graphics2D` class passed in to the `paintComponent()` method. The `Graphics2D` class inherits from the `Graphics` class and it has a very powerful API to draw geometrical shapes. For example, when you use a `Graphics` object, it draws shapes with a stroke (line width) of 1.0. If you use `Graphics2D`, you can use a custom stroke. The following snippet of code in the `paintComponent()` method of your `DrawingCanvas` class uses a stroke of 4.0 to draw a rectangle. To use the `Graphics2D` API inside the `paintComponent()` method, cast the passed in `Graphics` object to `Graphics2D` as shown:

```
Graphics2D g2d = (Graphics2D)g;  
g2d.setStroke(new BasicStroke(4));  
g2d.drawRect(450, 10, 50, 50);
```

The `JComponent` class has a `getGraphics()` method that returns a `Graphics` object for the component. If you need to draw on a component outside its `paintComponent()` method, you can use this method to get the `Graphics` object for the component to use it for drawing.

Immediate Painting

Swing takes care of repainting the regions of components that are visible at appropriate time. You can also request a repainting of a component by calling its `repaint()` method. The call to the `repaint()` method is asynchronous. That is, it is not carried out immediately. It is queued on the event dispatching thread and it will be carried out sometime in future. Sometimes a situation may warrant immediate painting. Use the `paintImmediately()` method of the component to carry out the painting immediately. The method is overloaded. The two versions are declared as follows:

- `void paintImmediately(int x, int y, int w, int h)`
- `void paintImmediately(Rectangle r)`

 **Tip** It is more efficient to call the `repaint()` method if you need to paint

more frequently or in a loop. Multiple calls to the `repaint()` method are coalesced into one call, whereas the calls to the `paintImmediately()` method are carried out individually.

Double Buffering

Different techniques can be used to paint a component on the screen. If a component is painted directly on the screen, it is known as an onscreen painting. If a component is painted using an off-screen buffer and that buffer is copied on to the screen in one step, it is called double buffering. There is another technique to paint a component that is called page flipping. Page flipping uses the computer's graphics card's capability to be used a video pointer, which is the address of the video contents, to display a video. Similar to double buffering, you draw the content to be displayed on an off-screen buffer. When you are done drawing onto an off-screen buffer, you change the video pointer of the graphics card to this off-screen buffer, and the graphics card will take care of displaying the images on the screen. Unlike double buffering, page flipping does not copy the contents from an off-screen buffer to an onscreen buffer. Rather, it redirects the graphics card to the new buffer. Double buffering and page flipping provide a better user experience by avoiding screen flickering when components are being painted.

Swing uses double buffering to paint all components. It lets you disable double buffering for a component. There is a catch when you disable the double buffering. Sometimes, disabling double buffering may not really do anything. If a container is being painted, Swing checks if the double buffering is enabled for the container. If the double buffering is enabled for the container, all its child components will use double buffering. Therefore, it does not help too simply disable double buffering on a component. If you want to disable double buffering, you may just want to disable it at the top-most level of the containment hierarchy that is the `JRootPane`. The repaint manager also lets you enable/disable double buffering globally for an application, as shown:

```
RepaintManager currentManager  
= RepaintManager.currentManager(component);  
currentManager.setDoubleBufferingEnabled(false);
```

When double buffering is enabled, Swing will create an off-screen image and pass the graphics of that off-screen image to the `paintComponent()` method of the `JComponent`. When you draw anything using a `Graphics` object in the `paintComponent()` method, essentially you are drawing on the off-screen image. Finally, Swing will copy the off-screen image to the screen.

Double buffering also lets you create an off-screen image in your program. You can draw to that off-screen image and use that image wherever you want it in your application. You need to use the `createImage()` method of a component to create an off-screen image. The following code creates a custom `JPanel` called `OffScreenImagePanel`. In its `paintComponent()` method, it creates an off-screen image, fills the image with the color red, and uses that image to draw on to the `JPanel`. This is a trivial example. However, it demonstrates the steps that you need to perform to use an off-screen image in an application.

```
public class OffScreenImagePanel extends JPanel{
    public OffScreenImagePanel() {
        this.setPreferredSize(new Dimension(200,
200));
    }

    public void paintComponent(Graphics g) {
        super.paintComponent(g);

        // Create an offscreen image and fill
        a rectangle with red
        int w = this.getWidth();
        int h = this.getHeight();
        Image offScreenImage
= this.createImage(w, h);
        Graphics imageGraphics
= offScreenImage.getGraphics();
        imageGraphics.setColor(Color.RED);
        imageGraphics.fillRect(0, 0, w, h);

        // Draw the offscreen image on the JPanel
        g.drawImage(offScreenImage, 0, 0, null);
    }
}
```

JFrame Revisited

You have been using `JFrames` in this chapter in almost every program you have written. In this section, I will discuss some important events and properties of the `JFrame`.

You can set the state of a `JFrame` programmatically using the `setExtendedState(int state)` method. The state is specified using constants defined in the `java.awt.Frame` class from which the `JFrame` class is inherited.

```
// Display the JFrame maximized  
frame.setExtendedState(JFrame.MAXIMIZED_BOTH);
```

Usually, you would change the state of a `JFrame` using the state buttons or state menu provided in its title bar's corners. [Table 2-21](#) lists the constants that can be used to change the state of a `JFrame`.

Table 2-21. *The List of Constants That Define States of a JFrame*

JFrame State Constants	Description
NORMAL	<code>JFrame</code> is displayed in normal size.
ICONIFIED	<code>JFrame</code> is displayed in minimized state.
MAXIMIZED_HORIZ	<code>JFrame</code> is displayed maximized horizontally, but in normal size vertically.
MAXIMIZED_VERT	<code>JFrame</code> is displayed maximized vertically, but in normal size horizontally.
MAXIMIZED_BOTH	<code>JFrame</code> is displayed maximized horizontally as well as vertically.

Sometimes you may want to use a default button in your `JFrame` or `JDialog`. A default button is an instance of the `JButton` class, which is activated when the user presses a key on the keyboard. A key that activates the

default button is defined by the look-and-feel. Typically, the key to activate the default button is the Enter key. You can set a default button for a JRootPane, which is present in a JFrame, JDialog, JWindow, JApplet, and JInternalFrame. Usually, you set the OK button as a default button on a JDialog. If a JRootPane has a default button set, pressing the Enter key will activate that button, and if you have an action-performed event handler added to that button, your code will be executed.

```
// Create a JButton
JButton okButton = new JButton("OK");

// Add an event handler to okButton here...

// Set okButton as the default button
frame.getRootPane().setDefaultButton(okButton);
```

You can add a window listener to a JFrame or any other top-level Swing window that will notify you of the seven kinds of changes in a window's state. The following snippet of code adds a window listener to a JFrame named frame. If you are interested in listening for only few window state changes, you can use the WindowAdapter class instead of the WindowListener interface. The WindowAdapter class provides an empty implementation of all the seven methods in the WindowListener interface.

```
frame.addWindowListener(new WindowListener() {
    @Override
    public void windowOpened(WindowEvent e) {
        System.out.println("JFrame has been made
visible first time");
    }

    @Override
    public void windowClosing(WindowEvent e) {
        System.out.println("JFrame is closing.");
    }

    @Override
    public void windowClosed(WindowEvent e) {
        System.out.println("JFrame is closed.");
    }
})
```

```

@Override
public void windowIconified(WindowEvent e) {
    System.out.println("JFrame is
minimized.");
}

@Override
public void windowDeiconified(WindowEvent e) {
    System.out.println("JFrame is
restored.");
}

@Override
public void windowActivated(WindowEvent e) {
    System.out.println("JFrame is
activated.");
}

@Override
public void windowDeactivated(WindowEvent e) {
    System.out.println("JFrame is
deactivated.");
}
);

// Use the WindowAdapter class to intercept only the
window closing event
frame.addWindowListener(new WindowAdapter() {
    @Override
    public void windowClosing(WindowEvent e) {
        System.out.println("JFrame is closing.");
    }
});

```

When you are done with a window (JFrame, JDialog or JWindow), you should call its `dispose()` method, which will make it invisible and release the resources to the operating system. Note that the `dispose()` method does not destroy or garbage collect the window object. As long as you hold the window's reference and it is reachable, Java would not destroy your window and you can

again display it calling its `setVisible(true)` method.

Summary

Swing provides a huge set of components to develop GUI applications. Most of the Swing components are lightweight components that redraw using Java code without having to use native peers. The `JComponent` class is the base class for all Swing components. A component that can contain other components is called a container. Swing provides two types of containers: top-level containers and non top-level containers. A top-level container is not contained within another container and it can be displayed directly on the desktop. An instance of the `JFrame` class represents a top-level container.

An object of the `JButton` class represents a button. A button is also known as a *push button* or a *command button*. The user presses or clicks a `JButton` to perform an action. A button can display text, an icon, or both.

An object of the `JPanel` class represents a container that can contain other components. Typically, a `JPanel` is used to group related components together. A `JPanel` is a non top-level container.

An object of the `JLabel` class represents a label component that displays text, an icon, or both. Typically, the text in a `JLabel` describes another component.

Swing provides several text components that let you display and edit different types of text. An object of the `JTextField` class is used to work with one line plain text. An object of the `JTextArea` is used to work with multiline plain text. An object of the `JPasswordField` is used to work with one line text in which the actual characters in the text are replaced with echo characters. An object of the `JFormattedTextField` lets you work with one line plain text where you can specify the format for the text such as displaying a date in mm/dd/yyyy format. An object of the `JEditorPane` lets you work with styled text such as in HTML and RTF formats. An object of the `JTextPane` lets you work with styled documents with embedded images and components. You can add an input verifier to a text component to validate the text entered by the user. An instance of the `InputVerifier` class acts as an input verifier. You can set an input verifier for a text component using the `setInputVerifier()` method of the `JComponent` class.

Swing provides many components that let you select one or more items from a list of items. Such components are objects of the `JToggleButton`, `JCheckBox`, `JRadioButton`, `JComboBox`, and `JList` classes. A `JToggleButton` can be in depressed or undepressed state and it represents a yes/no choice. A `JCheckBox` can be used to represent a yes/no choice. Sometimes a group of `JCheckBoxes` is used to let the user select zero or more options. A group of `JRadioButton` is used to present users a set of mutually exclusive options. A `JComboBox` is used to provide the user with a mutually exclusive set of choices where the user, optionally, can enter a new choice value. A `JComboBox` takes less space on the screen as compared to other choices, providing components because it folds all its choices and the user has to open the list of choices before he can make a selection. A `JList` lets the user select zero or multiple choices from a list of choices. All choices in a `JList` are visible to the user.

A `JSpinner` component combines the benefits of a `JFormattedTextField` and an editable `JComboBox`. It lets you set a list of choices as you set in a `JComboBox`, and at the same time, you can also apply a format to the displayed value. It shows only one value at a time from the list of choices. It lets you enter a new value.

A `JScrollBar` is used to provide scrolling capability for viewing a component that is bigger in size than the available space. A `JScrollBar` can be placed vertically or horizontally. The scolling is performed by dragging a knob along the track of the `JScrollBar`. You need to write the logic to provide the scolling capability using the `JScrollBar` component.

A `ScrollPane` is a container that is used to wrap a component that is bigger in size than the available space. The `ScrollPane` provides automatic scolling capabilities in horizontal and vertical directions.

A `JProgressBar` is used to display the progress of a task. It can have a horizontal or vertical orientation. It has three values associated with it: the current value, the minimum value, and the maximum value. If the progress of a task is not known, the `JProgressBar` is said to be in indeterminate state.

A `JSlider` lets you select a value graphically from a set of values between two integers by sliding a knob along a track.

A `JSeparator` is a handy component when you want to add a separator between two components or two groups of components. Typically, a `JSeparator` is used in a menu to separate groups of related menu items.

Typically, it appears as a horizontal or vertical solid line.

A menu component is used to provide a list of actions to the user in a compact form. An object the `JMenuBar` class represents a menu bar. An object of the `JMenu`, `JMenuItem`, `JCheckBoxMenuItem`, and `JRadioButtonMenuItem` class represent a menu item.

A toolbar is a group of small buttons that provides commonly used actions to the user in a `JFrame`. Typically, you provide a toolbar along with a menu.

A `JTable` is used to display and edit data in the tabular form. It presents the data in the form of rows and columns. Each column has a column header. Rows and columns are references using indexes starting at 0.

A `JTree` is used to display hierarchical data in a tree-like structure. Each item in a `JTree` is called a node. A node that has children is called a branch node. A node that has no children is called a leaf node. A branch node is called the parent node for its child nodes. The first node in the `JTree` that has no parent is called the root node.

A `JTabbedPane` component acts like a container for other Swing components, arranging them in a tabbed fashion. It can display tabs using a title, an icon, or both. Contents of only one tab are visible at a time. A `JTabbedPane` lets you share the space between multiple tabs.

A `JSplitPane` is a splitter that can be used to split space between two components. The splitter bar can be displayed horizontally or vertically. When the available space is less than the space needed to display the two components, the user can move the splitter bar up/down or left/right so one component gets more space than the other. If there is enough space, both components can be shown fully.

A `JDialog` is a top-level Swing container. It is used as a temporary top-level container (or as a pop-up window) to aid in the working with the main window to get the user's attention or user's input. The `JOptionPane` class provides many static methods to show different types of dialogs to the user using an instance of the `JDialog` class.

A `JFileChooser` lets the user select a file/directory from the file system using a built-in dialog. A `JColorChooser` is lets the user choose a color graphically using a built-in dialog.

A `JWindow` is an undecorated top-level container. It is not a commonly used top-level container, except as a splash window that is displayed once when the application is launched and automatically disappears after a few seconds.

Swing lets you set the background and foreground colors of a component. An object of the `java.awt.Color` class represents a color. You can specify the color using the red, green, blue, and alpha components or using the hue, saturation, and brightness components. The `Color` class is immutable. It provides several constants that represent commonly used colors, for example, `Color.RED` and `Color.BLUE` constants represent the red and blue colors.

In Swing, you can draw a border around components. A border is represented by an instance of the `Border` interface. Different types of borders exist: bevel border, soft bevel border, etched border, line border, titled border, matte border, empty border, and compound border. The `BorderFactory` class provides factory methods to create all types of borders.

Swing lets you set the font for text displayed in components. An object of the `java.awt.Font` class represents a font in a Java program.

A component can be valid or invalid. The `isValid()` method of the component returns `true` if the component is invalid. An invalid component indicates that its position and size need to be recomputed and it needs to be laid out again. A component is valid before it is made visible the first time. Adding/removing components and changing properties that may change component's position, size, or both may make the component invalid. Calling the `validate()` method makes the component valid again.

Swing lets you draw many types of shapes (circles, rectangles, lines, polygons, etc.) using the `Graphics` object. Typically, you use a `JPanel` as a canvas for drawing shapes.

Swing provides two ways to repaint components: asynchronously and synchronously. Calling the `repaint()` method paints the component asynchronously. Calling the `paintImmediately()` method paints the component immediately.

Painting of components can be performed onscreen or off-screen. The onscreen painting may result in flickers. The painting can be performed off-screen using a buffer and the buffer can be copied in one shot onscreen to avoid flickering. Such an off-screen painting is called double buffering and it provides better user experience by providing smooth painting on the screen.

CHAPTER 3



Advanced Swing

In this chapter, you will learn

- How to use labels in Swing components in HTML format
- About the threading model in Swing and how the event dispatch thread works
- How to execute a long-running task off the event dispatch thread
- How to use pluggable look and feel in Swing
- How to use skinnable look and feel using Synth
- How to perform drag and drop between Swing components
- How to create a multiple document interface (MDI) application
- How to use the `Toolkit` class to make a beep and know the screen details
- How to decorate Swing components using JLayer
- How to create translucent windows
- How to create shaped windows

Using HTML in Swing Components

Usually, you display the text on a component using one font and color, and in one line. If you want to display text on a component using different fonts and

color or in multiple lines, you can do so using an HTML string as the text for the component. Swing components have built-in support for displaying HTML text as their labels. You can use an HTML-formatted string as a label for a JButton, JMenuItem, JLabel, JToolTip, JTabbedPane, JTree, etc. using an HTML string, which should start and end with the <html> and </html> tags, respectively. For example, if you want to display the text “**Close** Window” on a JButton as its label (**Close** in boldface font and Window in plain font), you can do so as follows:

```
JButton b1 = new JButton("<html><b>Close</b>  
Window</html>");
```

Most of the time, placing an HTML string inside <html> and </html> tags will work fine. However, if a line in an HTML string starts with a slash (/), it may not display correctly. For example, <html>/Close Window</html> will display nothing and <html>/Close WindowProblem</html> will display only Problem. To avoid this kind of problem, you can always place your HTML-formatted string inside the <body> HTML tag as in <html><body>/Close Window</body></html> and it will display as /Close Window. How can you display a string that contains HTML tags as a label? Swing lets you disable the default HTML interpretation using the `html.disable` component’s client property. The following snippet of code disables the HTML property for a JButton and uses HTML tags in its label:

```
JButton b3 = new JButton();  
b3.putClientProperty("html.disable", Boolean.TRUE);  
b3.setText("<html><body>HTML is disabled</body>  
</html>");
```

You must set the text for the component after you disable the `html.disable` client property. The following snippet of code shows some examples of using HTML formatted string as text for a JButton. The buttons are shown in [Figure 3-1](#) when the code was run on Windows XP.

```
JButton b1 = new JButton();  
JButton b2 = new JButton();  
JButton b3 = new JButton();  
b1.setText("<html><body><b>Close</b> Window</body>
```

```

</html>") ;
b2.setText("<html><body>Line 1 <br/>Line 2</body>
</html>") ;

// Disable HTML text display for b3
b3.putClientProperty("html.disable", Boolean.TRUE) ;
b3.setText("<html><body>HTML is disabled</body>
</html>") ;

```



Figure 3-1. Using an HTML-formatted string as text for Swing components' labels

Threading Model in Swing

Most classes in Swing are not thread safe. They were designed to work with only one thread. It does not mean that you cannot use multiple threads in a Swing application. All it means is that you must understand Swing's thread model to write a thread-safe Swing application.

Swing's thread safety rule is very simple. It states that once a Swing component has been realized, you must modify or access that component's state on the event dispatch thread. A component is considered to be realized if it has been painted or it is ready to be painted. A top-level container in Swing is realized when you call its `pack()`, `setVisible(true)`, or `show()` method for the first time. When a top-level container is realized, all of its children are also realized.

What is the event dispatch thread? It is a thread automatically created by the JVM when it detects that it is working with a Swing application. The JVM uses this thread to execute the Swing component's event handlers. Suppose you have a JButton with an action listener. When you click the JButton, the code in the `actionPerformed()` method (which is the JButton's clicked event handler code) is executed by the event dispatch thread. You used a JButton in examples in previous chapters. You never paid attention to the thread that

executed the `actionPerformed()` method of its action listener. Typically, you need not concern yourself about the threading issue in simple Swing applications like the ones you have been using. Now that you know an event dispatch thread exists in every Swing application, let's unravel the mystery of how it works. You will be using two classes throughout this discussion in this section. They are helper classes used in a Swing application to deal with its threading model. The classes are

- `SwingUtilities`
- `SwingWorker`

How do you know that your code is executing in the event dispatch thread? It is very simple to know whether your code is executing in the event dispatch thread or not, by using the static method `isEventDispatchThread()` of the `SwingUtilities` class. It returns `true` if your code is executing in the event dispatch thread. Otherwise, it returns `false`. For debugging purposes, you can write the following statement anywhere in your Java code. If it prints `true`, it means your code was executed in the event dispatch thread.

```
System.out.println(SwingUtilities.isEventDispatchThread());
```

Consider the program shown in [Listing 3-1](#).

Listing 3-1. A Bad Swing Application

```
// Bad Swing App.java
package com.jdojo.swing;

import javax.swing.SwingUtilities;
import java.awt.BorderLayout;
import java.awt.Container;
import javax.swing.JFrame;
import javax.swing.JComboBox;

public class Bad SwingApp extends JFrame {
    JComboBox<String> combo = new JComboBox<>();

    public Bad SwingApp(String title) {
        super(title);
```

```

        initFrame();
    }

    private void initFrame() {
        this.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
        Container contentPane
        = this.getContentPane();
        contentPane.add(combo,
        BorderLayout.NORTH);

        // Add an ItemEvent listener to the
        // combobox
        combo.addItemListener(e ->
            System.out.println("isEventDispatchThread(): " +
            SwingUtilities.isEventDispatchThread()));

        combo.addItem("First");
        combo.addItem("Second");
        combo.addItem("Third");
    }

    public static void main(String[] args) {
        BadSwingApp badSwingApp = new
        BadSwingApp("A bad Swing App");
        badSwingApp.pack();
        badSwingApp.setVisible(true);
    }
}

```

The program is a simple Swing application, but it contains a potential bug. It displays a JComboBox in a JFrame. In the initFrame() method, it adds an item listener to the JComboBox. Then it adds three items to the JComboBox. The item listener simply prints a message showing whether it is executed by the event dispatch thread. As usual, you run the application by creating the frame, packing it, and making it visible. The application prints the following text on the standard output:

```
isEventDispatchThread(): false
```

Did I not say that it is the job of the event dispatch thread to execute events of all Swing components? Let's not lose hope, so select another item from the combo box such as "Second" or "Third" when the application is running. You would see the following message printed on the standard output:

```
isEventDispatchThread(): true
```

The first time, the item listener event for the combo box is executed on a non-event-dispatch thread, and from the second time onward, it is executed on the event dispatch thread. To know why this is happening in this small application, you need to know when the event dispatch thread is created, and when it starts handling events. The event dispatch thread waits for the events that are generated from the user's interaction with the GUI. Once the GUI is created, all the users' interactions with it are automatically handled by the event dispatch thread. In this case, the "main" thread created the `Bad SwingApp` frame in the `main()` method. The item event was triggered when the code added the first item to the `JComboBox` even before GUI was created and shown. Since the "main" thread ran the creation of the `Bad SwingApp` frame, the main thread also handled the item event. There are two problems with this program:

- It is not a good practice to add event handlers to a component first, and then do something that fires that event handler before the GUI is shown. Make it a rule of thumb to add all event handlers to a component at the end of the GUI-building code. You can fix this problem by just moving the `addItem()` calls before the `addItemListener()` call in the `initFrame()` method.
- You need to run all GUI code—from GUI building to making it visible—on the event dispatch thread. This is also a simple thing to do. You need to use the `invokeLater(Runnable r)` static method of the `SwingUtilities` class. The method takes a `Runnable` as its argument. It schedules the `Runnable` to run on the event dispatch thread. Here is the correct way to start a Swing application. You have not followed this way of starting your Swing application in any examples in the previous chapters. You always created and showed your frames in the `main()` method, which used the main thread

to build and show the GUI. I did not follow the correct way of building and showing the GUI, because my focus was to demonstrate the topic that I was discussing. This is the right time for you to learn how to start your Swing applications correctly.

```
// Correct way to start a Swing application
SwingUtilities.invokeLater(() -> {
    Bad SwingApp bad SwingApp = new
Bad SwingApp("A bad Swing App");
    bad SwingApp.pack();
    bad SwingApp.setVisible(true);
}) ;
```

If you replace the existing code inside the `main(String[] args)` method of [Listing 3-1](#) with this code, the application will print `isEventDispatchThread(): true` when it is run, because `invokeLater()` method of the `SwingUtilities` class will schedule the GUI-building code to run on the event dispatch thread. Once you start your application this way, it guarantees that all event handlers for your application will be executed on the event dispatch thread. The call to the `SwingUtilities.invokeLater(Runnable r)` method will start the event dispatch thread if it is not already started.

The `SwingUtilities.invokeLater()` method call returns immediately and the `run()` method of its `Runnable` argument is executed asynchronously. That is, its `run()` method's execution is queued to the event dispatch thread for later execution.

There is another important static method called `invokeAndWait(Runnable r)` in the `SwingUtilities` class. This method is executed synchronously and it does not return until the `run()` method of its `Runnable` argument has finished executing on the event dispatch thread. This method may throw an `InterruptedException` or

InvocationTargetException.

Tip The `SwingUtilities.invokeAndWait(Runnable r)` method should not be called from the event dispatch thread because the thread that executes this method call waits until the `run()` method has finished. If you execute this method call from the event dispatch thread, it will be queued to the event dispatch thread and the same thread (the event dispatch thread) will be waiting. Executing this method call in the event dispatch thread generates a runtime error.

Sometimes you may want to use the `invokeAndWait()` method of the `SwingUtilities` class to start a Swing application instead of the `invokeLater()` method. For example, the following snippet of code starts a Swing application and prints a message on console that the application has started:

```
try {
    SwingUtilities.invokeAndWait(() -> {
        JFrame frame = new JFrame();
        frame.pack();
        frame.setVisible(true);
    });
    System.out.println("Swing application is
running...");

    // You can perform some non-swing related work
    here
}
catch (Exception e) {
    e.printStackTrace();
}
```

Sometimes you may have to perform a time-consuming task in a Swing application. If you perform the time-consuming task on the event dispatch thread, your application will become unresponsive, which users are not going to like. You should perform long tasks in a separate thread other than the event dispatch thread. Note that it is likely that when the task is finished, you will want

to update the GUI or display a result in a component, which is part of your GUI. This will require you to access Swing components from a non-event dispatch thread. You can use the `invokeLater()` and `invokeAndWait()` methods of the `SwingUtilities` class to update the Swing component from your separate thread. However, Swing provides a `SwingWorker` class, which makes it easy to work with multiple threads in a Swing application. It takes care of starting a new thread and executing some pieces of code in a new background thread and some pieces of code in the event dispatch thread. You need to know which methods in the `SwingWorker` class will be executed in the new thread and the event dispatch thread.

The `SwingWorker<T, V>` class is declared `abstract`. The type parameter `T` is the result type produced by this class and the type parameter `V` is the intermediate result type. You must create your custom class inheriting from it. It contains few methods of interest where you would write your custom code:

- `doInBackground()`: This is the method where you write the code to perform a time-consuming task. It is executed in a separate worker thread. If you want to publish intermediate results, you can call the `publish()` method of the `SwingWorker` class from this method, which in turn will call its `process()` method. Note that you are not supposed to access any Swing component in this method, as this method does not execute on the event dispatch thread.
- `process()`: This method is called as a result of a `publish()` method call. This method executes on the event dispatch thread, and you are free to access any Swing component in this method. A call to the `process()` method may be a result of many calls to the `publish()` method. Here are the method signatures for these two methods:

```
protected final void publish(V...  
chunks)  
protected void process(List<V> chunks)
```

- The `publish()` method accepts a `varargs` argument. The `process()` method passes all arguments to the

`publish()` method packed in a `List`. If more than one call to the `publish()` method are combined together, the `process()` method gets all those arguments in its `List` argument.

- `done()`: When the `doInBackground()` method finishes, normally or abnormally, the `done()` method is called on the event dispatch thread. You can access Swing components in this method. By default, this method does nothing.
- `execute()`: You call this method when you want to start executing your task in a separate thread. This method schedules the `SwingWorker` object to be executed on a worker thread.
- `get()`: This method returns the result of the task as returned from the `doInBackground()` method. If the `SwingWorker` object has not finished executing the `doInBackground()` method, the call to this method blocks until the result is ready. It is not suggested to call this method on the event dispatch thread, as it will block all events until it returns.
- `cancel(boolean mayInterruptIfRunning)`: This method cancels the task if it is still running. If the task has not been started, the task never runs. Make sure to check for the cancelled state and for any interruptions in the `doInBackground()` method and exit the method accordingly. Otherwise, your process will not respond to the `cancel()` call.
- `isCancelled()`: It returns `true` if the process has been cancelled. Otherwise, it returns `false`.
- `isDone()`: It returns `true` if the task has completed. A task may complete normally or by throwing an exception or by cancellation. Otherwise, it returns `false`.

Tip It is important to note that a `SwingWorker` object is of a use-and-throw

kind. That is, you cannot use it more than once. Calling its `execute()` method more than once does not do anything.

Let's start discussing a simple use of the `SwingWorker` class. Suppose you want to perform a time-consuming task that computes a number, say an integer, in a separate thread. You want to retrieve the result of the processing by polling. That is, you will periodically check if the process has finished processing. Here is a simple use of the `SwingWorker` class:

```
// First, create a custom SwingWorker class, say
MySwingWorker.
public class MySwingWorker extends
SwingWorker<Integer, Integer> {
    @Override
    protected Integer doInBackground() throws
Exception {
        int result = -1;
        // Write code to perform the task

        return result;
    }
}

// Create an object of your SwingWorker class and
// execute the task
MySwingWorker mySW = new MySwingWorker();
mySW.execute();

// Keep checking for the result periodically. You need
// to wrap the get()
// call inside a try-catch to handle any exceptions.
if (mySW.isDone()) {
    int result = mySW.get();
}
```

[Listing 3-2](#) and [Listing 3-3](#) demonstrate how the `SwingWorker` class works. When you run the code in [Listing 3-3](#), it displays a frame, shown in [Figure 3-2](#). You can start the task by clicking the Start button. You can cancel the task anytime by clicking the Cancel button. The intermediate result is

displayed in a JLabel. The SwingWorkerProcessor class is simple. It accepts a SwingWorkerFrame, a counter, and a time interval. It computes the sum of 1 to the number to the counter. It sleeps for the specified time interval after it adds a number to the result. It displays the intermediate iteration and the final result using the process() and done() methods.

Listing 3-2. A Custom SwingWorker Class

```
// SwingWorkerProcessor.java
package com.jdojo.swing;

import javax.swing.SwingWorker;
import java.util.List;

public class SwingWorkerProcessor extends
SwingWorker<Integer, Integer> {
    private final SwingWorkerFrame frame;
    private int iteration;
    private int intervalInMillis;

    public SwingWorkerProcessor(SwingWorkerFrame
frame, int iteration,
        int intervalInMillis) {
        this.frame = frame;
        this.iteration = iteration;

        if (this.iteration <= 0) {
            this.iteration = 10;
        }

        this.intervalInMillis = intervalInMillis;

        if (this.intervalInMillis <= 0) {
            this.intervalInMillis = 1000;
        }
    }

    @Override
    protected Integer doInBackground() throws
Exception {
```

```
        int sum = 0;
        for (int counter = 1; counter <=
iteration; counter++) {
            sum = sum + counter;

            // Publish the result to the GUI
            this.publish(counter);

            // Make sure it listens to an
            interruption and exits this
            // method by throwing an
            appropriate exception
            if (Thread.interrupted()) {
                throw new
InterruptedException();
            }

            // Make sure the loop exits, when
            the task is cancelled
            if (this.isCancelled()) {
                break;
            }

            Thread.sleep(intervalInMillis);
        }

        return sum;
    }

    @Override
    protected void process(List<Integer> data) {
        for (int counter : data) {
            frame.updateStatus(counter,
iteration);
        }
    }

    @Override
    public void done() {
        frame.doneProcessing();
```

```
    }
}
```

Listing 3-3. A Swing Application to Demonstrate How a SwingWorker Class Works

```
// SwingWorkerFrame.java
package com.jdojo.swing;

import javax.swing.JFrame;
import java.awt.Container;
import javax.swing.JLabel;
import javax.swing.JButton;
import java.awt.BorderLayout;
import java.util.concurrent.ExecutionException;

public class SwingWorkerFrame extends JFrame {
    String startMessage = "Please click the start button...";
    JLabel statusLabel = new JLabel(startMessage);
    JButton startButton = new JButton("Start");
    JButton cancelButton = new JButton("Cancel");
    SwingWorkerProcessor processor;

    public SwingWorkerFrame(String title) {
        super(title);
        initFrame();
    }

    private void initFrame() {
        this.setDefaultCloseOperation(EXIT_ON_CLOSE);
        Container contentPane
= this.getContentPane();
        cancelButton.setEnabled(false);

        contentPane.add(statusLabel,
BorderLayout.NORTH);
        contentPane.add(startButton,
BorderLayout.WEST);
```

```
        contentPane.add(cancelButton,
BorderLayout.EAST);

        startButton.addActionListener(e ->
startProcessing());
        cancelButton.addActionListener(e ->
cancelProcessing());
    }

    public void setButtonStatus(boolean canStart) {
        if (canStart) {
            startButton.setEnabled(true);
            cancelButton.setEnabled(false);
        }
        else {
            startButton.setEnabled(false);
            cancelButton.setEnabled(true);
        }
    }

    public void startProcessing() {
        setButtonStatus(false);
        processor = new SwingWorkerProcessor(this,
10, 1000);
        processor.execute();
    }

    public void cancelProcessing() {
        // Cancel the processing
        processor.cancel(true);
        setButtonStatus(true);
    }

    public void updateStatus(int counter, int
total) {
        String msg = "Processing " + counter + "
of " + total;
        statusBar.setText(msg);
    }
}
```

```

public void doneProcessing() {
    if (processor.isCancelled()) {
        statusLabel.setText("Process
cancelled ...");
    }
    else {
        try {
            // Get the result of
processing
            int sum = processor.get();
            statusLabel.setText("Process
completed. Sum is " + sum);
        }
        catch (InterruptedException
| ExecutionException e) {
            e.printStackTrace();
        }
    }
    setButtonStatus(true);
}

public static void main(String[] args) {
    SwingUtilities.invokeLater(() -> {
        SwingWorkerFrame frame
            = new
SwingWorkerFrame("SwingWorker Frame");
        frame.pack();
        frame.setVisible(true);
    });
}
}

```



Figure 3-2. Demonstrating the use of the `SwingWorker` class

Pluggable Look and Feel

Swing supports pluggable look and feel (L&F). You can change the L&F for a Swing application using the `setLookAndFeel (String lafClassName)` static method of the `UIManager` class. The method throws checked exceptions that will require you to handle exceptions. The `lafClassName` argument of the method is the fully qualified name of the class providing the L&F. The following snippet of code sets the L&F for Windows using a generic catch block to handle all types of exceptions:

```
String windowsLAF=
"com.sun.java.swing.plaf.windows.WindowsLookAndFeel";
try {
    UIManager.setLookAndFeel(windowsLAF);
}
catch (Exception e) {
    e.printStackTrace();
}
```

Typically, you set the L&F before you start a Swing application. If you change the L&F after the GUI has been shown, you will need to update the GUI using the `updateComponentTreeUI (container)` method of the `SwingUtilities` class. Changing the L&F may force changes in the component's size and you may want to pack your container using the `pack ()` method again. You may end up writing the following three lines of code when you change the L&F of an application after the GUI has been shown:

```
// Assuming that frame is a reference to a JFrame
// object and windowsLAF contains the
// L&F class name for Windows L&F, set the new L&F,
// update the GUI, and pack the frame.
UIManager.setLookAndFeel(windowsLAF);
SwingUtilities.updateComponentTreeUI(frame);
frame.pack();
```

The following two methods of the `UIManager` class return the class names for the default Java L&F and the system L&F:

- String
getCrossPlatformLookAndFeelClassName ()
- String getSystemLookAndFeelClassName ()

The system L&F gives the Swing components an L&F of the native system and it will differ from system to system. If you want your application to look the same as the native L&F, you can achieve that by using the following piece of code without worrying about the actual name of the class representing the system L&F on the machine your application will run:

```
// Set the system (or native) L&F
UIManager.setLookAndFeel(UIManager.getSystemLookAndFeelClassName());
```

It is not always necessary to set the L&F for your Swing application. Swing will use the default Java L&F on its own when you start the application. If the call to `UIManager.setLookAndFeel()` fails, your Swing application will use the current L&F, which is the default Java L&F if it is the first time you tried to set a new L&F. Although it is possible to create your own L&F, it is not easy to do so. However, Java 5.0 added the Synth L&F to facilitate the creation of a skinnable L&F. I will discuss Synth L&F in the next section.

You can use the `UIManager` class to list all installed L&F on your computer that you can use in your Swing application. The program in [Listing 3-4](#) lists all available L&F on your machine. The output was obtained when the program was run on Windows; you may get a different output.

Listing 3-4. Knowing the Installed L&F on Your Machine

```
// InstalledLookAndFeel.java
package com.jdojo.swing;

import javax.swing.UIManager;
import javax.swing.UIManager.LookAndFeelInfo;

public class InstalledLookAndFeel {
    public static void main(String[] args) {
        // Get the list of installed L&F
        LookAndFeelInfo[] lafList
= UIManager.getInstalledLookAndFeels();
```

```

        // Print the names and class names of all
installed L&F
        for (LookAndFeelInfo lafInfo : lafList) {
            String name = lafInfo.getName();
            String className
= lafInfo.getClassName();
            System.out.println("Name: " + name
+
                    ", Class Name: "
+ className);
        }
    }
}

```

```

Name: Metal, Class Name:
javax.swing.plaf.metal.MetalLookAndFeel
Name: Nimbus, Class Name:
javax.swing.plaf.nimbus.NimbusLookAndFeel
Name: CDE/Motif, Class Name:
com.sun.java.swing.plaf.motif.MotifLookAndFeel
Name: Windows, Class Name:
com.sun.java.swing.plaf.windows.WindowsLookAndFeel
Name: Windows Classic, Class Name:
com.sun.java.swing.plaf.windows.WindowsClassicLookAndFeel

```

[Listing 3-5](#) builds a `JFrame` that lets you experiment with the installed L&F for the current platform. By default, the current L&F is selected. Select a different L&F from the list and the application's L&F is changed accordingly. You will get a different list of L&F on different platforms. [Figure 3-3](#) and [Figure 3-4](#) show the frame when the application was run on Windows and Linux, respectively.

[Listing 3-5.](#) Experimenting With Installed Look and Feels on the Current Platform

```

// InstalledLAF.java
package com.jdojo.swing;

```

```
import java.awt.BorderLayout;
import java.awt.Container;
import java.awt.event.ItemEvent;
import java.util.Map;
import java.util.TreeMap;
import javax.swing.AbstractButton;
import javax.swing.BorderFactory;
import javax.swing.Box;
import javax.swing.ButtonGroup;
import javax.swing.JButton;
import javax.swing.JFrame;
import javax.swing.JLabel;
import javax.swing.JPanel;
import javax.swing.JRadioButton;
import javax.swing.JTextField;
import javax.swing.LookAndFeel;
import javax.swing.SwingUtilities;
import javax.swing.UIManager;
import javax.swing.UIManager.LookAndFeelInfo;
import javax.swing.border.Border;
import javax.swing.border.EtchedBorder;

public class InstalledLAF extends JFrame {
    JLabel nameLbl = new JLabel("Name:");
    JTextField nameFld = new JTextField(20);
    JButton saveBtn = new JButton("Save");
    JTextField lafClassNameFld = new JTextField();
    ButtonGroup radioGroup = new ButtonGroup();
    static final Map<String, String> installedLAF
= new TreeMap<>();

    static {
        for (LookAndFeelInfo lafInfo
: UIManager.getInstalledLookAndFeels()) {
            installedLAF.put(lafInfo.getName(),
lafInfo.getClassName());
        }
    }
}
```

```
public InstalledLAF(String title) {
    super(title);
    initFrame();
}

private void initFrame() {

this.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
    Container contentPane
= this.getContentPane();

        // Get the current look and feel
        LookAndFeel currentLAF
= UIManager.getLookAndFeel();
        String currentLafName
= currentLAF.getName();
        String currentLafClassName
= currentLAF.getClass().getName();

lafClassNameFld.setText(currentLafClassName);
    lafClassNameFld.setEditable(false);

        // Build the panels
    JPanel topPanel = buildTopPanel();
    JPanel leftPanel
= buildLeftPanel(currentLafName);
    JPanel rightPanel = buildRightPanel();
    contentPane.add(topPanel,
BorderLayout.NORTH);
    contentPane.add(leftPanel,
BorderLayout.WEST);
    contentPane.add(rightPanel,
BorderLayout.CENTER);
}

private void setLAF(String lafClassName) {
    try {

UIManager.setLookAndFeel(lafClassName);

```

```

        SwingUtilities.updateComponentTreeUI(this);
                this.pack();
        }
        catch (Exception e) {
                e.printStackTrace();
        }
}

private JPanel buildTopPanel() {
        JPanel panel = new JPanel();
        panel.add(lafClassNameFld);
        panel.setBorder(getBorder("L&F Class
Name"));
        return panel;
}

private JPanel buildLeftPanel(String
currentLafName) {
        JPanel panel = new JPanel();
        panel.setBorder(getBorder("L&F Name"));
        Box vBox = Box.createVerticalBox();

        // Add a radio button for each installed
        L&F
        for (String lafName
        : installedLAF.keySet()) {
                JRadioButton radioBtn = new
        JRadioButton(lafName);
                if (lafName.equals(currentLafName))
{
                        radioBtn.setSelected(true);
                }

radioBtn.addItemListener(this::changeLAF);
                vBox.add(radioBtn);
                radioGroup.add(radioBtn);
}
}

panel.add(vBox);

```

```
        return panel;
    }

private JPanel buildRightPanel() {
    JPanel panel = new JPanel();
    panel.setBorder(getBorder("Swing
Components"));

    Box hBox = Box.createHorizontalBox();
    hBox.add(nameLbl);
    hBox.add(nameFld);
    hBox.add(saveBtn);
    panel.add(hBox);

    return panel;
}

private void changeLAF(ItemEvent e) {
    if (e.getSource() instanceof
AbstractButton) {
        AbstractButton btn
= (AbstractButton) e.getSource();
        String lafName = btn.getText();
        String lafClassName
= installedLAF.get(lafName);

        this.lafClassNameFld.setText(lafClassName);
        try {
UIManager.setLookAndFeel(lafClassName);
        SwingUtilities.updateComponentTreeUI(this);
        this.pack();
    }
    catch (Exception ex) {
        ex.printStackTrace();
    }
}
}
```

```

        private Border getBorder(String title) {
            Border etched
= BorderFactory.createEtchedBorder(EtchedBorder.LOWERED);
            Border titledBorder
= BorderFactory.createTitledBorder(etched, title);
            return titledBorder;
        }

        public static void main(String[] args) {
            SwingUtilities.invokeLater(() -> {
                InstalledLAF lafApp = new
InstalledLAF("Swing L&F");
                lafApp.pack();
                lafApp.setVisible(true);
            });
        }
    }
}

```

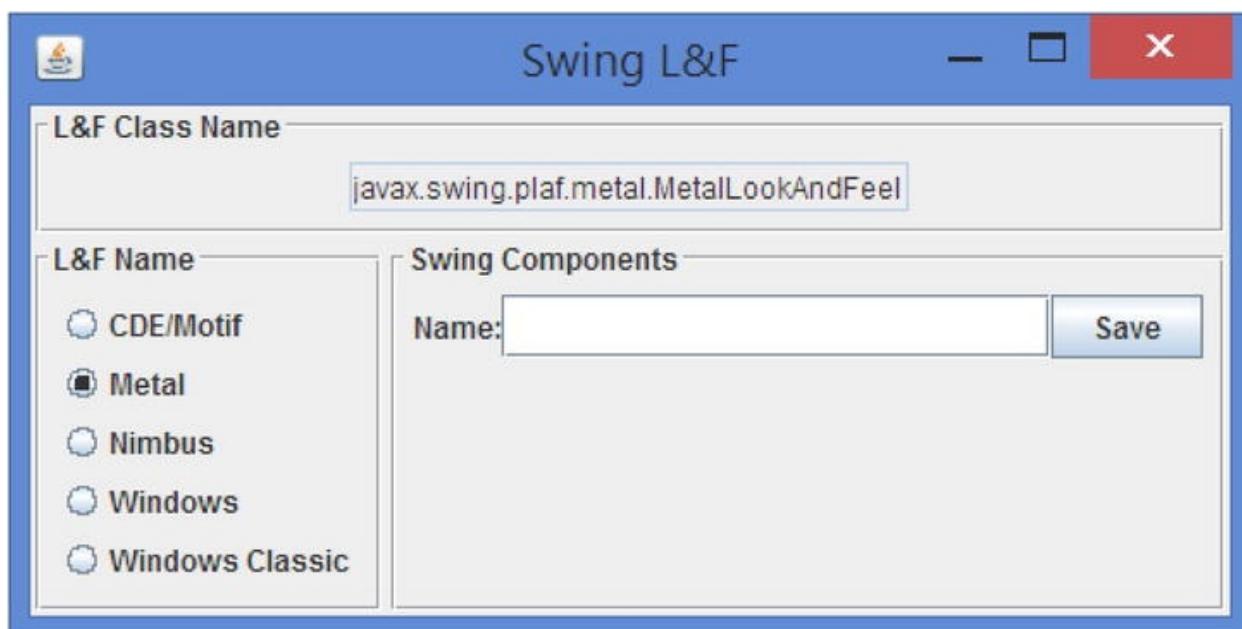


Figure 3-3. The InstalledLAF frame on Windows

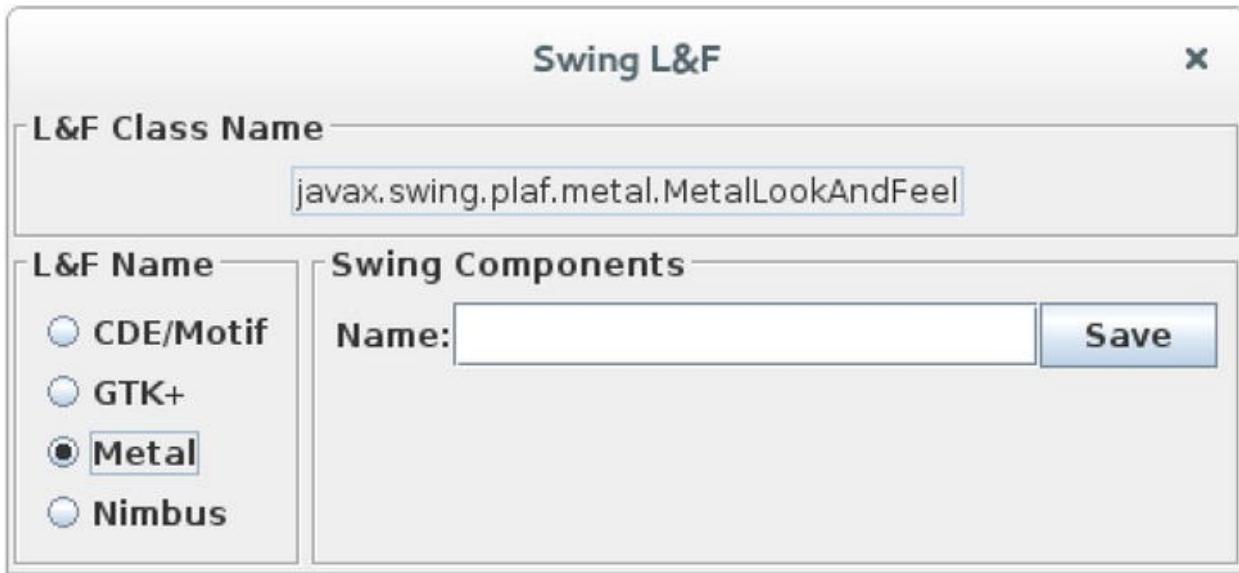


Figure 3-4. The InstalledLAF frame on Linux

Skinnable Look-and-Feel

Swing supports a skin-based L&F called *Synth*. What is a skin? A skin in a GUI is a set of attributes that defines the appearance of GUI components. Synth lets you define skins in an external XML file, and apply the skin at runtime to change the appearance of your Swing application. Before Synth was introduced, you needed to write a lot of Java code to have a custom L&F. With Synth, you do not need to write even one line of Java code to have a new custom L&F. Synth L&F is defined in an XML file. You need to perform the following steps to use the Synth L&F:

- Create an XML file and define the Synth L&F.
- Create an instance of the `SynthLookAndFeel` class.

```
SynthLookAndFeel laf = new  
SynthLookAndFeel();
```

- Use the `load()` method of the `SynthLookAndFeel` object to load the Synth L&F from the XML file. The `load()` method is overloaded. You can use a URL or an input stream to the XML file.

```
laf.load(url_to_your_synth_xml_file);  
or  
laf.load(input_stream_for_your_synth_xml_file,  
MyClass.class);
```

- Set the Synth L&F using the UIManager.

```
UIManager.setLookAndFeel(laf);
```

Let's discuss the loading process that can be used to load the XML file. A Synth L&F may use two different kinds of external resources.

- The XML file that defines the Synth L&F
- The resources such as images that are used in the Synth XML file

When you use a URL to load a Synth XML file, the URL points to the XML file, and all paths for the resources referred to in that XML file will be resolved relative to the URL. The following snippet of code loads a Synth XML file using a URL:

```
URL url = new  
URL("file:///C:/synth/synth_look_and_feel.xml");  
laf.load(url);
```

You can load a Synth XML file using a URL that may refer to a local file system or a network. You can use an http or ftp protocol to load a Synth XML file. You can also load a Synth XML file from a JAR file.

When you use the `load(InputStream input, Class resourceBase)` method to load the Synth XML file, the `input` parameter is the `InputStream` for the XML file to be loaded and the `resourceBase` class object is used to resolve the resources that are referred to inside that XML file. Suppose that you have the following folder structure on your computer on a Windows operating system:

```
C:\javabook  
C:\javabook\images\myimage.png  
C:\javabook\synth\synthlaf.xml
```

```
C:\javabook\book\chapter3\images\myimage.png  
C:\javabook\book\chapter3\synth\synthlaf.xml  
C:\javabook\book\chapter3\ MyClass.class
```

Suppose C:\javabook is set in the CLASSPATH and MyClass is a Java class defined in the com.jdojo.chapter3 package. The following snippet of code loads the synthlaf.xml:

```
// It will load C:\javabook\synth\synthlaf.xml because  
you are  
// using a forward slash in the file path  
"/synth/synthlaf.xml"  
Class cls = MyClass.class;  
InputStream ins  
= cls.getResourceAsStream("/synth/synthlaf.xml");  
laf.load(ins, cls);  
  
// It will load  
C:\javabook\book\chapter3\synth\synthlaf.xml because  
you are  
// not using a forward slash in the file path  
"synthlaf.xml"  
Class cls = MyClass.class;  
InputStream ins  
= cls.getResourceAsStream("synthlaf.xml");  
laf.load(ins, cls);
```

In both cases, the class reference `cls` will be used to resolve the path to the resources referenced in the XML file. For example, if an image is referred as `images/myimage.png`, it will be loaded from

C:\javabook\book\chapter3\images\myimage.png. If the image is referred to as `/images/myimage.png`, the C:\javabook\images\myimage.png file will be loaded.

Use the second version of the `load()` method, which is more flexible. You can package all your Synth L&F files and related resource files in a JAR file without worrying about their actual location at runtime. During development, you can place all your Synth files in a separate folder, which should be in your CLASSPATH. The only thing you need to pay attention to is that if the file name

starts with a forward slash, the path is resolved using the CLASSPATH. If your file name does not start with a forward slash, the package path for that class is added in front of the file name and then the CLASSPATH is used to resolve the path to your file.

Let's start building your Synth L&F XML file. Set your goal before you start defining your Synth L&F. [Figure 3-5](#) shows a sample JFrame that uses the Java default L&F.



[Figure 3-5.](#) A sample JFrame using the default Java L&F

The JFrame contains three components: a JLabel, a JTextField, and a JButton. You will build an XML file to define a Synth L&F for these components. The Java code to create this screen is shown in [Listing 3-6](#). The code that is of interest is in the main () method (shown below). For now, just create an empty XML file named synthlaf.xml and save it in the CLASSPATH.

```
try {
    SynthLookAndFeel laf = new SynthLookAndFeel();
    Class cls = SynthLookAndFeelFrame.class;
    InputStream ins
= cls.getResourceAsStream("/synthlaf.xml");
    laf.load(ins, cls);
    UIManager.setLookAndFeel(laf);
}
catch (Exception e) {
    e.printStackTrace();
}
```

[Listing 3-6.](#) Using a Synth L&F for Swing Components

```
// SynthLookAndFeelFrame.java
package com.jdojo.swing;
```

```
import java.io.InputStream;
import java.awt.Container;
import java.awt.FlowLayout;
import javax.swing.JButton;
import javax.swing.JFrame;
import javax.swing.JLabel;
import javax.swing.JTextField;
import javax.swing.UIManager;
import javax.swing.plaf.synth.SynthLookAndFeel;

public class SynthLookAndFeelFrame extends JFrame {
    JLabel nameLabel = new JLabel("Name:");
    JTextField nameTextField = new JTextField(20);
    JButton closeButton = new JButton("Close");

    public SynthLookAndFeelFrame(String title) {
        super(title);
        initFrame();
    }

    private void initFrame() {
        this.setDefaultCloseOperation(EXIT_ON_CLOSE);
        Container contentPane
        = this.getContentPane();
        contentPane.setLayout(new FlowLayout());
        contentPane.add(nameLabel);
        contentPane.add(nameTextField);
        contentPane.add(closeButton);
    }

    public static void main(String[] args) {
        try {
            SynthLookAndFeel laf = new
SynthLookAndFeel();
            Class c =
SynthLookAndFeelFrame.class;
            InputStream ins
= c.getResourceAsStream("/synthlaf.xml");
        }
    }
}
```

```

        laf.load(ins, c);
        UIManager.setLookAndFeel(laf);
    }
    catch (Exception e) {
        e.printStackTrace();
    }

    SynthLookAndFeel frame =
        new SynthLookAndFeel("Synth
Look-and-Feel Frame");
    frame.pack();
    frame.setVisible(true);
}
}

```

In its simplest form, a Synth XML file looks as shown:

```

<?xml version="1.0"?>
<synth version="1">
</synth>

```

The root element is `<synth>`, and optionally, you may specify a version number, which should be 1. You have not defined any L&F-related styles in the XML file. Let's run the `SynthLookAndFeel` class with these contents in the `synthlaf.xml` file. If you encounter a problem in running the class because it does not find the `synthlaf.xml` file, change the `load()` method call in the `main()` method to use a URL instead of an `InputStream`. [Figure 3-6](#) shows the `JFrame` that you get when you run the `SynthLookAndFeel` class.



[Figure 3-6](#). A `JFrame` with a Synth L&F where the Synth XML file does not define any styles

You did not expect a `JFrame` like this, did you? You will fix it in a minute. By default, a Synth L&F sets a white background with no border for all components. This is the reason why the `JLabel`, `JTextField`, and

JButton run together on the screen. A JTextField is still there on the screen, but it has no border.

Let's define a style. A style is defined using a `<style>` element. It has a mandatory attribute named `id` that is a unique identifier for the style. The `id` attribute's value is used when you bind the style to a component.

```
<?xml version="1.0"?>
<synth version="1">
    <style id="buttonStyle">
        <!-- Style specific elements go here -->
    </style>
</synth>
```

Defining the style itself does not have any effect. You must bind a style to one or more components to see the style in action. Binding a style to a component is accomplished using a `<bind>` element, which has the three attributes:

- `style`
- `type`
- `key`

The `style` is the value of the `id` attribute of a style element that you are binding to this component.

The `type` attribute determines the type of binding. Its value is either `region` or `name`. Each Swing component has at least one region. Some components have more than one region. All regions of a component have a name. Regions are defined by constants in the `Region` class, which is in the `javax.swing.plaf.synth` package. For example, a JButton has one region called `Button` that is represented by the `Region.BUTTON` constant; a JTextField has one region called `TextField` that is represented by the `Region.TEXT_FIELD` constant; a JTabbedPane has four regions called `TabbedPaneContent`, `TabbedPaneTabArea`, `TabbedPaneTab`, and `TabbedPane`. Please refer to the documentation for the `Region` class for the complete list of regions. If you use the value `name`, it refers to the value returned by the `getName()` method of the component. You can set a name for a component using its `setName()` method.

The `key` attribute is a regular expression that is used to match the region or name depending on the value used for the `type` attribute. For example, the regular expression `". *"` matches any region or name. Typically, you use `", *` as a `key` value to bind a default style to all components.

Here are some examples of using the `<bind>` element to bind a style to a component:

```
<!-- Bind a buttonStyle style to all JButtons -->
<bind style="buttonStyle" type="region" key="Button"
/>

<!-- Bind a defaultStyle to all Swing components -->
<bind style="defaultStyle" type="region" key=". *" />

<!-- Bind myDefaultStyle to all components whose name
returned by their getName() method starts with
"com.jdojo". Here \. means one dot and .* means any
characters zero or more times -->
<bind style="mydefaultStyle" type="name"
key="com\.\.jdojo.*" />
```

Let's define some styles for a JButton. All styles must be defined inside a `<style>` element. You can set the opacity in a style using a `<opaque>` element. It has a `value` attribute that could be true or false, as shown:

```
<opaque value="true"/>
```

A component can be in one of the seven states: ENABLED, MOUSE_OVER, PRESSED, DISABLED, FOCUSED, SELECTED, or DEFAULT. Not all components support all seven states. You can define style properties that apply to a specific state or all states. You define state specific properties using a `<state>` element. You need to specify a `value` attribute with one of the seven state values if the style properties only apply to a specific state. If you want to define some style properties for more than one state, you can separate state names with an AND. The following `<style>` element will define styles for a component when a mouse is over it and it is also focused:

```
<state value="MOUSE_OVER AND FOCUSED">
...
</state>
```

```
</state>
```

If multiple styles exist for the same state, the style definition associated with the most specific state is used. Suppose you have defined styles for two states: `MOUSE_OVER` and `FOCUSSED` and `MOUSE_OVER`. When the component has the mouse over its region and it is in focus, the first style is applied; if the component is not in focus, but it has a mouse over its region, the second style is applied.

Modify the `synthlaf.xml` file with the contents shown and rerun the application:

```
<?xml version="1.0"?>
<synth version="1">
    <style id="buttonStyle">
        <opaque value="true"/>
        <insets top="4" bottom="4" left="6" right="6"/>
        <imageIcon id="closeIconId"
path="/images/close_icon.png"/>
        <property key="Button.textShiftOffset"
type="Integer" value="2"/>
        <property key="Button.icon" type="idref"
value="closeIconId"/>
        <state>
            <font name="Serif" size="14" style="BOLD"/>
            <color value="LIGHT_GRAY" type="BACKGROUND"/>
            <color value="BLACK" type="TEXT_FOREGROUND"/>
        </state>
        <state value="PRESSED">
            <color value="GRAY" type="BACKGROUND"/>
            <color value="BLACK"
type="TEXT_FOREGROUND"/>
        </state>
    </style>
    <bind style="buttonStyle" type="region"
key="Button"/>
</synth>
```

Press the Close button and you will find that it works much better than before. Its background color changes when you press it. Its text shifts right and

down when it is in pressed.

Let's discuss all styles used in this XML file:

- The `buttonStyle` style defines styles for a JButton. The `<opaque>` element defines that the JButton will be opaque. The `<insets>` element sets the insets for the JButton.
- The `<imageIcon>` element defines an image resource. This element does not do anything by itself. You will need to refer to its `id` attribute's value in some other place when you need to use an image. Its `path` attribute refers to the path of the image file. It uses the `getResource()` method of the class object you pass to the `load()` method to locate the image file. You have used `/images/close_icon.png` as the path. It means that you need to have a folder named `images` under a folder, which is in the CLASSPATH, and you need to place a `close_icon.png` file under the `images` folder. If you used a URL to load a synth XML file, your path for the image will change accordingly. Suppose you loaded a Synth XML file using a URL string
`"file:///c:/mysynth/synthlaf.xml"`. This URL has `file:///c:/mysynth/` as the base and all paths in your XML will be resolved relative to this base. For example, if you specify `images/close_icon.png` as a path in a `<imageIcon>` element,
`file:///c:/mysynth/images/close_icon.png` will be the path used to load your image file. If you specify `/images/close_icon.png` as the path for in a `<imageIcon>` element, it will be treated as an absolute path, and Synth will attempt to load the image file using a `file://images/close_icon.png` path. It is very important that you understand how a resource lookup is affected by your choice of using different versions of the `load()` method of the `SynthLookAndFeel` class. It is better to use a URL and place all resources under the base folder of the URL. You can pack all resources including the

Synth XML file in a JAR file and use a URL version of the `load()` method.

A `<property>` element is used to set a property for a component. You cannot set any property of a component using a `<property>` element. A `<property>` element has three attributes: `key`, `type`, and `value`. The `key` attribute specifies the property name. The `type` attribute is the type of property, and its value could be `idref`, `boolean`, `dimension`, `insets`, `integer`, or `string`. The `type` attribute is optional, and it defaults to `idref`, which means the `value` attribute's value is an `id` referring to another element. You have set two properties for the JButton. One is the `Button.textShiftOffset` property, which is used to shift the JButton's text when it is pressed. Another property is an image icon for the JButton called `Button.icon`. You have not specified the `type` attribute, which is defaulted to `idref`. The `value` attribute for the `<property>` element is `closeIconId`, which is the `id` of an `<imageIcon>` element that defines the close image.

You can define a color attribute using a `<color>` element. You set the value for the `type` and `value` attributes of a `<color>` element. The `type` attribute can have one of the four values: FOREGROUND, BACKGROUND, TEXT_FOREGROUND, TEXT_BACKGROUND, and FOCUS. You can specify the value for the `value` attribute using constant names from the `java.awt.Color` class or a hex value in #RRGGBB or #AARRGGBB form. In the hex form, AA, RR, GG, and BB are values for alpha, red, green, and blue components of the color.

You can define a font style using a `` element. It has three attributes: `name`, `size`, and `style`. The `style` attribute is optional and it defaults to PLAIN. Other values for `style` attribute are BOLD and ITALIC.

Finally, you combine different styles and put them under a `<state>` element. You have set one set of styles for all states and one set for the PRESSED state in your `buttonStyle`. Note that your JButton will have a background color of LIGHT_GRAY by default. Its background color will change to GRAY when it is pressed. When you run the `SynthLookAndFeel` class with this XML file, the screen looks as shown in [Figure 3-7](#). Note that you have set an icon for the Close button. The background color changes when you press the Close button.

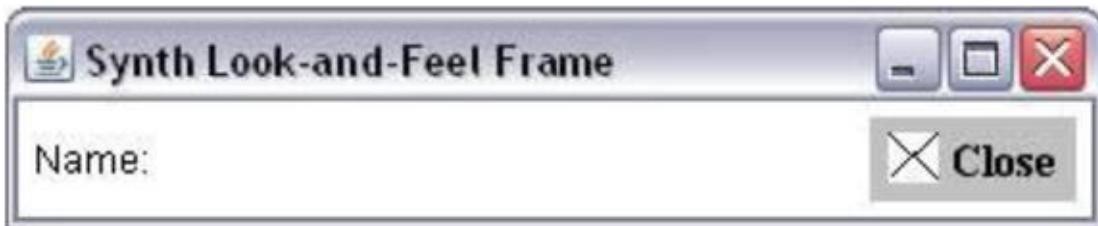


Figure 3-7. Using an icon with the Synth look and feel

You do not have a border for the JButton and JTextField. There are two ways to set a border in Synth: you can use an image or write Java code. I will discuss both ways to set a border. If you want a border to be painted by an image, you need to use an <imagePainter> element, as shown:

```
<imagePainter path="/images/line_border.png"
              sourceInsets="2 2 2 2"
              paintCenter="false"
              method="buttonBorder" />
```

The path attribute specifies the path of the image that is used to paint the border. The sourceInsets attribute specifies insets of the source image. The painterCenter attribute specifies if the center of the image should be drawn or just the border. If you want to draw a border, you should set this attribute to false. If you want to draw an image as a background, you should set this attribute to true. The method attribute is the name of the paint method in the javax.swing.plaf.synth.SynthPainter class. This class has a paint method to paint every component. The method name is of the form paintXxxYyy(), where Xxx is a component name and Yyy is an area to paint. The value of the method attribute is set to xxxYyy by leaving the “paint” word out and using a lowercase first character. For example, to paint a button’s border, the paint method name is paintButtonBorder(). The method attribute value for this method is buttonBorder. You can also set an image as a background for a component using a <imagePainter> element. The following style will set button_background.png as the background for a JButton:

```
<imagePainter path="/images/button_background.png"
              sourceInsets="2 2 2 2"
              paintCenter="true"
              method="buttonBackground" />
```

Tip By default, the image used in the <imagePainter> element is stretched to fit the size of the component. It means that if you want the same border around multiple components, you need to create only one image to represent that border. If you do not want the image stretched, you can set the stretch attribute of the <imagePainter> element to false.

If you want to write Java code to draw a border, you need to create a new class, which will inherit from the `SynthPainter` class as listed in [Listing 3-7](#). You need to override a specific paint method. This class overrides the `paintTextFieldBorder()` and `paintButtonBorder()` methods. They simply draw a rectangle using a custom color and stroke value.

Listing 3-7. A Custom Synth Border Painter Class for a JTextField and a JButton

```
// SynthRectBorderPainter.java
package com.jdojo.swing;

import javax.swing.plaf.synth.SynthPainter;
import javax.swing.plaf.synth.SynthContext;
import java.awt.Graphics;
import java.awt.Graphics2D;
import java.awt.BasicStroke;
import java.awt.Color;

public class SynthRectBorderPainter extends
SynthPainter {
    @Override
    public void paintTextFieldBorder(SynthContext
context, Graphics g,
        int x, int y, int w, int h) {
        Graphics2D g2 = (Graphics2D)g;
        g2.setStroke(new BasicStroke(2));
        g2.setColor(Color.BLUE);
        g2.drawRect(x, y, w, h);
    }

    @Override
```

```

        public void paintButtonBorder(SynthContext
context, Graphics g,
        int x, int y, int w, int h) {
        Graphics2D g2 = (Graphics2D)g;
        g2.setStroke(new BasicStroke(4));
        g2.setColor(Color.RED);
        g2.drawRect(x, y, w, h);
    }
}

```

Now, you need to specify in your Synth XML file that you want to use your custom painter class to paint your JButton's border. An <object> element represents a Java object in a Synth XML file. To specify a custom Java painter, you use a <painter> element, which needs an idref of an <object> element's id and a method name, as shown:

```

<object id="borderPainterId"
class="com.jdojo.swing.SynthRectBorderPainter"/>
<painter idref="borderPainterId"
method="buttonBorder"/>

```

Your final version of the Synth XML file is shown below. You have used a custom Java code to paint the border for the Close button when it is pressed, and an image icon when it is not pressed. The border for the JTextField is drawn using your custom Java code. You can modify the XML content to set styles for the JLabel. Finally, the JFrame looks as shown in [Figure 3-8](#).

```

<?xml version="1.0"?>
<synth version="1.0">
    <style id="buttonStyle">
        <opaque value="true"/>
        <insets top="4" bottom="4" left="6" right="6"/>
        <imageIcon id="closeIconId"
path="/images/close_icon.png"/>
        <property key="Button.textShiftOffset"
type="Integer" value="2"/>
        <property key="Button.icon" type="idref"
value="closeIconId"/>
        <state>

```

```
<imagePainter path="/images/line_border.png"
sourceInsets="2 2 2 2"
paintCenter="false"
method="buttonBorder"/>
<font name="Serif" size="14" style="BOLD"/>
<color value="LIGHT_GRAY" type="BACKGROUND"/>
<color value="BLACK" type="TEXT_FOREGROUND"/>
</state>
<state value="PRESSED">
<object id="borderPainterId"
class="com.jdojo.swing.SynthRectBorderPainter"
<painter idref="borderPainterId"
method="buttonBorder"/>
<color value="GRAY" type="BACKGROUND"/>
<color value="BLACK" type="TEXT_FOREGROUND"/>
</state>
</style>
<bind style="buttonStyle" type="region"
key="Button"/>

<style id="textFieldStyle">
<insets top="4" bottom="4" left="4" right="4"/>
<state>
<color value="WHITE" type="BACKGROUND"/>
<object id="textFieldPainterId"
class="com.jdojo.swing.SynthRectBorderPainter"/>
<painter idref="textFieldPainterId"
method="textFieldBorder"/>
</state>
</style>
<bind style="textFieldStyle" type="region"
key="TextField"/>
</synth>
```

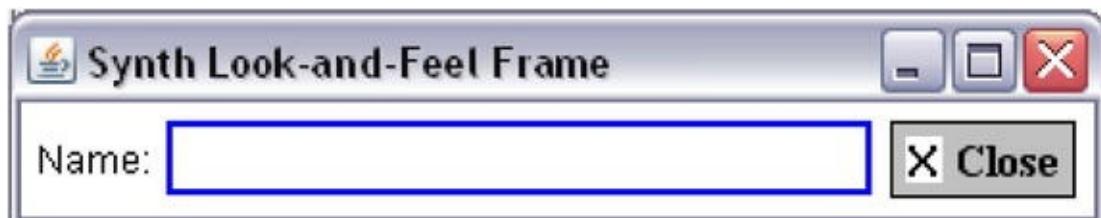


Figure 3-8. Using borders in a Synth L&F

Drag and Drop

Drag and drop (DnD) is a way to transfer data in an application. You can also transfer data using a clipboard with cut, copy, and paste actions.

DnD lets you transfer data by dragging a component and dropping it onto another component. The component that is dragged is called the *drag source*; it supplies the data to be transferred. The component onto which the drag source is dropped is called the *drop target*; it is the receiver of the data. It is the responsibility of the drop target to accept the drop action and import the data supplied by the drag source. The data transfer is accomplished using a `Transferable` object. `Transferable` is an interface in the `java.awt.datatransfer` package. The DnD mechanism is shown in Figure 3-9.

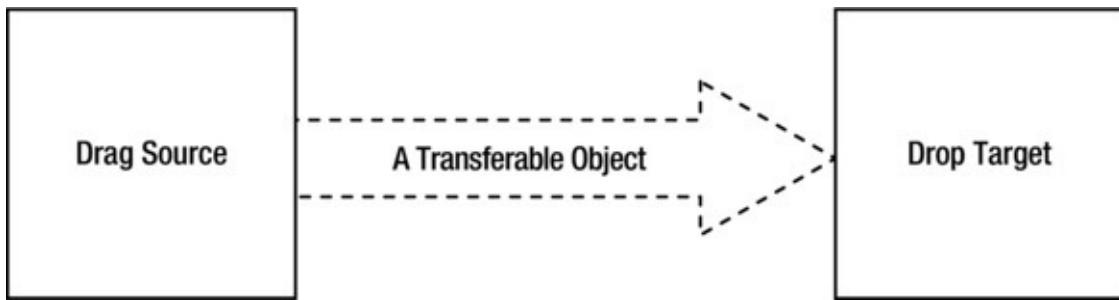


Figure 3-9. The data transfer mechanism used in DnD

The `Transferable` interface contains the following three methods:

- `DataFlavor[] getTransferDataFlavors()`
- `boolean isDataFlavorSupported(DataFlavor flavor)`
- `Object getTransferData(DataFlavor flavor) throws UnsupportedFlavorException, IOException`

Before you learn the three methods of the `Transferable` interface, you need to know why you need a `Transferable` object to transfer data using

DnD. Why does the drag target not get the data directly from the drag source? You can transfer data using DnD within the same Java application, between two Java applications, from a native application to a Java application, and from a Java application to a native application. The scope of a data transfer is very wide, and it supports the transfer of a wide variety of data. The `Transferable` interface provides a mechanism to pack the data and its type in an object. The receiver can query this object about the data type it holds, and import the data if it fits the receiver's requirements. An object of the `DataFlavor` class represents the details about the data. I will not discuss the `DataFlavor` class in detail. It contains several constants to define the type of data; for example, `DataFlavor.stringFlavor` represents Java's Unicode string class. The first two methods of the `Transferable` interface give details about the data. The third one returns the data itself as an `Object`. The drop target will use the `getTransferData()` method to get the data supplied by the drag source.

Using DnD in Swing is easy. Most of the time, you need to write only one line of code to start using DnD. All you need is to enable the dragging on the component, like so:

```
// Enable DnD for myComponent  
myComponent.setDragEnabled(true);
```

After that, you can start using DnD on `myComponent`. Using DnD is UI-dependent. On a Windows platform, you need to press the left mouse button on the drag source to start the drag action. To keep dragging the drag source, you need to move the mouse while holding the left mouse button down. Releasing the left mouse button while the mouse pointer is on a drop target performs the drop action. Throughout the DnD process, the user receives visual feedbacks.

All text components (`JFileChooser`, `JColorChooser`, `JList`, `JTree`, and `JTable`) have built-in drag support for DnD. All text components and `JColorChooser` have built-in drop support for DnD. For example, suppose you have a `JTextField` named `nameFld` and a `JTextArea` named `descTxtArea`. To start using DnD between them, you need to write the following two lines of code:

```
nameFld.setDragEnabled(true);  
descTxtArea.setDragEnabled(true);
```

You can select text in the JTextField, drag it, and drop it onto the JTextArea. The selected text in the JTextField is transferred to the JTextArea. You can also drag text from the JTextArea to the JTextField.

How is the data transferred from one text component to another? Does it get copied or moved? The answer depends on the drag source and the user's action. A drag source declares the actions it supports. The user's action determines what action took place. For example, on the Windows platform, simple dragging indicates a MOVE action whereas dragging with the Ctrl key down indicates a Copy action, and dragging with Ctrl + Shift keys down indicates a LINK action. Actions are represented by the constants declared in the TransferHandler class:

- TransferHandler.COPY
- TransferHandler.MOVE
- TransferHandler.COPY_OR_MOVE
- TransferHandler.LINK
- TransferHandler.NONE

The drop action is not built-in for the JList, JTable, and JTree components. The reason is that the user's intention cannot be predicted when a drag source is dropped onto these components. You will need to write code to get the drop action in place for these components. Note that they have built-in support for the drag action. DnD provides you with appropriate information about the drop location on these components. These components let you specify the drop mode using their setDropMode (DropMode dm) method. A drop mode determines how the drop location is tracked during a DnD operation. Drop modes are represented by constants in the java.swing.DropMode enum as listed in [Table 3-1](#).

Table 3-1. The List of DropMode Enum Contants for JList, JTree, and JTable

DropMode Enum Constant	Using Component	Description
ON	JList JTree JTable	The drop location is tracked using the index of existing items.

INSERT	JList JTree JTable	The drop location is tracked as the position where the data will be inserted.
INSERT_COLS	JTable	The drop location is tracked in terms of the column index where the new columns will be inserted.
INSERT_ROWS	JTable	The drop location is tracked in terms of the row index where the new rows will be inserted.
ON_OR_INSERT	JList JTree JTable	Tracks drop location as both ON and INSERT.
ON_OR_INSERT_ROWS ON_OR_INSERT_COLS	JTable	Tracks ON or INSERT with respect to row or column.
USE_SELECTION	JList JTree JTable	It works the same as ON. It is the default drop mode. If you drag onto a component that is already selected, this mode changes the selection to the item on which the mouse cursor is being dragged. However, the ON drop mode keeps the user's selection intact and selects the item temporarily on which a mouse cursor is dragged. ON is a better choice for the user's experience. This option is only provided for backward compatibility.

Let's write some code to use DnD with a `JList`. You need to do the following:

- Create a new class inheriting from the `javax.swing.TransferHandler` class.
- Override some of the methods in the new class to handle the data transfer.
- Use the `JList`'s `setTransferHandler()` method to set an instance of your transfer handler class.

[Listing 3-8](#) contains the code for a custom `TransferHandler` for a `JList`.

Listing 3-8. A Custom TransferHandler for a `JList`

```
// ListTransferHandler.java
package com.jdojo.swing;
```

```
import java.awt.datatransfer.DataFlavor;
import java.awt.datatransfer.StringSelection;
import java.awt.datatransfer.Transferable;
import
java.awt.datatransfer.UnsupportedFlavorException;
import java.io.IOException;
import javax.swing.DefaultListModel;
import javax.swing.JComponent;
import javax.swing.JList;
import javax.swing.TransferHandler;

public class ListTransferHandler extends
TransferHandler {
    @Override
    public int getSourceActions(JComponent c) {
        return TransferHandler.COPY_OR_MOVE;
    }

    @Override
    protected Transferable
createTransferable(JComponent source) {
        // Suppress the unchecked cast warning
        @SuppressWarnings("unchecked")
        JList<String> sourceList
= (JList<String>)source;

        String data
= sourceList.getSelectedValue();

        // Uses only the first selected item in
the list
        Transferable t = new
StringSelection(data);
        return t;
    }

    @Override
    protected void exportDone(JComponent source,
Transferable data, int action) {
```

```
// Suppress teh unchecked cast warning
@SuppressWarnings("unchecked")
JList<String> sourceList
= (JList<String>)source;

        String movedItem
= sourceList.getSelectedValue();

        if (action == TransferHandler.MOVE) {
            // Remove the moved item
            DefaultListModel<String> listModel
                = (DefaultListModel<String>)
sourceList.getModel();
            listModel.removeElement(movedItem);
        }
    }

@Override
public boolean
canImport(TransferHandler.TransferSupport support) {
    // We only support drop, not copy-paste
    if (!support.isDrop()) {
        return false;
    }

    return
support.isDataFlavorSupported(DataFlavor.stringFlavor)
}

@Override
public boolean
importData(TransferHandler.TransferSupport support) {
    // This is necessary to handle paste
    if (!this.canImport(support)) {
        return false;
    }

    // Get the data
    Transferable t =
support.getTransferable();
```

```

        String data = null;
        try {
            data = (String)
t.getTransferData(DataFlavor.stringFlavor);
            if (data == null) {
                return false;
            }
        }
        catch (UnsupportedFlavorException
| IOException e) {
            e.printStackTrace();
            return false;
        }

        // Get the drop location for the JList
        JList.DropLocation dropLocation
            = (JList.DropLocation)
support.getDropLocation();

        int dropIndex = dropLocation.getIndex();

        // Suppress the unchecked cast warning
        @SuppressWarnings("unchecked")
        JList<String> targetList
= (JList<String>) support.getComponent();

        DefaultListModel<String> listModel
            =
        (DefaultListModel<String>) targetList.getModel();

        if (dropLocation.isInsert()) {
            listModel.add(dropIndex, data);
        }
        else {
            listModel.set(dropIndex, data);
        }

        return true;
    }
}

```

If you want to support the drop action for only a `JList`, you only need to override two methods: `canImport()` and `importData()` in your transfer handler class. The `canImport()` method returns `true` if the drop target wants to transfer the data. Otherwise, it returns `false`. In your code, you are making sure that this operation is a drop operation and that the drag source supplies a string data. Note that if you set a custom `TransferHandler` object to a component, the same `TransferHandler` object will also be used for cut-copy-paste operations. Your code supports only a drop operation. The `importData()` method reads the data from a `Transferable` object and inserts or replaces the item in the `JList` based on the user's action.

The default `TransferHandler` for the `JList` handles the drag action and supplies the data. However, once you set your own `TransferHandler`, you lose the default feature, and you are responsible for adding that feature to your `TransferHandler`. If you want to support a drag action, you need to write custom code for the `createTransferable()` and `getSourceActions()` methods. The first method packs the data into a `Transferable` object and the second one returns the kind of actions supported by the drag source. `StringSelection` is an implementation of the `Transferable` interface to transfer Java strings.

If your drag source supports a `MOVE` action, you are supposed to provide code that will remove the item after the move action. You get a placeholder to write cleanup code in the `exportDone()` method, as shown in [Listing 3-9](#).

[Listing 3-9](#) has the code that displays a `JTextField` and two `JLists`, which lets you demonstrate DnD for a `JList`. [Figure 3-10](#) shows the `JFrame` you get when you run the program in [Listing 3-9](#). You can use DnD among any of the three components: the `JTextField` and two `JLists`. There is one bug in the code. If you drag an item in the `JList` and drop it in the same `JList`, nothing happens. It is left as an exercise for you to figure out this bug and fix it. I will give you a hint: try removing the element before adding it to the same `List` in the `importData()` method of the `ListTransferHandler` class. Also, this custom code supports only a single selection in the `JList`. You can customize the code in the `ListTransferHandler` class to handle multiple selections in the `JList`.

[Listing 3-9](#). Using DnD to Transfer Data Between Swing Components

```
// DragAndDropApp.java
package com.jdojo.swing;

import java.awt.BorderLayout;
import java.awt.Container;
import javax.swing.Box;
import javax.swing.DefaultListModel;
import javax.swing.DropMode;
import javax.swing.JFrame;
import javax.swing.JLabel;
import javax.swing.JList;
import javax.swing.JScrollPane;
import javax.swing.JTextField;
import javax.swing.ListSelectionModel;
import javax.swing.SwingUtilities;

public class DragAndDropApp extends JFrame {
    private JLabel nameLabel = new JLabel("New:");
    private JTextField textField = new JTextField(10);
    private JLabel sourceLabel = new JLabel("Source");
    private JLabel destLabel = new JLabel("Destination");
    private JList<String> sourceList = new JList<>(new DefaultListModel<>());
    private JList<String> destList = new JList<>(new DefaultListModel<>());

    public DragAndDropApp(String title) {
        super(title);
        populateList();
        initFrame();
    }

    private void initFrame() {
        Container contentPane
= this.getContentPane();
        Box nameBox = Box.createHorizontalBox();
```

```
nameBox.add(newLabel);
nameBox.add(newTextField);

Box sourceBox = Box.createVerticalBox();
sourceBox.add(sourceLabel);
sourceBox.add(new
JScrollPane(sourceList));

Box destBox = Box.createVerticalBox();
destBox.add(destLabel);
destBox.add(new JScrollPane(destList));

Box listBox = Box.createHorizontalBox();
listBox.add(sourceBox);
listBox.add(destBox);

Box allBox = Box.createVerticalBox();
allBox.add(nameBox);
allBox.add(listBox);

contentPane.add(allBox,
BorderLayout.CENTER);

// Our lists support only single selection
sourceList.setSelectionMode(
ListSelectionModel.SINGLE_SELECTION);
destList.setSelectionMode(
ListSelectionModel.SINGLE_SELECTION);

// Enable Drag and Drop for components
newTextField.setDragEnabled(true);
sourceList.setDragEnabled(true);
destList.setDragEnabled(true);

// Set the drop mode to Insert
sourceList.setDropMode(DropMode.INSERT);
destList.setDropMode(DropMode.INSERT);

// Set the transfer handler
```

```
        sourceList.setTransferHandler(new
ListTransferHandler());
        destList.setTransferHandler(new
ListTransferHandler());
    }

    public void populateList() {
        DefaultListModel<String> sourceModel
            = (DefaultListModel<String>)
sourceList.getModel();

        DefaultListModel<String> destModel
            = (DefaultListModel<String>)
destList.getModel();
        for (int i = 0; i < 5; i++) {
            sourceModel.add(i, "Source Item "
+ i);
            destModel.add(i, "Destination Item
" + i);
        }
    }

    public static void main(String[] args) {
        SwingUtilities.invokeLater(() -> {
            DragAndDropApp frame = new
DragAndDropApp("Drag and Drop Frame");
            frame.pack();
            frame.setVisible(true);
        });
    }
}
```

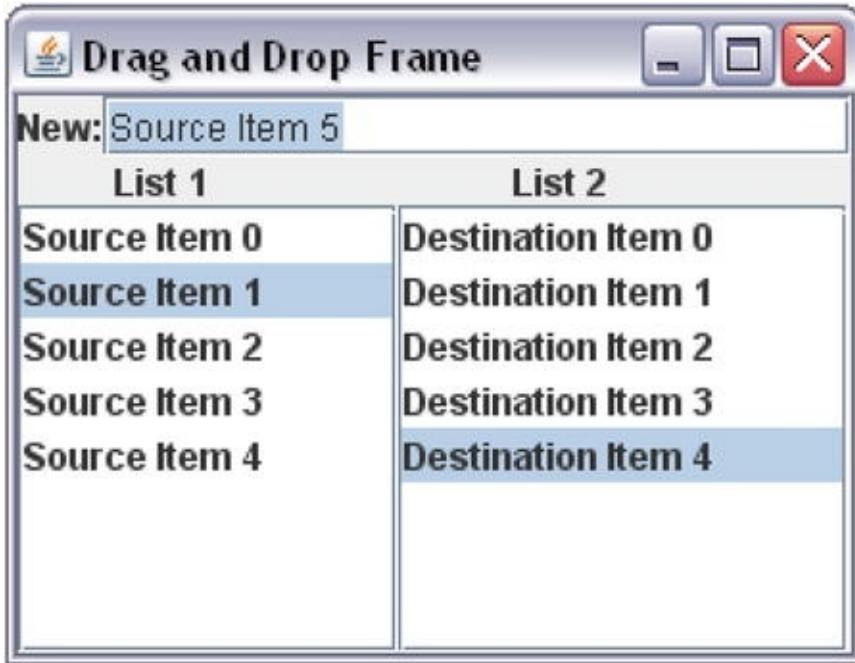


Figure 3-10. A JFrame with a few Swing components supporting DnD

Multiple Document Interface Application

Broadly speaking, there are three types of applications based on how windows are organized within an application to present information to users. They are

- Single Document Interface (SDI)
- Multiple Document Interface (MDI)
- Tabbed Document Interface (TDI)

In an SDI application, only one window is opened at any time. In an MDI application, one main window (also called the parent window) is opened, and multiple child windows are open within the main window. In a TDI application, one window is opened, which has multiple windows open as tabs. Microsoft Notepad is an example of an SDI application, Microsoft Word 97 is an example of an MDI application (newer versions of Microsoft Word are SDI), and Google Chrome browser is an example of a TDI application.

You can use Swing to develop SDI, MDI, and TDI applications. In an MDI

application, you can open multiple frames that will be instances of the `JInternalFrame` class. You can organize multiple internal frames in many ways. For example, you can maximize and minimize them; you can view them side by side in a tiled fashion, or you can view them in a cascaded form. The following are four classes you will be working with in an MDI application:

- `JInternalFrame`
- `JDesktopPane`
- `DesktopManager`
- `JFrame`

An instance of the `JInternalFrame` class acts as a child window that is always displayed inside the area of its parent window. For the most part, working with it is the same as working with a `JFrame`. You add Swing components to its content pane, pack them using the `pack()` method, and make it visible using the `setVisible(true)` method. If you want to listen to window events such as activated, deactivated, etc., you need to add an `InternalFrameListener` to the `JInternalFrame` instead of a `WindowListener`, which is used for a `JFrame`. You can set various properties in its constructor or using setter methods. The following snippet of code shows how to use an instance of the `JInternalFrame` class:

```
String title = "A Child Window";
Boolean resizable = true;
Boolean closable = true;
Boolean maximizable = true;
Boolean iconifiable = true;
JInternalFrame iFrame =
    new JInternalFrame(title, resizable, closable,
maximizable, iconifiable);

// Add components to the iFrame using iFrame.add(...)

// Pack eth frame and make it visible
iFrame.pack();
iFrame.setVisible(true);
```

An instance of the `JDesktopPane` class is used as a container (not as a

top-level container) for all child windows that are instances of the `JInternalFrame` class. It uses a `null` layout manager. You add it to a `JFrame`. You would like to store the reference to the desktop pane as an instance variable to the `JFrame`, so that you can get to it to work with child windows later.

```
// Create a desktop pane  
JDesktopPane desktopPane = new JDesktopPane();  
  
// Add all JInternalFrames to the desktopPane  
desktopPane.add(iFrame);
```

You can get all `JInternalFrames` that are added to a `JDesktopPane` using its `getAllFrames()` method.

```
// Get the list of child windows  
JInternalFrame[] frames = desktopPane.getAllFrames();
```

A `JDesktopPane` uses an instance of the `DesktopManager` interface to manage all internal frames. The `DefaultDesktopManager` class is an implementation of the `DesktopManager` interface. If you want to customize the way a desktop manager manages the internal frames, you need to create your own class inheriting from `DefaultDesktopManager`. You can set your custom desktop manager using the `setDesktopManager()` method of `JDesktopPane`. The desktop manager has many useful methods. For example, if you want to close an internal frame programmatically, you can use its `closeFrame()` method. The user can also close an internal frame using the context menu that is provided if you make it closable. You can get the reference of the desktop manager using the desktop pane's `getDesktopManager()` method.

```
// Close the internal frame named frame1  
desktopPane.getDesktopManager().closeFrame(frame1);
```

The `JFrame` class is used as a top-level container and it acts as the parent window of `JInternalFrames`. It contains an instance of `JDesktopPane`. Note that the `pack()` method of `JFrame` will not do any good in a MDI application because its only child, the desktop pane, uses a `null` layout manager. You must set its size explicitly. Typically, you display the `JFrame`

maximized.

[Listing 3-10](#) demonstrates how to develop an MDI application. Swing does not provide ways to organize your internal frames as tiled or cascaded windows, which is normal in any Windows-based MDI application. You can build the tiled and cascaded features into your Swing MDI application by applying simple logic to organize your internal frames and providing menu items to use them. [Figure 3-11](#) shows the screen that is displayed when you run the program in [Listing 3-10](#).

Listing 3-10. Developing an MDI Application Using Swing

```
// MDIApp.java
package com.jdojo.swing;

import java.awt.BorderLayout;
import java.awt.Dimension;
import javax.swing.JDesktopPane;
import javax.swing.JFrame;
import javax.swing.JInternalFrame;
import javax.swing.JLabel;
import javax.swing.SwingUtilities;
import javax.swing.UIManager;

public class MDIApp extends JFrame {
    private final JDesktopPane desktopPane = new
JDesktopPane();

    public MDIApp(String title) {
        super(title);
        initFrame();
    }

    public void initFrame() {
        JInternalFrame frame1
            = new JInternalFrame("Frame 1",
true, true, true, true);

        JInternalFrame frame2
            = new JInternalFrame("Frame 2",
```

```
        true, true, true, true);

                JLabel label1 = new JLabel("Frame
1 contents...");
                frame1.getContentPane().add(label1);
                frame1.pack();
                frame1.setVisible(true);

                JLabel label2 = new JLabel("Frame
2 contents...");
                frame2.getContentPane().add(label2);
                frame2.pack();
                frame2.setVisible(true);

                // Default location is (0,0) for
a JInternalFrame.
                // Set the location of frame2, so that
both frames are visible
                int x2 = frame1.getX() + frame1.getWidth()
+ 10;
                int y2 = frame1.getY();
                frame2.setLocation(x2, y2);

                // Add both internal frames to the desktop
pane
                desktopPane.add(frame1);
                desktopPane.add(frame2);

                // Finally add the desktop pane to the
JFrame
                this.add(desktopPane,
BorderLayout.CENTER);

                // Need to set minimum size for the JFrame
this.setMinimumSize(new Dimension(300,
300));
        }

public static void main(String[] args) {
    try {
```

```

        // Set the system look and feel
        UIManager.setLookAndFeel(
            UIManager.getSystemLookAndFeelClassName());
    }
    catch (Exception e) {
        e.printStackTrace();
    }

    SwingUtilities.invokeLater(() -> {
        MDIApp frame = new MDIApp("MDI
Frame");
        frame.pack();
        frame.setVisible(true);

        frame.setExtendedState(frame.MAXIMIZED_BOTH);
    });
}
}

```

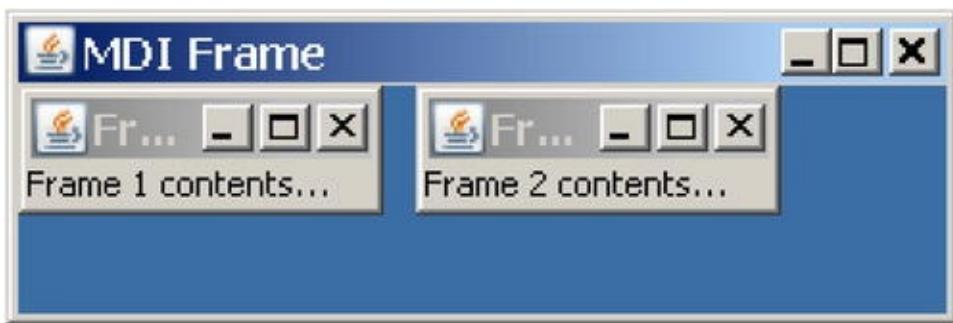


Figure 3-11. An MDI application in Swing run on Windows

When you work with an MDI application, you need to use the `showInternalXxxDialog()` methods of `JOptionPane` instead of the `showXxxDialog()` methods. For example, in an MDI application, you use the `JOptionPane.showInternalMessageDialog()` method instead of the `JOptionPane.showMessageDialog()`. The `showInternalXxxDialog()` version displays the dialog box, so they are always displayed within the top-level container, whereas the `showXxxDialog()` version displays a dialog box that can be dragged outside the boundary of the top-level container of the MDI application.

Tip It is important to decide upfront whether you want to develop an SDI, MDI, or TDI application. Changing from one type to another is not an easy task.

The Toolkit Class

Java needs to communicate with the native system to provide most of the basic GUI functionalities. It uses a specific class on each platform to achieve that. The `java.awt.Toolkit` is an abstract class. Java uses a subclass of the `Toolkit` class on each platform to communicate with the native toolkit system. The `Toolkit` class provides a static `getDefauleToolkit()` factory method to get the toolkit object used on a particular platform. The `Toolkit` class contains useful methods to let you work with screen size and resolution, get access to the system clipboard, and to make a beeping sound, etc. [Table 3-2](#) lists a few of the methods of the `Toolkit` class. The table contains methods that throw a `HeadlessException`. A `HeadlessException` is thrown when code that is dependent on a keyboard, display, or mouse is called in an environment that does not support a keyboard, display, or mouse.

Table 3-2. The List of a Few Useful Methods of the `java.awt.Toolkit` Class

Method of Toolkit Class	Description
<code>abstract void beep()</code>	Makes a beeping sound. It is useful in alerting the user when a severe error occurs in the application.
<code>static Toolkit getDefauleToolkit()</code>	Returns the current <code>Toolkit</code> instance used in the application.
<code>abstract int getScreenResolution() throws HeadlessException</code>	Returns the screen resolution in terms of dots per inch.
<code>abstract Dimension getScreenSize() throws HeadlessException</code>	Returns a <code>Dimension</code> object that contains the width and the height of the screen in pixels.
<code>abstract Clipboard getSystemClipboard() throws HeadlessException</code>	Returns an instance of the <code>Clipboard</code> class that represents a system clipboard.

The following snippet of code shows some examples of how to use the

Toolkit class:

```
/* Copy the selected text from a JTextArea named
dataTextArea to the system clipboard.
If there is no text selection, beep and display
a message.
*/
Toolkit toolkit = Toolkit.getDefaultToolkit();
String data = dataTextArea.getSelectedText();
if (data == null || data.equals("")) {
    toolkit.beep();
    JOptionPane.showMessageDialog(null, "Please
select the text to copy.");
}
else {
    Clipboard clipboard
= toolkit.getSystemClipboard();

    // Pack data as a string in a Transferable
object
    Transferable transferableData = new
StringSelection(data);
    clipboard.setContents(transferableData, null);
}

/* Paste text from the system clipboard to a TextArea,
named dataTextArea.
If there is no text in the system clipboard, beep
and display a message.
*/
Toolkit toolkit = Toolkit.getDefaultToolkit();
Clipboard clipboard = toolkit.getSystemClipboard();
Transferable data = clipboard.getContents(null);
if (data != null &&
data.isDataFlavorSupported(DataFlavor.stringFlavor)) {
    try {
        String text
= (String) data.getTransferData(DataFlavor.stringFlavor
        dataTextArea.replaceSelection(text);
```

```

        }
        catch (Exception e) {
            e.printStackTrace();
        }
    }
else {
    toolkit.beep();
    JOptionPane.showMessageDialog(null, "No text in
the system clipboard to paste");
}

/* Set the size of a JFrame to the size of the screen.
Note that you can also use the
frame.setExtendedState(JFrame.MAXIMIZED_BOTH)
method to use full screen area for a JFrame.
*/
JFrame frame = new JFrame("My Frame");
frame.setSize(Toolkit.getDefaultToolkit().getScreenSiz·

```

Decorating Components Using JLayer

The `JLayer` class represents a Swing component. It is used to decorate another component, which is called the *target* component. It lets you perform custom painting over the component it decorates. It can also receive notifications of all events that are generated within its border. In other words, a `JLayer` lets you perform custom processing based on events occurring in the component it decorates.

When you work with the `JLayer` class, you also need to work with the `LayerUI` class. A `JLayer` delegates its work to a `LayerUI` for custom painting and event handling. To do anything meaningful with a `JLayer`, you need to create a subclass of the `LayerUI` class and override its appropriate methods to write your code.

The following steps are needed to use a `JLayer` in a Swing application.

1. Create a subclass of the `LayerUI` class. Override its various methods to implement the custom processing for the component. The `LayerUI` class takes a type parameter that is the type of the component it will work with.
2. Create an object of the `LayerUI` subclass.
3. Create a Swing component (target component) that you want to decorate with a `JLayer` such as a `JTextField`, a `JPanel`, etc.
4. Create an object of the `JLayer` class, passing the target component and the object of the `LayerUI` subclass to its constructor.
5. Add the `JLayer` object to your container, not the target component.

Let's see a `JLayer` in action. Suppose you want to use a `JLayer` to draw a blue rectangular border around a `JTextField` component. Your first step is to create a subclass of the `LayerUI`. [Listing 3-11](#) contains the code for a `BlueBorderUI` class that inherits from the `LayerUI` class. It overrides the `paint()` method of the `LayerUI` class.

[Listing 3-11](#). A Subclass of the `LayerUI` Class to Draw a Blue Border Around the Layer

```
// BlueBorderUI.java
package com.jdojo.swing;

import java.awt.Color;
import java.awt.Graphics;
import java.awt.Graphics2D;
import javax.swing.JComponent;
import javax.swing.JTextField;
import javax.swing.plaf.LayerUI;

public class BlueBorderUI extends LayerUI<JTextField>
{
```

```

@Override
public void paint(Graphics g, JComponent layer)
{
    // Let the superclass paint the component
    first
    super.paint(g, layer);

    // Create a copy of the Graphics object
    Graphics gTemp = (Graphics2D) g.create();

    // Get the dimension of the layer
    int width = layer.getWidth();
    int height = layer.getHeight();

    // Draw a blue rectangle that is custom
    your border
    gTemp.setColor(Color.BLUE);
    gTemp.drawRect(0, 0, width, height);

    // Destroy the copy of the Graphics object
    gTemp.dispose();
}
}

```

The `paint()` method of the `LayerUI` is called whenever the target component needs to be painted. The method of the `LayerUI` class receives two arguments. The first argument is the reference of the `Graphics` object that you can use to draw on the component. The second argument is the reference of the `JLayer` object, not the target component. You can get the reference of the target component, the component the `JLayer` is decorating, using the second argument. You can cast the second argument to a `JLayer` type and use the `getView()` method of the `JLayer` class, which returns the reference of the target component. The logic inside the `paint()` method is simple. It creates a copy of its `Graphics` argument and draws a blue rectangle around the component. The passed-in `Graphics` object to this method is set up for painting this component. Copying the passed-in `Graphics` object is advised because making changes to the passed-in `Graphics` object may result in unexpected results.

Now you are ready to use the `BlueBorderUI` with a `JLayer` to draw a

blue border around a JTextField. The following snippet of code shows the logic:

```
// Create a JTextField as usual
JTextField firstName = new JTextField(10);

// Create an object of the BlueBorderUI
LayerUI<JTextField> ui = new BlueBorderUI();

// Create a JLayer object by wrapping the JTextField
and BlueBorderUI
JLayer<JTextField> layer = new JLayer(firstName, ui);

// Add the layer object to a container, say the
content pane of a frame.
// Note that you add the layer and not the component
to a container.
contentPane.add(layer)
```

The target component and LayerUI may be passed to a JLayer when you create it. If you do not know the target component and/or the LayerUI for a JLayer, you may pass them later using the setView() and setUI() methods of the JLayer class. The getView() and getUI() methods of the JLayer class let you get the reference of the current target component and the LayerUI for a JLayer, respectively.

[Listing 3-12](#) demonstrates how to use a JLayer to draw a border around two JTextField components. The code is simple and self-explanatory. When you run this program, it will display two JTextField components with blue borders in a JFrame.

[Listing 3-12.](#) Decorating JTextField Components Using JLayer

```
// JLayerBlueBorderFrame.java
package com.jdojo.swing;

import java.awt.FlowLayout;
import javax.swing.JFrame;
import javax.swing.JLabel;
import javax.swing.JLayer;
```

```
import javax.swing.JTextField;
import javax.swing.SwingUtilities;
import javax.swing.plaf.LayerUI;

public class JLayerBlueBorderFrame extends JFrame {
    private JLabel firstNameLabel = new
JLabel("First Name:");
    private JLabel lastNameLabel = new JLabel("Last
Name:");
    private JTextField firstName = new
JTextField(10);
    private JTextField lastName = new
JTextField(10);

    public JLayerBlueBorderFrame(String title) {
        super(title);
        initFrame();
    }

    public void initFrame() {
        this.setLayout(new FlowLayout());
this.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);

        // Create an object of the LayerUI
        subclass - BlueBorderUI
        LayerUI<JTextField> ui = new
BlueBorderUI();

        // Wrap the LayerUI and two JTextFields in
two JLayers.
        // Note that a LayerUI object can be
shared by multiple JLayers
        JLayer<JTextField> layer1 = new JLayer<>
(firstName, ui);
        JLayer<JTextField> layer2 = new JLayer<>
(lastName, ui);

        this.add(firstNameLabel);
        this.add(layer1); // Add layer1, not
```

```

firstName to the frame

        this.add(lastNameLabel);
        this.add(layer2); // Add layer2, not
lastName to the frame
    }

public static void main(String[] args) {
    SwingUtilities.invokeLater(() -> {
        JLayerBlueBorderFrame frame
            = new
JLayerBlueBorderFrame("JLayer Test Frame");
        frame.pack();
        frame.setVisible(true);
    }) ;
}
}

```

Let's look at an example of how to handle events of a target component using a `JLayer`. A `JLayer` delegates the event processing task to the associated `LayerUI`. You need to perform the following steps to handle events in a `LayerUI` subclass.

1. Register for the events that a `JLayer` will process.
2. Write the event handler code in an appropriate method of the `LayerUI` subclass.

You need to call the `setLayerEventMask(long layerEventMask)` method of the `JLayer` class to register for all events that a `JLayer` is interested in. The `layerEventMask` parameter of this method must be a bitmask of the `AWTEvent` constants. For example, if a `JLayer` named `layer` is interested in key and focus events, you call this method as shown:

```

int layerEventMask = AWTEvent.KEY_EVENT_MASK
| AWTEvent.FOCUS_EVENT_MASK;
layer.setLayerEventMask(layerEventMask);

```

Typically, a `JLayer` registers for events in the `installUI()` method of the `LayerUI` subclass. You need to override the `installUI()` method of the

`LayerUI` class in your subclass. You need to set the event mask for the `JLayer` to zero when the UI is uninstalled. This is accomplished in the `uninstallUI()` method. The following snippet of code shows a `JLayer` registering for a focus event and resetting its event mask:

```
public class SmartBorderUI extends LayerUI<JTextField>
{
    @Override
    public void installUI(JComponent c) {
        super.installUI(c);
        JLayer layer = (JLayer)c;

        // Register for the focus event

layer.setLayerEventMask(AWTEvent.FOCUS_EVENT_MASK);
    }

    @Override
    public void uninstallUI(JComponent c) {
        super.uninstallUI(c);
        JLayer layer = (JLayer)c;

        // Reset the event mask
        layer.setLayerEventMask(0);
    }

    // Other code goes here
}
```

When a registered event is delivered to the `JLayer`, the `eventDispatched(AWTEvent event, JLayer layer)` method of the associated `LayerUI` is called. You may be tempted to override this method in your `LayerUI` subclass to handle all registered events. Technically, you are correct in overriding this method to handle events. However, there is a better way to provide the event handling code in a `LayerUI` subclass. The `eventDispatched()` method of the `LayerUI` class calls an appropriately named method when it receives an event. Those methods are declared as

```
protected void processXxxEvent(XxxEvent e, JLayer
layer).
```

Here, `Xxx` is the name of the registered event. The following snippet of code shows examples of the event type and the declaration of the method that is called when the `JLayer` receives that kind of event:

```
public class SmartBorderUI extends LayerUI<JTextField>
{
    @Override
    protected void processFocusEvent(FocusEvent e,
JLayer layer) {
        // Process the focus event here
    }

    @Override
    protected void processKeyEvent(KeyEvent e,
JLayer layer) {
        // Process the key event here
    }

    @Override
    protected void processMouseEvent(MouseEvent e,
JLayer layer) {
        // Process the mouse event here
    }

    // Other code goes here...
}
```

That is all you need to do to process events in a `JLayer`. Let's improve the previous example. This time, the `JLayer` will draw a border around a `JTextField` whose color will depend on whether the `JTextField` has focus. When it has focus, a red border is drawn. When it loses focus, a blue border is drawn.

[Listing 3-13](#) contains the code for a `SmartBorderUI` class, which inherits from `LayerUI`. Its `paint()` method draws a red or blue border depending on whether the target component has focus. Its `installUI()` method registers for the focus event. The `unInstallUI()` method deregisters for the focus event by setting the event mask to zero. Its `processFocusEvent()` method handles the focus event. Note that this method is called when a focus event occurs on the target component. It calls the `repaint()` method, which in turn

will call the `paint()` method, which paints the border according to the focus state of the component.

Listing 3-13. A Subclass of LayerUI for Decorating JTextField Based on Focus

```
// SmartBorderUI.java
package com.jdojo.swing;

import java.awt.AWTEvent;
import java.awt.Color;
import java.awt.Graphics;
import java.awt.Graphics2D;
import java.awt.event.FocusEvent;
import javax.swing.JComponent;
import javax.swing.JLayer;
import javax.swing.JTextField;
import javax.swing.plaf.LayerUI;

public class SmartBorderUI extends LayerUI<JTextField>
{
    @Override
    public void paint(Graphics g, JComponent layer)
    {
        // Let the superclass paint the component
        // first
        super.paint(g, layer);

        Graphics gTemp = (Graphics2D) g.create();
        int width = layer.getWidth();
        int height = layer.getHeight();

        // Suppress the unchecked warning
        @SuppressWarnings("unchecked")
        JLayer<JTextField> myLayer
        = (JLayer<JTextField>) layer;

        JTextField field
        = (JTextField) myLayer.getView();

        // When in focus, draw a red rectangle.
```

```

Otherwise, draw a blue rectangle
    Color bColor;
    if (field.hasFocus()) {
        bColor = Color.RED;
    }
    else {
        bColor = Color.BLUE;
    }

    gTemp.setColor(bColor);
    gTemp.drawRect(0, 0, width, height);
    gTemp.dispose();
}

@Override
public void installUI(JComponent c) {
    // Let the superclass do its job
    super.installUI(c);

    // Set the event mask for the layer
    stating that it is interested
    // in listening to the focus event for its
    target
    JLayer layer = (JLayer)c;

    layer.setLayerEventMask(AWTEvent.FOCUS_EVENT_MASK);
}

@Override
public void uninstallUI(JComponent c) {
    // Let the superclass do its job
    super.uninstallUI(c);

    JLayer layer = (JLayer) c;

    // Set the event mask back to zero
    layer.setLayerEventMask(0);
}

@Override

```

```

        protected void processFocusEvent(FocusEvent e,
JLayer layer) {
            layer.repaint();
        }
}

```

[Listing 3-14](#) contains the code that uses the SmartBorderUI class with a JLayer. When you run this program, it will display a JFrame with two JTextField components. Changing focus between the JTextField components will change their border colors.

Listing 3-14. Decorating JTextField Components Using Jlayer Based on Focus

```

// JLayerSmartBorderFrame.java
package com.jdojo.swing;

import java.awt.FlowLayout;
import javax.swing.JFrame;
import javax.swing.JLabel;
import javax.swing.JLayer;
import javax.swing.JTextField;
import javax.swing.SwingUtilities;
import javax.swing.plaf.LayerUI;

public class JLayerSmartBorderFrame extends JFrame {
    private JLabel firstNameLabel = new
JLabel("First Name:");
    private JLabel lastNameLabel = new JLabel("Last
Name:");
    private JTextField firstName = new
JTextField(10);
    private JTextField lastName = new
JTextField(10);

    public JLayerSmartBorderFrame(String title) {
        super(title);
        initFrame();
    }
}

```

```

public void initFrame() {
    this.setLayout(new FlowLayout());

this.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);

        // Create an object of LayerUI subclass
- SmartBorderUI
    LayerUI<JTextField> ui = new
SmartBorderUI();

        // Wrap the LayerUI and two JTextFields in
two JLayers
    JLayer<JTextField> layer1 = new JLayer<>
(firstName, ui);
    JLayer<JTextField> layer2 = new JLayer<>
(lastName, ui);

        this.add(firstNameLabel);
        this.add(layer1); // Add layer1 and not
firstName to the frame

        this.add(lastNameLabel);
        this.add(layer2); // Add layer2 and not
lastName to the frame
    }

public static void main(String[] args) {
    SwingUtilities.invokeLater(() -> {
        JLayerSmartBorderFrame frame
            = new
JLayerSmartBorderFrame("JLayer Test Frame");
        frame.pack();
        frame.setVisible(true);
    });
}
}

```

Translucent Windows

Before discussing translucent windows in Swing, let's define three terms:

- Transparent
- Translucent
- Opaque

If something is transparent, you can see through it; clear water is transparent. If something is opaque, you cannot see through it; a concrete wall is opaque. If something is translucent, you can see through it, but not clearly. If something is translucent, it partially allows light to pass through; a plastic curtain is translucent. The terms “transparent” and “opaque” describe two opposite states, whereas the term “translucent” describes a state between transparent and opaque.

You can define the degree of translucency of a window such as a `JFrame`. A 90% translucent window is 10% opaque. The degree of translucency of a window can be defined using the alpha value of the color component for a pixel. You can define the alpha value of a color using the constructors of the `Color` class:

- `Color(int red, int green, int blue, int alpha)`
- `Color(float red, float green, float blue, float alpha)`

The value for the `alpha` argument is specified between 0 and 255, when the color components are specified in terms of `int` values. For the `float` type arguments, its value is between 0.0 and 1.0. The `alpha` value of 0 or 0.0 means transparent (100% translucent and 0% opaque). The `alpha` value of 255 or 1.0 means opaque (0% translucent and not transparent at all).

Three forms of translucency in a window are supported. They are represented by the following three constants of the `WindowTranslucency` enum:

- `PERPIXEL_TRANSPARENT`: In this form of translucency, a pixel in a window is either opaque or transparent. That is, the `alpha` value for a pixel is either 0.0 or 1.0.
- `TRANSLUCENT`: In this form of translucency, all pixels in a

window have the same translucency, which can be defined by an alpha value between 0.0 and 1.0.

- **PERPIXEL_TRANSLUCENT**: In this form of translucency, each pixel in a window can have its own alpha value between 0.0 and 1.0. It lets you define the translucency in a window on a per pixel basis.

Not all platforms support all the three forms of translucency. You must check for the supported forms of translucency in your program before using them. Otherwise, your code may throw an `UnsupportedOperationException`. The `isWindowTranslucencySupported()` method of the `GraphicsDevice` class lets you check the forms of translucency that are supported on a platform. [Listing 3-15](#) demonstrates how to check for translucency support on a platform. The code in this listing is short and self-explanatory. I have omitted checking in subsequent examples to keep the code shorter.

Listing 3-15. Checking for the Translucency support on a Platform

```
// TranslucencySupport.java
package com.jdojo.swing;

import java.awt.GraphicsDevice;
import java.awt.GraphicsEnvironment;
import static
java.awt.GraphicsDevice.WindowTranslucency.*;

public class TranslucencySupport {
    public static void main(String[] args) {
        GraphicsEnvironment graphicsEnv
            =
        GraphicsEnvironment.getLocalGraphicsEnvironment();

        GraphicsDevice graphicsDevice
            =
        graphicsEnv.getDefaultScreenDevice();

        // Print the translucency supported by the
        platform
```

```

        boolean isSupported
        =
graphicsDevice.isWindowTranslucencySupported(
                PERPIXEL_TRANSPARENT);
        System.out.println("PERPIXEL_TRANSPARENT
supported: "
                + isSupported);

        isSupported
        =
graphicsDevice.isWindowTranslucencySupported(TRANSLUCE)
        System.out.println("TRANSLUCENT supported:
" + isSupported);

        isSupported
= graphicsDevice.isWindowTranslucencySupported(
                PERPIXEL_TRANSLUCENT);
        System.out.println("PERPIXEL_TRANSLUCENT
supported: "
                + isSupported);
    }
}

```

Let's see a uniform translucent `JFrame` in action. You can set the translucency of a `JFrame` using the `setOpacity(float opacity)` method. The value for the specified `opacity` must be between `0.0f` and `1.0f`. Before you call this method on a window, the following three conditions must be met:

- The platform must support the `TRANSLUCENT` translucency. You can use the logic from [Listing 3-15](#) to check if the `TRANSLUCENT` translucency is supported by the platform.
- The window must be undecorated. You can make a `JFrame` or `JDialog` undecorated by calling the `setUndecorated(false)` method on them.
- The window must not be in full-screen mode. You can put a window in full-screen mode using the `setFullScreenWindow(Window w)` method of the

`GraphicsDevice` class.

If all conditions are not met, setting the opacity of a window other than 1.0f throws an `IllegalComponentStateException`.

[Listing 3-16](#) demonstrates how to use a uniform translucent `JFrame`. The following two statements in the `initFrame()` method in the listing is of interest to get a translucent `JFrame`. The first statement makes sure that the frame is undecorated, and the second one sets the translucency of the frame in terms of opacity.

[Listing 3-16.](#) Using a Uniform Translucent JFrame

```
// UniformTranslucentFrame.java
package com.jdojo.swing;

import java.awt.BorderLayout;
import javax.swing.JButton;
import javax.swing.JFrame;
import javax.swing.SwingUtilities;

public class UniformTranslucentFrame extends JFrame {
    private JButton closeButton = new JButton("Close");

    public UniformTranslucentFrame(String title) {
        super(title);
        initFrame();
    }

    public void initFrame() {
        this.setDefaultCloseOperation(EXIT_ON_CLOSE);

        // Make sure the frame is undecorated
        this.setUndecorated(true);

        // Set 40% opacity. That is, 60%
        // translucency.
        this.setOpacity(0.40f);
    }
}
```

```

        // Set its size
        this.setSize(200, 200);

        // Center it on the screen
        this.setLocationRelativeTo(null);

        // Add a button to close the window
        this.add(closeButton, BorderLayout.SOUTH);

        // Exit the application when the close
button is clicked
        closeButton.addActionListener(e ->
System.exit(0));
    }

    public static void main(String[] args) {
        SwingUtilities.invokeLater(() -> {
            UniformTranslucentFrame frame
                = new
UniformTranslucentFrame("Translucent Frame");
            frame.setVisible(true);
        });
    }
}

// Make sure the frame is undecorated
this.setUndecorated(true);

// Set 40% opacity. That is, 60% translucency.
this.setOpacity(0.40f);

```

When you run this program, you can see the contents on your screen through the `JFrame` display area. A `Close` button is added to the frame to close it.

Let's see a per-pixel translucent `JFrame` in action. You will create a gradient effect (fading effect) inside a `JPanel` by setting the alpha value for its background color different for different pixels in its display area. You can get a per-pixel translucency in different ways. The easiest way to see it in action is to use a `JPanel` with a background color and setting the alpha component to a desired translucency. The following snippet of code illustrates this:

```

// Create a frame and set its properties
JFrame frame = new JFrame();
frame.setUndecorated(true);
frame.setBounds(0, 0, 200, 200);

// Set the background color of the frame to all zero,
so that the per-pixel translucency works
frame.setBackground(new Color(0, 0, 0, 0));

// Create a blue JPanel with 128 alpha component
JPanel panel = new JPanel();
int alpha = 128;
Color bgColor = new Color(0, 0, 255, alpha);
panel.setBackground(bgColor);

// Add the JPanel to the frame and display it
frame.add(panel);
frame.setVisible(true);

```

Two things are different in the code. First, it sets the background color of the frame with all color components set to 0 to achieve the per-pixel translucency. Second, it sets the background color of the JPanel, which has an alpha component, to 128. You can add another JPanel with a different alpha component for its background color to the JFrame. This will give you two areas on the JFrame whose pixels use different translucency.

You can achieve a fancier result if you use an object of the GradientPaint class to paint your JPanel. A GradientPaint object fills a Shape with a linear gradient pattern. It requires you to specify two points, p1 and p2, and colors for each point, c1 and c2. The color on the connecting line between p1 and p2 will proportionally change from c1 to c2.

[Listing 3-17](#) contains the code for a custom JPanel that uses a GradientPaint object to paint its area. The background color for the JPanel is specified in its constructor. It has overridden the paintComponent() to provide the custom painting effect. The gradient color pattern is provided by Graphics2D. The method checks if it have a Graphics2D object. The starting point, p1, is the upper left corner of the JPanel. The color for the starting point, c1, is the same as the one passed in the constructor. It uses 255 as its alpha component. The second point, p2, is the

upper right corner of the JPanel, with the same color that uses a zero alpha component. This will give the JPanel a gradient effect from opaque at the left edge to gradually turning transparent at the right edge. You can experiment by changing the two points and the alpha component values for them to get a different gradient pattern. It sets the GradientPaint object as the Paint object for the Graphics2D object and calls the fillRect() method to paint the area of the JPanel.

Listing 3-17. A Custom JPanel With a Gradient Color Effect Using the Per-Pixel Translucency

```
// TranslucentJPanel.java
package com.jdojo.swing;

import java.awt.Color;
import java.awt.GradientPaint;
import java.awt.Graphics;
import java.awt.Graphics2D;
import java.awt.Paint;
import javax.swing.JPanel;

public class TranslucentJPanel extends JPanel {
    private int red = 240;
    private int green = 240;
    private int blue = 240;

    public TranslucentJPanel(Color bgColor) {
        this.red = bgColor.getRed();
        this.green = bgColor.getGreen();
        this.blue = bgColor.getBlue();
    }

    @Override
    protected void paintComponent(Graphics g) {
        if (g instanceof Graphics2D) {
            int width = this.getWidth();
            int height = this.getHeight();
            float startPointX = 0.0f;
            float startPointY = 0.0f;
```

```

        float endPointX = width;
        float endPointY = 0.0f;
        Color startColor = new Color(red,
green, blue, 255);
        Color endColor = new Color(red,
green, blue, 0);

        // Create a GradientPaint object
        Paint paint = new
GradientPaint(startPointX, startPointY,
startColor,
endPointX,
endPointY,
endColor);

        Graphics2D g2D = (Graphics2D) g;
        g2D.setPaint(paint);
        g2D.fillRect(0, 0, width, height);
    }
}
}

```

Listing 3-18 contains the code to see the per-pixel translucency in a JFrame in action. It adds three instances of the TranslucentJPanel class with the background color of red, green, and blue. A Close button is added to close the frame.

Listing 3-18. Using Per-Pixel Translucency in a JFrame

```

// PerPixelTranslucentFrame.java
package com.jdojo.swing;

import java.awt.Color;
import java.awt.GridLayout;
import javax.swing.JButton;
import javax.swing.JFrame;
import javax.swing.SwingUtilities;

public class PerPixelTranslucentFrame extends JFrame {

```

```
    private JButton closeButton = new
JButton("Close");

    public PerPixelTranslucentFrame(String title) {
        super(title);
        initFrame();
    }

    public void initFrame() {

this.setDefaultCloseOperation(EXIT_ON_CLOSE);

        // Make sure the frame is undecorated
this.setUndecorated(true);

        // Set the background color with all
components as zero,
        // so per-pixel translucency is used
this.setBackground(new Color(0, 0, 0, 0));

        // Set its size
this.setSize(200, 200);

        // Center it on the screen
this.setLocationRelativeTo(null);

        this.getContentPane().setLayout(new
GridLayout(0, 1));

        // Create and add three JPanel with
different color gradients
        this.add(new
Translucent JPanel(Color.RED));
        this.add(new
Translucent JPanel(Color.GREEN));
        this.add(new
Translucent JPanel(Color.BLUE));

        // Add a button to close the window
this.add(closeButton);
closeButton.addActionListener(e ->
```


```

        System.exit(0));
    }

    public static void main(String[] args) {
        SwingUtilities.invokeLater(() -> {
            PerPixelTranslucentFrame frame
                = new
PerPixelTranslucentFrame("Per-Pixel Translucent
Frame");
            frame.setVisible(true);
        }) ;
    }
}

```

[Figure 3-12](#) shows the `JFrame` when the program is run. Notice the gradient effect in the frame. Each panel is more translucent as you move from left to right. The text shown the figure is not part of the `JFrame`. The text was displayed in the background when the `JFrame` was displayed. You can see through the translucent part of the `JFrame`.

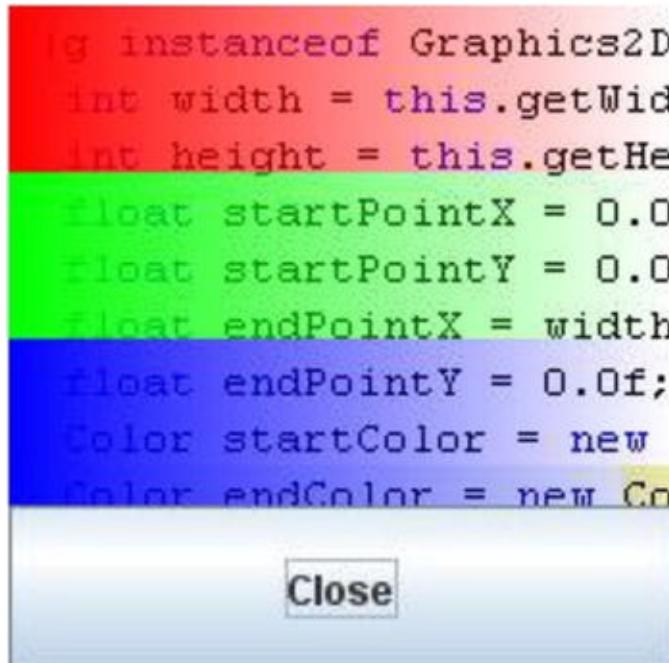

[Figure 3-12.](#) A `JFrame` using per-pixel translucency

Shaped Window

Swing lets you create a custom shaped window such as a round shaped JFrame, an oval shaped JDialog, etc. You can give a window a custom shape by using the `setShape(Shape s)` method of the Window class. The shape of the window is limited only by your imagination. You can create a shape by combining multiple shapes using the classes in the `java.awt.geom` package. The following snippet of code creates a shape that contains an ellipse placed above a rectangle. At the end, it sets the custom shape to a JFrame.

```
// Create a shape with an ellipse over a rectangle
Ellipse2D.Double ellipse = new Ellipse2D.Double(0, 0,
200, 100);
Rectangle2D.Double rect = new Rectangle2D.Double(0,
100, 200, 200);

// Combine an ellipse and a rectangle into a Path2D
object to get a new shape
Path2D path = new Path2D.Double();
path.append(rect, true);
path.append(ellipse, true);

// Create a JFrame
JFrame frame = new JFrame("A Custom Shaped JFrame");

// Set the custom shape to the JFrame
frame.setShape(path);
```

A Window owns a rectangular area on the screen. If you give a custom shape to a window, some of its parts may be cut off. The part of a shaped window that does not belong to the custom shape is not visible and not clickable. [Figure 3-13](#) shows a custom shaped window with an ellipse placed above a rectangle. The window contains a Close button. The areas around the four corners of the ellipse are not visible and not clickable.

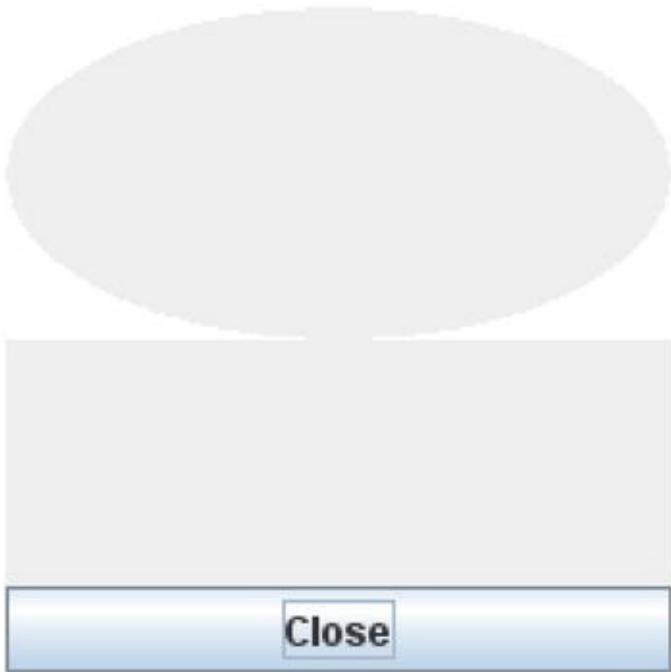


Figure 3-13. A custom shaped window with an ellipse placed above a rectangle

The following three criteria must be met to use a shaped window:

- The platform must support `PERPIXEL_TRANSPARENT` translucency. You can use the logic from [Listing 3-15](#) to check whether the `PERPIXEL_TRANSPARENT` translucency is supported.
- The window must be undecorated. You can make a `JFrame` or `JDialog` undecorated by calling the `setUndecorated(false)` method on them.
- The window must not be in full-screen mode. You can put a window in full-screen mode using the `setFullScreenWindow(Window w)` method of the `GraphicsDevice` class.

[Listing 3-19](#) contains the code that displays a shaped `JFrame` that was shown in [Figure 3-13](#).

[Listing 3-19.](#) Using a Custom Shaped JFrame

```
// ShapedFrame.java
```

```
package com.jdojo.swing;

import java.awt.BorderLayout;
import java.awt.geom.Path2D;
import java.awt.geom.Ellipse2D;
import java.awt.geom.Rectangle2D;
import javax.swing.JButton;
import javax.swing.JFrame;
import javax.swing.SwingUtilities;

public class ShapedFrame extends JFrame {
    private JButton closeButton = new JButton("Close");

    public ShapedFrame() {
        initFrame();
    }

    public void initFrame() {
        // Make sure the frame is undecorated
        this.setUndecorated(true);

        this.setDefaultCloseOperation(EXIT_ON_CLOSE);
        this.setSize(200, 200);

        // Create a shape with an ellipse placed
        // over a rectangle
        Ellipse2D.Double ellipse = new
        Ellipse2D.Double(0, 0, 200, 100);
        Rectangle2D.Double rect = new
        Rectangle2D.Double(0, 100, 200, 200);

        // Combine the ellipse and rectangle into
        // a Path2D object and
        // set it as the shape for the JFrame
        Path2D path = new Path2D.Double();
        path.append(rect, true);
        path.append(ellipse, true);
        this.setShape(path);
    }
}
```

```

        // Add a Close button to close the frame
        this.add(closeButton, BorderLayout.SOUTH);
        closeButton.addActionListener(e ->
    System.exit(0));
    }

    public static void main(String[] args) {
        SwingUtilities.invokeLater(() -> {
            // Display the custom shaped frame
            ShapedFrame frame = new
ShapedFrame();
            frame.setLocationRelativeTo(null);
            frame.setVisible(true);
        });
    }
}

```

The following part of the code inside the `initFrame()` method in this listing is of interest:

```

// Make sure the frame is undecorated
this.setUndecorated(true);

// Create a shape with an ellipse placed over
// a rectangle
Ellipse2D.Double ellipse = new Ellipse2D.Double(0, 0,
200, 100);
Rectangle2D.Double rect = new Rectangle2D.Double(0,
100, 200, 200);

// Combine the ellipse and rectangle into a Path2D
// object and
// set it as the shape for the JFrame
Path2D path = new Path2D.Double();
path.append(rect, true);
path.append(ellipse, true);
this.setShape(path);

```

The first statement makes sure that the `JFrame` is undecorated. Two shapes, an ellipse and a rectangle, are created. Their coordinates and size are set to place

the ellipse over the rectangle. A `Path2D.Double` object is used to connect the ellipse and rectangle together into a custom `Shape` object. `Path2D` is an abstract class in the `java.awt.geom` package. It declares two static inner classes, `Path2D.Double` and `Path2D.Float`, to store the coordinates of a shape in double precision and single precision floating-point numbers, respectively. `Shape` is an interface declared in the `java.awt` package. The `Path2D` class implements the `Shape` interface. Note that the `setShape()` method in the `Window` class takes an instance of the `Shape` interface as an argument. The `append()` method of the `Path2D` class appends the geometry of the specified `Shape` object to the path. The second argument to the `append()` method is an indicator whether you want to connect two shapes using a line segment. If it is `true`, a call to the `moveTo()` method is translated to the `lineTo()` method. In this case, the value of `true` for this argument is of no significance. Please explore the classes in the `java.awt.geom` package to learn more about the many interesting shapes that you can use in your Java application.

Summary

Swing components have built-in support for displaying HTML text as labels. You can use an HTML-formatted string as a label for a `JButton`, `JMenuItem`, `JLabel`, `JToolTip`, `JTabbedPane`, `JTree`, etc. using an HTML string, which should start and end with the `<html>` and `</html>` tags, respectively. If you do not want Swing to interpret text enclosed in HTML tags as HTML for a component, you can disable the feature by calling the `putClientProperty("html.disable", Boolean.TRUE)` method on the component.

Swing components are not thread-safe. You are supposed to update the component's states from a single thread called an event dispatch thread. All event handlers for components are executed in the event dispatch thread. Swing creates the event dispatch thread automatically. Swing provides a utility class called `SwingUtilities` to work with the event dispatch thread; its `invokeLater(Runnable r)` method schedules the specified `Runnable` to be executed on the event dispatch thread. It is safe to build the Swing GUI and show it on the event dispatch thread. The `isEventDispatchThread()` of

the `SwingUtilities` class returns true if this method is executed by the event dispatch thread.

Running long-running tasks on the event dispatch thread will make your GUI unresponsive. Swing provides a `SwingWorker` class to execute long-running tasks on worker threads that are threads other than the event dispatch thread. The `SwingWorker` class provides features to publish the results of the task on the event dispatch thread that can update the Swing components safely.

Swing provides pluggable L&F. It ships with some predefined L&F. You can use the `UIManager.setLookAndFeel()` method to set a new L&F for your application.

Swing supports skinnable L&F called Synth that lets you define the L&F in an external XML file.

Drag and drop (DnD) is a way to transfer data between components in an application. Swing supports DnD between Swing component, and Swing components and native components. Using DnD, you can copy, move, and link data between two components.

Using Swing, you can develop a multiple document interface (MDI) application that consists of multiple frames managed by a desktop manager. Frames in an MDI application can be arranged in different ways; for example, they can be arranged in layers, they can be cascaded, they can be placed side by side, etc.

Swing provides an instance of the `Toolkit` class to communicate with the native system. The class contains many useful methods such as for making a beep sound, knowing the screen resolution and size, etc.

Swing lets you have translucent windows. Translucency can be defined to be the same for all pixels in the window or on a per-pixel basis.

In Swing, you are not limited to having only rectangular windows. It lets you create shaped windows. A shaped window can be of any shape, such as circular, oval, or any custom shape.

CHAPTER 4



Applets

In this chapter, you will learn

- What an applet is
- How to develop, deploy, and run applets
- How to use the `<applet>` tag to embed an applet in an HTML document
- How to install and configure Java Plug-in, which runs the applets
- How to use the `appletviewer` program to run applets
- The life cycle of applets
- How to pass parameters to applets
- How to publish an applet's parameters and applet's description
- How to use images and audio clips in applets
- How to customize the Java policy file to grant permissions to applets
- How to sign applets

What Is an Applet?

An *applet* is a Java program that is embedded in an HTML document and run in

a web browser. The compiled Java code that makes up an applet is stored on a web server. The web browser downloads the applet code from the web server over the Internet, and runs the code locally in the browser's context. Typically, an applet has a graphical user interface (GUI). An applet has many security restrictions as far as what it can or cannot access on the client's computer. Restrictions on applets are necessary because applets may not be developed and used by the same person. An applet written with bad intentions may do harmful things to the client's machine if it is allowed full access to the client's machine. For example, security restrictions do not allow an applet to access the file system or start a program on the client machine. Suppose you open a web page with an applet that can read files on your machine. Without your knowledge, a rogue applet could send your private information stored on your machine to its server. To protect the applet users from this kind of mischief, it is necessary to have security restrictions in place when an applet is run. There are many security restrictions that can be configured using a policy file. I will discuss how to configure applet security policies later in this chapter.

Although a *servlet* is not related to an *applet*, I'll explain the difference between the two. Like an applet, a servlet is also a Java program that is deployed on a web server. Unlike an applet, a servlet runs on the web server itself and it does not include a GUI.

Developing an Applet

Developing an applet is a four-step process:

- Writing the Java code for the applet
- Packaging and deploying the applet files
- Installing and configuring Java Plug-in
- Viewing the applet

Writing Java code for an applet is not much different from writing code for a Swing application. You just need to learn a few standard classes and methods for applets that you will use in your code.

An applet is deployed on a web server and viewed in a web page using a web browser over the Internet/intranet. You can also view an applet using an applet viewer during development and testing. JDK ships an *appletviewer* program.

The appletviewer program is installed in the `JAVA_HOME\bin` directory on your machine when you install the JDK. I will discuss using the appletviewer in detail later in this chapter.

To view an applet in a web page, you need to embed the reference to the applet in an HTML document. You can use any of the three HTML tags, `<applet>`, `<object>`, or `<embed>` to embed an applet in an HTML document. I will discuss using these tags in detail shortly.

The next two sections discuss how to write Java code for an applet, and how to view the applet.

Writing an Applet

Your applet class must be a subclass of the standard applet classes supplied by Java. There are two standard applet classes:

- `java.applet.Applet`
- `javax.swing.JApplet`

The `Applet` class supports AWT GUI components whereas the `JApplet` class supports Swing GUI components. The `JApplet` class inherits from the `Applet` class. I will discuss only `JApplet` in this chapter. [Listing 4-1](#) shows the code for the simplest applet you can have.

[Listing 4-1](#). The Simplest Applet

```
// SimplestApplet.java
package com.jdojo.applet;

import javax.swing.JApplet;
public class SimplestApplet extends JApplet {
    // No extra code is needed for your simplest
    applet
}
```

The `SimplestApplet` does not have any GUI parts or logic. Technically,

it is a complete applet. If you test this applet in a browser, all you see is a blank area inside the web page.

Let's create another applet with a GUI, so you can see something in the browser. The new applet is called `HelloApplet` and it's shown in [Listing 4-2](#).

Listing 4-2. A HelloApplet Applet That Displays a Message Using a JLabel

```
// HelloApplet.java
package com.jdojo.applet;

import java.awt.Container;
import java.awt.FlowLayout;
import javax.swing.JApplet;
import javax.swing.JButton;
import javax.swing.JLabel;
import javax.swing.JOptionPane;
import javax.swing.JTextField;
import static
javax.swing.JOptionPane.INFORMATION_MESSAGE;

public class HelloApplet extends JApplet {
    @Override
    public void init() {
        // Create Swing components
        JLabel nameLabel = new JLabel("Your
Name:");
        JTextField nameFld = new JTextField(15);
        JButton sayHelloBtn = new JButton("Say
Hello");

        // Add an action listener to the button to
display the message
        sayHelloBtn.addActionListener(e ->
sayHello(nameFld.getText()));

        // Add Swing components to the content
pane of the applet
        Container contentPane
= this.getContentPane();
```

```

        contentPane.setLayout(new FlowLayout());
        contentPane.add(nameLabel);
        contentPane.add(nameFld);
        contentPane.add(sayHelloBtn);
    }

    private void sayHello(String name) {
        String msg = "Hello there";
        if (name.length() > 0) {
            msg = "Hello " + name;
        }

        // Display the hello message
        JOptionPane.showMessageDialog(null,
            msg, "Hello",
            INFORMATION_MESSAGE);
    }
}

```

Does the code for the `HelloApplet` class look familiar? It is similar to working with a custom `JFrame`. The `JApplet` class contains an `init()` method. You need to override the method and add GUI parts to the applet. I will discuss writing code in the `init()` method of an applet in detail shortly. Like a `JFrame`, a `JApplet` has a content pane that holds the components for the applet. You added a `JLabel`, a `JTextField`, and a `JButton` to the content pane of the `JApplet`. The program logic is simple. The user may enter a name and click the Say Hello button that displays a message.

Unlike a Swing application, you should not add any GUI to your applet in its constructor even though it would work most of the time. The constructor for an applet is called to create an object of the applet class. The applet object does not get its “applet” status at the time it is created. It is still an ordinary Java object. If you use any features of an applet inside its constructor, these features will not work correctly because the applet object is just a simple Java object, not an “applet” in a real sense. After its creation, it gets the status of an applet, and its `init()` method is called by the environment (typically a browser) that displays it. This is the reason why you need to place all your GUI code (or any initialization code) in its `init()` method. The `Applet` class provides some other standard methods that you can override and write your logic to perform different kinds of work inside an applet.

You do not run an applet the same way you run a Swing application. Note that an applet class does not have a `main()` method. However, technically, it is possible to add a `main()` method to an applet, which does not help in running an applet in any way. To see an applet in action, you need to have an HTML file. You should have basic knowledge of HTML to work with an applet, but you do not need to be an expert in HTML. I will discuss how to view an applet in the next section. At this time, you should compile the `HelloApplet` class. You will have a class file named `HelloApplet.class`.

Deploying an Applet

Applets are Java programs. However, they are not run directly as any other Java programs. You need to do some plumbing before you can run an applet. An applet needs to be deployed before it can be used. There are two parts in the applet deployment:

- The Java Code that defines the applet GUI and logic
- An HTML document that contains applet's details such as its class name, archive file name containing the class file, width, height, etc.

You saw how to write the Java code for an applet in the previous section.

You embed the applet details in an HTML document using the `<applet>` tag. Both the applet code and the HTML document are deployed to the web server. The browser on the client machine requests the HTML document from the web server. When the browser finds the `<applet>` tag in the HTML document, it reads the applet's details, downloads the applet code from the web server, and runs the code as an applet in the browser. Does this mean that you need to have a web server to see your applets in action? The answer is no. You can test your applets without using a web server. You will need a web server to deploy your applets if you want to make your applets available for users. The following sections describe how to create an HTML document for an applet and how to deploy an applet to different environments.

Creating the HTML Document

An <applet> tag is used to embed an applet in an HTML document. The following is an example of an <applet> tag:

```
<applet code="com.jdojo.applet.HelloApplet"
width="300" height="100" archive="myapplets.jar">
    This browser does not support Applets.
</applet>
```

You need specify the following mandatory attributes of the <applet> tag:

- code
- width
- height
- archive

The code attribute specifies the fully qualified class name of the applet. Optionally, you can append .class to the applet's fully qualified name. For example, both of the following <applet> tags work the same:

```
<!-- Use fully qualified name of the applet class as
code -->
<applet code="com.jdojo.applet.HelloApplet">
...
</applet>

<!-- Use fully-qualified name of the applet class
followed by .class -->
<applet code="com.jdojo.applet.HelloApplet.class">
...
</applet>
```

You can also use a forward slash instead of a dot to separate the sub-package names. For example, you can also specify the code attribute's value as "com/jdojo/applet/HelloApplet" and "com/jdojo/applet/HelloApplet.class".

The width and height attributes specify the initial width and height of the applet's area in the web page, respectively. You can specify the width and height attributes in pixel or in percentage. If the values are numbers, they are

considered in pixels; for example, `width="150"` denotes a width of 150 pixels. If the values are followed by a percent sign (%), it denotes the percentage of the dimension of the container in which the applet is displayed; for example, `width="50%"` denotes that the width of the applet will be 50% of its container. Typically, the container is the browser window.

If you are using Java 7 Update 51 or later to view the applet, the `archive` attribute is mandatory. You need to bundle all files—class files and other resource files—for an applet in a JAR file. Bundling applet files in a JAR file makes the files smaller in size and results in a faster download for the applet's users. The value of the `archive` attribute is the name of the JAR file containing the files for the applet.

You may want to display a message in the web page if the browser does not support the `<applet>` tag. The message should be placed between the `<applet>` and `</applet>` tags as follows. The browser will ignore the message if it supports applets.

```
<applet>
    Inform the user that the browser does not
    support applets.
</applet>
```

Listing 4-3 shows the contents of the `helloapplet.html` file that you will use to test the applet. Note that the `<applet>` tag does not contain the `archive` attribute that will let you test the applet without having to create a JAR file.

Listing 4-3. Contents of the `helloapplet.html` File

```
<html>
    <head>
        <title>Hello Applet</title>
    </head>
    <body>
        <h3>Hello Applet in Action</h3>

        <applet
            code="com.jdojo.applet.HelloApplet" width="200"
            height="100">
```

This browser does not support Applets.

```
</applet>
</body>
</html>
```

Deploying Applets in Production

In a production environment, you must deploy your applet using a JAR file and sign the JAR file using a certificate issued by a trusted authority. A self-signing the JAR will not work. In a test environment, you can ignore this requirement, and you can use an unsigned JAR files or simply use class files. I will show you how to ignore this requirement to test the applets in this chapter. If you are learning applets for the first time, you may skip to the next section. You can revisit this section when you need to deploy your applet in the production environment.

Use the following steps to package and deploy applets. The steps refer to terms and commands related to created JAR files. Please refer to [Chapter 8](#) in the book *Beginning Java Language Features* (ISBN: 978-1-4302-6658-7) for more details on creating JAR files.

1. Create a manifest file (say `manifest.mf`). It must contain a `Permissions` attribute. The following shows the contents of the manifest file:

```
Manifest-Version: 1.0
Permissions: sandbox
```

The other value for the `Permissions` attribute is `all-permissions`. The value of `sandbox` indicates that the applet will run in the security sandbox and it does not require access to any additional resources on the client's machine. The value of `all-permissions` indicates that the applet needs access to the client's machine.

2. Create a JAR file that contains all class files for the applet and the manifest file created in the previous section. You can use the following command to create the JAR file

named helloapplet.jar:

```
jar cvfm helloapplet.jar manifest.mf  
com\jdojo\applet\*.class
```

3. Sign the helloapplet.jar file with the certificate you obtained from a trusted authority. Obtaining a certificate costs money (approximately \$100). If you are just learning applets, you can skip this step. The “Signing Applets” section later in this chapter explains in detail how to sign an applet.
4. Deploy the signed helloapplet.jar file to the web server. You will need to consult the documentation of your web server on how to deploy applets. Some web servers provide deployment screens to let you deploy your JAR files and some let you drop the JAR file into a specific directory. The typical way of deploying files to a web server is to let the development IDE such as NetBeans and Eclipse package and deploy the necessary project files for you.

Deploying Applets for Testing

It will be too much trouble to package and deploy an applet for testing if you need to follow the steps described in the previous section. You can keep all class files and HTML files in the file system and test your applet. I assume that you have the applet files and that their full paths are similar to the following paths:

- C:\myapplets\helloapplet.html
- C:\myapplets\com\jdojo\applet\HelloApplet.clas

The paths are shown using the file path syntax used on Windows. Please change them to the path syntax used by your operating system if you are not using Windows.

You are not required to store the applet files in a specific directory such as C:\myapplets. You can replace the directory C:\myapplets with a path to any directory. However, you must preserve the file paths after the

C:\myapplets directory. You will be able to play with the directory structures for storing applet files after you read few more sections later.

If you have created the helloapplet.jar file to test the applet, I assume that you have added the archive attribute to the <applet> tag as archive="helloapplet.jar" in the helloapplet.html file and that the file paths will look as shown:

- C:\myapplets\helloapplet.html
- C:\myapplets\helloapplet.jar

Installing and Configuring Java Plug-in

Browsers use Java Plug-in to run applets. You must install and configure Java Plug-in before you can run your applet.

Installing the Java Plug-in


The Java Runtime Environment (JRE) is also known as Java Plug-in or Java add-on. The JRE (and hence Java Plug-in) is installed for you when you install JDK. The client machine running your applets does not need to install the JDK. It can just install the JRE. You can download the latest version of the JRE, which is 8.0 at the time of this writing, from www.oracle.com. The JRE is free to download, install, and use.

On Windows 8, using 64-bit JRE 8.0, I was able to run my applets only in Internet Explorer. I had to uninstall 64-bit JRE 8.0 and install 32-bit JRE 9.0 for my applets to work in all browsers, such as Google Chrome, Mozilla Firefox, and Internet Explorer.

On Linux, you need to do some manual setup to install Java Plug-in for the Firefox browser. Please follow the instructions at www.oracle.com/technetwork/java/javase/manual-plugin-install-linux-136395.html to set up the Java Plug-in on Linux.

Opening the Java Control Panel

You can configure Java Plug-in using the Java Control Panel program. The Java Control Panel program launches the window shown in [Figure 4-1](#).

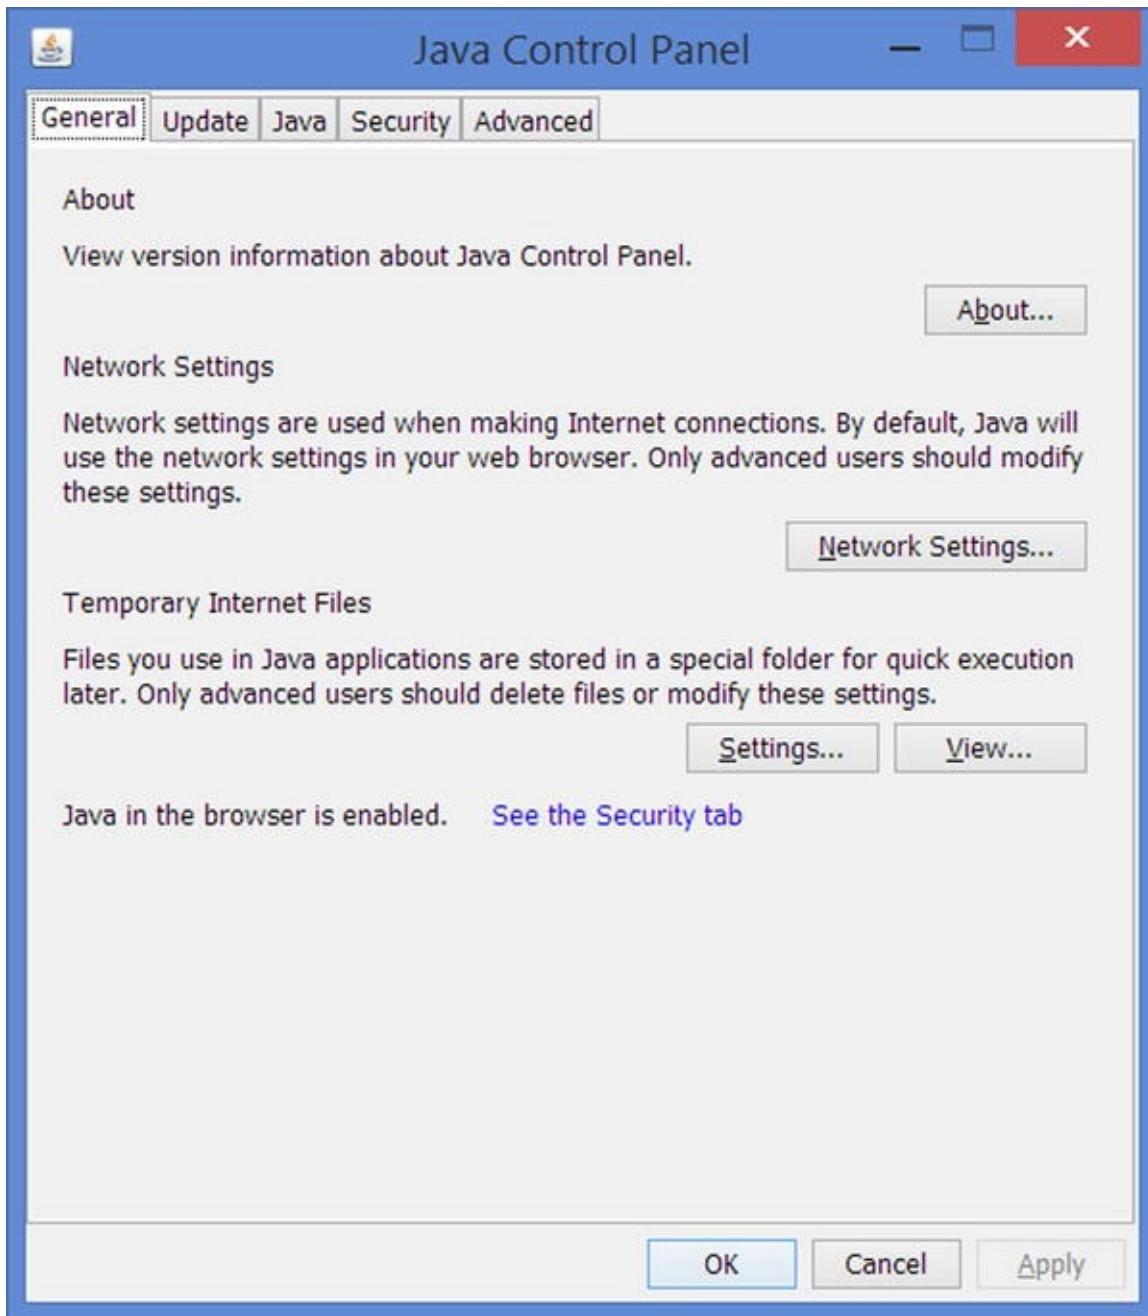

[Figure 4-1.](#) The Java Control Panel

On Windows 8, you can access the Java Control Panel via the following

steps.

1. Open Search by pressing the Windows logo key + W.
Make sure to select “Everywhere” for the search location.
By default “Settings” is selected.
2. Enter “Java,” “Java Control Panel,” or “Configure Java”
as the search term.
3. Click the Java icon to open the Java Control Panel.
4. If you could not find the Java Control Panel using Search,
open the Control Panel by right-clicking the Start icon and
selecting Control Panel from the menu. In the top-right
corner in the Control Panel, you get a Search field. Enter
“Java” in the Search field and you will see a program
named Java. Click the program name to open the Java
Control Panel.

On Windows 7, you can access Java Control Panel via the following steps.

1. Click the Start button, and then select the Control Panel
option from the menu.
2. Enter Java Control Panel in the Search field in Control
Panel.
3. Click the Java icon to open the Java Control Panel.

Tip On Windows, you can directly launch the Java Control Panel by running the file `javacpl.exe` that is located under the `JRE_HOME\bin` directory. For JRE 8, the default path is `C:\Program Files\Java\jre8\bin\javacpl.exe`.

On Linux, you can access the Java Control Panel by running the `ControlPanel` program from the Terminal window. The `ControlPanel` program is installed in the `JRE_HOME\bin` directory where `JRE_HOME` is the directory in which you have installed the JRE. Suppose you have installed the JRE in `/java8/jre` directory. You need to run the following command from the Terminal window:

```
[/java8/jre/bin]$ ./ControlPanel
```

On Mac OS X (10.7.3 and above), you can access the Java Control Panel using the following steps:

- Go to the System Preferences by clicking the Apple icon in the upper left of screen.
- Click the Java icon to access the Java Control Panel.

Configuring Java Plug-in

You can configure a variety of settings for Java Plug-in using the Java Control Panel. In this section, I will describe how to bypass the signed JAR requirement for running applets. Open the Java Control Panel and select the Security tab, as shown in [Figure 4-2](#).

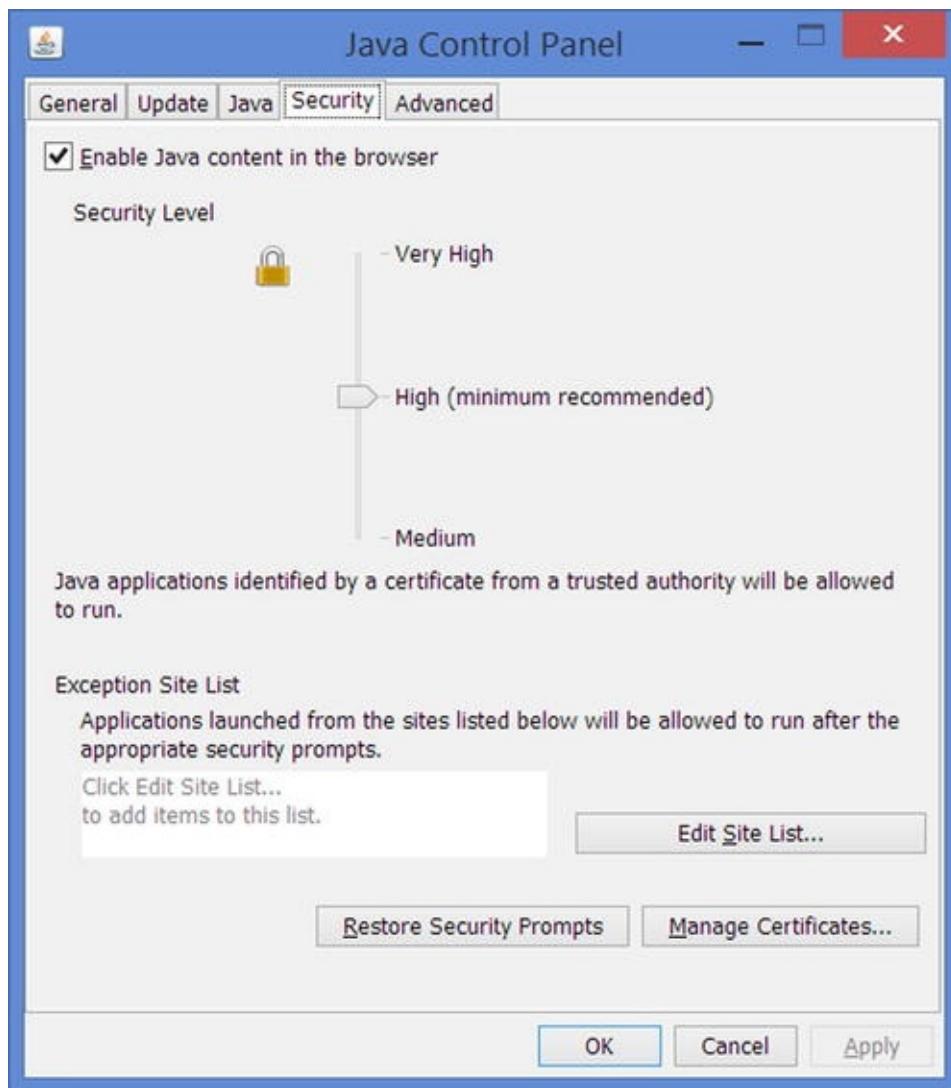


Figure 4-2. Configuring the security settings in the Java Control Panel

The checkbox labeled “Enable Java content in the browser” lets you enable/disable the support for running applets in the browser. By default, this checkbox is checked and applets can run in the browser. If this checkbox is unchecked, you cannot run applets in the browser.

The second setting is the security level, which you can set by sliding the knob of the vertical slider control. It can be set to the following three values:

- **Very High:** This is the most restrictive security level setting. Only signed applets with a valid certificate and that include the `Permissions` attribute in the manifest for the main JAR file are allowed to run with security prompts. All other applets are blocked.

- High: This is the minimum recommended and default security level setting. Applets that are signed with a valid or expired certificate and that include the `Permissions` attribute in the manifest for the main JAR file are allowed to run with security prompts. Applets are also allowed to run with security prompts when the revocation status of the certificate cannot be checked. All other applets are blocked.
- Medium: Only unsigned applets that request all permissions are blocked. All other applets are allowed to run with security prompts. Selecting this security level is not recommended. It will make your computer more vulnerable if you run a malicious applet.

For your testing purposes, you can set the security level to Medium. This will allow you to test applets packaged in an unsigned JAR file. You do not need to include the `Permissions` attribute in the manifest file either. It will also allow you to test your applets from the file system, avoiding the need for a web server to deploy your applets. You should change the security setting back to the recommended High or Very High as soon as you are done with testing. Note that using the Medium security level setting will show you warnings when you attempt to run any applets not meeting the security requirements. You will need to confirm when you get the warnings that you want to continue with running the applets despite the security risks.

The third setting on the Security tab is called Exception Site List. This lets you bypass the security requirements needed by the Security Level setting for the specified sites. Click the “Edit Site List” button to open the Exception Site List dialog box shown in [Figure 4-3](#).

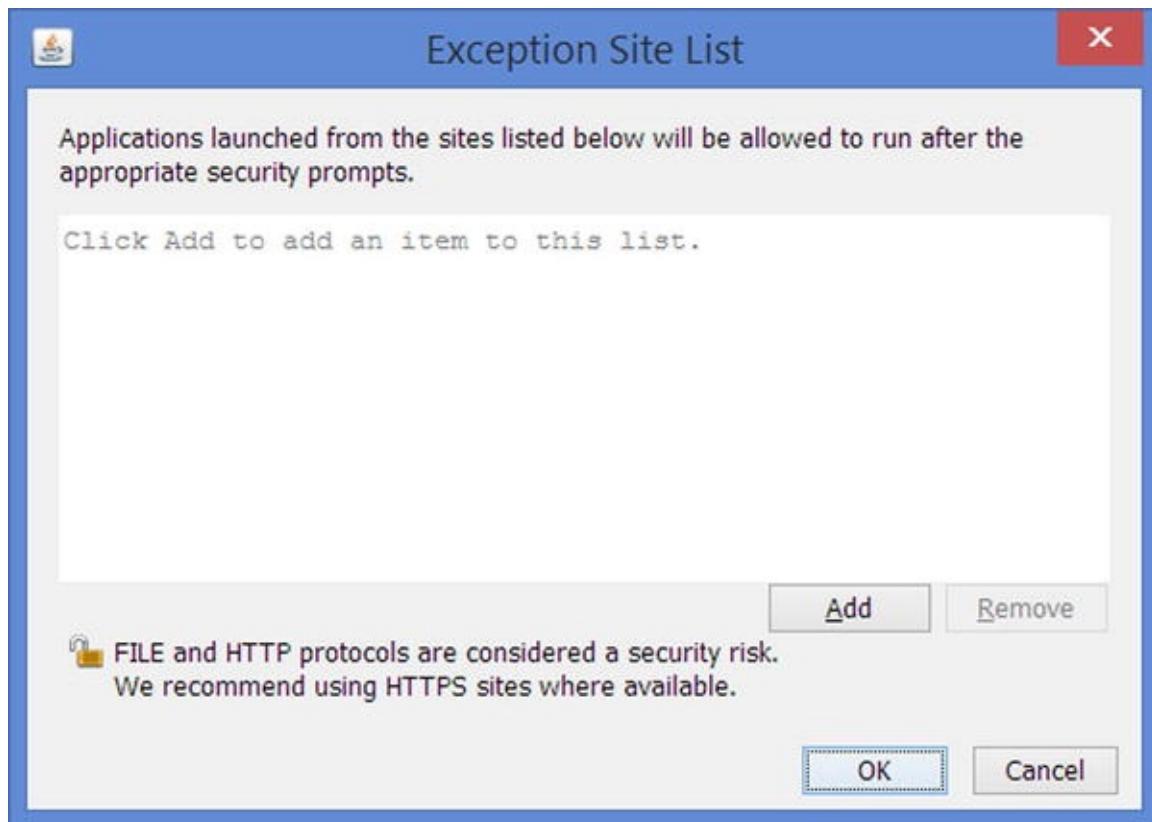


Figure 4-3. The Exception Site List Dialog Box

Click the Add button. You will see a blank row added for the location. Enter `file:///` (Note the three `/`) for the location. Click the Add button again. Clicking the Add button second time displays a Security Warning message stating that adding `file://` (note two `/`) is a security risk. Click the Continue button on the warning dialog box. You get another blank row location. Enter `http://localhost:8080`. Repeat this step to add one more location, `http://www.jdojo.com`. The Exception Site List dialog box should look as shown in [Figure 4-4](#). Now, click the OK button to return to the Security tab.

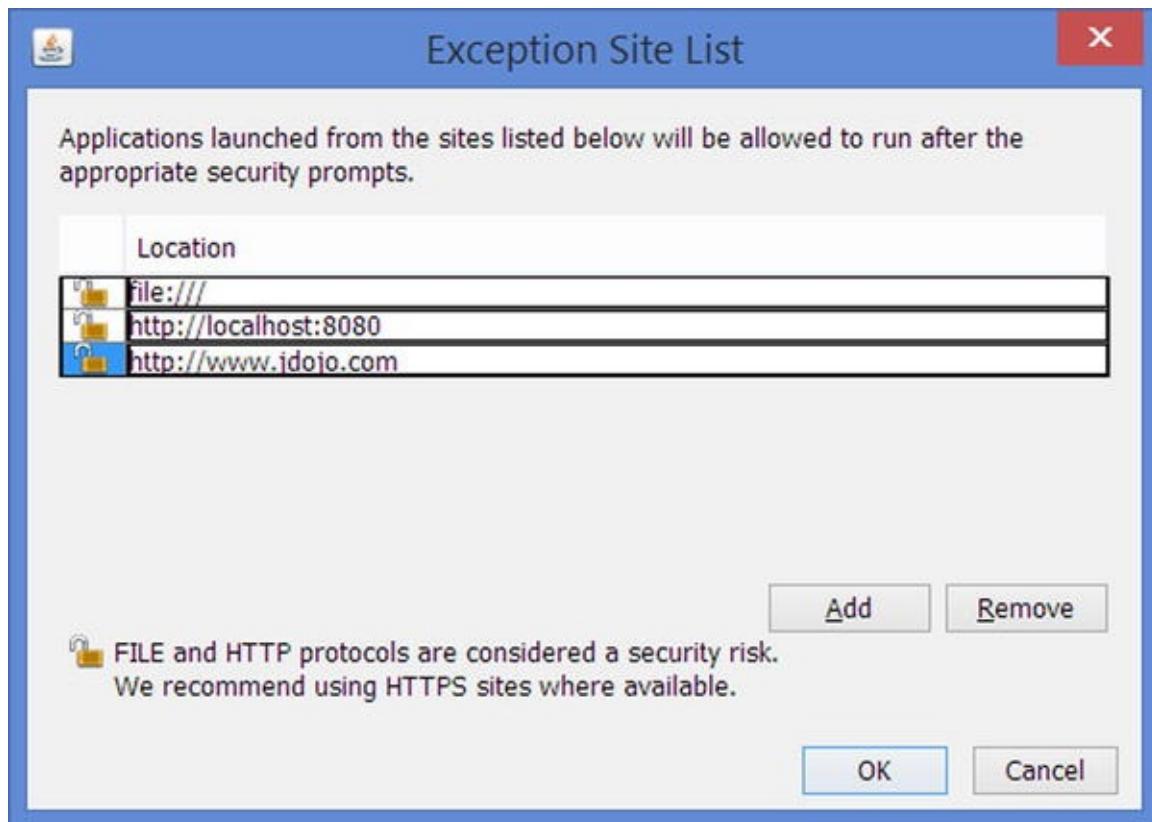


Figure 4-4. The Exception Site List Dialog Box

From now on, irrespective of the “Security Level” setting, you will be able to run all applets from the three sites:


- `file:///` means applets from your file system using the `file` protocol.
- `http://localhost:8080` means any web server running at port 8080 on your machine using the `http` protocol.
- `http://www.jdojo.com` means applets running from the website `www.jdojo.com` using the `http` protocol. I maintain `jdojo.com`. You can access the hello applets using the URL
`http://www.jdojo.com/myapplets/helloapplet.htm`

Once you are done with the testing your applets, please remove these sites from the exception list so your computer is protected from running malicious applets.

Viewing an Applet

If you have been following the steps in the previous sections, viewing an applet is as simple as entering the URL of the `hellapapplet.html` file in the browser. Follow these steps to view the applet.

1. Open the browser of your choice, such as Google Chrome, Mozilla Firefox, or Internet Explorer.
2. Press `Ctrl + O` or select the `Open` menu option from the `File` menu. You will get a browse/open dialog box. Navigate to the directory in which you have stored the `helloapplet.html` file and open it in the browser.
3. Depending on the settings in the Java Control Panel, you may get security warnings, which you need to ignore.
4. Alternatively, you can enter the URL for the HTML file directly. If you saved the `helloapplet.html` file in the `C:\myapplets` directory in windows, you can enter the URL as
`file:///C:/myapplets/helloapplet.html`.
5. If everything was set up correctly, you will see the applet running in your browser as shown in [Figure 4-5](#). Enter your name and click the `Say Hello` button to display a greeting dialog box.

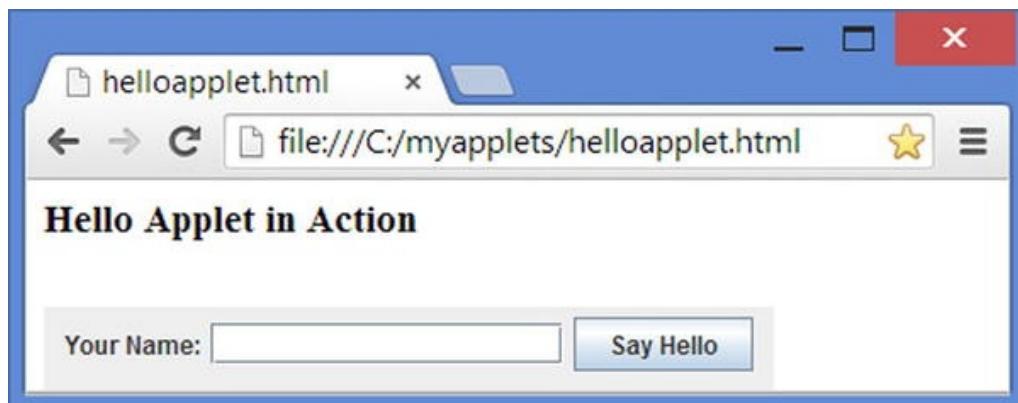

[Figure 4-5.](#) The Hello Applet running from the file system in the Google Chrome browser

If you are not able to view the applets using these steps, please read on the next section, which will describe how to view applets during testing using the appletviewer.

Using the appletviewer to Test Applets

You can use the appletviewer command to view an applet. It is available as appletviewer program in the JAVA_HOME\bin folder, where JAVA_HOME is the JDK installation folder on your machine. Here is the generic form of the command syntax:

```
appletviewer <options> <urls>
```

In <options>, you can specify various options for the command. You must specify one or more URLs separated by a space that contain the applet documents. You can use any of the following commands to view the applet described in the previous section. On Microsoft Windows, you can use the command prompt to enter the command. On Linux, use the Terminal window.

```
appletviewer  
http://www.jdojo.com/myapplets/helloapplet.html
```

or

```
appletviewer file:///C:/myapplets/helloapplet.html
```

You may get the following error when you run the above command:

```
'appletviewer' is not recognized as an internal or external command, operable program or batch file.
```

If you received the above error, you need to specify the full path for the appletviewer command, such as C:\java8\bin\appletviewer, assuming you have installed the JDK in C:\java8 directory. You can try the following command on the Windows command prompt:

```
C:\java8\appletviewer
```

<http://www.jdojo.com/myapplets/helloapplet.html>

Figure 4-6 shows the applet running in the appletviewer window. Note that the appletviewer displays only the applet from the document specified in the URL. All other HTML contents are ignored. For example, the applet does not display the text from the helloapplet.html file that you had added inside the <h3> tag.

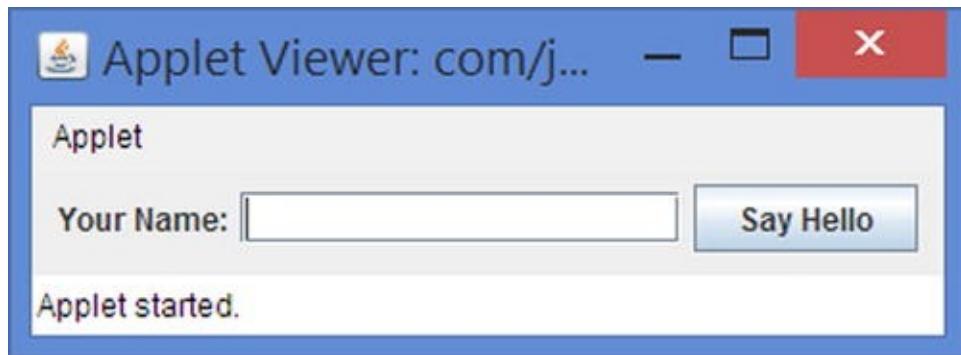


Figure 4-6. The Hello Applet running from the file system in the Google Chrome browser

If you want to view multiple applets using the `appletviewer` command, you can do so by specifying multiple URLs on the command line. Each applet will be displayed in a separate applet viewer window. The following command may be used to display two applets from two different web servers, where `URL_PART1` could be <http://www.myserver1.com/myapplets1> and `URL_PART2` could be <http://www.myserver2.com/myapplets2>:

```
appletviewer URL_PART1/applet1.html  
URL_PART2/applet2.html
```

The `appletviewer` command displays each applet found in the documents in a separate window. For example, if `applet1.html` contains two applets and `applet2.html` contains three applets, the above command will open five applet viewer windows. If the document referred to by the URL does not contain any applet, the `appletviewer` command does not do anything. The content in the document referred to by the URL is ignored except for the part that is related to an applet. The appletviewer window has a main menu called “Applet” that lets you reload an applet, restart it, stop it, save it in serialized form, etc.

You can specify three options to the `appletviewer` command:

- `-debug`

- `-encoding`
- `-Jjavaoptions`

The `-debug` option lets you start the appletviewer in debug mode. You can specify the encoding of your document referred to by the URLs using the `-encoding` option. The `-Jjavaoptions` option lets you specify any Java options for the JVM. The `-J` part of the option is removed and the remaining part is passed to the JVM. The following are examples of using these options. Note that to specify the classpath environment variable for the appletviewer, you need to specify the `-J` options twice.

```
appletviewer -debug your_document_url_goes_here  
appletviewer -encoding ISO-8859-1  
your_document_url_goes_here  
appletviewer -J-classpath -Jc:\myclasses  
your_document_url_goes_here
```

 **Tip** If you are using the NetBeans IDE to develop your applets, right-clicking the applet's file, such as `HelloApplet.java` in the IDE, and selecting the `Run File` menu option runs your applet in the appletviewer.

Using the codebase Attribute

In the `HelloApplet` example, you placed the Java class file and the HTML file under the same parent directory. You files were placed as follows:

- `ANY_DIR\html_file`
- `ANY_DIR\package_directories\class_file`

You do not have to follow the above directory structure to use your applet. The parent directory in which the HTML file for the applet is stored is called the *document base*. The parent directory where the Java class files (always consider the directory structure needed for the package in which the applet class is placed) are stored is called the *code base*. You can specify a code base for your

applet in the `<applet>` tag using the `codebase` attribute. If you do not specify the `codebase` attribute, the document base is used as `codebase`. The `codebase` attribute could be a relative URL or an absolute URL. Using an absolute URL for the code base opens up another possibility for storing applet class files. You can store an applet's HTML file on one web server and the Java classes on another. In such cases, you must specify an absolute `codebase` for the java classes.

A relative URL for the `codebase` attribute is resolved using the `href` attribute's value for the `<base>` tag in the HTML document. If a `<base>` tag is not specified in the HTML document, the URL from where the HTML document was downloaded is used to resolve the relative `codebase` URL. Let's look at some examples.

Example 1

The content of a `helloapplet.html` file is as follows. Note that you include a `<base>` tag and you do not specify the `codebase` attribute for the `<applet>` tag.

```
<html>
    <head>
        <title>Hello Applet</title>
        <base
href="http://www.jdojo.com/myapplets/myclasses">
    </head>
    <body>
        <applet
code="com.jdojo.applet.HelloApplet" width="150"
height="100">
            This browser does not support
Applets.
        </applet>
    </body>
</html>
```

The document is downloaded using the URL
<http://www.jdojo.com/myapplets/helloapplet.html>. Since

you have specified the <base> tag, the browser will look for the applet's class file at

<http://www.jdojo.com/myapplets/myclasses/com/jdojo/app>

Example 2

The content of a helloapplet.html file is as follows. Note that you include the <base> tag and you do not specify the codebase attribute for the <applet> tag as mydir.

```
<html>
    <head>
        <title>Hello Applet</title>
        <base
            href="http://www.jdojo.com/myapplets/myclasses">
    </head>
    <body>
        <applet
            code="com.jdojo.applet.HelloApplet" width="150"
            height="100"
            codebase="mydir">
            This browser does not support
            Applets.
        </applet>
    </body>
</html>
```

The document is downloaded using the URL

<http://www.jdojo.com/myapplets/helloapplet.html>. Since you have specified the <base> tag, the browser will look for the applet's class file at

<http://www.jdojo.com/myapplets/mydir/com/jdo>

Note that the codebase value of mydir is resolved using the <base> tag's href value. If you had specified the codebase value as ../xyzdir (two dots means one directory up), the browser will look for the class file at

<http://www.jdojo.com/myapplets/xyzdir/com/jdojo/applet>

Note that some browsers do not let you specify two dots to indicate one level up

in a directory hierarchy as part of a codebase URL for security reasons.

Example 3

The content of a `helloapplet.html` file is as follows. Note that you have not included the `<base>` tag and you have specified the `codebase` attribute for the `<applet>` tag.

```
<html>
    <head>
        <title>Hello Applet</title>
    </head>
    <body>
        <applet
            code="com.jdojo.applet.HelloApplet"
            width="150" height="100"
            codebase="abcdir">
            This browser does not support
            Applets.
        </applet>
    </body>
</html>
```

The document is downloaded using the URL <http://www.jdojo.com/myapplets/helloapplet.html>. Since you have not specified the `<base>` tag, the relative URL for the codebase will be resolved using the URL used to download the HTML file and the browser will look for a class file at <http://www.jdojo.com/myapplets/abcdir/com/jdojo/applet>

If you use an absolute URL for the codebase, the browser will look for the applet's class files using that absolute URL, irrespective of the presence of a `<base>` tag in the HTML file and from where the HTML file is downloaded. Let's consider the following `<applet>` tag:

```
<applet code="com.jdojo.applet.HelloApplet"
        width="150" height="100"
        codebase="http://www.jdojo.com/myclasses">
        This browser does not support Applets.
```

```
</applet>
```

The browser will look for the applet's class files at <http://www.jdojo.com/myclasses/com/jdojo/applet>HelloA>. If you want to store the applet's class files and HTML files on different servers, you need to specify the codebase value as an absolute URL.

The Applet class provides two methods called `getDocumentBase()` and `getCodeBase()` to get the document base URL and the code base URL, respectively. The `getDocumentBase()` method returns the URL of the document that has an embedded `<applet>` tag. For example, if you enter the URL <http://www.jdojo.com/myapplets/helloapplet.html> in your browser to view the applet, <http://www.jdojo.com/myapplets/helloapplet.html> will be returned from the `getDocumentBase()` method. The `getCodeBase()` method returns the URL of the directory that is used to download the Java classes for the applet. The URL returned from this method depends on many factors, as you have just seen in the examples.

The Life Cycle of an Applet

An applet goes through different stages during its existence. It is created, initialized, started, stopped, and destroyed. An applet is first created by calling its constructor. At the time of its creation, it is a simple Java object and it does not get its “applet” status. After its creation, it gets its applet status and there are four methods in the `Applet` class that are called by the browser. You can place code in those methods to perform different kinds of logic. These methods are as follows:

- `init()`
- `start()`
- `stop()`
- `destroy()`

The `init()` Method

The `init()` method is called by the browser after an applet has been instantiated and loaded. You can override this method to place any code that performs initialization logic for your applet. Typically, you will place code to create a GUI for your applet in this method. This method is called only once during the lifetime of the applet.

The `start()` Method

The `start()` method is called just after the `init()` method. It may be called multiple times. Suppose you are viewing an applet in a web page, and you open another web page in the same browser window (or tab) by replacing the applet's web page. If you go back to the previous web page, and if the applet was cached, its `start()` method will be called again. If the applet was destroyed when you replaced the applet's web page by another web page, its life cycle will start over, and its `init()` and `start()` methods will be called in sequence. You can place any code in this method that starts a process, such as an animation when the applet is shown on a web page.

The `stop()` Method

The `stop()` method is the counterpart of the `start()` method. It may be called multiple times. Typically, it is called when the web page showing the applet is replaced by another web page. It is also called before the `destroy()` method is called. Typically, you place code in this method that stops any process such as an animation that was started in the `start()` method.

The `destroy()` Method

The `destroy()` method is called when the applet is destroyed. You can place code that performs logic to release any resources that were held during the lifetime of the applet. The `stop()` method is always called before the `destroy()` method is called. This method is called only once during the lifetime of an applet.

[Listing 4-4](#) contains the code for an applet that displays a dialog box when the applet's `init()`, `start()`, `stop()`, and `destroy()` methods are

called. It includes the number of times the start() and stop() methods are called in the messages.

Listing 4-4. An Applet to Demonstrate the Life Cycle of an Applet

```
// AppletLifeCycle.java
package com.jdojo.applet;

import javax.swing.JApplet;
import javax.swing.JLabel;
import javax.swing.JOptionPane;

public class AppletLifeCycle extends JApplet {
    private int startCount = 0;
    private int stopCount = 0;

    @Override
    public void init() {
        this.getContentPane().add(new
JLabel("Applet Life Cycle!!!!"));
        JOptionPane.showMessageDialog(null,
"init()");
    }

    @Override
    public void start() {
        startCount++;
        JOptionPane.showMessageDialog(null,
"start(): " + startCount);
    }

    @Override
    public void stop() {
        stopCount++;
        JOptionPane.showMessageDialog(null,
"stop(): " + stopCount);
    }

    @Override
    public void destroy() {
```

```

        JOptionPane.showMessageDialog(null,
    "destroy()");
}
}

```

[Listing 4-5](#) contains the contents of the HTML file to view the AppletLifeCycle applet. It assumes that the HTML file and Java class file will be placed in a directory structure as shown:

```

ANY_DIR\appletlifecycle.html
ANY_DIR\com\jdojo\applet\AppletLifeCycle.class

```

If you have a different directory structure, you may need to include the codebase attribute in an <applet> tag. You can view applets using the steps described previously.

[Listing 4-5.](#) The Contents of the appletlifecycle.html File to View the AppletLifeCycle Applet

```

<html>
    <head>
        <title>Lifecycle of an Applet</title>
    </head>
    <body>
        <applet
code="com.jdojo.applet.AppletLifeCycle"
            height="200" width="200">
            This browser does not support
Applets.
        </applet>
    </body>
</html>

```

Passing Parameters to Applets

You can let the users of your applets configure the applet by passing parameters to it in the HTML document. You can pass parameters to an applet using the

<param> tag inside the <applet> tag. The <param> tag has two attributes called name and value. The name and value attributes of a <param> tag are used to specify a name and value of the parameter, respectively. You can pass multiple parameters to an applet using multiple <param> tags. The following HTML snippet passes two parameters to an applet:

```
<applet code="MyApplet" width="100" height="100">
    <param name="buttonHeight" value="20" />
    <param name="buttonText" value="Hello" />
</applet>
```

The parameter names are buttonHeight and buttonText and their values are 20 and Hello, respectively. Make sure you have meaningful names for your applet parameter that make sense to the user who reads them. Technically, any string for a parameter name is fine. For example, technically, p1 and p2 are as good parameter names as buttonHeight and buttonText. However, the latter are more meaningful to the users.

The Applet class provides a getParameter() method that accepts the parameter name as its argument and returns the parameter value as a String. Note that it always returns a String irrespective of the value set for a parameter. For example, if you want to use the value 20 for the parameter buttonHeight as an integer, you need to convert the String into an integer in inside the applet's Java code. The name of the parameter that you pass to the getParameter() method is case-insensitive; both getParameter("buttonHeight") and getParameter("BUTTONHEIGHT") return the same value of 20 as a String. If the specified parameter has not been set in the HTML document, the getParameter() method returns null. The following snippet of code demonstrates how to use the getParameter() method in the code for an applet:

```
// buttonHeight and buttonText will get the values 20
// and Hello
String buttonHeight = getParameter("buttonHeight");
String buttonText = getParameter("buttonText");

// bgColor will be null as there is no backgroundColor
// parameter set
```

```
String bgColor = getParameter("backgroundColor");
```

You can customize a few aspects of your applet using parameters. You do not have to change your code if the value of the parameter changes. If you pass parameters to your applet, make sure to assign a default value to each parameter, in case it is not set in the HTML document. For example, you can set the background color of your applet as an applet's parameter. If it is not set, you can default to a color such as gray or white.

[Listing 4-6](#) shows the code for an AppletParameters applet. It uses two GUI components, a JTextArea to display a welcome message and a JButton. The welcome message and the button's text can be customized passing two parameters called welcomeText and helloButtonText. The applet code reads the two parameter values in its `init()` method. It sets the default values for parameters if they are not set in the HTML document. [Listing 4-7](#) contains the HTML file's content and [Figure 4-7](#) shows the applet in action. [Figure 4-8](#) shows the message box that is displayed when you click the Say Hello button.

[Listing 4-6](#). Passing Parameters to an Applet Using the <param> Tag

```
// AppletParameters.java
package com.jdojo.applet;

import java.awt.Container;
import java.awt.FlowLayout;
import javax.swing.JApplet;
import javax.swing.JButton;
import javax.swing.JOptionPane;
import javax.swing.JScrollPane;
import javax.swing.JTextArea;

public class AppletParameters extends JApplet {
    private JTextArea welcomeTextArea = new
    JTextArea(2, 20);
    private JButton helloButton = new JButton();

    @Override
    public void init() {
        Container contentPane
```

```
= this.getContentPane();
    contentPane.setLayout(new FlowLayout());

    contentPane.add(new
JScrollPane(welcomeTextArea));
    contentPane.add(helloButton);

    // Show parameters when the button is
clicked
    helloButton.addActionListener(e ->
showParameters());

    // Make the welcome JTextArea non-
editable
    welcomeTextArea.setEditable(false);

    // Display the welcome message
    String welcomeMsg
= this.getParameter("welcomeText");
    if (welcomeMsg == null ||
welcomeMsg.equals("")) {
        welcomeMsg = "Welcome!";
    }
    welcomeTextArea.setText(welcomeMsg);

    // Set the hello button text
    String helloButtonText
= this.getParameter("helloButtonText");
    if (helloButtonText == null ||
helloButtonText.equals("")) {
        helloButtonText = "Hello";
    }

    helloButton.setText(helloButtonText);
}

private void showParameters() {
    String welcomeText
= this.getParameter("welcomeText");
    String helloButtonText
```

```

= this.getParameter("helloButtonText");

        String msg = "Parameters passed from HTML
are\nwelcomeText="
                + welcomeText
+ "\nhelloButtonText=" + helloButtonText;
        JOptionPane.showMessageDialog(null, msg);
    }
}

```

Listing 4-7. Contents of the appletparameters.html File Used to View the AppletParameters Applet

```

<html>
    <head>
        <title>Applet Parameters</title>
    </head>
    <body>
        <applet
code="com.jdojo.applet.AppletParameters"
            width="300" height="50">
            <param name="welcomeText"
                  value="Welcome to the applet
world!"/>
            <param name="helloButtonText"
                  value="Say Hello"/>
            This browser does not support
Applets.
        </applet>
    </body>
</html>

```



Figure 4-7. The AppletParameters applet running in a browser

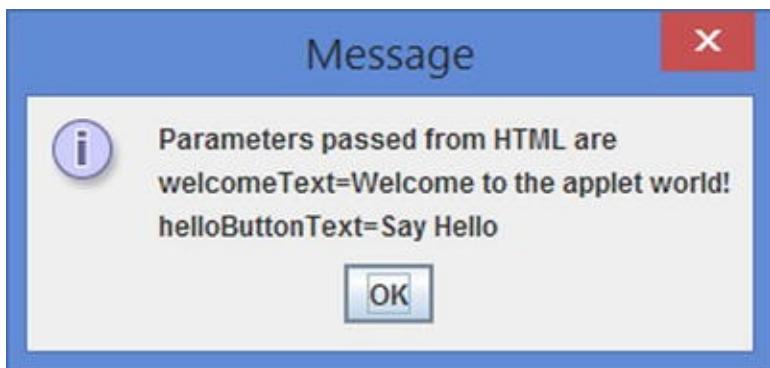


Figure 4-8. The AppletParameters applet running in a browser

Tip You can also use the `getParameter()` method of the `Applet` class to get the value of attributes of a `<applet>` tag. For example, you can use `getParameter("code")` to get the value of the `code` attribute of the `<applet>` tag.

Publishing the Applet’s Parameter Information

An applet lets you publish information about the parameters it accepts. You may develop an applet that knows about its parameters. Your applet may be viewed using different applet viewers and by users other than you. Publishing the parameters that your applet accepts may be helpful for the program that is hosting the applet and to the user who is viewing it. For example, an applet viewer may let the user change the applet’s parameters interactively and reload the applet. The `Applet` class provides a `getParameterInfo()` method, which you need to override in your applet class to publish information about your applet’s parameters. It returns a two-dimensional ($n \times 3$) array of `String`. By default, it returns `null`. The array should have rows equal to the number of parameters it accepts. Each row should have three columns containing the parameter’s name, type, and description. Implementing the `getParameterInfo()` method in your applet is not necessary for your applet to work. However, it is good practice to provide information about your applet’s parameters through this method. Let’s assume that the following

<applet> tag is used to display your applet:

```
<applet code="MyApplet" width="100" height="100">
    <param name="buttonHeight" value="20" />
    <param name="buttonText" value="Hello" />
</applet>
```

One possible implementation for a `getParameterInfo()` method for the `MyApplet` class is as follows. Note that as a developer, you are just the publisher of the applet's parameter information. It is up to the applet viewer programs to use it in any way they choose.

```
public class MyApplet extends JApplet {
    // Other code for applet goes here...

    // Public applet's parameter info
    public String[][] getParameterInfo() {
        String[][] parametersInfo =
            { {"buttonHeight",
                "integer",
                "Height for the Hello
button in pixel"
            },
            { "buttonText",
                "String",
                "Hello button's text"
            }
        };
        return parametersInfo;
    }
}
```

Publishing the Applet's Information

The `Applet` class provides a `getAppletInfo()` method that should return a text description of the applet. The default implementation of this method returns `null`. It is good practice to return a brief description of your applet from this

method, so your applet users can know a little more about your applet. This description may be displayed in some manner by the tool that is used to view the applet. The following snippet of code illustrates using the `getAppletInfo()` method to provide information about your applet:

```
public class MyApplet extends JApplet {  
    // Other applet's logic goes here...  
  
    public String getAppletInfo() {  
        return "My Demo Applet, Version 1.0, No  
Copyright";  
    }  
}
```

Other Attributes of the <applet> Tag

[Table 4-1](#) lists all attributes for the <applet> tag and their usage. In addition to the attributes listed in this table, you can also use some other standard HTML attributes such as `id`, `style`, etc. with the <applet> tag.

Table 4-1. The List of Attributes for the <applet> tag

Name	Usage
Code	Specifies the fully qualified name of the applet's class or the applet's class file name.
codebase	Specifies the URL for the base directory that contains the applet's classes. If it is not specified, the document's base URL, specified in the <base> tag, or the URL from where the document is downloaded is used as its value. Its value could be a relative or absolute URL. A relative URL is resolved based on a document base URL in the <base> tag's value if present, or a URL from where the document is downloaded.
width	Specifies the width of the applet in pixels or percentage of its container's width. For example, <code>width="100"</code> specifies the applet's width as 100 pixels whereas <code>width="30%"</code> specifies the applet's width as 30% of its container's width.
height	Specifies the height of the applet in pixel or percentage of its container's height. For example, <code>height="200"</code> specifies applet's height as 200 pixels whereas <code>height="20%"</code> specifies the applet's height as 20% of its container's height.
	Specifies a list of comma-separate archive files (JAR or ZIP files). The archive files may contain classes and other resources such as images, audios, etc., that are used by the applet. The archive file may use a relative or absolute URL. The

archive	relative URL is resolved using the <code>codebase</code> attribute's value. The download time is reduced significantly if your applet uses multiple classes and other resources that are packaged in archive files. If you do not use archives, each class and resource for your applet will be downloaded separately when they are needed. If you archive them, all files contained in the archives are downloaded using one connection to the server, thus reducing the download time. You can choose to place some files in archives and some in directories. If your applet needs a resource, it first looks for it in the archive, and then on the server in directories as specified by the <code>codebase</code> attribute value.
object	Specifies the name of the file that contains the serialized form of the applet. You can specify either a <code>code</code> attribute or an <code>object</code> attribute, but not both. When the applet is displayed, it will be deserialized, and its <code>init()</code> method will not be called. Its <code>start()</code> method will be called. This attribute is not used often.
Name	Specifies the name of the applet. You can use the name of the applet to find other applets running in the same web page. You can also specify the name of the applet by using a <code><param></code> tag with its <code>name</code> attribute value as "name". Both of the following will set the name of the applet to <code>myapplet1</code> :
	<pre><applet name="myapplet1" ...> ... </applet></pre> <p>or</p> <pre><applet ...> <param name="name" value="myapplet1"/> </applet></pre>
	You can get the name of an applet by using the <code>getParameter("name")</code> method of the <code>Applet</code> class.
alt	Specifies alternate text to be displayed if the browser understands the <code><applet></code> tag but cannot run the applet. It is preferred to use text between the <code><applet></code> and <code></applet></code> tags to display the alternate text that can also include HTML formatting in your alternate text.
align	Specifies the position of the applet with respect to the surrounding contents. Its value could be <code>bottom</code> , <code>middle</code> , <code>top</code> , <code>left</code> , or <code>right</code> . Note that this attribute specifies the applet's position relative to its surrounding, not relative to its container. For example, using <code>align="middle"</code> will not make the applet appear in the middle of the browser window. If you want to place your applet in the middle of the browser window, you need to use another HTML technique such as placing the <code><applet></code> tag inside another container such as <code><p></code> and then setting the <code>align</code> attribute. For example, the following HTML piece of code will place an applet in the center of the browser window:
	<pre><p align="center"> <applet ...>...</applet> </p></pre>
hspace	Specifies the space in pixels that is left to the left and right of the applet.
vspace	Specifies the space in pixels that is left to the top and bottom of the applet.

Using Images in an Applet

Using images in an applet is simple. The `Applet` class has an overloaded `getImage()` method that returns a `java.awt.Image` object. Here are the two versions of this method:

- `Image getImage(URL imageURL)`
- `Image getImage(URL baseURL, String imageURLPath)`

The first version takes an absolute URL of the image such as <http://www.jdojo.com/myapplets/images/welcome.jpg>. The second version takes a base URL and a URL path to the image. The URL for the image is resolved using the first argument, which is the base URL. Consider the following snippet of code in an applet:

```
URL baseURL = new  
URL("http://www.jdojo.com/myapplets/abc.html");  
Image welcomeImage = getImage(baseURL,  
"images/welcome.jpg");
```

The contents of the `welcome.jpg` file will be fetched using the base URL and the relative image's URL from <http://www.jdojo.com/myapplets/images/welcome.jpg>. Consider the following snippet of code in an applet:

```
URL baseURL = new  
URL("http://www.jdojo.com/myapplets/abc.html");  
Image welcomeImage = getImage(baseURL,  
"/images/welcome.jpg");
```

This time, the image URL path (`/images/welcome.jpg`) starts with a forward slash. This URL path will be resolved to <http://www.jdojo.com/images/welcome.jpg>. You can store all images under the directory where you store the HTML document, and always use the document base URL returned from `getDocumentBase()` method as the base URL to fetch the images.

The `getImage()` method returns immediately. The image is downloaded

when the applet needs to paint it.

[Listing 4-8](#) contains the code for an applet that uses an image. [Listing 4-9](#) has the HTML content to view the applet.

Listing 4-8. Using Images in an Applet

```
// ImageApplet.java
package com.jdojo.applet;

import java.awt.Container;
import java.awt.Image;
import javax.swing.ImageIcon;
import javax.swing.JApplet;
import javax.swing.JLabel;

public class ImageApplet extends JApplet {
    JLabel imageLabel;

    @Override
    public void init() {
        Container contentPane
= this.getContentPane();
        Image img = this.getWelcomeImage();
        if (img == null) {
            imageLabel = new JLabel("Image
parameter not set...");
        }
        else {
            imageLabel = new JLabel(new
ImageIcon(img));
        }
        contentPane.add(imageLabel);
    }

    private Image getWelcomeImage() {
        Image img = null;
        String imageURL
= this.getParameter("welcomeImageURL");
        if (imageURL != null) {
```

```

        img
= this.getImage(this.getDocumentBase(), imageURL);
    }
    return img;
}
}

```

Listing 4-9. Contents of the imageapplet.html File

```

<html>
    <head>
        <title>Using Images in Applet</title>
    </head>
    <body>
        <applet
code="com.jdojo.applet.ImageApplet"
            width="250" height="200">
            <param name="welcomeImageURL"
                  value="images/welcome.jpg"/>
            This browser does not support
        Applets.
        </applet>
    </body>
</html>

```

This example assumes the following directory structure, where ANY_DIR means a directory in your web server or local file system:

- ANY_DIR\myapplets\imageapplet.html
- ANY_DIR\myapplets\images\welcome.jpg
- ANY_DIR\myapplets\com\jdojo\applet\ImageApplet

The image URL path relative to the document base is specified as a parameter. If the image URL is not specified in the HTML code, the applet displays a string to that effect in a JLabel. If your directory structure is not the same as listed above, you will need to modify the applet's code or HTML contents before you can run this example successfully.

Playing Audio Clips in an Applet

It is easy to play an audio clip in an applet. The `Applet` class has an overloaded `getAudioClip()` method that returns an instance of the `java.applet.AudioClip` interface. Here are the two versions of this method:

- `AudioClip getAudioClip(URL audioAbsoluteURL)`
- `AudioClip getAudioClip(URL baseURL, String audioURLPath)`

The `getAudioClip()` method works the same way as the `getImage()` method. It returns immediately. The audio clip is loaded when it is played. The `AudioClip` interface is declared as follows:

```
package java.applet;

public interface AudioClip {
    void play();
    void stop();
    void loop();
}
```

You can start playing an audio clip using the `play()` method. You can stop playing the audio clip using the `stop()` method. You can play an audio clip in a loop using its `loop()` method. The following code snippet demonstrates how to use an audio clip in an applet:

```
// Assuming that audios/myaudio.wav is stored under
// a directory
// where the HTML file for the applet is stored
AudioClip clip = getAudioClip(getDocumentBase(),
"audios/myaudio.wav");
clip.play(); /* Play the clip

// Other logic goes here
```

```
clip.stop(); // Stop the clip
```

The Applet class contains some convenience methods that let you play an audio clip without dealing with the AudioClip interface. The applet will download the audio clip and play it for you. You just need to specify the URL of the audio clip and use the play() method of the Applet class as shown:

```
// Assuming that the following code is inside your  
applet class  
this.play(this.getDocumentBase(), "audios/myfav.wav");
```

If you want to play an audio clip in a Java application, use the newAudioClip() static method of the Applet class to get the AudioClip object as shown:

```
URL myFavAudioURL = new  
URL("http://www.jdojo.com/myfav.wav");  
AudioClip clip = Applet.newAudioClip(myFavAudioURL);  
clip.play();
```

Interacting with the Applet's Environment

An applet context refers to the environment that runs the applet, such as a browser, an applet viewer, etc. An instance of the java.applet.AppletContext interface represents the applet's context. The Applet class provides a getAppletContext() method that returns the applet's context. Using an AppletContext object, you can open a new document, display a message in the applet's container status bar, and get reference to another applet running in the same document. The following snippet of code demonstrates some of the uses of the AppletContext object:

```
// Get the applet context object  
AppletContext context = getAppletContext();  
  
// Open the Yahoo's home page in a new window  
URL yahooURL = null;
```

```

try {
    yahooURL = new URL("http://www.yahoo.com");
    context.showDocument(yahooURL, "_blank");
}
catch (MalformedURLException e) {
    e.printStackTrace();
}

// Show a brief message in the status bar
context.showStatus("Welcome to the applet world!");

// Get reference of another applet named "crazyApplet"
Applet crazyApplet = context.getApplet("crazyApplet");
if (crazyApplet != null) {
    context.showStatus("Found the crazy
applet...");

    // Now you can invoke methods on crazyApplet
}

```

The `showDocument()` method opens another document specified by the first parameter. By using its second parameter, you can control the window in which it displays the new document. The valid values for the second parameter are: `"_self"`, `"_parent"`, `"_top"`, `"_blank"`, and `"any existing/non-existing frame/window name"`. The same values are also used in standard HTML/JavaScript code.

The `showStatus()` method is used to display a short, but not very important, message in the status bar of a browser. The browser also uses the same status bar to display messages. You should not display an important message that needs the user's attention using this method. The user may not see your message, or it may be overwritten before the user has a chance to see it. If you need to display important messages, you should consider displaying it in the applet area.

The `getApplet()` and `getApplets()` methods are used to find other applets running in the same document. Refer to the next section for more details on how an applet may communicate with other applets.

 **Tip** The applet context is not available when the applet object is created.

Calling the `getAppletContext()` method in an applet's constructor returns null. The `getImage()` and `getAudioClip()` methods invoke a corresponding method in the `AppletContext` object. Since the `AppletContext` object for an applet is not available when the applet's constructor is executing, do not use the `getImage()` and `getAudioClip()` methods of `Applet` class in its constructor.

Communion of Applet, HTML, and JavaScript

An applet can open another HTML document using its `showDocument()` method. It can also display a brief message on the status bar of the browser by using its `showStatus()` method. There are many other possibilities when you work with applets. In fact, applets, HTML, and JavaScript coexist happily and they can communicate with each other. Here are some of the possibilities:

- An applet can communicate with another applet in the same HTML document.
- An applet can communicate with JavaScript by invoking JavaScript functions.
- JavaScript can communicate with an applet by accessing an applet's methods and fields.

[Figure 4-9](#) shows a possible interaction among applets, HTML, and JavaScript.

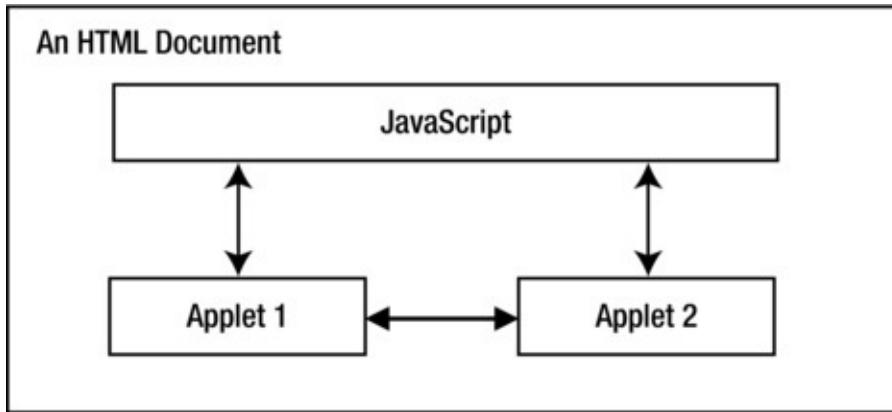


Figure 4-9. Communication between applets, HTML, and JavaScript

Before an applet can communicate with another applet, it must find the applet it wants to communicate with. The `AppletContext` class has two methods that let an applet find another applet in the same HTML document:

- `Applet getApplet(String appName)`
- `Enumeration<Applet> getApplets()`

The `getApplet()` method requires you to pass the name of the applet you are looking for and it returns the reference of the applet if it is found. If it does not find the applet, it returns `null`. You must specify a name for your applet to be found for this method to work. You use this method as shown:

```

import java.applet.Applet;
...
Applet app = getAppletContext().getApplet("applet2");
if (app == null) {
    // applet2 is not found
}
else {
    // Work with applet2 object.
}
  
```

The `getApplets()` method returns the `Enumeration` of all applets on the page including the one that calls this method. You can use this method as shown:

```

import java.applet.Applet;
  
```

```

import java.util.Enumeration;
...
Enumeration<Applet> e =
getAppletContext().getApplets();
while(e.hasMoreElements()) {
    Applet app = e.nextElement();
    // Work with app applet now
}

```

An applet can communicate with JavaScript using the `netscape.javascript.JSObject` class. The `JSObject` class is not part of the standard Java library. If you have installed JRE, it is packaged in the `plugin.jar` file, which is stored in a `JRE_HOME\lib` folder. If you use `JSObject` in your applet, you need to include the `plugin.jar` file in your `CLASSPATH` in order for your applet's code to compile. You can get the reference of the browser window using the `JSObject.getWindow()` static method. You need to pass the reference of the applet to the `JSObject.getWindow()` method. The following snippet of code demonstrates how to call a JavaScript method from an applet:

```

// Need to import the JSObject class
import netscape.javascript.JSObject;

// Get the reference of the browser window
JSObject browserWindow
= (JSObject)JSObject.getWindow(this);

/* You need to use the call() method of the
browserWindow passing the
JavaScript function name as a string and arguments
as an Object array.
Assume that helloJS(msgText) is a JavaScript
function which accepts a
string argument and returns some value.
*/
String methodName = "helloJS";
Object[] methodArgs = {"Hello from applet"};
Object returnValue = browserWindow.call(methodName,

```

```
methodArgs);
```

To access JavaScript from inside an applet, you must include a MAYSCRIPT attribute in your <applet> tag. Your applet tag will look as follows:

```
<applet code="MyApplet" width="100" height="100"  
MAYSCRIPT>  
...  
</applet>
```

JavaScript provides references to all applets in the document as an applets property of the document object. The property is an array. You can access it using a zero-based index or an applet name. Suppose you have two applets in a document named applet1 and applet2. The following JavaScript functions have the code to call the pushMessage () method of all applets and applet1 on the page, assuming the all applets in the HTML document have a pushMessage (String msg) method:

```
// A JavaScript function.  
// Call the pushMessage() method of all applets on the  
page  
function pushMessageToAllApplets() {  
    for(var i = 0; i < document.applets.length;  
i++) {  
        document.applets[i].pushMessage("Hello");  
    }  
}  
  
// A JavaScript function.  
// Call the pushMessage() method of applet1 on the  
page  
function pushMessageToApplet1() {  
    document.applets["applet1"].pushMessage("Hello  
applet1");  
}
```

You can access any public methods or fields of an applet from JavaScript code. Note that JavaScript is not a compiled language and it may throw runtime errors if the method or field name of the applet does not exist.

Packaging Applets in Archives

You can package all Java classes and resources such as images, audios, etc. for an applet in archives (JAR or ZIP files). You can use one or more archives to package your applet resources. All archive file names are specified in a comma-separated list as the value for `archive` attribute of the `<applet>` tag. The archive files names are resolved using the `codebase` attribute value.

```
<applet code="MyApplet"
        width="200"
        height="200"
        codebase="resources"
        archive="myclasses1.jar, myclasses2.jar,
myimages.zip">
</applet>
```

If you package all your resources in archives, you do not have to maintain the specific directory structures on your web server to store your classes and other resources. Packaging all your resources for an applet in archives has a huge advantage with regards to applet loading time. It improves the applet loading time significantly, as it downloads the entire archive using one connection rather than connecting once for each file to download. However, if, for some reason, you cannot package all your applet classes and resources in archives, you may keep some in directories and package some in archives. If the applet needs a resource (class file, image, audio clips, etc.), it looks for it first in archives, and then on the server.

The Event Dispatching Thread and Applets

I covered a great deal about the role of the event-dispatching thread in a Swing application in [Chapter 3](#). The discussion about the event-dispatching thread and Swing also applies to applets because applets also use Swing components. The four applet life cycle methods of `init()`, `start()`, `stop()`, and `destroy()` are called by applet viewers (typically a web browser) and they are

not called on the event-dispatching thread. You are supposed to write your program so that all Swing-related code executes on the event-dispatching thread. You have been building your GUI in the `init()` method, and now you know that the `init()` method is not executed on the event-dispatching thread. So, you have not been following the correct way of working with Swing components. You have not come across any problems in your applets related to the event-dispatching thread because the examples so far have been trivial. If you are developing production-level applets, you need to follow the guidelines suggested.

You need to use the `invokeAndWait()` and `invokeLater()` methods of the `SwingUtilities` class to run your code on the event-dispatching thread. Usually, you use the `invokeLater()` method so your code is scheduled to run on the event-dispatching thread later. The `invokeLater()` method returns immediately. You should not use the `invokeLater()` method to build a GUI from the `init()` method of the applet. The reason is very obvious. An applet viewer (usually a web browser) calls the applet's `init()` and `start()` methods in sequence. When the `init()` method returns, it calls the `start()` method. If you use the `invokeLater()` method in the `init()` method to build the GUI, the `init()` method will return immediately (not necessarily after running the code to build the GUI, but just after scheduling the GUI building code to run later) and the applet viewer will call the `start()` method. That is, when the `start()` method executes, your GUI may not be ready. However, the assumption is that your applet must be initialized before the `init()` method returns, so that you can perform the next steps in its `start()` method. This is the reason why you need to use the `invokeAndWait()` method to build a GUI inside an applet's `init()` method, so you can be sure that when the `start()` method is called, your GUI is already in place. Here is the correct way to code the `init()` method of an applet. [Listing 4-10](#) rewrites the `HelloApplet` class and calls it `BetterHelloApplet`. It uses the `initApplet()` method to build the GUI for the applet. The `initApplet()` method is called on the event-dispatching thread from the `init()` method.

[Listing 4-10](#). Using the Event-Dispatching Thread to Build a GUI in an Applet

```
// BetterHelloApplet.java
package com.jdojo.applet;
```

```
import javax.swing.JApplet;
import javax.swing.SwingUtilities;
import java.awt.Container;
import java.awt.FlowLayout;
import java.lang.reflect.InvocationTargetException;
import javax.swing.JButton;
import javax.swing.JLabel;
import javax.swing.JOptionPane;
import javax.swing.JTextField;
import static
javax.swing.JOptionPane.INFORMATION_MESSAGE;
import static javax.swing.JOptionPane.ERROR_MESSAGE;

public class BetterHelloApplet extends JApplet {
    @Override
    public void init() {
        try {
            // Build the GUI on the event-
            dispatching thread
            SwingUtilities.invokeAndWait(() ->
initApplet());
        }
        catch (InterruptedException
| InvocationTargetException e) {
            JOptionPane.showMessageDialog(null,
e.getMessage(),
                    "Error", ERROR_MESSAGE);
        }
    }

    private void initApplet() {
        // This method is supposed to be executed
on the
        // event-dispatching thread

        // Create Swing components
        JLabel nameLabel = new JLabel("Your
Name:");
        JTextField nameFld = new JTextField(15);
```

```

        JButton sayHelloBtn = new JButton("Say
Hello");

        // Add an action listener to the button to
show the hello message
        sayHelloBtn.addActionListener(e ->
sayHello(nameFld.getText()));

        // Add Swing components to the content
pane of the applet
        Container contentPane
= this.getContentPane();
        contentPane.setLayout(new FlowLayout());
        contentPane.add(nameLabel);
        contentPane.add(nameFld);
        contentPane.add(sayHelloBtn);
    }

    private void sayHello(String name) {
        String msg = "Hello there";
        if (name.length() > 0) {
            msg = "Hello " + name;
        }

        // Display the hello message
        JOptionPane.showMessageDialog(null, msg,
"Hello", INFORMATION_MESSAGE);
    }
}

```

The choice of using the `invokeAndWait()` and `invokeLater()` methods of the `SwingUtilities` class in other places depends on the situation at hand. As a rule of thumb, you need to execute the code for the `init()`, `start()`, `stop()`, and `destroy()` methods of your applet in the event-dispatching thread using one of the two methods of the `SwingUtilities` class. You can use the `SwingWorker` class to perform any task in a background thread and coordinate with Swing components using the event-dispatching thread. Please refer to the [Chapter 3](#) for details on using threads in a Swing application.

Painting in Applets

The Applet class is inherited from the `java.awt.Panel` class. The `JApplet` class is inherited from the `Applet` class. If you want to draw graphics or strings on an applet surface directly, you need to override its `paint(Graphics g)` method and write your code. Note that if you add Swing components and draw onto their surface, you need to override the `paintComponent(Graphics g)` method of those Swing components. Alternatively, you can override the `paint()` method of the `Applet` class and perform the drawing as shown in [Listing 4-11](#).

Listing 4-11. An Applet Using the `paint()` Method to Draw a String

```
// DrawingHelloApplet.java
package com.jdojo.applet;

import javax.swing.JApplet;
import java.awt.Graphics;

public class DrawingHelloApplet extends JApplet {
    @Override
    public void paint(Graphics g) {
        super.paint(g);
        g.drawString("Hello Applet!", 10, 20 );
    }
}
```

Is the Java Code Trusted?

There are two kinds of Java code that may run on your machine: trusted code and untrusted code. There are no hard and fast rules to designate which Java code is always trusted and which one is not. However, there are a few rules you can go by. By default, you should categorize all Java code that your web browser downloads over the Internet to run applets as untrusted because you do not know who wrote the code for the applets. You can categorize all local Java code that is run as applications on your machine as trusted code. The difference between

trusted and untrusted code comes into picture when the code tries to access some privileged resources such as the local file system. By default, Java treats all locally stored code as trusted to give full access to the privileged resources. It treats the code downloaded over the network as untrusted. It does not grant access to the privileged resources to untrusted code. Java lets you grant access to the privileged resources to some code and not to others using policy files. Let's consider an example to understand how you can customize security in Java using policy files. [Listing 4-12](#) contains the code for the SecurityTest class. It writes a text message to a file called `c:\sec_demo.txt`. The file path is for the Windows platform. You can modify the file path when you run this program according to your choice.

Listing 4-12. A SecurityTest Class That Writes a Text Message to a File

```
// SecurityTest.java
package com.jdojo.applet;

import java.io.IOException;
import java.nio.file.Files;
import java.nio.file.Path;
import java.nio.file.Paths;

public class SecurityTest {
    public static void main(String[] args) throws
IOException {
        // Message to be written to the file
        String msg = "Testing Java filee
permission security...";

        // Change the path C:\sec_demo.txt to
conform to the
        // syntax supported by your operating
system
        Path filePath
= Paths.get("C:\\sec_demo.txt");

        // Write message to the file
        Files.write(filePath, msg.getBytes());
    }
}
```

```
        // Print a message
        System.out.println("Test message written
to " + filePath);
    }
}
```

You can run this class using the following command:

```
java com.jdojo.applet.SecurityTest
```

The above command will print the following message on the standard output:

```
Test message written to c:\sec_demo.txt
```

Running the same SecurityTest class using the following command generates a runtime error. A partial error message is shown:

```
java -Djava.security.manager
com.jdojo.applet.SecurityTest
```

```
Exception in thread "main"
java.security.AccessControlException: access denied
("java.io.FilePermission" "C:\sec_demo.txt" "write")
...
```

You passed `-Djava.security.manager` as a JVM option when you ran the SecurityTest class the second time. This option tells the JVM to run the class using a security manager. When you ran this class the first time, it was run without a security manager, and the program was able to access the file system and write to a file. When a security manager is present, it checks for the permissions granted to the executing code, which needs to access some resources. Since you have not granted your code the permission to write to a file, you received the security exception when you ran the class the second time.

Policy files control Java security. Two default policy files grant permissions to Java code. `JRE_HOME\jre\lib\security\java.policy` is a system-wide policy file, where `JRE_HOME` is the directory where the Java Runtime environment is installed. Another policy file is user-specific and it is stored in `USER_HOME\.java.policy`, where `USER_HOME` is the user's home directory defined by a `user.home` system property. Note the dot in front

of the user-specific default Java policy file name (`.java.policy`). You can also have custom policy files and specify their URLs at the command line when you run your application.

There is a configuration file stored in `JRE_HOME\lib\security\java.security` that contains detailed information about the default policy files locations and other security related details. The following is the partial content of the `java.security` file that is supplied with the JRE installation. It states the name of the two Java policy files —one in the Java home directory and one in the user's home directory. You can add some more default policy files to this by following the pattern for the key.

```
# The default is to have a single system-wide policy
# file,
# and a policy file in the user's home directory.
policy.url.1=file:${java.home}/lib/security/java.polic
policy.url.2=file:${user.home}/.java.policy
```

To make the example work and let it write to a `C:\sec_demo.txt` file, let's create a file named `jsec.policy` and add the following text to this file:

```
grant {
    permission java.io.FilePermission
"C:\\\\sec_demo.txt", "read, write";  };
};
```

Save the custom security file as `C:\jsec.policy`. The grant statement in your custom policy file states the following: grant read and write permissions on `C:\sec_demo.txt` file to any code. The write permission is good enough to run the example. However, you have granted both read and write permissions in your policy file. Note the two backslashes in the file path (`C:\\\\sec_demo.txt`) in the grant statement. The policy file parser will translate the two backslashes into one and the file path will be treated as `C:\sec_demo.txt`. Run the `SecurityTest` class with the following command. The entire command is entered in one line.

```
java -Djava.security.manager -
Djava.security.policy=file:/C:/jsec.policy
com.jdojo.applet.SecurityTest
```

The following message will be printed on the standard output:

```
Test message written to c:\sec_demo.txt
```

This time you instructed the JVM to run the `SecurityTest` class using a security manager and a policy file at `file:/C:/jsec.policy` URL. Note that you use a URL to locate a policy file, not a file path. It means you can store your policy files at a web server and use a URL like

<http://www.jdojo.com/mysec.policy> to locate the custom policy file. Note that, by default, the two policy files—one system-wide policy file and one user-specific policy file—are still used along with your custom policy file. If you did not want to create a custom policy file, you could have added the above permissions in any of the two default policy files and the application would have run the same.

I will not discuss Java security policy file formats in detail. JDK/JRE ships with a utility application called `policytool` that lets you work with a Java policy file graphically. It is installed in the `JAVA_HOME\bin` folder, where `JAVA_HOME` is the JDK or JRE installation folder on your machine.

To start the discussion on security restrictions and customization for applets, I will discuss a little more about the policy file format. Here are some more examples of granting permissions in a policy file. You can use Java comments in a policy file as well.

The simplified general syntax of granting permissions in policy files is

```
grant signedby "<signer names>", codebase "<code base  
URL>" {  
    permission <permission class name> "<target  
name>", "<actions>";  
};
```

The text in `<...>` is supplied by the writer of the policy file. Many of the options are optional. You can include multiple permission clauses in one grant block. You can have multiple grant blocks in one policy file. The `signedby` option indicates that the permissions are granted only to the code that is signed by the signers. For example, consider the following grant block:

```
grant signedby "John" {  
    ...  
};
```

The grant block indicates that the permissions are granted if the code is

signed by John.

Consider the following grant block:

```
grant signedby "John, Robert, Cheryl" {  
    ...  
};
```

The grant block indicates that permissions are granted if the code is signed by John, Robert, and Cheryl. I will discuss more about code signing in the next section. If the signedby option is not present, the permissions are granted to the code based on other criteria, irrespective of whether the code is signed or not.

The codebase option is used to grant permissions to the code that is executed from a specific URL. Consider the following grant block:

```
grant codebase "file:/c:/classes" {  
    ...  
};
```

The grant block indicates that the code from file:/c:/classes URL will be granted the permissions. If the codebase option is not present, permissions are granted to the code that is downloaded and executed from any locations. Some examples of granting permissions in a Java policy file are as follows:

```
/* Grant read and write permission to the file  
c:\sec_demo.txt  
to code signed or unsigned and downloaded from any  
location.  
*/  
grant {  
    permission java.io.FilePermission  
"c:\\sec_demo.txt", "read, write";  
};  
  
/* Grant write permission to the file c:\sec_demo.txt  
to code signed or  
unsigned and downloaded from file:/C:/classes/ URL.  
*/
```

```

grant codebase "file:/C:/classes/" {
    permission java.io.FilePermission
"C:\\sec_demo.txt", "write";
};

/* Grant two permissions to the code signed by John
and downloaded
from the file:/C:/classes/ URL.
1. Grant the execute permission on the file
c:\\crazy.exe
2. Grant the read permission for the system
property user.home, so
the code can execute the statement
System.getProperty("user.home").
If this permission is not granted, reading the
property "user.home"
will throw a security exception.
*/
grant signedby "John", codebase "file:/C:/classes/" {
    permission java.io.FilePermission
"C:\\crazy.exe", "execute";
    permission java.util.PropertyPermission
"user.home", "read";
};

```

You can grant `java.io.FilePermission` to a file or directory. You can use a file or directory path and a set of actions to grant the permissions on a file. You can grant any combinations of `read`, `write`, `delete`, and `execute` permissions on a file/directory. Multiple actions are separated by a comma. A policy file supports different formats to specify a file/directory path, such as those listed in [Table 4-2](#).

Table 4-2. The List of File/Directory Path Format Used in Granting the `java.io.FilePermission`

File/Directory Path Format	Description
File path: C:\\mydir\\test.txt	Grants permissions only on this file.
	Grants permissions only on this directory. (One trailing

Directory path:	file separator is treated the same as no trailing separator for a directory. It is a forward slash on UNIX such as /usr/mydir or /usr/mydir/, and a backslash on Windows.
C:\mydir or C:\mydir\	
C:\mydir*	Grants permissions on all files under the C:\mydir directory. Note that it does not grant permissions on the C:\mydir directory itself.
*	Grants permissions on all files under the current directory.
C:\mydir\-	Grants permissions to all files and folders under C:\mydir and its subdirectories, recursively.
-	Grants permissions to all files and folders under the current directory and its subdirectories, recursively.
<<ALL FILES>>	Grants permissions on all files and folders under the file system. For example, the following grant clause grants read permission to all code on all files in the file system:
	<pre>grant { permission java.io.FilePermission "<<ALL FILES>>", "read"; };</pre>

Security Restrictions for Applets

By default, the code for an applet is treated as untrusted code and it is run under a security manager. If you run an applet from a local file system using a file protocol, the browser may relax some of these restrictions. These restrictions apply if the applet's code is downloaded using a network protocol such as `http` or `https`. The code for an applet that is downloaded over the network is considered untrusted by default, even if the web server from which the code is downloaded is running locally. The following is a partial list of restrictions that are applied to untrusted code and applets:

- It cannot access a local file system.
- It cannot connect to any machine, except the machine from which its code was downloaded.
- It cannot load a native library.
- It cannot start a program on the machine it is running on.

- It can read only a few system properties, which are considered harmless. It can read system properties, such as the `OS.name`, `OS.version`, `java.version`, etc. It cannot read potentially risky system properties, such as `user.home`, `user.dir`, `java.class.path`, etc.
- It cannot exit the JVM using the `System.exit()` method call.
- It displays pop-up windows with some visual hints to the users to indicate that the pop-up windows are being displayed from an applet and it is untrusted.

How can an applet perform some of the tasks that are restricted? There are two ways to let an applet perform the otherwise restricted tasks:

- You can customize the policy file and grant the specific permissions.
- You can use a signed applet.

[Listing 4-13](#) contains the code for an applet that attempts to read the `user.home` system property. [Listing 4-14](#) contains the HTML code to view the applet.

Listing 4-13. An Applet That Attempts to Read the `user.home` System Property

```
// ReadUserHomeApplet.java
package com.jdojo.applet;

import javax.swing.JApplet;
import javax.swing.JTextArea;
import java.io.StringWriter;
import java.io.PrintWriter;
import javax.swing.JScrollPane;
import java.awt.Container;

public class ReadUserHomeApplet extends JApplet {
    JTextArea msgTextArea = null;

    @Override
```

```

        public void init() {
            String msg = "";
            try {
                String userHome
= System.getProperty("user.home");
                msg = "User's Home Directory is ''"
+ userHome + "'";
            }
            catch (Throwable t) {
                msg = this.getStackTrace(t);
            }

            this.msgTextArea = new JTextArea(msg, 10,
40);
            Container contentPane
= this.getContentPane();
            contentPane.add(new
JScrollPane(msgTextArea));
        }

        public String getStackTrace(Throwable t) {
            StringWriter sw = new StringWriter();
            PrintWriter pw = new PrintWriter(sw,
true);
            t.printStackTrace(pw);
            pw.close();
            return sw.toString();
        }
    }
}

```

Listing 4-14. Contents of the `readuserhomeapplet.html` File Used to View the `ReadUserHomeApplet` Applet

```

<html>
    <head>
        <title>Read User Home Directory</title>
    </head>
    <body>
        <applet

```

```
code="com.jdojo.applet.ReadUserHomeApplet"
      width="400"
      height="300">
    This browser does not support
Applets.
  </applet>
</body>
</html>
```

The applet code in [Listing 4-13](#) is very simple. It uses the `System.getProperty("user.home")` method to read the user's home directory. By default, an applet is not allowed to read the `user.home` system property. When you view this applet, you get a security exception. The partial exception message is as follows:

```
java.security.AccessControlException: access denied
("java.util.PropertyPermission" "user.home" "read")
...
```

The exception message is stating that the applet's code does not have a read permission of type `java.util.PropertyPermission` to read the `user.home` system property. The following grant block grants this permission to all code:

```
grant {
    permission java.util.PropertyPermission
"user.home", "read";
};
```

Add this grant block to a `.java.policy` file in your home directory. If a `.java.policy` file does not exist in your home directory, you can create a new file with this name and add the above grant to it. On Windows XP, your home directory is `C:\Documents and Settings\<your-user-name>`. You can also get your user's home directory path by executing `System.getProperty("user.home")` statement in a standalone Java application that is not running under a security manager. After adding the above grant in a `.java.policy` file in the user's home directory, the `ReadUserHomeApplet` applet displays a message similar to the following:

User's Home Directory is 'C:\Documents and Settings\sharan'

Make sure that you remove the grant block from your `.java.policy` file after working on this example. Otherwise, any applet will be able to read your user's home directory on your machine without your knowledge. I will go through the same example in the next section using a signed applet.

Signing Applets

When an applet is run in a browser, it cannot access anything on the client's machine, except some information like OS name, version of the JVM, etc. When you want to give access to an applet the same as a Java application, you need to use a signed applet.

The concept behind a signed applet is the same as the concept behind a signed document. By signing a document, you approve it, and, by approving it, you take responsibility for what is contained in the document. It does not guarantee that someone else cannot tamper with the document after you have signed it. However, in case of any doubts about the document's authenticity, you can be contacted for verification. Whoever can verify your signature and trusts you can take your signed document to be authentic. The concept works the same for an applet. Recall that an applet's code is untrusted by default. If an applet is a signed applet, the user of the applet grants permissions to a signed applet in a Java policy file or he can trust the applet and grant permissions on the fly.

Before you can sign an applet, you must have a key pair called private/public key. You can generate a key pair using the `keytool` command that is installed in `JAVA_HOME\bin` folder, where `JAVA_HOME` is the folder in which you have installed the JDK or JRE. The generated keys are stored in a database known as a *keystore*. The `keytool` command also lets you create a keystore database. The private key is a secret key for you and the public key is for the public who wants to verify your signature. Once you have a key pair, you need to generate a certificate request (you can use the `keytool` command with a `-certreq` option to generate a certificate request) to send to a Certification Authority (CA) to get a certificate. A CA is an organization that issues a digital certificate. The digital certificate comprises the public key supplied by you and your identity. CA will charge you a moderate fee for issuing the certificate. DigiCert, Thawte, and VeriSign are some of the CAs available. You can also

issue a certificate yourself and this is what you will do for the demonstration purpose in this section. However, if you are deploying your applet on the web for public use, you need to spend some money and get a certificate from a trusted CA to add more authenticity to your applet's signature. It is more likely that the public will trust a certificate issued by Thawte, rather than by you. Note starting from Java 7, your applet must be signed, packages in a JAR file with a manifest file having the attribute `Permissions`. Otherwise, your applet will not run by default.

You need to package your applet classes into a JAR file so that you can sign it. You can sign the JAR file with your secret private key using the `jarsigner` command that is available under the `JAVA_HOME\bin` folder, where `JAVA_HOME` is the installation folder for JDK or JRE. There are other tools available that you can use to sign a JAR file. The signing process will place the certificate and the public key in the JAR file for the users of the JAR file to verify the signature.

The following steps walk you through the process of signing and using an applet.

Step 1: Developing an Applet

You need to write the applet's source code and compile it to class files. Use the `ReadUserHomeApplet` class as listed in [Listing 4-13](#). At the end of this step, you will have a `ReadUserHomeApplet.class` file.

Step 2: Packaging Class Files into a JAR File

Create a `manifest.mf` file with the following contents. Remember to add a blank line at the end of the file.

```
Manifest-Version: 1.0  
Permissions: sandbox
```

Use the following command to create a `signedapplet.jar` file. The `jar` command is available in your `JDK_HOME\bin` folder.

```
jar cvfm signedapplet.jar manifest.mf  
com/jdojo/applet/ReadUserHomeApplet.class
```

Make sure that, in the JAR file, the path for the class file is set to com/jdojo/applet, which is the same as its package. To make sure that your JAR file contains the correct path for the class file, use the following command:

```
jar -tf signedapplet.jar
```

```
META-INF/  
META-INF/MANIFEST.MF  
com/jdojo/applet/ReadUserHomeApplet.class
```

At the end of this step, you will have a signedapplet.jar file.

Step 3: Generating Private/Public Key Pair

Use the keytool command to generate a private/public key pair as follows:

```
keytool -genkey -keystore mykeystore -alias Kishori
```

The above command will create a keystore file named mykeystore. It will generate a private/public key pair, which you can work with using an alias Kishori. Note that you need to specify an alias for your key pair. From now on, you will use the alias, Kishori in this case, to refer to your key in your keystore. The above command will ask for details that will identify you. You will need to enter those pieces of information. The keystore file is password protected. The private key is also password protected. You will need to use new passwords when you use the above command. Memorize those passwords because you will be asked for those passwords to access the keystore or the key pair referred to by alias Kishori.

You can certify the generated key yourself by using the following command:

```
keytool -keystore mykeystore -selfcert -alias Kishori
```

At the end of this step, you will have a file named mykeystore and you will have generated a key pair with an alias Kishori.

Step 4: Signing the JAR File

Use the following command to sign the JAR file:

```
jarsigner -keystore mykeystore signedapplet.jar  
Kishori
```

The above command will prompt you for a keystore password. At the end of this step, you will have a signed signedapplet.jar file. If you list the table of contents for the signedapplet.jar file, you will notice that the jarsigner command has added more files to it, as shown:

```
jar -tf signedapplet.jar  
  
META-INF/MANIFEST.MF  
META-INF/KISHORI.SF  
META-INF/KISHORI.DSA  
META-INF/  
com/jdojo/applet/ReadUserHomeApplet.class
```

Step 5: Creating the HTML File

Create an HTML file to view the signed applet, as shown in [Listing 4-15](#). Note the use of an archive attribute for the <applet> tag.


Listing 4-15. Contents of the signedreaduserhomeapplet.html File

```
<html>  
    <head>  
        <title>Read User Home Directory (signed  
Applet)</title>  
    </head>  
    <body>  
        <applet  
code="com.jdojo.applet.ReadUserHomeApplet"  
            width="400" height="300"  
            archive="signedapplet.jar">  
            This browser does not support  
Applets.  
        </applet>
```

```
</body>  
</html>
```

Step 6: Viewing the Signed Applet

A security-warning window is displayed by Java Plug-in when you attempt to view a signed applet. It lets you view the details of the signature that is used to sign the applet. You can click the Run button to run the applet. Checking “Always trust content from this publisher” checkbox and clicking Run will make Java Plug-in import the certificate as a trusted certificate, as shown in [Figure 4-10](#).

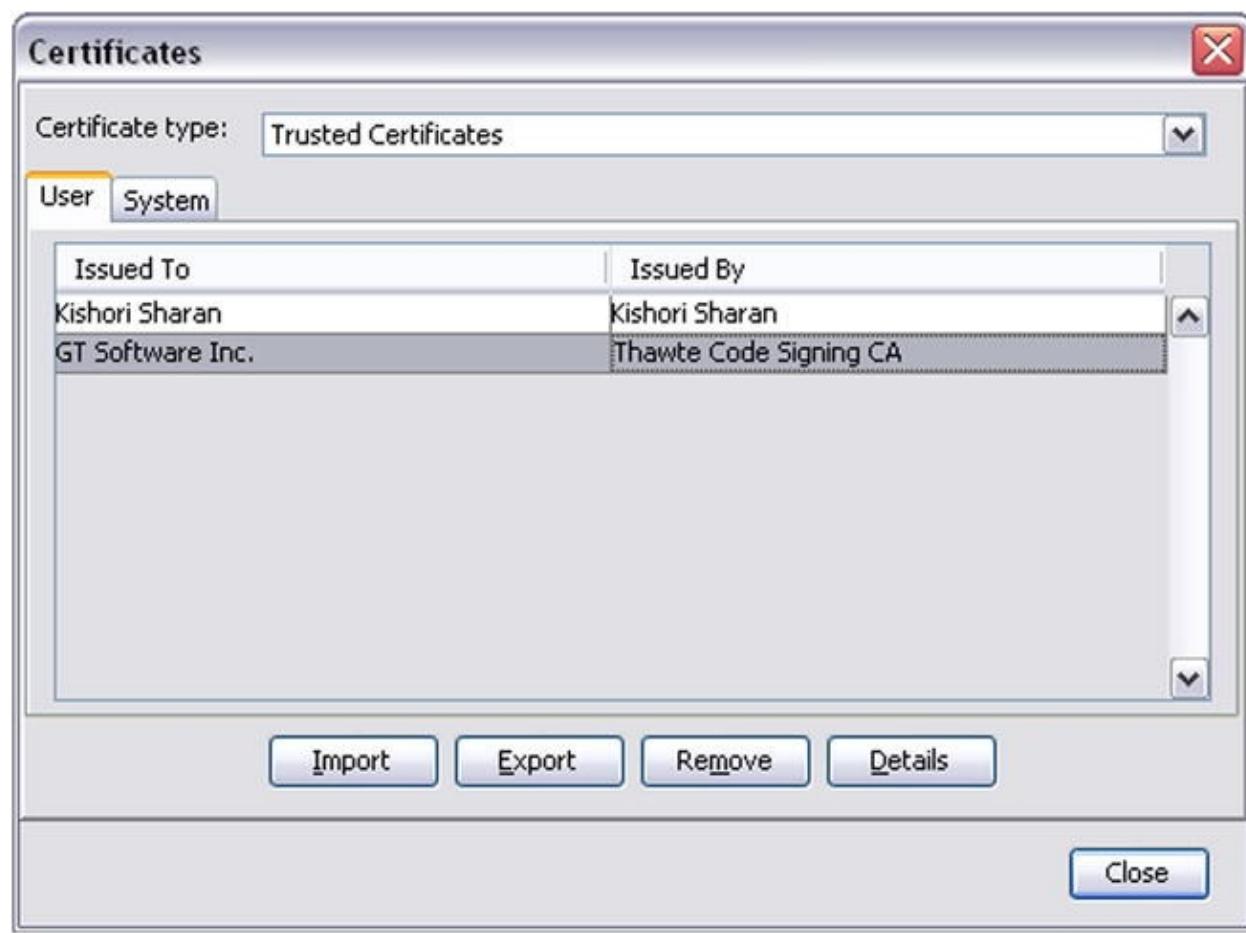

[Figure 4-10.](#) The Certificates dialog in the Java Control Panel

Once Java Plug-in stores the certificate in its trusted certificate repository, it will trust this certificate in the future without prompting you. You can delete a

once-trusted certificate from the repository later by going to Java Control Panel ➤ Security Tab ➤ Manager Certificate.

By trusting a signed applet, you give all permissions to it. If you still want to apply permissions using a Java policy file to a signed and trusted applet, you need to use the `usePolicy` `java.lang.RuntimePermission` in the Java policy file, which will direct Java Plug-in not to prompt the user to accept the signed applet's certificate. Rather, it will apply the permissions granted to that applet from the policy file.

The following entry in the policy file (system-wide or user specific policy file) will direct Java Plug-in to use the policy file all the time:

```
grant {  
    permission java.lang.RuntimePermission  
"usePolicy";  
};
```

Your applet will be able to access resources as granted by you in the policy file. Java Plug-in will not prompt the user to trust an applet.

You can also direct Java Plug-in not to prompt users to grant access to a signed applet by switching off its “Allow user to grant permission to signed content” option by going to Java Control Panel ➤ Advanced Tab ➤ Secure User Environment. If this option is unchecked, users will get a security warning when they try to view the applet. By default, this option is enabled.

Summary

An applet is a Java program designed to be embedded in an HTML document and run in a web browser. Technically, an applet is a Java class that inherits from the `Applet` or `JApplet` class. If you inherit your applet's class from the `JApplet` class, writing code for applets is very similar to writing for Swing applications. Applets use Swing components to build the GUI.

An applet is embedded in an HTML document using the `<applet>` tag. The HTML document may be a static HTML file or generated dynamically such as in a JSP page. Typically, an applet's Java class files and resources such as images and audios are packaged in JAR files and stored on the web server. On the client machine, the browser requests the HTML document, parses the `<applet>` tag in the HTML document, downloads the applet's code, and runs

the code inside the browser. By default, applets run in a security sandbox and they do not have access to the client's machine resources such as the local file system. These restrictions may be relaxed using the Java policy files or signing the applet's JAR files.

The `<applet>` tag is used to embed an applet in an HTML document. The `<applet>` tag contains four mandatory attributes called `code`, `width`, `height`, and `archive`. The `code` attribute specifies the fully qualified name of the applet class. The `width` and `height` attributes specify the width and height of the applet's display area in the browser. The `archive` attribute specifies the archive files (JAR/ZIP) containing the applet's files. Note that the `archive` attribute is mandatory if you want to run your applet using the default Java Plug-in settings.

You need to install Java Plug-in (part of the JRE) to run the applets in the browser on your machine. You can configure Java Plug-in using the Java Control Panel program that is installed with Java Plug-in.

An applet has a life cycle. Its four methods called `init()`, `start()`, `stop()`, and `destroy()` are automatically called during its life cycle. The `init()` method is called by the browser after the applet has been instantiated and loaded. The `start()` method is called just after the `init()` method, and it may be called multiple times. The `stop()` method is the counterpart of the `start()` method, and it may be called multiple times. The `destroy()` method is called at the end of the life cycle of an applet when the applet is destroyed. These methods are not called on the event-dispatching thread. Use the `SwingUtilities` class, which was described in [Chapter 3](#), to run any GUI-related code in the event-dispatching thread.

An instance of `AppletContext` object represents the context of the applet running it. You can use this object to interact with the applet's context such as the browser from the Java code.

In Java 7 and later, by default, applets are blocked if the following conditions are not met:

- The applet should be packaged in a signed JAR file.
- The manifest file in the applet's JAR file should contain a `Permissions` attribute whose value can be `sandbox` or `all-permissions`.
- The applet's JAR file should be signed with a certificate

issues by a trusted authority.

You can relax these restrictions, though it's not recommended, by configuring Java Plug-in settings using the Java Control Panel.

CHAPTER 5



Network Programming

In this chapter, you will learn

- What network programming is
- What the network protocol suite is
- What an IP address is and what the different IP addressing schemes are
- Special IP addresses and their uses
- What port numbers are and how they are used
- Using TCP and UDP client and server sockets for communication between remote computers
- The definitions of URI, URL, and URN and how to represent them in Java programs
- How to use non-blocking sockets
- How to use asynchronous socket channels
- Datagram-oriented socket channels and multicast datagram channels

The first few sections are intended to give a quick overview of basics related to network technologies for those readers who do not have a computer science background. If you understand terms like IP address, port number, network protocol suites, etc., you may skip these sections and start reading from the “Socket API and Client-Server Paradigm” section.

What Is Network Programming?

A network is a group of two or more computers or other types of electronic devices such as printers that are linked together with a goal to share information. Each device linked to a network is called a *node*. A computer that is linked to a network is called a *host*. Network programming in Java involves writing Java programs that facilitate the exchange of information between processes running on different computers on the network.

Java makes it easy to write network programs. Sending a message to a process running on another computer is as simple as writing data to a local file system. Similarly, receiving a message that was sent from a process running in another computer is as simple as reading data from a local file system. Most of the programs in this chapter will involve reading and writing data over the network, and they are similar to file I/O. Please refer to [Chapters 7 through 10](#) in the book *Beginning Java Language Features* (ISBN: 978-1-4302-6658-7) for more details on file I/O. You will learn about a few new classes in this chapter that facilitate the communication between two computers on a network.

You do not need to have advanced level knowledge of networking technologies to understand or write Java programs in this chapter. This chapter covers high-level details of a few things that are involved in network communication.

A network can be categorized based on different criteria. Based on the geographical area that a network is spread over, it is categorized as

- *Local Area Network (LAN)*: It covers a small area such as a building or a block of buildings.
- *Campus Area Network (CAN)*: It covers a campus such as a university campus, interconnecting multiple LANs within that campus.
- *Metropolitan Area Network (MAN)*: It covers more geographical area than a LAN. Usually, it covers a city.
- *Wide Area Network (WAN)*: It covers a larger geographical area such as a region of a country or multiple regions in different countries in the world.

When two or more networks are connected using routers (also known as

gateways), it is called *internetworking*, and the resulting combined network is called an *internetwork*, in short, *internet* (note the lowercase i). The global internetwork, which encompasses all networks in the world connected together, is referred to as the *Internet* (note the uppercase I).

Based on the topology (the arrangement of nodes in a network), a network may be categorized as *star*, *tree*, *ring*, *bus*, *hybrid*, etc.

Based on the technology a network uses to transmit the data, it can be categorized as *Ethernet*, *LocalTalk*, *Fiber Distributed Data Interface (FDDI)*, *Token Ring*, *Asynchronous Transfer Mode (ATM)*, etc.

I will not cover any details about the different kinds of networks. Please refer to any standard textbook on networks to learn more about networks and network technologies in detail.

Communication between two processes on a computer is simple and it is achieved using interprocess communication as defined by the operating system. It is a very tedious task when two processes running on two different computers on an internet need to communicate. You need to consider many aspects of the communication before the two processes on two computers on an internet may start communicating. Some of the points that you need to consider are as follows:

- The two computers may be using different technologies such as different operating systems, different hardware, etc.
- They may be on two different networks that use different network technologies.
- They may be separated by many other networks, which may be using different technologies. That is, two computers are not on two networks that are interconnected directly. You need to consider not just two networks, but all networks that the data from one computer has to pass to reach another computer.
- They may be a few miles apart or on other sides of the globe. How do you transmit the information efficiently without worrying about the distance between the two computers?
- One computer may not understand the information sent by the other computer.
- The information sent over a network may be duplicated,

delayed, or lost. How should the receiver and the sender handle these abnormal situations?

Simply put, two computers on a network communicate using messages (sequences of 0s and 1s). There must be well-defined rules to handle the above-mentioned issues (and many more). The set of rules to handle a specific task is known as a *protocol*. Many types of tasks are involved in handling network communication. There is a protocol defined to handle each specific task. There is a stack of protocols (also called *protocol suite*) that are used together to handle a network communication.

Network Protocol Suite

Modern networks are called *packet switching networks* because they transmit data in chunks called *packets*. Each packet is transmitted independent of other packets. This makes it easy to transmit the packets from the same computer to the same destination using different routes. However, it may become a problem if a computer sends two packets to a remote computer and the second packet arrives before the first one. For this reason, each packet also has a packet number along with its destination address. There are rules to rearrange the out-of-order arrival of the packets at the destination computer. The following discussion attempts to explain some of the mechanisms that are used to handle packets in a network communication.

[Figure 5-1](#) shows a layered protocol suite called the *Internet Reference Model* or *TCP/IP Layering Model*. This is the most widely used protocol suite. Each layer in the model performs a well-defined task. The main advantage of having a layered protocol model is that any layer can be changed without affecting others. A new protocol can be added to any layer without changing other layers.

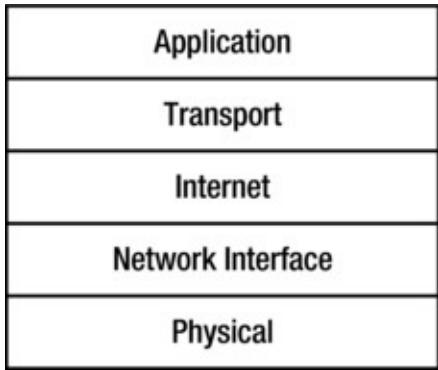


Figure 5-1. The Internet Protocol Suite showing its five protocol layers

Each layer knows about only the layer immediately above and below it. Each layer in the protocol suite has two interfaces—one for the layer above it and one for the layer below it. For example, the transport layer has interfaces to the application layer and internet layer. That is, the transport layer knows how to communicate only with the application layer and the internet layer. It knows nothing about the network interface layer or the physical layer.

A user application such as a Java program uses the application layer to communicate to a remote application. The user application has to specify the protocol that it wants to use to communicate with the remote application. A protocol in an application layer defines the rules for formatting messages and associating the meaning to the information contained in the messages such as the message type, describing whether it is a request or a response, etc. After the application layer formats the message, it hands over the message to the transport layer. The examples of protocols in an application layer are Hypertext Transfer Protocol (HTTP), File Transfer Protocol (FTP), Gopher, Telecommunication Network (Telnet), Simple Mail Transfer Protocol (SMTP), and Network News Transfer Protocol (NNTP).

The transport layer protocol handles the ways messages are transported from one application on one computer to another application on the remote computer. It controls the data flow, error handling during data transmission, and connections between two applications. For example, a user application may hand over a very large chunk of data to the transport layer to transmit to a remote application. The remote computer may not be able to handle that large amount of data at once. It is the responsibility of the transport layer to pass a suitable amount of data at a time to the remote computer, so the remote application can handle the data according to its capacity. The data passed to the remote computer over a network may be lost on its way due to various reasons. It is the responsibility of the transport layer to retransmit the lost data. Note that the

application layer passes data to be transmitted to the transport layer only once. It is the transport layer (not the application layer) that keeps track of the delivered and the lost data during a transmission. There may be multiple applications running, all of which use different protocols and exchange information with different remote applications. It is the responsibility of the transport layer to hand over messages sent to a remote application correctly. For example, you may be browsing the Internet using the HTTP protocol from one remote web server and downloading a file using the FTP protocol from another FTP server. Your computer is receiving messages from two remote computers and they are meant for two different applications running on your computer—one web browser to receive HTTP data and one FTP application to receive FTP data. It is the responsibility of the transport layer to pass the incoming data to the appropriate application. You can see how different layers of the protocol suite play different roles in data transmission over the network. Depending on the transport layer protocol being used, the transport layer adds relevant information to the message and passes it to the next layer, which is the internet layer. The examples of protocols used in the transport layer are Transmission Control Protocol (TCP), User Datagram Protocol (UDP), and Stream Control Transmission Protocol (SCTP).

The internet layer accepts the messages from the transport layer and prepares a packet suitable for sending over the internet. It includes the Internet Protocol (IP). The packet prepared by the IP is also known as an IP datagram. It consists of a header and a data area, apart from other pieces of information. The header contains the sender's IP address, destination IP address, time to live (TTL, which is an integer), a header checksum, and many other pieces of information specified in the protocol. The IP prepares the message into datagrams, which are ready to be transmitted over the internet. The TTL in the IP datagram header specifies how long, in terms of the number of routers, an IP datagram can keep traveling before it needs to be discarded. Its size is one byte and its value could be between 1 and 255. When an IP datagram reaches a router in its route to the destination, the router decrements the TTL value by 1. If the decremented value is zero, the router discards the datagram and sends an error message back to the sender using Internet Control Message Protocol (ICMP). If the TTL value is still a positive number, the router forwards the datagram to the next router. The IP uses an address scheme, which assigns a unique address to each computer. The address is called an IP address. I will discuss the IP addressing scheme in detail in the next section. The internet layer hands over the IP datagram to the next layer, which is the network interface layer. The examples of protocols in an internet layer are Internet Protocol (IP), Internet Control Message Protocol

(ICMP), Internet Group Management Protocol (IGMP), and Internet Protocol Security (IPsec).

The network interface layer prepares a packet to be transmitted on the network. The packet is called a *frame*. The network interface layer sits just on top of the physical layer, which involves the hardware. Note that the IP layer uses the IP address to identify the destination on a network. An IP address is a virtual address, which is completely maintained in software. The hardware is unaware of the IP address and it does not know how to transmit a frame using an IP address. The hardware must be given the hardware address, also called *Media Access Control* (MAC) address, of the destination that it needs to transmit the frame to. This layer resolves the destination hardware address from the IP address and places it in the frame header. It hands over the frame to the physical layer. The examples of protocols in a network interface layer are Open Shortest Path First (OSPF), Point-to-Point Protocol (PPP), Point-to-Point Tunneling Protocol (PPTP), and Layer 2 Tunneling Protocol (L2TP).

The physical layer consists of the hardware. It is responsible for converting the bits of information into signals and transmitting the signal over the wire.

Tip *Packet* is a generic term that is used to mean an independent chunk of data in network programming. Each layer of protocol also uses a specific term to mean the packet it deals with. For example, a packet is called a *segment* in the TCP layer; it is called a *datagram* in the IP layer; it is called a *frame* in the network interface and physical layers. Each layer adds a header (sometimes also a trailer) to the packet it receives from the layer before it, while preparing the packet to be transmitted over the network. Each layer performs the reverse action when it receives a packet from the layer below it. It removes the header from the packet; performs some actions, if needed; and hands over the packet to the layer above it.

When a packet sent by an application reaches the remote computer, it has to pass through the same layer of protocols in the reverse order. Each layer will remove its header, perform some actions, and pass the packet to the layer immediately above it. Finally, the packet reaches the remote application in the same format it started from the application on the sender's computer. [Figure 5-2](#) shows the transmission of packets from the sender and the receiver computer. P1, P2, P3, and P4 are the packets in different formats of the same data. A protocol layer at a destination receives the same packet from the layer

immediately below it, which the same protocol layer had passed to the layer immediately below it on the sender's computer.

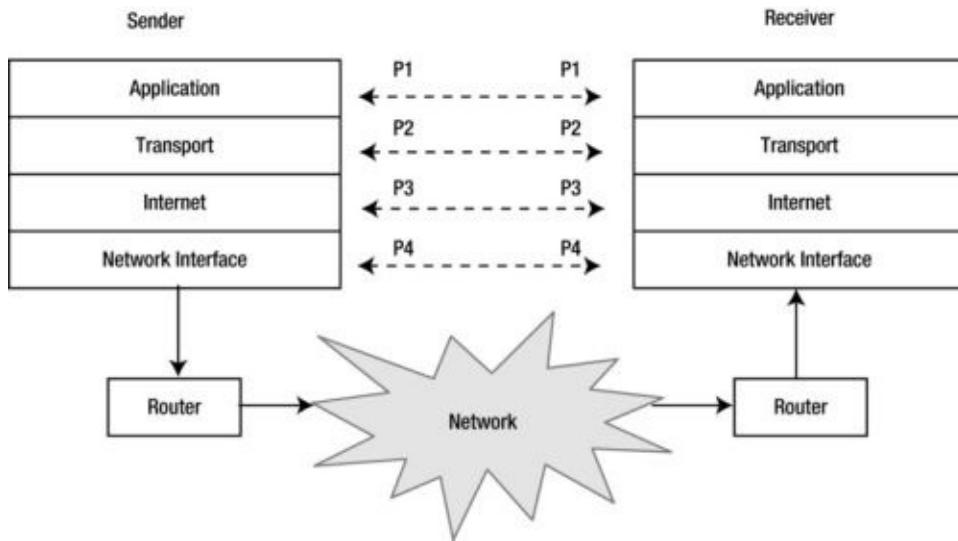


Figure 5-2. Transmission of packets through the protocol layers on the sender's and receiver's computers

IP Addressing Scheme

IP uses a unique address, called an IP address, to route an IP datagram to the destination. An IP address uniquely identifies a connection between a computer and a router. Normally, it is understood that an IP address identifies a computer. However, it should be emphasized that it identifies a connection between a computer and a router, not just a computer. A router is also assigned an IP address. A computer can be connected to multiple networks using multiple routers and each connection between the computer and the router will have a unique IP address. In such cases, the computer will be assigned multiple IP addresses and the computer is known as *multi-homed*. Multi-homing increases the availability of the network connection to a computer. If one network connection fails, the computer can use other available network connections.

An IP address contains two parts—a network identifier (I will call it a prefix) and a host identifier (I will call it a suffix). The prefix identifies a network on the Internet uniquely; the suffix identifies a host uniquely within that network. It is possible for two hosts to have IP addresses with the same suffix as long as they have a different prefix.

There are two versions of Internet Protocol—IPv4 (or simply IP) and IPv6,

where v4 and v6 stand for version 4 and version 6. IPv6 is also known as Internet Protocol next generation (IPng). Note that there is no IPv5. When IP was in its full swing of popularity, it was at version 4. Before IPng was assigned a version number 6, version 5 was already assigned to another protocol called Internet Stream Protocol (ST).

Both IPv4 and IPv6 use an IP address to identify a host on a network. However, the addressing schemes in the two versions differ significantly. The next two sections will discuss the addressing schemes used by IPv4 and IPv6.

Since an IP address must be unique, its assignment is controlled by an organization called *Internet Assigned Numbers Authority* (IANA). IANA assigns a unique address to each network that belongs to an organization. The organization uses the network address and a unique number to form a unique IP address for each host on the network. IANA divides the IP address allocations to five Regional Internet Registry (RIR) organizations, which allocate IP addresses in specific regions as listed in [Table 5-1](#). You can find more information on how to get a network address in your area from IANA at www.iana.com.

Table 5-1. The List of Regional Internet Registries for Allocating Network IP Addresses

Regional Internet Registry Organization Name	Regions Covered
African Network Information Centre (AfriNIC)	Africa Region
Asia-Pacific Network Information Centre (APNIC)	Asia/Pacific Region
American Registry for Internet Numbers (ARIN)	North America Region
Latin American and Caribbean Internet Address Registry (LACNIC)	Latin America and some Caribbean Islands
Réseaux IP Européens Network Coordination Centre (RIPE NCC)	Europe, the Middle East, and Central Asia

IPv4 Addressing Scheme

IPv4 (or simply IP) uses a 32-bit number to represent an IP address. An IP address contains two parts—a prefix and a suffix. The prefix identifies a network and the suffix identifies a host on the network, as shown in [Figure 5-3](#).



Figure 5-3. IPv4 addressing scheme

It is not easy for humans to remember a 32-bit number in binary format. IPv4 allows you to work with an alternate form using four decimal numbers. Each decimal number is in the range from 0 to 255. Programs take care of converting decimal numbers into a 32-bit binary number that will be used by the computer. The decimal number format of IPv4 is called dotted decimal format because a dot is used to separate two decimal numbers. Each decimal number represents the value contained in 8 bits of the 32-bit number. For example, an IPv4 address of 110000001010100000000111100111 in the binary format can be represented as 192.168.1.231 in the dotted decimal format. The process of converting binary IPv4 to its decimal equivalent is shown in [Figure 5-4](#). In 192.168.1.231, the part 192.168.1 identifies the network address (the prefix) and the part 231 (the suffix) identifies the host on that network.

32-bit Binary Representation	11000000	10101000	00000001	11100111
Decimal Value of Each Octet	192	168	1	231
Parts of IPv4 Address	Prefix			Suffix
Alternate Representation of IPv4	192.168.1.231			

Figure 5-4. Parts of an IPv4 address in binary and decimal formats

How do you know that 192.168.1 represents a prefix in an IPv4 address 192.168.1.231? A rule governs the value of a prefix and a suffix in an IPv4. I will discuss how to identify a prefix and suffix in an IPv4 later in this section, when I discuss the class type of a network.

How does an IPv4 address divide its 32 bits between a prefix and a suffix? IPv4 address space is divided in five categories called network classes, named A, B, C, D, and E. A class type defines how many bits of the 32 bits will be used to represent the network address part of an IP address. The leading bit (or bits) in the prefix defines the class of the IP address. This is also known as a *self-identifying* or *classful* IP address because you can tell which class it belongs to by looking at the IP address.

[Table 5-2](#) lists the five network classes and their characteristics in IPv4. The

leading bits in an IP address identify the class of the network. For example, if an IP address looks like 0XXX, where XXX is the last 31 bits of the 32 bits, it belongs to the class A network; if an IP address looks like 110XXX, where XXX is the last 29 bits of 32 bits, it belongs to the class C network. There can be only 128 networks of class A type and each network can have 16777214 hosts. The number of hosts that a class A network can have is very big and it is very unlikely that a network will have that many hosts. In a class C type of network, the maximum number of hosts that a network can have is limited to 254.

Table 5-2. Five Classes of IPv4 in the Classful Addressing Scheme

Network Class	Prefix	Suffix	Leading Bit(s) in Prefix	Number of Networks	Number of Hosts per Network
A	8 bits	24 bits	0	128	16777214
B	16 bits	16 bits	10	16384	65534
C	24 bits	8 bits	110	2097152	254
D	Not Defined	Not defined	1110	Not defined	Not defined
E	Not Defined	Not defined	1111	Not defined	Not defined

What happens if an organization is assigned a network address from class C and it has only 10 hosts to attach to the network? The remaining slots in the IP addresses in that network remain unused. Recall that the host (or suffix) part in an IP address must be unique within the network (the prefix part). On the other hand, if an organization needs to connect 300 computers to a network, it needs to get two class C network addresses because getting a class B network address, which can accommodate 65534 hosts, will again waste a great many IP addresses.

Note that if the number of bits allocated for a suffix is N, the number of hosts that can be used is $2^N - 2$. Two bits patterns—all 0s and all 1s—cannot be used for a host address. They are used for special purposes. This is the reason a class C network can have a maximum of 254 hosts and not 256. Class D addresses are used as multicast addresses. Class E addresses are reserved.

The fast growth of the Internet and the large number of IP addresses not being used prompted for a new addressing scheme. This scheme is simply based on one criterion—one should be able to use an arbitrary boundary between the prefix and suffix parts of an IP address, instead of predefined boundaries at 8, 16, and 24 bits. This will keep the unused addresses at a minimum. For example, if an organization needs a network number for a network with only 20 hosts, that

organization can use only a 27-bit prefix and a 5-bit suffix.

Two terminologies called *subnetting* and *supernetting* are used to describe the situations when some bits from the suffix are used for the prefix and some bits from the prefix are used as the suffix. When bits from the suffix are used as the prefix, essentially, it creates more network addresses at the cost of host addresses. The extra network addresses are called *subnets*. Subnetting is achieved by using a number called a *subnet mask* or an *address mask*. A subnet mask is a 32-bit number that is used to compute the network address from an IP address. Using a subnet mask eliminates the restriction that the class of a network must predefine the network number part of the IP address. A logical AND is performed on the IP address and the subnet mask to compute the network number. In this scheme of addressing, an IP address is always specified with its subnet mask. A forward slash and subnet mask follows an IP address. For example, 140.10.11.9/255.255.0.0 denotes an IP address of 140.10.11.9 with a subnet mask 255.255.0.0. It is possible to use any subnet mask whose four decimal parts ranges from 0 to 255. In this example, 140.10.11.9 is a class B address. A class B address uses 16 bits for the prefix and 16 bits for the suffix. Let's take 6 bits off the suffix and add it to the prefix. Now, the prefix is 22 bits and the suffix is only 10 bits. By doing this, you have created additional network numbers at the cost of host numbers. To describe an IP address in this scheme of subnetting, you need to use a subnet mask of 255.255.252.0. If you write an IP address using this subnet mask as 140.10.11.9/255.255.252.0, the network address is computed as 140.10.8.0, like so:

IP Address:	10001100	00001010	00001011	00001001
Subnet Mask:	11111111	11111111	11111100	00000000
<hr/>				
Logical AND:	10001100	00001010	00001000	00000000
	(140)	(10)	(8)	(0)

Classless Inter-Domain Routing (CIDR) is another IPv4 addressing scheme in which an IPv4 address is specified as four dotted decimal numbers along with another decimal number separated by a forward slash such as 192.168.1.231/24, where the last number 24 denotes the prefix-length (or number of bits used for a network number) in the 32-bit IPv4 address. Note that the CIDR addressing scheme lets you define the prefix/suffix boundary at any bits in 32-bit IPv4. By moving the bits from the prefix to the suffix, you can

combine multiple networks and increase the number of hosts per network. This is called *supernetting*. You can create supernets as well as subnets using CIDR notation.

Some IP addresses in an IPv4 addressing scheme are reserved for broadcast and multicast IP addresses. I will discuss broadcasting and multicasting later in this chapter.

IPv6 Addressing Scheme

IPv6 is a new version of IP and it is the successor for IPv4. The address space in IPv4 was running out of addresses in the fast growing Internet world. IPv6 is aimed at providing enough address space, so that every computer in the world may get a unique IP address in the decades to come. Here are some of the main features of IPv6:

- IPv6 uses a 128-bit number for an IP address instead of a 32-bit number used in IPv4.
- It has different header formats for IP packets than IPv4. IPv4 has only one header per datagram, whereas IPv6 has one base header followed by multiple variable-length extension headers per datagram.
- IPv6 supports datagrams of a bigger size than IPv4.
- In IPv4, the routers performed an IP packet fragmentation. In IPv6, the sender host is supposed to perform a packet fragmentation rather than the routers. This means that the host that uses IPv6 must know in advance the path of the maximum transmission unit (MTU) that is the minimum of the maximum packet size allowed by all networks to the destination host. The IP datagram's fragmentation occurs when it has to enter a network that has a lower size transmission capacity than the network the datagram is leaving. In IPv4, the fragmentation is performed by the router, which detects a lower transmission capacity network in the route. Since IPv6 allows only the host to perform the fragmentation, the host must discover the minimum size datagram that can be routed through all possible routes from

the source to the destination host.

- IPv6 supports specifying routing information for the datagrams in the headers so that routers can use it to route the datagrams through a specific route. This feature is helpful in delivering time-critical information.
- IPv6 is extensible. Any number of extension headers can be added to an IPv6 datagram, which can be interpreted in a new way.

IPv6 uses a 128-bit IP address. It uses an easy-to-understand notation to represent an IP address in a textual form. The 128 bits are divided into 8 fields of 16 bits each. Each field is written in hexadecimal form and separated by a colon. The following are some examples of IPv6 addresses:

- F6DC:0:0:4015:0:BA98:C0A8:1E7
- F6DC:0:0:7678:0:0:0:A21D
- F6DC:0:0:0:0:0:0:A21D
- 0:0:0:0:0:0:0:1

It is common to have many fields in an IPv6 address with zero values, especially for all IPv4 addresses. The IPv6 address notation lets you compress contiguous fields of zero values by using two consecutive colons. You can use two colons to suppress contiguous zero value fields only once in an address. The above IPv6 address may be rewritten using the zero compression technique:

- F6DC::4015:0:BA98:C0A8:1E7
- F6DC:0:0:7678::A21D
- F6DC::A21D
- ::1

Note that we could suppress only one of the two sets of contiguous zero fields in the second address, F6DC:0:0:7678::A21D. Rewriting it as F6DC::7678::A21D would be invalid as it uses two colons more than once. You can use two colons to suppress contiguous zero fields, which may occur in the beginning, middle, or end of the address string. If an address contains all

zeros in it, you can represent it simply as ::.

You can also mix hexadecimal and decimal formats in an IPv6 address. The notation is useful when you have an IPv4 address and want to write it in IPv6 format. You can write the first six 16-bit fields using a hexadecimal notation as described above and use dotted decimal notation for IPv4 for the last two 16-bit fields. The mixed notation takes the form X:X:X:X:X:X:D.D.D.D, where an X is a hexadecimal number and a D is a decimal number. You can rewrite the above IPv6 addresses using this notation as follows:

- F6DC::4015:0:BA98:192.168.1.231
- F6DC:0:0:7678::0.0.162.29
- F6DC::0.0.162.29
- ::0.0.0.1

Unlike IPv4, IPv6 does not assign IP addresses based on network classes. Like IPv4, it uses CIDR addresses, so that the boundary between the prefix and suffix in an IP address can be specified at any arbitrary bit. For example, ::1 can be represented in CIDR notation as ::1/128, where 128 is the prefix length.

Tip IPv6 address should be enclosed in brackets ([]) when it is used inside a literal string as part of a URL. This rule does not apply to IPv4. For example, if you are accessing a web server on a loopback address using IPv4 address, you can use a URL like <http://127.0.0.1/index.html>. In an IPv6 address notation, you need to use a URL like [http://\[::1\]/index.html](http://[::1]/index.html). Make sure your browser supports IPv6 address notation in its URLs before using it.

Special IP Addresses

Some IP addresses are used for special purposes. Some of such IP addresses are as follows:

- Loopback IP Address

- Unicast IP Address
- Multicast IP Address
- Anycast IP Address
- Broadcast IP Address
- Unspecified IP Address

The following sections describe the use of these special IP addresses in detail.

Loopback IP Address

You need at least two computers connected via a network to test or run a network program. Sometimes it may not be feasible or desirable to set up a network when you want to test your network program during the development phase of your project. The designers of IP realized this need. There is a provision in the IP addressing scheme to treat an IP address as a loopback address to facilitate testing of network programs using only one computer. When the Internet layer in the protocol suite detects a loopback IP address as the destination for an IP datagram, it does not pass over the packet to the protocol layer below it (that is network interface layer). Rather, it turns around (or loops back, hence the name *loopback address*) and routes the packet back to the transport layer on the same computer. The transport layer will deliver the packet to the destination process on the same host as it would have done had the packet come from a remote host. A loopback IP address makes testing of a network program using one computer possible. [Figure 5-5](#) depicts the way an Internet packet, which is addressed to a loopback IP address, is processed by the IP. The packet never leaves the source computer. It is intercepted by the internet layer and routed back to the same computer it started from.

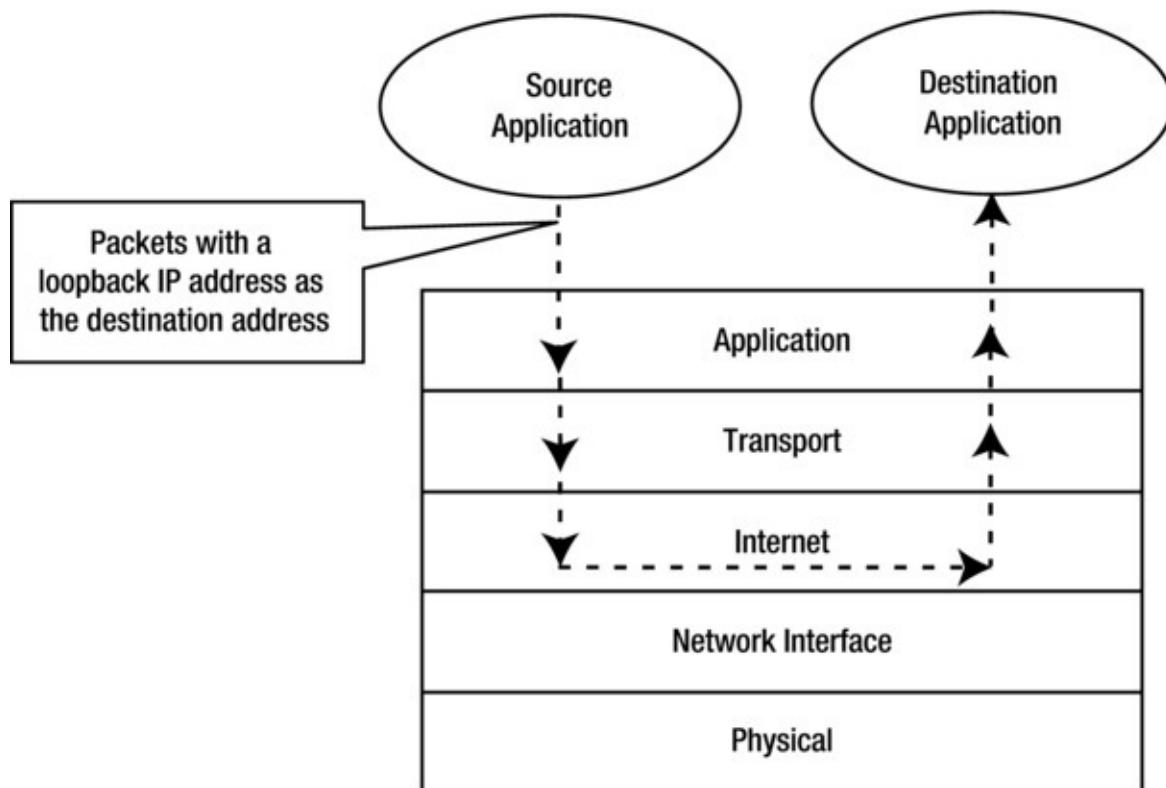


Figure 5-5. An Internet packet that has a loopback IP address as its destination is routed back to the same computer from the Internet protocol in the internet layer

Loopback IP addresses are reserved addresses and the IP is required not to forward a packet with a loopback IP address as its destination address to the network interface layer.

In an IPv4 addressing scheme, $127.x.x.x$ block is reserved for loopback addresses, where x is a decimal number between 0 and 255. Typically, $127.0.0.1$ is used as a loopback address in IPv4. However, you are not limited to using only $127.0.0.1$ as the only loopback address. If you wish, you can also use $127.0.0.2$ or $127.3.5.11$ as a valid loopback address. Typically, the name `localhost` is mapped to a loopback address of $127.0.0.1$ on a computer.

In an IPv6 addressing scheme, there is only one loopback address, which is sufficient to perform any local testing for a network program. It is $0:0:0:0:0:0:0:1$ or simply $::1$.

Unicast IP Address

Unicast is one-to-one communication between two computers on a network in which an IP packet is delivered to a single remote host. A unicast IP address identifies a unique host on a network. IPv4 and IPv6 support unicast IP addresses.

Multicast IP Address

Multicast is a one-to-many communication where one computer sends an IP packet that is delivered to multiple remote computers. Multicasting lets you implement the concept of group interaction such as audio or video conferencing, where one computer sends information to all computers in the group. The benefit of using multicasting in place of multiple unicasts is that the sender sends only one copy of the packet. One copy of the packet travels along the network as long it can. If receivers of the packet are on multiple networks, a copy of the packet is made when needed, and each copy of the packet is routed independently. Finally, each receiver is delivered an individual copy of the packet. Multicasting is an efficient way of communication between group members as it reduces network traffic.

An IP packet has only one destination IP address. How is an IP packet delivered to multiple hosts using multicasting? IP contains some addresses in its address space as multicast addresses. If a packet is addressed to a multicast address, the packet will be delivered to multiple hosts. The concept of multicast packet delivery is the same as a group membership for an activity. When a group is formed, the group is given a group ID. Any information addressed to that group ID is delivered to all group members. In a multicast communication, a multicast IP address (similar to a group ID) is used. Multicast packets are addressed to that multicast address. Each interested host registers its IP address with the local router that it is interested in communication made on that multicast address. The registration process between a host and the local router is accomplished using an Internet Group Management Protocol (IGMP). When the router receives a packet with a multicast address, it delivers a copy of the packet to each host registered with it for that multicast address. A receiver may choose to leave the multicast group any time by informing the router.

A multicast packet may travel through many routers before it finds its way to the receiver hosts. All receivers of a multicast packet may not be on the same network. There are many protocols, such as Distance Vector Multicast Routing Protocol (DVMRP), that deal with routing of multicast packets.

Both IPv4 and IPv6 support multicast addressing. In IPv4, Class D network addresses are used for multicasting. That is, the four highest order bits are 1110 in a multicast address in IPv4. In IPv6, a multicast address has the first 8 bits set to 1. That is, a multicast address in IPv6 always starts with FF. For example, FF0X:0:0:0:0:0:2:0000 is a multicast address in IPv6.

Anycast IP Address

Anycast is a one-to-one_from_a_group communication where one computer sends a packet to a group of computers, but the packet is delivered to exactly one computer in the group. IPv4 does not support anycasting. IPv6 supports anycasting. In anycasting, the same address is assigned to multiple computers. When a router receives a packet, which is addressed to an anycast address, it delivers the packet to the nearest computer. Anycasting is useful when a service has been replicated at many hosts and you want to provide the service at the nearest host to the client. Sometimes, anycast addressing is also called *cluster addressing*. An anycast address is used from the unicast address space. You cannot distinguish a unicast address from an anycast address by looking at their bit arrangements. When the same unicast address is assigned to multiple hosts, it is treated as an anycast address. Note that the router must know about the hosts that are assigned an anycast address, so that it can deliver the packets addressed to that anycast address to one of the nearest hosts.

Broadcast IP Address

Broadcast is a one-to-all communication where one computer sends a packet and that packet is delivered to all computers on the network. IPv4 assigns some addresses as broadcast addresses. When all 32 bits are set to 1, it forms a broadcast address and the packet is delivered to all hosts on the local subnet. When all bits in the host address are set to 1 and a network address is specified, it forms a broadcast address for the specified network number. For example, 255.255.255.255 is a broadcast address for a local subnet and 192.168.1.255 is a broadcast address for a network 192.168.1.0. IPv6 does not have a broadcast address. You need to use a multicast address as the broadcast address in IPv6.

Unspecified IP Address

0.0.0.0 in IPv4 and :: in IPv6 (note that :: denotes 128-bit IPv6 address with all bits set to zero) are known as unspecified addresses. A host uses this address as a source address to indicate that it does not have an IP address yet, such as during the boot up process when it is not assigned an IP address yet.

Port Numbers

A port number is a 16-bit unsigned integer ranging from 0 to 65535. Sometimes a port number is also referred to simply as a *port*. A computer runs many processes, which communicate with other processes running on remote computers. When the transport layer receives an incoming packet from the Internet layer, it needs to know which process (running in the application layer) on that computer should this packet be delivered to. A port number is a logical number that is used by the transport layer to recognize a destination process for a packet on a computer.

Each incoming packet to the transport layer has a protocol; for example, the TCP protocol handler in the transport layer handles a TCP packet and the UDP protocol handler in the transport layer handles a UDP packet.

In the application layer, a process uses a separate protocol of each communication channel it wants to communicate on with a remote process. A process uses a unique port number for each communication channel it opens for a specific protocol and registers that port number with the specific protocol module in the transport layer. Therefore, a port number must be unique for a specific protocol. For example, process P1 can use a port number 1988 for a TCP protocol and another called process P2 can use the same port number 1988 on the same computer for a UDP protocol. A process on a host uses the protocol and the port number of the remote process to send data to the remote process.

How does a process on a computer start communicating with a remote process? For example, when you visit Yahoo's web site, you simply enter <http://www.yahoo.com> as the web page address. In this web page address, http indicates the application layer protocol, which uses TCP as a transport layer protocol and www.yahoo.com is the machine name, which is resolved to an IP address using a Domain Name System (DNS). The machine identified by www.yahoo.com may be running many processes, which may use the http

protocol. Which process on www.yahoo.com does your web browser connect to? Since many people use Yahoo's web site, it needs to run its `http` service at a well-known port, so that everyone can use that port to connect to it. Typically, the `http` web server runs at port 80. You can use

`http://www.yahoo.com:80`, which is the same as using `http://www.yahoo.com`. It is not always necessary to run the `http` web server at port 80. If you do not run your `http` web server at port 80, people who want to use your `http` service must know the port you are using. IANA is responsible for recommending which port numbers to use for well-known services. IANA divides the port numbers into three ranges:

- Well-known Ports: 0 -1023
- Registered Ports: 1024 - 49151
- Dynamic and/or Private Ports: 49152 - 65535

Well-known port numbers are used by most commonly used services provided globally such as HTTP, FTP, etc. **Table 5-3** lists some of the well-known ports that are used for well-known application layer protocols. Generally, you need administrative privileges to use a well-known port on a computer.

Table 5-3. A Partial List of Well-Known Ports Used for Some Application Layer Protocols

Application Layer Protocol	Port Number
echo	7
FTP	21
Telnet	23
SMTP	25
HTTP	80
POP3	110
NNTP	119

An organization (or a user) can register a port number with IANA in the registered ports range to be used by an application. For example, 1099 (TCP/UDP) port has been registered for the RMI Registry (RMI stands for Remote Method Invocation).

Any application can use a port number from dynamic/private port number range.

Socket API and Client-Server Paradigm

I have not yet started discussing Java classes that make network communication possible in a Java program. In this section, I will cover sockets and the client-server paradigm that is used in a network communication between two remote hosts.

I covered briefly the different lower layers of protocols and their responsibilities in the previous sections. It is time to move up in the protocol stack and discuss the interaction between the application layer and the transport layer. How does an application use these protocols to communicate with a remote application? Operating systems provide an application program interface (API) called a *socket*, which lets two remote applications communicate, taking advantage of lower level protocols in the protocol stack. A socket is not another layer of protocol. It is an interface between the transport layer and the application layer. It provides a standard way of communication between the two layers, which in turn provides a standard way of communication between two remote applications.

There are two kinds of sockets:

- A Connection-Oriented Socket
- A Connectionless Socket

A connection-oriented socket is also called a *stream socket*. A connectionless socket is also called a *datagram socket*. Note that the data is always sent one datagram at a time from one host to another on the Internet using IP datagrams.

Transmission Control Protocol (TCP), which is used in a transport layer, is one of the most widely used protocols to provide connection-oriented sockets. The application hands over data to a TCP socket and the TCP takes care of streaming the data to the destination host. The TCP takes care of all issues like ordering, fragmentation, assembly, lost data detection, duplicates data transmission, etc., on both sides of the communication, which gives the

impression to the applications that data is flowing like a continuous stream of bytes from the source application to the destination application. No physical connection at the hardware level exists between two hosts that use TCP sockets. It is all implemented in software. Sometimes it is also called a *virtual connection*. The combination of two sockets uniquely defines a connection.

In a connection-oriented socket communication, the client and the server create a socket at their ends, establish a connection, and exchange information. TCP takes care of the errors that may occur during data transmission. TCP is also known as a reliable transport level protocol because it guarantees the delivery of the data. If it could not deliver the data for some reasons, it will inform the sender application about the error conditions. After it sends the data, it waits for an acknowledgment from the receiver to make sure that the data reached the destination. However, the reliability that TCP offers comes at a price. The overhead as compared to a connectionless protocol is much more significant, and it is slower. TCP makes sure that a sender sends the amount of data to the receiver, which can be handled by the receiver's buffer size. It also handles traffic congestion over the network. It slows down the data transmission when it detects traffic congestion. Java supports TCP sockets.

User Datagram Protocol (UDP), which is used in a transport layer, is the most widely used protocol that provides a connectionless socket. It is unreliable, but much faster. It lets you send limited sized data—one packet at a time, which is different from TCP, which lets you send data as a stream of any size, handling the details of segmenting them in appropriate size of packets. Data delivery is not guaranteed when you send data using UDP. However, it is still used in many applications and it works very well. The sender sends a UDP packet to a destination and forgets about it. If receiver gets it, it gets it. Otherwise, there is no way to know—for the receiver—that there was a UDP packet sent to it. You can compare the communication used in TCP and UDP to the communication used in a telephone and mailing a letter. A telephone conversation is reliable and it offers acknowledgment between two parties that are communicating. When you mail a letter, you do not know when the addressee receives it, or if he received it at all. There is another important difference between UDP and TCP. UDP does not guarantee the ordering of data. That is, if you send five packets to a destination using UDP, those five packets may arrive in any order. However, TCP guarantees that packets will be delivered in the order they were sent. Java supports UDP sockets.

Which protocol should you use: TCP or UDP? It depends on how the application will be used. If data integrity is of utmost significance, you should

use TCP. If speed is prioritized over lower data integrity, you should use UDP. For example, a file transfer application should use TCP, whereas a video conferencing application should use UDP. If you lose video data of a few pixels, it does not matter much to the video conference. It can continue. However, if you lose a few bytes of data when a file is being transferred, that file may not be usable at all.

How do two remote applications start communicating? Which application initiates the communication? How does an application know that a remote application is interested in communicating with it? Have you ever dialed a customer service number of a company to talk to a customer service representative? If you have talked to a company's customer service representative, you already have experienced two remote applications communicate. I will refer to the mechanism of using a company's customer service to explain remote communication in this section. You and a company's representative are at two remote locations. You need a service and the company provides that service. In other words, you are the client and the company is a service provider (or a server). You do not know when you will need a service from the company. The company provides a customer service phone number, so you can contact the company. There is one more thing the company does. What is it that the company must do to provide you a service? Can you guess? It waits for your calls at the phone number that it gave you. The communication has to happen between you and the company, and the company has already taken one step forward in that communication by *passively* waiting for your call. As soon as you dial the company's number, a connection is established and you exchange information with the company's representative. Both of you hang up, at the end, to discontinue the communication. The network communication using sockets is similar to the communication that happens between you and the company's representative. If you understand this example of communication, understanding sockets is easy.

Two remote applications use a pair of sockets to communicate. You need two endpoints for any communication to occur. A socket is a communication endpoint on each side of the communication channel. Communication over a pair of sockets follows a typical client-server communication paradigm. One application creates a socket and passively waits to be contacted by another remote application. The application that waits for a remote application to contact it is called a *server application* or simply a *server*. Another application creates a socket and initiates the communication with the waiting server application. This is called a *client application* or simply a *client*. Many other steps must be

performed before a client and a server can exchange information. For example, a server must advertise the location and other details about itself so a client may contact it.

A socket passes through different states. Each state marks an event. It is the state of the socket that tells us what a socket can do and what it cannot do. Generally, a socket's lifecycle is described by eight primitives listed in [Table 5-4](#).

Table 5-4. *The List of Typical Socket Primitives and Their Descriptions*

Primitives	Description
Socket	Creates a socket, which is used by an application to serve as a communication endpoint.
Bind	Associates a local address to the socket. The local address includes an IP address and a port number. The port number must be a number between 0 and 65535. It should be unique for the protocol being used for the socket on the computer. For example, if a TCP socket uses port 12456, a UDP socket can also use the same port number 12456.
Listen	Defines the size of its wait queue for a client request. It is performed only by a connection-oriented server socket.
Accept	Waits for a client request to arrive. It is performed only by a connection-oriented server socket.
Connect	Attempts to establish a connection to a server socket, which is waiting on an accept primitive. It is performed by a connection-oriented client socket.
Send/Sendto	Sends data. Usually send indicates a send operation on a connection-oriented socket and Sendto indicates a send operation on a connectionless socket.
Receive/ReceiveFrom	Receives data. They are counterparts of Send and Sendto.
Close	Closes a connection.

The following sections elaborate each socket primitive.

The Socket Primitive

A server creates a socket by specifying what kind of socket it is: a stream socket or a datagram socket.

The Bind Primitive

The `bind` primitive associates the socket to a local IP address and a port number. Note that a host can have multiple IP addresses. A socket can be bound to one of the IP addresses of the host or all of them. Binding a socket to all available IP addresses for the host is also known as binding to a wildcard address. Binding reserves the port number for this socket. No other socket can use that port number for communication. The bound port will be used by the transport protocol (TCP as well as UDP) to route the data intended for this socket. I will explain more about transferring data between the transport layer and a socket little later in this section. For now, it is sufficient to understand that, in binding, the socket tells the transport layer that here is my IP address and port number, and if you get any data addressed to this address, please pass that data to me. The IP address and the port number to which a socket is bound are called the *local address* and the *local port* for the socket, respectively.

The Listen Primitive

A server informs the operating system to place the socket in a passive mode so it waits for the incoming client requests. At this point, the server is not yet ready to accept any client request. A server also specifies a wait queue size for the socket. When a client contacts the server at this socket, the client request is placed in that queue. Initially, the queue is empty. If a client contacts the server at this socket and the wait queue is full, the client's request is rejected.

The Accept Primitive

A server informs the operating system that this socket is ready to accept client requests. This step is not performed if the server is using a socket using a connectionless transport protocol such as UDP. This step is performed for TCP server sockets. When a socket sends an accept message to the operating system, it blocks until it receives a client request for a new connection.

The Connect Primitive

Only a connection-oriented client socket performs this step. This is the most important phase in a socket communication. The client socket sends a request to the server socket to establish a connection. The server socket has issued accept and has been waiting for a client request to arrive. The client socket sends the IP address and the port number of the server socket. Recall that a server socket binds an IP address and a port number before it starts listening and accepting connections from outside. Along with its request, a client socket also sends its own IP address and the port number to which it is already bound.

An important question arises at this point. How does the transport layer such as TCP know that the packet (in the form of a request for a connection) that came from a client has to be handed over to the server socket? During the binding phase, a socket specifies its local IP address and a local port number as well as a remote IP address and a remote port number. If the server socket wants to accept a connection only from a specific remote host IP address and port number, it can do so. Usually, the server socket will accept a connection from any client and it will specify an unspecified IP address and a zero port number as its remote address. A server socket passes five pieces of information—a local IP address, a local port number, a remote IP address, and a remote port number, and a buffer—to the transport layer. The transport layer stores them for future use in a special structure called a *Transmission Control Block* (TCB). When a packet from outside arrives at the transport layer, it looks up its TCB based on the four pieces of information contained in the incoming packet, <source IP address, source port number, destination IP address, destination port number>. Recall that the client sends the source and destination addresses in each TCP packet to the server. The transport layer attempts to find a buffer that is associated with the source and destination addresses. If it finds a buffer, it transfers the incoming data to the buffer and notifies the socket that there is some information for it in the buffer. If the server socket is accepting requests from any client (all zeroes in the remote address), the data from any client will be routed to its buffer.

Once a server socket detects a request from a client, it creates a new socket with the remote client's address information. The new socket is bound using a <local IP address, local port number (the same as server socket's port number), remote IP address, and remote port number> and a new buffer is created and bound to this combined addresses. In fact, two buffers are created for a socket: one for the incoming data and one for the outgoing data. At this point, a server socket lets the new socket communicate with the client socket that requested a connection. The server socket itself can close itself (accepting no more client requests for a connection) or it can start waiting again to accept another client

request for a connection.

After a connection is established between two sockets (a client and a server), they can exchange information. A TCP connection supports full duplex connection. That is, data can be sent or received in both directions simultaneously.

A client socket knows its local IP address, local port number, remote IP address, and remote port number before it attempts to connect to a server. At the client end, the creation of a TCB follows similar rules.

Once the client and server sockets are in place, two sockets (the client socket and the server socket dedicated to the client) define a connection.

A server socket acts like a receptionist sitting at the front desk in an office (server). A client comes in and talks to the receptionist first. A connection request comes from a client to the server and contacts the server socket first. The receptionist hands over the client to another staff. At this point, the job of the receptionist is over with that client. She continues her work of waiting to welcome another client coming to the office. Meanwhile, the first client can continue talking to another staff as long as he needs. Similarly, the server socket creates a new socket and assigns that new socket to the client for any further communication. As soon as the server socket assigns a new socket to the client, its job is over with that client. It will wait for another incoming request for connection from another client. Note that apart from many other details, a socket has five important pieces of information associated with it: a protocol, a local IP address, a local port number, a remote IP address, and a remote port number.

The Send/Sendto Primitive

It is the stage when a socket sends data.

The Receive/ReceiveFrom Primitive

It is the stage when a socket receives data.

The Close Primitive

It is time to say goodbye. Finally, the server and client sockets close the

connection.

Subsequent sections will discuss Java classes that support different kinds of sockets to facilitate network programming. Java classes that are related to network programming are in `java.net`, `javax.net`, and `javax.net.ssl` packages.

Representing a Machine Address

Internet protocol uses the IP addresses of machines to deliver packets. Using IP addresses in a program is not always easy because of its numeric format. You may be able to memorize and use IPv4 addresses because they are only four decimal numbers in length. Memorizing and using IPv6 addresses is a little more difficult because they are eight numbers in a hexadecimal format. Every computer also has a name such as www.yahoo.com. Using a computer name in your program makes your life much easier. Java provides classes that let you use a computer name or an IP address in a Java program. If you use a computer name, Java takes care of resolving the computer name to its IP address using a DNS.

An object of the `InetAddress` class represents an IP address. It has two subclasses, `Inet4Address` and `Inet6Address`, which represent IPv4 and IPv6 addresses, respectively. The `InetAddress` class does not have a public constructor. It provides six factory methods to create its object. They are as follows. All of them throw a checked `UnknownHostException`.

- `static InetAddress[] getAllByName(String host)`
- `static InetAddress getByAddress(byte[] addr)`
- `static InetAddress getByAddress(String host, byte[] addr)`
- `static InetAddress getByName(String host)`
- `static InetAddress getLocalHost()`

- static InetAddress getLoopbackAddress()

The host argument refers to a computer name or an IP address in the standard format. The addr argument refers to the parts of an IP address as a byte array. If you specify an IPv4 address, addr must be a 4-element byte array. For IPv6 addresses, it should be a 16-element byte array. The InetAddress class takes care of resolving the host name to an IP address using DNS.

Sometimes a host may have multiple IP addresses. The getAllByName() method returns all addresses as an array of InetAddress objects.

Typically, you create an object of the InetAddress class using one of the four factory methods and pass that object to other methods during a socket creation and connection. The following snippet of code demonstrates some of its uses. You will need to handle exceptions when you use the InetAddress class or its subclasses.

```
// Get the IP address of the yahoo web server
InetAddress yahooAddress
= InetAddress.getByName("www.yahoo.com");

// Get the loopback IP address
InetAddress loopbackAddress
= InetAddress.getByName(null);

/* Get the address of the local host. Typically,
a name "localhost" is
mapped to a loopback address. Here, we are trying
to get the IP address
of the local computer where this code executes and
not the loopback address.
*/
InetAddress myComputerAddress
= InetAddress.getLocalHost();
```

[Listing 5-1](#) demonstrates the use of the InetAddress class and some of its methods. You may get a different output when you run the program.

[Listing 5-1](#). Demonstrating the Use of the InetAddress Class

```
// InetAddressTest.java
package com.jdojo.net;

import java.io.IOException;
import java.net.InetAddress;

public class InetAddressTest {
    public static void main(String[] args) {
        // Print www.yahoo.com address details
        printAddressDetails("www.yahoo.com");

        // Print the loopback address details
        printAddressDetails(null);

        // Print the loopback address details
        // using IPv6 format
        printAddressDetails(":1");
    }

    public static void printAddressDetails(String host) {
        System.out.println("Host '" + host + "'"
details starts...");

        try {
            InetAddress addr
= InetAddress.getByName(host);
            System.out.println("Host IP
Address: " + addr.getHostAddress());
            System.out.println("Canonical Host
Name: " + addr.getCanonicalHostName());

            int timeOutInMillis = 10000;
            System.out.println("isReachable():"
" + addr.isReachable(timeOutInMillis));
            System.out.println("isLoopbackAddre
" + addr.isLoopbackAddress());
        }
        catch (IOException e) {
            e.printStackTrace();
        }
    }
}
```

```

        }
        finally {
            System.out.println("Host '" + host
+ "' details ends...");
            System.out.println("");
        }
    }
}

```

```

Host 'www.yahoo.com' details starts...
Host IP Address: 98.139.183.24
Canonical Host Name: ir2.fp.vip.bf1.yahoo.com
isReachable(): false
isLoopbackAddress(): false
Host 'www.yahoo.com' details ends...

Host 'null' details starts...
Host IP Address: 127.0.0.1
Canonical Host Name: 127.0.0.1
isReachable(): true
isLoopbackAddress(): true
Host 'null' details ends...

Host '::1' details starts...
Host IP Address: 0:0:0:0:0:0:0:1
Canonical Host Name: BHMIS-J00BXFL-D.corporate.local
isReachable(): true
isLoopbackAddress(): true
Host '::1' details ends...

```

Representing a Socket Address

A socket address contains two parts, an IP address and a port number. An object of the `InetSocketAddress` class represents a socket address. You can use the following constructors to create an object of the `InetSocketAddress` class:

- `InetSocketAddress(InetAddress addr, int port)`
- `InetSocketAddress(int port)`
- `InetSocketAddress(String hostname, int port)`

All constructors will attempt to resolve a host name to an IP address. If a host name could not be resolved, the socket address will be flagged as unresolved, which you can test using the `isUnresolved()` method. If you do not want this class to resolve the address when creating its object, you can use the following factory method to create the socket address:

```
static InetSocketAddress createUnresolved(String host,
int port)
```

The `getAddress()` method returns an `InetAddress` object. If a host name is not resolved, the `getAddress()` method returns `null`. If you use an unresolved `InetSocketAddress` object with a socket, an attempt is made to resolve the host name during the bind process.

[Listing 5-2](#) shows how to create resolved and unresolved `InetSocketAddress` objects. You may get a different output when you run the program.

Listing 5-2. Creating an `InetSocketAddress` Object

```
// InetSocketAddressTest.java
package com.jdojo.net;

import java.net.InetSocketAddress;

public class InetSocketAddressTest {
    public static void main(String[] args) {
        InetSocketAddress addr1 = new
InetSocketAddress("::1", 12889);
        printSocketAddress(addr1);

        InetSocketAddress addr2 =
InetSocketAddress.createUnresolved(
```

```

    12881);
                printSocketAddress(addr2);
}

public static void
printSocketAddress(InetSocketAddress sAddr) {
    System.out.println("Socket Address: " +
+ sAddr.getAddress());
    System.out.println("Socket Host Name: " +
+ sAddr.getHostName());
    System.out.println("Socket Port: " +
+ sAddr.getPort());
    System.out.println("isUnresolved(): " +
+ sAddr.isUnresolved());
    System.out.println();
}
}

```

```

Socket Address: /0:0:0:0:0:0:0:1
Socket Host Name: HYE6754
Socket Port: 12889
isUnresolved(): false

```

```

Socket Address: null
Socket Host Name: ::1
Socket Port: 12881
isUnresolved(): true

```

Creating a TCP Server Socket

An object of the `ServerSocket` class represents a TCP server socket in Java. A `ServerSocket` object is used to accept a connection request from a remote client. The `ServerSocket` class provides many constructors. You can use the no-args constructor to create an unbound server socket and use its `bind()` method to bind it to a local port and a local IP address. The following snippet of

code shows how to create a server socket:

```
// Create an unbound server socket
ServerSocket serverSocket = new ServerSocket();

// Create a socket address object
InetSocketAddress endPoint = new
InetSocketAddress("localhost", 12900);

// Set the wait queue size to 100
int waitQueueSize = 100;

// Bind the server socket to localhost and at port
12900 with
// a wait queue size of 100
serverSocket.bind(endPoint, waitQueueSize);
```

There is no separate `listen()` method in the `ServerSocket` class that corresponds to the `listen` socket primitive. Its `bind()` method takes care of specifying the waiting queue size for the socket.

You can combine `create`, `bind`, and `listen` operations in one step by using any of the following constructors of the `ServerSocket` class. The default value for the wait queue size is 50. The default value for a local IP address is the wild-card address, which means all IP addresses of the server machine.

- `ServerSocket(int port)`
- `ServerSocket(int port, int waitQueueSize)`
- `ServerSocket(int port, int waitQueueSize, InetAddress bindAddr)`

You can combine the socket creation and bind steps into one statement as shown:

```
// Create a server socket at port 12900, with 100 as
the wait
// queue size and at the localhost loopback address
ServerSocket serverSocket =
```

```
new ServerSocket(12900, 100,  
InetAddress.getByName("localhost"));
```

Once a server socket is created and bound, it is ready to accept incoming connection requests from remote clients. To accept a remote connection request, you need to call the `accept()` method on the server socket. The `accept()` method call blocks until a request from a remote client arrives in its wait queue. When the server socket receives a request for a connection, it reads the remote IP address and the remote port number from the request and creates a new *active* socket. The reference of the newly created active socket is returned from the `accept()` method. An object of the `Socket` class represents the new active socket. The `accept()` method returns a new *active* socket because it is not a *passive* socket like a server socket, which waits for a remote request. It is an active socket because it is created for an active communication with the remote client. Sometimes this active socket is also called a *connection socket* because it handles the data transmission on a connection.

```
// Wait for a new remote connection request  
Socket activeSocket = serverSocket.accept();
```

Once the server socket returns from the `accept()` method call, the number of sockets in the server application increases by one. You have one passive server socket and one more active socket. The new active socket is the endpoint at the server for the new client connection. At this point, you need to handle the communication with the client using the new active socket.

Now you are ready to read and write data on the connection represented by the new socket. A Java TCP socket provides a full duplex connection. It lets you read data from the connection as well as write data to the connection. The `Socket` class contains two methods called `getInputStream()` and `getOutputStream()` for this purpose. The `getInputStream()` method returns an `InputStream` object that you can use to read data from the connection. The `getOutputStream()` method returns an `OutputStream` object that you can use to write data to the connection. You use `InputStream` and `OutputStream` objects as if you are reading from and writing to a file on a local file system. I assume that you are familiar with Java I/O. If you are not familiar with Java I/O, please refer to [Chapter 7](#) in the book *Beginning Java Language Features* (ISBN: 978-1-4302-6658-7) before you proceed in this section. However, you can still read about the UDP socket in the section later in this chapter. When you are done with reading/writing data on the connection,

you close the `InputStream`/`OutputStream`, and finally close the socket. The following snippet of code reads a message from a client and echoes it to the client. Note that the server and the client must agree on the format of the message before they start communicating. The following snippet of code assumes that the client sends one line of text at a time:

```
// Create a buffered reader and a buffered writer from  
the socket's  
// input and output streams, so that we can read/write  
one line at a time  
BufferedReader br = new BufferedReader(  
    new  
InputStreamReader(activeSocket.getInputStream()));  
  
BufferedWriter bw = new BufferedWriter(  
    new  
OutputStreamWriter(activeSocket.getOutputStream()));
```

You can use `br` and `bw` the same way you will use them to read from a file or write to a file. An attempt to read from an input stream blocks until data becomes available on the connection.

```
// Read one line of text from the connection  
String inMsg = br.readLine();  
  
// Write some text to the output buffer  
bw.write("hello from server");  
bw.flush();
```

At the end, close the connection using the socket's `close()` method. Closing the socket also closes its input and output streams. In fact, you can close one of the three (the input stream, the output stream, or the socket) and the other two will be closed automatically. An attempt to read/write on a closed socket throws a `java.net.SocketException`. You can check if a socket is closed by using its `isClosed()` method, which returns `true` if the socket is closed.

```
// Close the socket  
activeSocket.close();
```

Tip Once you close a socket, you cannot reuse it. You must create a new

socket and bind it before using the new socket.

A server handles two kinds of work: accepting new connection requests and responding to already connected clients. If responding to a client takes a very small amount of time, you can use the strategy as shown:

```
ServerSocket serverSocket = create a server socket here;
while(true) {
    Socket activeSocket = serverSocket.accept();

        // Handle the client request on activeSocket here
}
```

The above strategy handles one client at a time. It is suitable only if the number of concurrent incoming connections is very low and a client's request takes a very small amount of time to respond. If a client request takes a significant amount of time to respond, all other clients will have to wait before they can be served.

Another strategy to work with multiple client requests is to handle each client's request in a separate thread so the server can serve multiple clients at the same time. The following pseudo code outlines this strategy:

```
ServerSocket serverSocket = create a server socket here;
while(true) {
    Socket activeSocket = serverSocket.accept();
    Runnable runnable = () -> {
        // Handle the client request on the activeSocket here
    };
    new Thread(runnable).start(); // start a new thread
}
```

The above strategy seems to work fine until you have too many threads that are created for concurrent client connections. Another strategy that works well in most of the situations is to have a thread pool to serve all client connections. If

all threads in the pool are busy serving clients, the request should wait until a thread becomes free to serve it.

[Listing 5-3](#) contains complete code for an echo server. It creates a new thread to handle each client request. You can run the echo server program now. However, it is not going to do much as you do not have a client program to connect to it. You will see it in action after you learn how to create the TCP client socket in the next section.

[Listing 5-3.](#) An Echo Server Based on TCP Sockets

```
// TCPEchoServer.java
package com.jdojo.net;

import java.io.BufferedReader;
import java.io.BufferedWriter;
import java.io.IOException;
import java.io.InputStreamReader;
import java.io.OutputStreamWriter;
import java.net.InetAddress;
import java.net.ServerSocket;
import java.net.Socket;

public class TCPEchoServer {
    public static void main(String[] args) {
        try {
            // Create a Server socket
            ServerSocket serverSocket = new
ServerSocket(12900, 100,
                        InetAddress.getByName("localhost"));
            System.out.println("Server started
at: " + serverSocket);

            // Keep accepting client
connections in an infinite loop
            while (true) {
                System.out.println("Waiting
for a connection...");

            // Accept a connection
        }
    }
}
```

```

final Socket activeSocket
= serverSocket.accept();
System.out.println("Received
a connection from " +
activeSocket);

// Create a new thread to
handle the new connection
Runnable runnable =
() ->
handleClientRequest(activeSocket);
new
Thread(runnable).start(); // start a new thread
}
}
catch (IOException e) {
e.printStackTrace();
}
}

public static void handleClientRequest(Socket
socket) {
BufferedReader socketReader = null;
BufferedWriter socketWriter = null;

try {
// Create a buffered reader and
writer for teh socket
socketReader = new BufferedReader(
new
InputStreamReader(socket.getInputStream()));
socketWriter = new BufferedWriter(
new
OutputStreamWriter(socket.getOutputStream()));

String inMsg = null;
while ((inMsg
= socketReader.readLine()) != null) {

```

```

        System.out.println("Received
from client: " + inMsg);

                // Echo the received message
to the client

        String outMsg = inMsg;
        socketWriter.write(outMsg);
        socketWriter.write("\n");
        socketWriter.flush();
    }

}

catch (IOException e) {
    e.printStackTrace();
}

finally {
    try {
        socket.close();
    }
    catch (IOException e) {
        e.printStackTrace();
    }
}

}

}
}

```

Creating a TCP Client Socket

An object of the `Socket` class represents a TCP client socket. You have already seen how an object of the `Socket` class works with a TCP server socket. For a server socket, you got an object of the `Socket` class as the return value from the server socket's `accept()` method. For a client socket, you will have to perform three additional steps: create, bind, and connect. The `Socket` class provides many constructors that let you specify the remote IP address and port number. These constructors bind the socket to a local host and an available port number. The following snippet of code shows how to create a TCP client socket:

```
// Create a client socket, which is bound to the
```

```

localhost at any
// available port; connected to remote IP of
192.168.1.2 at port 3456
Socket socket = new Socket("192.168.1.2", 3456);

// Create an unbound client socket. bind it, and
connect it.
Socket socket = new Socket();
socket.bind(new InetSocketAddress("localhost",
14101));
socket.connect(new InetSocketAddress("localhost",
12900));

```

Once you get a connected `Socket` object, you can use its input and output streams using the `getInputStream()` and `getOutputStream()` methods, respectively. You can read/write on the connection the same way you would read/write from/to a file using the input and output streams.

[Listing 5-4](#) contains the complete code for an echo client application. It receives input from the user, sends the input to the echo server as listed in [Listing 5-3](#), and prints the server's response on the standard output. Both applications, the echo server and the echo client, must agree on the format of the messages that they will be exchanging. They exchange one line of text at a time. It is important to note that you must append a new line with every message that is sent across the connection because you are using the `readLine()` method of the `BufferedReader` class, which returns only when it encounters a new line. The client application must use the same IP address and port number where the server socket is accepting the connection.

[Listing 5-4](#). An Echo Client Based on TCP Sockets

```

// TCPEchoClient.java
package com.jdojo.net;

import java.io.BufferedReader;
import java.io.BufferedWriter;
import java.io.IOException;
import java.io.InputStreamReader;
import java.io.OutputStreamWriter;
import java.net.Socket;

```

```
public class TCPEchoClient {
    public static void main(String[] args) {
        Socket socket = null;
        BufferedReader socketReader = null;
        BufferedWriter socketWriter = null;
        try {
            // Create a socket that will
            connect to localhost
            // at port 12900. Note that the
            server must also be
            // running at localhost and 12900.
            socket = new Socket("localhost",
12900);

            System.out.println("Started client
socket at " +
socket.getLocalSocketAddress()

            // Create a buffered reader and
            writer using the socket's
            // input and output streams
            socketReader = new BufferedReader(
                new
InputStreamReader(socket.getInputStream()));
            socketWriter = new BufferedWriter(
                new
OutputStreamWriter(socket.getOutputStream()));

            // Create a buffered reader for
            user's input
            BufferedReader consoleReader =
                new BufferedReader(new
InputStreamReader(System.in));

            String promptMsg = "Please enter
a message (Bye to quit):";
            String outMsg = null;

            System.out.print(promptMsg);
```

```

        while ( (outMsg
= consoleReader.readLine()) != null) {
            if
(outMsg.equalsIgnoreCase("bye")) {
                break;
            }

                // Add a new line to the
message to the server,
                // because the server reads
one line at a time.

                socketWriter.write(outMsg);
socketWriter.write("\n");
socketWriter.flush();

                // Read and display the
message from the server
                String inMsg
= socketReader.readLine();
System.out.println("Server:
" + inMsg);

                System.out.println(); //
Print a blank line
                System.out.print(promptMsg);
            }
        }
    catch (IOException e) {
        e.printStackTrace();
    }
    finally {
        // Finally close the socket
        if (socket != null) {
            try {
                socket.close();
            }
        catch (IOException e) {
            e.printStackTrace();
        }
    }
}

```

```
        }  
    }  
}
```

Putting a TCP Server and Clients Together

Figure 5-6 shows the setup in which three clients are connected to a server. Two Socket objects, one at each end, represent a connection. The ServerSocket object in the server keeps waiting for incoming connection requests from a client.

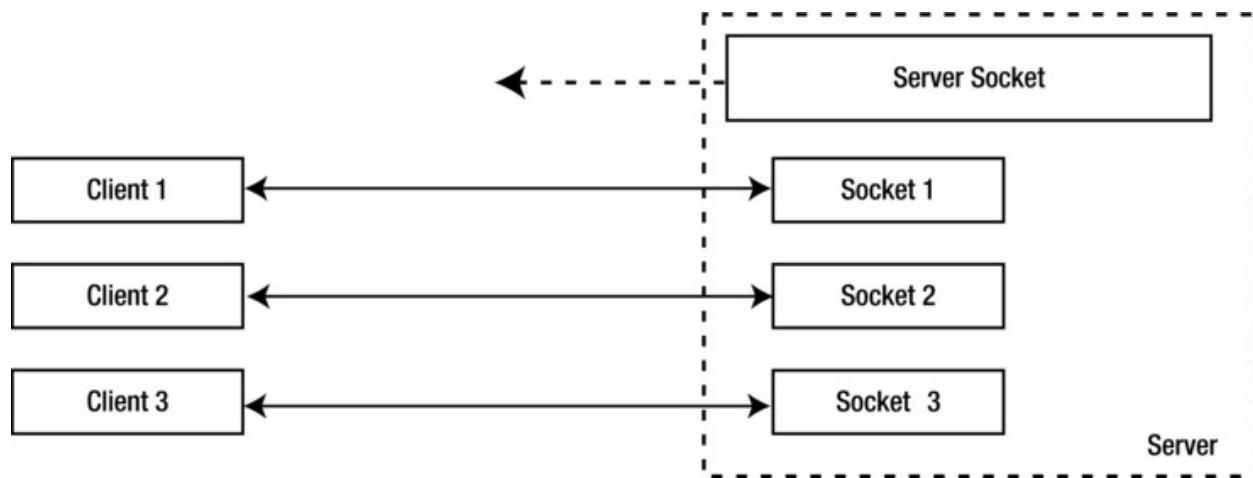


Figure 5-6. A client-server setup using `ServerSocket` and `socket` objects

Listing 5-3 and Listing 5-4 list the complete program for a TCP echo server and client application. You need to run the `TCPEchoServer` class first, and then the `TCPEchoClient` class. The server application waits for the client application to connect. The client application prompts the user to enter a text message on the console. Once the user enters a text message and presses the Enter key, the client application sends that text to the server. The server responds back with the same message. Both applications print the details about the conversation on the standard output. The following are the outputs for an echo server and an echo client. You can run multiple instances of the `TCPEchoClient` application. The server application handles each client

connection in a separate thread.

The following is a sample output for the server application:

```
Server started at:
```

```
ServerSocket[addr=localhost/127.0.0.1, port=0, localport=
```

```
Waiting for a connection ...
```

```
Received a connection from
```

```
Socket[addr=/127.0.0.1, port=1698, localport=12900]
```

```
Waiting for a connection ...
```

```
Received from client: Hello
```

The following is a sample output for the client application:

```
Started client socket at /127.0.0.1:1698
```

```
Please enter a message (Bye to quit):Hello
```

```
Server: Hello
```

```
Please enter a message (Bye to quit):Bye
```

Working with UDP Sockets

A socket based on UDP is connectionless and is based on datagrams, as opposed to a TCP socket, which is connection-oriented and is based on streams. The effect of being a connectionless socket is that the two sockets (client and server) do not establish a connection before they communicate. Recall that TCP has a server socket whose sole function was to listen for a connection request from remote clients. Since UDP is a connectionless protocol, there will not be a server socket when you work with UDP. In TCP sockets, the impression of having a stream-oriented data transmission between the client and server was produced by TCP in the transport layer because of its connection-oriented features. TCP maintained the state of the data being transmitted on each side of the connection. The implication of UDP being a connectionless protocol is that each side (client and server) sends or receives a chunk of data without any prior knowledge of communication between them. In a communication using UDP, each chunk of data that is sent to the same destination is independent of the previously sent data. The chunk of data that is sent using UDP is called a datagram or a UDP packet. Each UDP packet has the data, the destination IP address, and the destination port number. UDP is an unreliable protocol because it does not guarantee the delivery and the order of delivery of packets to the intended

recipient.

Tip Although UDP is a connectionless protocol, you can build a connection-oriented communication using UDP in your application. You will need to write the logic that will handle the lost packets, out of order packet delivery, and many more things. TCP provides all these features at transport layer and your application does not have to worry about them.

Writing an application using UDP sockets is easier than writing an application using TCP sockets. You have to deal with only two classes:

- DatagramPacket
- DatagramSocket

An object of the `DatagramPacket` class represents a UDP datagram that is the unit of data transmission over a UDP socket. An object of the `DatagramSocket` class represents a UDP socket that is used to send or receive a datagram packet. Here are the steps you need to perform to work with UDP sockets:

1. Create an object of the `DatagramSocket` class and bind it to a local IP address and a local port number.
2. Create an object of the `DatagramPacket` class to hold the destination address and the data to be transmitted.
3. Use the `send()` method to send the datagram packet to its destination. On the receiving end, use the `receive()` method to read the datagram packet.

You can use one of the constructors to create an object of the `DatagramSocket` class. All of them will create the socket and bind it to a local IP address and a local port number. Note that a UDP socket does not have a remote IP address and a remote port number because it is never connected to a remote socket. It can receive/send a datagram packet from/to any UDP socket.

```
// Create a UDP Socket bound to a port number 15900 at localhost
```

```
DatagramSocket udpSocket = new DatagramSocket(15900,  
"localhost");
```

The DatagramSocket class provides a bind() method, which lets you bind the socket to a local IP address and a local port number. Typically, you do not need to use this method as you specify the socket address to which it needs to be bound in its constructor, as you just did.

A DatagramPacket contains three things: a destination IP address, a destination port number, and the data. The constructors for the DatagramPacket class fall into two categories. Constructors in one of the categories let you create a DatagramPacket object to receive a packet. They require only the buffer size, offset, and length of data in that buffer. Constructors in the other category let you create a DatagramPacket object to send a packet. They require you to specify the destination address along with the data. If you have created a DatagramPacket without specifying the destination address, you can set the destination address afterwards using the setAddress() and setPort() methods.

Constructors of the DatagramPacket class to create a packet to receive data are as follows:

- DatagramPacket(byte[] buf, int length)
- DatagramPacket(byte[] buf, int offset, int length)

Constructors of the DatagramPacket class to create a packet to send data are as follows:

- DatagramPacket(byte[] buf, int length, InetAddress address, int port)
- DatagramPacket(byte[] buf, int offset, int length, InetAddress address, int port)
- DatagramPacket(byte[] buf, int length, SocketAddress address)
- DatagramPacket(byte[] buf, int offset, int length, SocketAddress address)

The following snippet of code demonstrates some of the ways to create a datagram packet:

```
// Create a packet to receive 1024 bytes of data
byte[] data = new byte[1024];
DatagramPacket packet = new DatagramPacket(data,
data.length);

// Create a packet that has buffer size of 1024, but
it will receive
// data starting at offset 8 (offset zero means the
first element in
// the array) and it will receive only 32 bytes of
data.
byte[] data2 = new byte[1024];
DatagramPacket packet2 = new DatagramPacket(data2, 8,
32);

// Create a packet to send 1024 bytes of data that has
a destination
// address of "localhost" and port 15900. Will need to
populate data3
// array before sending the packet.
byte[] data3 = new byte[1024];
DatagramPacket packet3 = new DatagramPacket(data3,
1024,
InetAddress.getByName("localhost
15900");

// Create a packet to send 1024 bytes of data that has
a destination
// address of "localhost" and port 15900. Will need to
populate data4
// array before sending the packet. The code sets the
destination
// address by calling methods on the packet instead of
specifying it
// in its constructor.
byte[] data4 = new byte[1024];
DatagramPacket packet4 = new DatagramPacket(data4,
```

```
1024);  
packet4.setAddress(InetAddress.getByName("localhost"))  
packet4.setPort(15900);
```

It is very important to understand that data in the packet always has offset and length specified. You need to use those two pieces of information while reading the data from a packet. Suppose that a `receivedPacket` object reference represents a `DatagramPacket` that you have received from a remote UDP socket. The `getData()` method of the `DatagramPacket` class returns the buffer (a byte array) of the packet. A packet can have a bigger buffer than the size of the received data from a remote client. In such cases, you must use the offset and the length to read the data from the buffer that was received without touching the garbage data in the buffer. If a packet's buffer size is smaller than the size of the data received, the extra bytes are silently ignored. You should use the code similar to the one shown below to read data that a socket receives. The point is that you should use data in the receiving buffer starting from its specified `offset` and as many bytes as indicated by its `length` property.

```
// Get the packet's buffer, offset, and length  
byte[] dataBuffer = receivedPacket.getData();  
int offset = receivedPacket.getOffset();  
int length = receivedPacket.getLength();  
  
// Copy the received data using offset and length to  
// receivedData array,  
// which will hold all good data  
byte[] receivedData = new byte[length];  
System.arraycopy(dataBuffer, offset, receivedData, 0,  
length);
```

Creating a UDP socket (client as well as server) is as simple as creating an object of the `DatagramSocket` class. You can use its `send()` method to send a packet. You can use the `receive()` method to receive a packet from a remote socket. The `receive()` method blocks until a packet arrives. You supply an empty datagram packet to the `receive()` method. The socket populates it with information that it receives from the remote socket. If the supplied datagram packet has a smaller data buffer size than that of the received datagram packet, the received data is truncated silently to fit into the supplied

datagram packet. If the supplied datagram packet has a bigger data buffer size than that of the received one, the socket will copy the received data to the supplied data buffer in its segment indicated by its offset and length properties and would not touch the other parts of the buffer. Note that the available data buffer size is not the size of the byte array. Rather, it is defined by the length. For example, suppose you have a datagram packet with a byte array of 32 elements with an offset of 2 and a data buffer length of 8. If you pass this datagram packet to the `receive()` method, the maximum of 8 bytes of received data will be copied. The data will be copied from the third element in the buffer to the eleventh element as indicated by the offset 2 and the length 8, respectively.

```
// Create a UDP socket bound to a port number 15900 at
localhost
DatagramSocket socket = new DatagramSocket(15900,
InetAddress.getByName("localhost"));

// Send a packet assuming that you have a datagram
packet in p
socket.send(p);

// Receive a packet
DatagramPacket p2 = new DatagramPacket(new byte[1024],
1024);
socket.receive(p2);
```

Creating a UDP Echo Server

Creating an echo server using UDP is very easy. It takes only four lines of real code. Use the following steps to create an UDP echo server:

1. Create a `DatagramSocket` object to represent a UDP socket.
2. Create a `DatagramPacket` object to receive the packet from a remote client.
3. Call the `receive()` method of the socket to wait for a packet to arrive.

4. Call the `send()` method of the socket passing the same packet that you received. When a UDP packet is received by a server, it contains the sender's address. You do not need to change anything in the packet to echo back the same message to the sender of the packet. When you prepare a datagram packet for sending, you need to set a destination address. When the packet arrives at its destination, it contains its sender's address. This is useful in case the receiver wants to respond to the sender of the datagram packet.

The following snippet of code shows how to write a UDP echo server:

```
DatagramSocket socket = new DatagramSocket(15900);
DatagramPacket packet = new DatagramPacket(new
byte[1024], 1024);
while(true) {
    // Receive the packet
    socket.receive(packet);

    //Send back the same packet to the sender
    socket.send(packet);
}
```

[Listing 5-5](#) has the expanded version of the same code for a UDP echo server. It contains the same basic logic as shown above. Additionally, it has code to handle errors and print the packet's details on the standard output.

Listing 5-5. An Echo Server Based on UDP Sockets

```
// UDPEchoServer.java
package com.jdojo.net;

import java.io.IOException;
import java.net.DatagramPacket;
import java.net.DatagramSocket;
import java.net.InetAddress;

public class UDPEchoServer {
    public static void main(String[] args) {
```

```
final int LOCAL_PORT = 15900;
final String SERVER_NAME = "localhost";

try {
    DatagramSocket udpSocket =
        new
DatagramSocket(LOCAL_PORT,
                           InetAddress.getByName(:

System.out.println("Created UDP
server socket at " +
                    udpSocket.getLocalSocketAddress()
+ "...");

// Wait for a message in a loop
and echo the same
// message to the sender
while (true) {
    System.out.println("Waiting
for a UDP packet" +
                       " to
arrive...");

// Prepare a packet to hold
the received data
DatagramPacket packet =
    new DatagramPacket(new
byte[1024], 1024);

// Receive a packet
udpSocket.receive(packet);

// Print the packet details
displayPacketDetails(packet);

// Echo the same packet to
the sender
    udpSocket.send(packet);
}
}
```

```

        catch (IOException e) {
            e.printStackTrace();
        }
    }

    public static void
displayPacketDetails(DatagramPacket packet) {
    // Get the message
    byte[] msgBuffer = packet.getData();
    int length = packet.getLength();
    int offset = packet.getOffset();

    int remotePort = packet.getPort();
    InetAddress remoteAddr
= packet.getAddress();
    String msg = new String(msgBuffer,
offset, length);

    System.out.println("Received a packet:[IP
Address=" +
                           remoteAddr + ", port="
+ remotePort +
                           ", message=" + msg + "']");
}
}

```

[Listing 5-6](#) contains the program for the client application that uses a UDP socket to send/receive messages to/from the UDP echo server. Note that the client and server exchange one line of text at a time.

Listing 5-6. An Echo Client Based on UDP Sockets

```

// UDPEchoClient.java
package com.jdojo.net;

import java.io.BufferedReader;
import java.io.InputStreamReader;
import java.net.DatagramPacket;
import java.net.DatagramSocket;
import java.net.InetAddress;

```

```
import java.net.UnknownHostException;

public class UDPEchoClient {
    public static void main(String[] args) {
        DatagramSocket udpSocket = null;
        BufferedReader br = null;
        try {
            // Create a UDP socket at
localhost using an available port
            udpSocket = new DatagramSocket();

            String msg = null;

            // Create a buffered reader to get
an input from a user
            br = new BufferedReader(new
InputStreamReader(System.in));

            String promptMsg = "Please enter
a message (Bye to quit):";
            System.out.print(promptMsg);

            while ((msg = br.readLine()) !=
null) {
                if
(msg.equalsIgnoreCase("bye")) {
                    break;
                }

                // Prepare a packet to send
to the server
                DatagramPacket packet
= UDPEchoClient.getPacket(msg);

                // Send the packet to the
server
                udpSocket.send(packet);

                // Wait for a packet from
the server
            }
        } catch (IOException e) {
            e.printStackTrace();
        }
    }
}
```

```

        udpSocket.receive(packet);

        // Display the packet
details received from
                                // the server
displayPacketDetails(packet);

        System.out.print(promptMsg);
    }
}

catch (Exception e) {
    e.printStackTrace();
}
finally {
    // Close the socket
    if (udpSocket != null) {
        udpSocket.close();
    }
}
}

public static void
displayPacketDetails(DatagramPacket packet) {
    byte[] msgBuffer = packet.getData();
    int length = packet.getLength();
    int offset = packet.getOffset();
    int remotePort = packet.getPort();
    InetAddress remoteAddr
= packet.getAddress();
    String msg = new String(msgBuffer,
offset, length);
    System.out.println("[Server at IP
Address=" + remoteAddr +
                    ", port=" + remotePort
+ "]: " + msg);

    // Add a line break
    System.out.println();
}

```

```

        public static DatagramPacket getPacket(String
msg)
                                         throws
UnknownHostException {
    // We will send and accept a message of
1024 bytes in length.
    // longer messages will be truncated
    final int PACKET_MAX_LENGTH = 1024;
    byte[] msgBuffer = msg.getBytes();

    int length = msgBuffer.length;
    if (length > PACKET_MAX_LENGTH) {
        length = PACKET_MAX_LENGTH;
    }

    DatagramPacket packet = new
DatagramPacket(msgBuffer, length);

    // Set the destination address and the
port number
    int serverPort = 15900;
    final String SERVER_NAME = "localhost";
    InetAddress serverIPAddress =
        InetAddress.getByName(SERVER_
packet.setAddress(serverIPAddress);
    packet.setPort(serverPort);

    return packet;
}
}

```

To test the UDP echo application, you need to run the UDPEchoServer and UDPEchoClient classes. You need to run the server first. The client application will prompt you to enter a message. Enter a text message and press the Enter key to send that message to the server. The server will echo the same message. Both applications display the messages being exchanged on the standard output. They also display the packet details, such as the sender's IP address and port number. The server application uses port number 15900 and the client application uses any available UDP port on the computer. If you get an error, it means that port number 15900 is in use, so you need to change the port

number in the server program and use the new port number in the client program to address the packet. The server is designed to handle multiple clients at a time. You can run multiple instances of the UDPEchoClient class. Note that the server runs in an infinite loop and you must stop the server application manually.

The following is a sample log on the server console:

```
Created UDP server socket at /127.0.0.1:15900...
Waiting for a UDP packet to arrive...
Received a packet:[IP Address=/127.0.0.1, port=1522,
message=Hello]
Waiting for a UDP packet to arrive...
Received a packet:[IP Address=/127.0.0.1, port=1522,
message=Nice talking to you]
Waiting for a UDP packet to arrive...
```

The following is a sample log on the client console:

```
Please enter a message (Bye to quit):Hello
[Server at IP Address=localhost/127.0.0.1,
port=15900]: Hello

Please enter a message (Bye to quit):Nice talking to
you
[Server at IP Address=localhost/127.0.0.1,
port=15900]: Nice talking to You

Please enter a message (Bye to quit):bye
```

A Connected UDP Socket

UDP sockets do not support an end-to-end connection like the TCP sockets. The DatagramSocket class contains a `connect()` method. This method allows an application to restrict sending and receiving of UDP packets to a specific IP address at a specific port number. Consider the following snippet of code:

```
InetAddress localIPAddress
= InetAddress.getByName("192.168.11.101");
int localPort = 15900;
```

```
DatagramSocket socket = new DatagramSocket(localPort,  
localIPAddress);  
  
// Connect the socket to a remote address  
InetAddress remoteIPAddress  
= InetAddress.getByName("192.168.12.115");  
int remotePort = 17901;  
socket.connect(remoteIPAddress, remotePort);
```

The socket is bound to the local IP address 192.168.11.101 and local UDP port number 15900. It is connected to a remote IP address of 192.168.12.115 and a remote UDP port number 17901. It means that the socket object can be used to send/receive a datagram packet only to/from another UDP socket running at an IP address of 192.168.12.115 at the port number 17901. After you have called the `connect()` method on a UDP socket, you do not need to set the destination IP address and the port number for the outgoing datagram packets. The socket will add the destination IP address and port number that were used in the `connect()` method's call to all outgoing packets. If you do supply a destination address with a packet before you send it, the socket will make sure the destination address supplied in the packet is the same as the remote address used in the `connect()` method call. Otherwise, the `send()` method will throw an `IllegalArgumentException`.

Using the `connect()` method of a UDP socket has two advantages:

- It sets the destination address for the outgoing packets every time you send a packet.
- It restricts the socket to communicate only to the remote host whose IP address was used in the `connect()` method's call.

Now you understand that UDP sockets are connectionless and you do not have a real connection using a UDP socket. The `connect()` method in the `DatagramSocket` class does not provide any kind of connection for UDP sockets. Rather, it is useful for restricting the communication to a specific remote UDP socket.

UDP Multicast Sockets

Java supports UDP multicast sockets that can receive datagram packets sent to a multicast IP address. An object of the `MulticastSocket` class represents a multicast socket. Working with a `MulticastSocket` socket is similar to working with a `DatagramSocket` with one difference: a multicast socket is based on a group membership. After you have created and bound a multicast socket, you need to call its `joinGroup (InetAddress multiCastIPAddress)` method to make this socket a member of the multicast group defined by the specified multicast IP address, `multiCastIpAddress`. Once it becomes a member of a multicast group, any datagram packet sent to that group will be delivered to this socket. There can be multiple members in a multicast group. A multicast socket can be a member of multiple multicast groups. If a member decides not to receive a multicast packet from a group, it can leave the group by calling the `leaveGroup (InetAddress multiCastIPAddress)` method.

In IPv4, any IP address in the range 224.0.0.0 to 239.255.255.255 can be used as a multicast address to send a datagram packet. The IP address 224.0.0.0 is reserved and you should not use it in your application. A multicast IP address cannot be used as a source address for a datagram packet, which implies that you cannot bind a socket to a multicast address.

A socket itself does not have to be a member of a multicast group to send a datagram packet to a multicast address.

Java 7 added the IP multicast capability to the `DatagramChannel` class. Please refer to the “Multicasting Using Datagram Channels” section later in this chapter on how to use a datagram channel for IP multicasting. Note that the `DatagramChannel` class was added in Java 1.4, which did not have the IP multicast capability.

[Listing 5-7](#) contains a program that creates a multicast socket that receives datagram packets addressed to the 230.1.1.1 multicast IP address.

[Listing 5-7](#). A UDP Multicast Socket That Receives UDP Multicast Messages

```
// UDPMultiCastReceiver.java
package com.jdojo.net;
```

```
import java.io.IOException;
import java.net.DatagramPacket;
import java.net.InetAddress;
import java.net.MulticastSocket;

public class UDPMultiCastReceiver {
    public static void main(String[] args) {
        int mcPort = 18777;
        String mcIPStr = "230.1.1.1";
        MulticastSocket mcSocket = null;
        InetAddress mcIPAddress = null;
        try {
            mcIPAddress
= InetAddress.getByName(mcIPStr);
            mcSocket = new
MulticastSocket(mcPort);
            System.out.println("Multicast
Receiver running at:" +
mcSocket.getLocalSocketAddress());

            // Join the group
            mcSocket.joinGroup(mcIPAddress);

            DatagramPacket packet =
                new DatagramPacket(new
byte[1024], 1024);

            while (true) {
                System.out.println("Waiting
for a multicast message...");

                mcSocket.receive(packet);
                String msg = new
String(packet.getData(),
                    packet.get
packet.get
                    System.out.println("

[Multicast Receiver] Received:" + msg);
            }
        }
    }
}
```

```
        catch (Exception e) {
            e.printStackTrace();
        }
    finally {
        if (mcSocket != null) {
            try {
                mcSocket.leaveGroup(mc
                mcSocket.close();
            }
            catch (IOException e) {
                e.printStackTrace();
            }
        }
    }
}
```

[Listing 5-8](#) contains a program that sends a message to the same multicast address. Note that you can run multiple instances of the `UDPMulticastReceiver` class and all of them will become a member of the same multicast group. When you run the `UDPMulticastSender` class, it will send a message to the group, and all members in the group will receive a copy of the same message. The `UDPMulticastSender` class uses a `DatagramSocket`, not a `MulticastSocket` to send a multicast message.

Listing 5-8. A UDP Datagram Socket, a Multicast Sender Application

```
// UDPMultiCastSender.java
package com.jdojo.net;

import java.net.DatagramPacket;
import java.net.DatagramSocket;
import java.net.InetAddress;

public class UDPMultiCastSender {
    public static void main(String[] args) {
        int mcPort = 18777;
        String mcIPStr = "230.1.1.1";
        DatagramSocket udpSocket = null;
```

```
try {
    // Create a datagram socket
    udpSocket = new DatagramSocket();

    // Prepare a message
    InetAddress mcIPAddress
= InetAddress.getByName(mcIPStr);

    byte[] msg = "Hello multicast
socket".getBytes();
    DatagramPacket packet =
        new DatagramPacket(msg,
msg.length);
    packet.setAddress(mcIPAddress);
    packet.setPort(mcPort);
    udpSocket.send(packet);

    System.out.println("Sent
a multicast message.");
    System.out.println("Exiting
application");
}
catch (Exception e) {
    e.printStackTrace();
}
finally {
    if (udpSocket != null) {
        try {
            udpSocket.close();
        }
        catch (Exception e) {
            e.printStackTrace();
        }
    }
}
}
```

URI, URL, and URN

A Uniform Resource Identifier (URI) is a sequence of characters that identifies a resource. The Request for Comments (RFC) 3986 defines the generic syntax for a URI. The full text of this RFC is available at

<http://www.ietf.org/rfc/rfc3986.txt>. A resource identifier can identify a resource by a location, a name, or both. This section gives an overview of the URI. If you are interested in details about the URI, you are advised to read RFC3986.

A URI that uses a location to identify a resource is called Uniform Resource Locator (URL). For example, <http://www.yahoo.com/index.html> represents a URL that identifies a document named `index.html` at the host www.yahoo.com. Another example of a URL is

`mailto:ksharan@jdojo.com` in which the `mailto` protocol instructs the application that interprets it to open up an email application to send an email to the email address specified in the URL. In this case, the URL is not locating any resources. Rather, it is identifying the details of an email. You can also set the subject and the body parts of an email using the `mailto` protocol. Therefore, a URL does not always imply a location of a resource. Sometimes the resource may be abstract, as in the case of the `mailto` protocol. Once you locate a resource using a URL, you can perform some operations, such as retrieve, update, or delete, on the resource. The details of how the operations are performed depend on the scheme being used in the URL. A URL just identifies the parts of a resource location and scheme to locate it, not the details of any operations that can be performed on the resource.

A URI that uses a name to identify a resource is called a Uniform Resource Name (URN). For example, `URN:ISBN:978-1-4302-6661-7` represents a URN, which identifies a book using International Standard Book Numbers (ISBN) namespace.

URL and URN are subsets of URI. Therefore, the discussion about URI applies to both URL and URN. The detailed syntax of a URI depends on the scheme it uses. In this section, I will cover a generic syntax of the URI, which is typically a URL. The next section will explore Java classes that are used to represent URIs and URLs in Java programs.

A URI can be absolute or relative. A relative URI is always interpreted in the context of another absolute URI, which is called the base URI. In other words, you must have an absolute URI to make a relative URI meaningful.

An absolute URI has the following generic format:

```
<scheme>:<scheme-specific-part>
```

The `<scheme-specific-part>` depends on the `<scheme>`. For example, an `http` scheme uses one format, and a `mailto` scheme uses another format. Another generic form of a URI is as follows. Typically, but not necessarily, it represents a URL.

```
<scheme>://<authority><path>?<query>#<fragment>
```

Here, `<scheme>` indicates a method to access a resource. It is the protocol name such as `http`, `ftp`, etc. We all use the term “protocol” for what is termed a “scheme” in the URI specification. If the term “scheme” throws you off, you can read it as “protocol” whenever it appears in this section. The `<scheme>` and `<path>` parts are required in a URI. All other parts are optional. The `<path>` part may be an empty string.

The `<authority>` part indicates the server name (or IP address) or a scheme-specific registry. If the `<authority>` part represents a server name, it may be written in the form of `<userinfo>@host:port`. If a `<authority>` is present in a URI, it begins with two forward slashes; it is an optional part. For example, a URL that identifies a file in a local file system on a machine uses the `file` scheme as

```
file:///c:/documents/welcome.doc.
```

The URI syntax uses a hierarchical syntax in its `<path>` part, which locates the resource on the server. Multiple parts of the `<path>` are separated by a forward slash (/).

The `<query>` part indicates that the resource is obtained by executing the specified query. It consists of name-value pairs separated by an ampersand (&). The name and value are separated by an equal sign (=). For example, `id=123&rate=5.5` is a query, which has two parts, `id` and `rate`. The value for `id` is 123 and the value for `rate` is 5.5.

The `<fragment>` part identifies a secondary resource, typically a subset of the primary resource identified by another part of the URI.

The following is an example of a URI, which is also broken into parts:

URI: <http://www.jdojo.com/java/intro.html?id=123#conclusion>

Scheme: http
Authority: www.jdojo.com
Path: /java/intro.html
Query: id=123
Fragment: conclusion

The URI represents a URL that refers to a document named `intro.html` on the www.jdojo.com server. The scheme `http` indicates that the document can be retrieved using the `http` protocol. The query `id=123` indicates that the document is obtained by executing this query. The fragment part `conclusion` can be interpreted differently by different applications that use the document. In case of an HTML document, the fragment part is interpreted by the web browser as the part of the main document.

Not all parts of a URI are mandatory. Which parts are mandatory and which parts are optional depend on the scheme that is used. One of the goals of using a URI to identify a resource was to make it universally readable. For this reason, there is a well-defined set of characters that can be used to represent a URI. URI syntax uses some reserved characters that have special meaning and they can only be used in specific parts of a URI. In other parts, the reserved characters need to be escaped. A character is escaped by using a percent character followed by its ASCII value in a hexadecimal format. For example, ASCII value of space is 32 in decimal format, and it is 20 in hexadecimal format. If you want to use a space character in a URI, you must use `%20`, which is the escaped form for a space. Since the percent sign is used as part of an escape character, you must use `%25` to represent a `%` character in a URI (25 is the hexadecimal value for number 37 in decimal. The ASCII value for `%` is 37 in decimal). For example, if you want to use a value of `5.2%` in a query, the following is an invalid URI:

`http://www.jdojo.com/details?rate=5.2%`

To make it a valid URI, you need to escape the percent sign character as `%25` as shown:

`http://www.jdojo.com/details?rate=5.2%25`

It is important to understand the usage of a relative URI. A relative URI is always interpreted in the context of an absolute URI, which is called the base URI. An absolute URI starts with a scheme. A relative URI inherits some parts of its base URI. Let's consider a URI that refers to an HTML document as shown:

<http://www.jdojo.com/java/intro.html>

The document referred to in the URI is `intro.html`. Its path is `/java/intro.html`. Suppose two documents named `brief_intro.html` and `detailed_intro.html` reside (physically or logically) in the same path hierarchy as `intro.html`. The following are the absolute URIs for all three documents:

- <http://www.jdojo.com/java/intro.html>
- http://www.jdojo.com/java/brief_intro.html
- http://www.jdojo.com/java/detailed_intro.html

If you are already in the `intro.html` context, it will be easier to refer to the other two documents using their names instead of their absolute URI. What does it mean by being in the `intro.html` context? When you use the <http://www.jdojo.com/java/intro.html> URI to identify a resource, it has three parts: a scheme (`http`), a server name (www.jdojo.com), and a document path (`/java/intro.html`). The path indicates that the document is under the `java` path hierarchy, which in turn is at the root of the path hierarchy. All details—scheme, server name, path details, excluding the document name itself (`intro.html`)—make up the context for the `intro.html` document. If you look at the URI for the other two documents listed above, you will notice that all details about them are the same as for `intro.html`. In other words, you can state that the context for the other two documents is the same as for `intro.html`. In this case, with an absolute URI of the `intro.html` document as base URI, the relative URIs for the other two documents are their names: `brief_intro.html` and `detailed_intro.html`. It can be listed as follows:

- Base URI:
<http://www.jdojo.com/java/intro.html>
- Relative URI: `brief_intro.html`
- Relative URI: `detailed_intro.html`

In the list, the two relative URIs inherit the scheme, server name, and path hierarchy from the base URI. It is to be emphasized that a relative URI never

makes sense without specifying its base URI.

When a relative URI has to be used, it must be resolved to its equivalent absolute URI. The URI specification lays down rules to resolve a relative URI. I will discuss some of the most commonly used forms of relative URIs and their resolutions. There are two special characters used to define the <path> part of a URI. They are a dot and two dots. A dot means the current path hierarchy. Two dots mean one up in the path hierarchy. You must have seen these two sets of characters being used in a file system to mean the current directory and parent directory. You can think of their meanings in a URI the same way, but a URI does not assume any directory hierarchy. In a URI, a path is considered as hierarchical, and it is not tied to a file system hierarchical structure at all. However, in practice, when you work with web-based applications, URLs are usually mapped to a file system hierarchical structure. In the normalized form of a URI, dots are replaced appropriately. For example, `s://sn/a/.b` is normalized to `s://sn/a/b`, and `s://sn/a/..b` is normalized to `s://sn/b`. The non-normalized and normalized forms refer to the same URL. The normalized form has extra characters removed. By just looking at two URIs, you cannot say that they are referring to the same resource or not. You must normalize them before you compare them for equality. During the comparison process, scheme, server name, and hexadecimal digits are considered case-insensitive. Here are some rules to resolve a relative URI:

- If a URI starts with a scheme, it is considered an absolute URI.
- If a relative URI starts with an authority, it inherits scheme from its base URI.
- If a relative URI is an empty string, it is the same as the base URI.
- If a relative URI has a fragment part only, the resolved URI uses the new fragment. If a base URI had a fragment, it is replaced with the fragment of the relative URI. Otherwise, the fragment of the relative URI is added to the base URI.
- A relative URI's path does not start with a forward slash (/). If the base URI has a path, remove the last component of the path in the base URI and append the relative URI. Note that the last component of the path may be an empty string as in

<http://www.abc.com/>.

- If a relative URL starts with a path, which in turn starts with a forward slash (/), the base URI's path is replaced with the relative URI's path.

Table 5-5 contains examples of using these rules. The examples in the table conform to the rules followed in Java URI and URL classes. Java rules deviate slightly in a few cases from the rules set in the URI specification.

Table 5-5. Examples of How a Relative URI is Resolved to an Absolute URI Using a Base URI

Base URI	Relative URI	Resolved Relative URI	Description of the Relative URI
h://sn/a/b/c	http://sn2/foo	h://sn2/foo	It is an absolute URI.
h://sn/a/b/c	//sn2/h/k	h://sn2/h/k	It starts with an authority
h://sn/a/b/c		h://sn/a/b/c	It is an empty string.
h://sn/a/b/c	#k	h://sn/a/b/c#k	It contains a fragment only.
h://sn/a/b/c#a	#k	h://sn/a/b/c#k	It contains a fragment only.
h://sn/a/b/	foo	h://sn/a/b/foo	The path does not start with a /.
h://sn/a/b/c	foo	h://sn/a/b/foo	The path does not start with a /.
h://sn/a/b/c?d=3	foo	h://sn/a/b/foo	The path does not start with a /.
h://sn/	foo	h://sn/foo	The path does not start with a /.
h://sn	foo	h://sn/foo	The path does not start with a /.
h://sn/a/b/	/foo	h://sn/foo	The path starts with a /.
h://sn/a/b/c	/foo	h://sn/foo	The path starts with a /.
h://sn/a/b/c?d=3	/foo	h://sn/foo	The path starts with a /.
h://sn/	/foo	h://sn/foo	The path starts with a /.
h://sn	/foo	h://sn/foo	The path starts with a /.

Tip You can also use a host name or IP address as an authority in a URI. IPv4 can be used in its dotted decimal format such as

<http://192.168.10.178/docs/toc.html>. IPv6 must be enclosed in brackets such as

[http://\[1283::8:800:200C:A43A\]/docs/toc.html](http://[1283::8:800:200C:A43A]/docs/toc.html).

URI and URL as Java Objects

Java represents a URI and a URL as objects. It provides the following four classes that you can use to work with a URI and a URL as objects in a Java program:

- `java.net.URI`
- `java.net.URL`
- `java.net.URLEncoder`
- `java.net.URLDecoder`

An object of the `URI` class represents a URI. An object of the `URL` class represents a URL. `URLEncoder` and `URLDecoder` are utility classes that help encode and decode URI strings. I will discuss other Java classes in the next sections that are used to retrieve the resource identified by a URL.

The `URI` class has many constructors. They let you pass variable combinations of parts (scheme, authority, path, query, and fragment) of a URI. All constructors throw a checked exception called `URIException`. They throw an exception because strings, which you use to construct a `URI` object, may not be in conformity with the URI specification.

```
// Create a URI object
URI baseURI = new URI("http://www.yahoo.com");

// Create a URI with relative URI string and resolve
// it using baseURI
URI relativeURI = new URI("welcome.html");
URI resolvedRelativeURI
= baseURI.resolve(relativeURI);
```

[Listing 5-9](#) demonstrates how to use the `URI` class in a Java program.

[Listing 5-9](#). A Sample Class That Demonstrates the Use of the `java.net.URI` Class

```
// URITest.java
```

```
package com.jdojo.net;

import java.net.URI;
import java.net.URISyntaxException;

public class URITest {
    public static void main(String[] args) {
        String baseURIStr
= "http://www.jdojo.com/javaintro.html?" +
                    "id=25&rate=5.5%25#foo";
        String relativeURIStr
= "../sports/welcome.html";

        try {
            URI baseURI = new URI(baseURIStr);
            URI relativeURI = new
URI(relativeURIStr);

            // Resolve the relative URI with
respect to the base URI
            URI resolvedURI
= baseURI.resolve(relativeURI);

            printURIDetails(baseURI);
            printURIDetails(relativeURI);
            printURIDetails(resolvedURI);
        }
        catch (URISyntaxException e) {
            e.printStackTrace();
        }
    }

    public static void printURIDetails(URI uri) {
        System.out.println("URI:" + uri);
        System.out.println("Normalized:"
+ uri.normalize());
        String parts = "[Scheme="
+ uri.getScheme() +
                    ", Authority="
+ uri.getAuthority() +
                    ", Port="
+ uri.getPort());
        System.out.println(parts);
    }
}
```

```

        ", Path=" + uri.getPath() +
        ", Query:" + uri.getQuery() +
        ", Fragment:"
+ uri.getFragment() + "]";
System.out.println(parts);
System.out.println();
}
}

```

URI:<http://www.jdojo.com/javaintro.html?id=25&rate=5.5%25#foo>
Normalized:<http://www.jdojo.com/javaintro.html?id=25&rate=5.5%25#foo>
[Scheme=http, Authority=www.jdojo.com,
Path=/javaintro.html, Query:id=25&rate=5.5%,
Fragment:foo]

URI:[../sports/welcome.html](#)
Normalized:[../sports/welcome.html](#)
[Scheme=null, Authority=null,
Path=[../sports/welcome.html](#), Query:null,
Fragment:null]

URI:<http://www.jdojo.com/..../sports/welcome.html>
Normalized:<http://www.jdojo.com/..../sports/welcome.html>
[Scheme=http, Authority=www.jdojo.com,
Path=[..../sports/welcome.html](#), Query:null,
Fragment:null]

You can also get a URL object from a URI object using its `toURL()` method as shown:

```
URL baseURL = baseURI.toURL();
```

You can also create a URI object using the `create(String str)` static method of the URI class. The `create()` method does not throw a checked exception. It throws a runtime exception. Therefore, its use will not

force you to handle the exception. You should use this method only when you know that a URI string is well-formed.

```
URI uri2 = URI.create("http://www.yahoo.com");
```

An instance of the `java.net.URL` class represents a URL in a Java program. Although every URL is also a URI, Java does not inherit the `URL` class from the `URI` class. Java uses the term protocol to refer to the scheme part in the `URI` specification. You can create a `URL` object by providing a string that has all URL's parts concatenated, or by providing parts of a URL separately. If strings that you supply to create a `URL` object are not valid, the constructors of the `URL` class will throw a `MalformedURLException` checked exception. You must handle this exception when you create a `URL` object.

Listing 5-10 demonstrates how to create a `URL` object. The `URL` class lets you create an absolute URL from a relative URL and a base URL using one of its constructors.

Listing 5-10. A Sample Class That Demonstrates the Use of the `java.net.URL` Class

```
// URLTest.java
package com.jdojo.net;

import java.net.URL;

public class URLTest {
    public static void main(String[] args) {
        String baseURLStr
= "http://www.ietf.org/rfc/rfc3986.txt";
        String relativeURLStr = "rfc2732.txt";
        try {
            URL baseURL = new URL
(baseURLStr);
            URL resolvedRelativeURL = new
URL(baseURL, relativeURLStr);
            System.out.println("Base URL:"
+ baseURL);
            System.out.println("Relative URL
String:" + relativeURLStr);
        }
    }
}
```

```

        System.out.println("Resolved
Relative URL:" + resolvedRelativeURL);
    }
    catch (Exception e) {
        e.printStackTrace();
    }
}

```

Base URL:<http://www.ietf.org/rfc/rfc3986.txt>
 Relative URL String:rfc2732.txt
 Resolved Relative
 URL:<http://www.ietf.org/rfc/rfc2732.txt>

Typically, you create a URL object to retrieve the resource identified by the URL. Note that you can create an object of the URL class as long as the URL is well formed textually and the protocol to handle the URL is available. The successful creation of a URL object in a Java program does not guarantee the existence of the resource at the server specified in the URL. The URL class provides methods that you can use in conjunction with other classes to retrieve the resource identified by the URL.

The URL class makes sure that it can handle the protocol specified in the URL string. For example, it will not let you create a URL object with a string as `ppp://www.sss.com/` unless you develop and supply it a protocol handler for a ppp protocol. I will discuss in detail how to retrieve the resource identified by a URL in the next section.

Sometimes you do not know the parts of the URL string in advance. You get the parts of the URL at runtime as input from other parts of the program or from the user. In such cases, you will need to encode the parts of the URL before you can use them to create a URL object. Sometimes you get a string in encoded form and you want it to be decoded. An encoded string will have all the restricted characters properly escaped.

The URLEncoder and URLDecoder classes are used to encode and decode strings, respectively. The `URLEncoder.encode (String source, String encoding)` static method is used to encode a source string using the specified encoding. The

`URLDecoder.decode(String source, String encoding)` static method is used to decode a source string using a specified encoding. The following snippet of code shows how to encode/decode strings. Typically, you encode/decode the value part of name-value pairs in the query part of a URL. Note that you should never attempt to encode the entire URL string. Otherwise, it will encode some of the reserved characters such a forward slash and the resulting URL string will be invalid.

```
String source = "this is a test for 2.5% and &" ;
String encoded = URLEncoder.encode(source, "utf-8");
String decoded = URLDecoder.decode(encoded, "utf-8");
System.out.println("Source: " + source);
System.out.println("Encoded: " + encoded);
System.out.println("Decoded: " + decoded);
```

```
Source: this is a test for 2.5% and &
Encoded: this+is+a+test+for+2.5%25+and+%26
Decoded: this is a test for 2.5% and &
```

Accessing the Contents of a URL

A URL has a protocol that is used to communicate with the remote application that hosts the URL's contents. For example, the URL <http://www.yahoo.com/index.html> uses the `http` protocol. In a URL, you specify a protocol that is used by the application layer in the protocol suite. When you need to access the URL's contents, the computer will use some kind of protocols from lower layers in the protocol suite (transport, Internet layers, etc.) to communicate with the remote host. The `http` application layer protocol uses TCP/IP protocols in lower layers. In a distributed application, it is very frequent that you need to retrieve (or read) the resource (could be text, html content, image files, audio/video files or any other kind of information) identified by a URL. Although it is possible to open a socket every time you need to read the contents of URL, it is time consuming and cumbersome for programmers. After all, programmers need some way to be more productive than writing repetitive code for what seems to be a routine job. Java designers

realized this need and they have provided a very easy (yes, it is very easy) way to read/write data from/to a URL. This section will explore some of the ways, from very simple to quite complex, to read/write data from/to a URL.

As the data passes from one layer to another in the protocol suite, each layer adds a header to the data. Since a URL uses a protocol in the application layer, it also contains its own header. The format of the header depends on the protocol being used. When the `http` request is send to a remote host, the application layer in the source host adds the `http` header to the data. The remote host has an application layer that handles the `http` protocol and it uses the header information to interpret the contents. In summary, a URL data will have two parts: a header part and a contents part. The `URL` class along with some other classes let you read/write both header and content parts of a URL. I will start with the simplest case of reading the contents of a URL.

Before you read/write from/to a URL, you need to have a working URL that you can access. You can read content of any URL that is publicly available on the Internet. For this discussion, I will assume that you are familiar with Java Server Pages (JSP) and you have access to a web server where you can deploy a JSP page. If you do not know JSP, you can just replace the URL used in examples of this section with any publicly available URL; for example, the URL <http://www.yahoo.com> will work fine, and you should be able to run all examples. Writing data to a URL is a little different. It will be easier if you can run your JSP to see how writing to a URL works. I assume that you have deployed a web application on a web server and it has a web page called echo_params.jsp.

[Listing 5-11](#) shows the content of this JSP page. It performs two things. It reads the HTTP request method, which can be GET or POST, and prints it. It reads all the parameters passed in with the HTTP request and prints the list of parameter names and values.

[Listing 5-11](#). The Contents of the echo_params.jsp File

```
<%@ page contentType="text/html; charset=windows-
1252"%>
<html>
    <head>
        <meta http-equiv="Content-Type"
content="text/html;
                           charset=windows-1252"/>
        <title>Echo Request Method and
Parameters</title>
    </head>
    <body>
        <h1>URL Connection Test</h1>
        <%
            out.println("Request Method: "
+ request.getMethod());
            out.println("<br/><br/>");

            out.println("<u>List of Parameter Names
and Values</u><br/>");
            java.util.Enumeration paramNames =

```

```

        request.getParameterNames();
        while(paramNames.hasMoreElements()) {
            String paramName =
(String)paramNames.nextElement();
            String paramValue
= request.getParameter(paramName);
            out.println("Name: " + paramName
+ ", Value: " + paramValue);
            out.println("<br/>");
        }
    %>
</body>
</html>

```

The URL class lets you read the contents (not header) of a URL by just writing two lines of code as shown:

```

URL url = new URL("your URL string goes here");
InputStream ins = url.openStream();

```

[Listing 5-12](#) has the complete program that reads a URL's contents. You will need to change the URL in this program according to your web server setup. The output shows that you do access the JSP, and the JSP gets the query (`id=123`) passed to it and transmits back the generated HTML contents. The HTML request was sent using the GET method. If you want to use the POST method to send a request to a URL, you will need to use the `URLConnection` class, which I will discuss next. I have formatted the output for better readability.

[Listing 5-12.](#) A Simple URL Contents Reader Program

```

// SimpleURLContentReader.java
package com.jdojo.net;

import java.io.BufferedReader;
import java.io.IOException;
import java.io.InputStream;
import java.io.InputStreamReader;
import java.net.URL;

public class SimpleURLContentReader {

```

```
    public static String getURLContent(String
urlStr) {
        BufferedReader br = null;
        try {
            URL url = new URL(urlStr);

            // Get the input stream
            InputStream ins
= url.openStream();

            // Wrap input stream into a reader
            br = new BufferedReader(new
InputStreamReader(ins));

            StringBuilder sb = new
StringBuilder();
            String msg = null;
            while ((msg = br.readLine()) !=
null) {
                sb.append(msg);
                sb.append("\n"); // Append
a new line
            }

            return sb.toString();
        }
        catch (IOException e) {
            e.printStackTrace();
        }
        finally {
            if (br != null) {
                try {
                    br.close();
                }
                catch (IOException e) {
                    e.printStackTrace();
                }
            }
        }
    }
}
```

```
// If we get here it means there was an
error
        return null;
    }

    public static void main(String[] args) {
        String urlStr
= "http://localhost:8080/docsapp/" +
                "echo_params.jsp?id=123";
        String content = getURLContent(urlStr);
        System.out.println(content);
    }
}
```

```
<html>
  <head>
    <meta http-equiv="Content-Type"
content="text/html;
    charset=windows-1252"/>
    <title>Echo Request Method and Parameters</title>
  </head>
  <body>
    <h1>URL Connection Test</h1>
    Request Method: GET
    <br/><br/>
    <u>List of Parameter Names and Values</u><br/>
    Name: id, Value: 123
    <br/>
  </body>
</html>
```

Once you get the input stream, you can use it for reading the content of the URL. Another way of reading the content of a URL is by using the `getContent()` method of the `URL` class. Since `getContent()` can return any kind of content, its return type is the `Object` type. You will need to check what kind of object it returns before you use the contents of the object. For example, it may return an `InputStream` object, and in that case, you will need

to read data from the input stream. The following are the two versions of the `getContent()` method:

- `final Object getContent() throws IOException`
- `final Object getContent(Class[] classes) throws IOException`

The second version of the method lets you pass an array of class type. It will attempt to convert the content object to one of the classes you pass to it in the specified order. If the content object does not match any of the types, it will return `null`. You will still need to write `if` statements to know what type of object was returned from the `getContent()` method, as shown:

```
URL baseURL = new URL ("your url string goes here");
Class[] c = new Class[] {String.class,
BufferedReader.class, InputStream.class};

Object content = baseURL.getContent(c);
if (content == null) {
    // Contents are not of any of the three kinds
}
else if (content instanceof String) {
    // You got a string
}
else if (content instanceof BufferedReader) {
    // You got a reader
}
else if (content instanceof InputStream) {
    // You got an input stream
}
```

If you read the contents of a URL using the `openStream()` or `getContent()` method, the URL class handles many of the complexities of using sockets internally. The downside of this approach is that you do not have any control over the connection settings. You cannot write data to the URL using this approach. Also, you do not have access to the header information for the protocol used in a URL. Don't despair; Java provides another class named

`URLConnection` that lets you do all of these in a simple and concise manner. `URLConnection` is an abstract class and you cannot create its object directly. You need to use the `openConnection()` method of the `URL` object to get a `URLConnection` object. The `URL` class will handle the creation of an `URLConnection` object, which will be appropriate to handle the data for the protocol used in the URL. The following snippet of code shows how to use an `URLConnection` object to read and write data to a URL:

```
URL url = new URL("your URL string goes here");  
  
// Get a connection object  
URLConnection connection = url.openConnection();  
  
// Indicate that you will be writing to the connection  
connection.setDoOutput(true);  
  
// Get output/input streams to write/read data  
OutputStream ous = connection.getOutputStream();  
InputStream ins = connection.getInputStream(); //  
Caution. Read below
```

The `openConnection()` method of the `URL` class returns a `URLConnection` object, which is not connected to the URL source yet. You must set all connection-related parameters to this object before it is connected. For example, if you want to write data to the URL, you must call the `setDoOutput(true)` method on the connection object before it is connected. A `URLConnection` object gets connected when you call its `connect()` method. However, it is connected implicitly when you call its methods that require a connection. For example, writing data to a URL and reading the URL's data or header fields will connect the `URLConnection` object automatically, if it is not already connected.

Here are few things you must follow if you want to avoid problems when you work with an `URLConnection` to read and write data to a URL:

- When you are only reading data from a URL, you can get the input stream using its `getInputStream()` method. Use the input stream to read data. It will use a GET method for the request to the remote host. That is, if you are passing some parameters to the URL, you must do so by adding the

query part to the URL.

- If you are writing as well as reading data from a URL, you must call the `setDoOutput(true)` before you connect. You must finish writing the data to the URL before you start reading the data. Writing data to a URL will change the request method to POST. You cannot even get the input stream before you finish writing data to the URL. In fact, the `getInputStream()` method sends a request to the remote host. Your intention is to send the data to the remote host and read the response from the remote host. This one gets as tricky as it can. Here is a little more explanation, using a snippet of code, assuming that `connection` is an `URLConnection` object:

```
// Incorrect - 1. Get input and output streams
// you must get the output stream first
InputStream ins
= connection.getInputStream();
OutputStream ous
= connection.getOutputStream();

// Incorrect - 2. Get output and input streams
// you must get the output stream and finish writing
// before you should get the input stream
OutputStream ous
= connection.getOutputStream();
InputStream ins
= connection.getInputStream();

// Correct. Get output stream and get done with it.
// And, then get the input stream and read data.
OutputStream ous
= connection.getOutputStream();
```

```

// Write logic to write data using our
object here. Make sure
// you are done writing data before you
call the
// getInputStream() method as shown
below
InputStream ins
= connection.getInputStream();

// Write logic to read data

```

- Using the `getInputStream()` method and reading header fields, using any method such as `getHeaderField(String headerName)`, have the same effect. The URL's server supplies both header and content. An `URLConnection` must send the request to get them.

[**Listing 5-13**](#) contains the complete code that writes/reads data to/from the `echo_params.jsp` page as listed in [**Listing 5-11**](#). Note that you will need the `echo_params.jsp` page deployed to a web server for this example to work. I have formatted the output for better readability.

Listing 5-13. A URL Reader/Writer Class That Writes/Reads Data to/from a URL

```

// URLConnectionReaderWriter.java
package com.jdojo.net;

import java.io.BufferedReader;
import java.io.BufferedWriter;
import java.io.IOException;
import java.io.InputStream;
import java.io.InputStreamReader;
import java.io.OutputStream;
import java.io.OutputStreamWriter;
import java.io.UnsupportedEncodingException;
import java.net.URL;

```

```
import java.net.URLConnection;
import java.net.URLEncoder;
import java.util.Map;

public class URLConnectionReaderWriter {
    public static String getURLContent(String urlStr, String input) {
        BufferedReader br = null;
        BufferedWriter bw = null;

        try {
            URL url = new URL(urlStr);
           URLConnection connection
= url.openConnection();

            // Must call setDoOutput(true) to
indicate that we
            // will write to the connection.
By default, it is false
            // By default, setDoInput() is set
to true.
            connection.setDoOutput(true);

            // Now, connect to the remote
object
            connection.connect();

            // Write data to the URL first
before reading the response
            OutputStream ous
= connection.getOutputStream();
            bw = new BufferedWriter(new
OutputStreamWriter(ous));
            bw.write(input);
            bw.flush();
            bw.close();

            // Must be placed after writing
the data. Otherwise,
            // it will result in error,
```

```
because if write is performed,
                    // read must be performed after
the write
                printRequestHeaders(connection);

                InputStream ins
= connection.getInputStream();

                    // Wrap the input stream into
a reader
                br = new BufferedReader(new
InputStreamReader(ins));

                StringBuffer sb = new
StringBuffer();
                String msg = null;
                while ((msg = br.readLine()) !=
null) {
                    sb.append(msg);
                    sb.append("\n"); // Append
a new line
                }

                return sb.toString();
}
catch (IOException e) {
    e.printStackTrace();
}
finally {
    if (br != null) {
        try {
            br.close();
        }
        catch (IOException e) {
            e.printStackTrace();
        }
    }
}

// If we arrive here it means there was
```

```
an error
        return null;
    }

    public static void
printRequestHeaders(URLConnection connection) {
    Map headers
= connection.getHeaderFields();
    System.out.println("Request Headers
are:");
    System.out.println(headers);
    System.out.println();
}

public static void main(String[] args) {
    // Change the URL to point to the
echo_params.jsp page
    // on your web server
    String urlStr
= "http://www.jdojo.com/docsapp/echo_params.jsp";
    String query = null;
    try {
        // Encode the query. We need to
encode only the value
            // of the name parameter. Other
names and values are fine
        query = "id=789&name=" +
                URLEncoder.encode("John &
Co.", "utf-8");

        // Get the content and display it
on the console
        String content
= getURLContent(urlStr, query);
        System.out.println(content);
    }
    catch (UnsupportedEncodingException e) {
        e.printStackTrace();
    }
}
```

```
    }  
}
```

Request Headers are:

```
{null=[HTTP/1.1 200 OK], Date=[Fri, 19 Dec 2008  
02:15:14 GMT], Content-Length=[402], Set-Cookie=  
[JSESSIONID=567B1B9F853DD22DD73AB8452E220E0A;  
Path=/examples], Content-Type=  
[text/html; charset=windows-1252], Server=[Apache-  
Coyote/1.1]}  
<html>  
  <head>  
    <meta http-equiv="Content-Type"  
content="text/html;  
        charset=windows-1252"/>  
    <title>Echo Request Method and Parameters</title>  
  </head>  
  <body>  
    <h1>URL Connection Test</h1>  
    Request Method: POST  
<br/><br/>  
<u>List of Parameter Names and Values</u><br/>Name:  
name, Value: John & Co.  
<br/>Name: id, Value: 789  
<br/>  
  </body>  
</html>
```

This time, you are using the POST method to send data to the URL. Note that the data that you send has been encoded using the `URLEncoder` class. You needed to encode only the value of the name field, which is "John & Co." because the ampersand in the value will conflict with the name-value pair separator in the query string. The program has plenty of comments to warn you of any dangers if you change the sequence of any statements.

The program prints information about all headers that are returned in a `java.util.Map` object. The `URLConnection` class provides several ways to get the header field's values. For commonly used headers, it provides a direct

method. For example, the methods called `getContentLength()`, `getContentType()`, and `getContentEncoding()` return the value of the header fields that indicate length, type, and encoding of the URL's contents, respectively. If you know the header field name or its index, you can use the `getHeaderField(String headerName)` or `getHeaderField(int headerIndex)` method to get its value. The `getHeaderFields()` method returns a `Map` object whose keys represent the header field names and the values represent the header field values. Use caution when reading a header field because it has the same effect on the `URLConnection` object as reading the contents. If you wish to write data to a URL, you must first write the data before you can read the header fields.

Java lets you read the contents of a JAR file using the `jar` protocol. Suppose you have a JAR file called `myclasses.jar`, which has a class file whose path is `myfolder/Abc.class`. You can get a `JarURLConnection` from a URL and use its methods to access the JAR file data. Note that you can only read JAR file contents from a URL. You cannot write to a JAR file URL. The following snippet of code shows how to get a `JarURLConnection` object. You will need to use its methods to get the JAR specific data.

```
String str  
= "jar:http://www.abc.com/myclasses.jar!/myfolder/Abc.class";  
URL url = new URL(str);  
JarURLConnection connection  
= (JarURLConnection)url.openConnection();  
  
// Use the connection object to access any jar related data.
```

 **Tip** You have read many words of caution in this section about using a `URLConnection` object. Here is one more: a `URLConnection` object must be used for only one request. It works on the concept of obtain-use-and-throw. If you wish to write or read data from a URL multiple times, you must call the URL's `openConnection()` each time separately.

Non-Blocking Socket Programming

In previous sections, I discussed TCP and UDP sockets. The `connect()`, `accept()`, `read()`, and `write()` methods of the `Socket` and `ServerSocket` classes block until the operation is complete. For example, a client socket's thread is blocked if it calls the `read()` method to read data from a server until the data is available. Would it not be nice if you could call the `read()` method on a client socket and start doing something else until the data from the server arrives? When data is available from the server, the client socket will be notified, which will read the data at an appropriate time. Another big issue that you face with socket programming is the scalability of a server application. In previous sections, I suggested that you would need to create a new thread to handle each client connection or you would have a pool of threads to handle all client connections. Both ways, you will be creating and maintaining a bunch of threads in your program. Wouldn't it be nice if you didn't have to deal with threads in a server program to handle multiple clients? Non-blocking socket channels offer all of these nice features. As always, a good feature has a price tag associated with it; so too with the non-blocking socket channel. It has a bit of a learning curve. You are used to programming where things happen sequentially. With non-blocking socket channels, you will need to change your mindset about the way you think about performing things in a program. Changing your mindset takes time. Your program will be performing multiple things that will not be performed sequentially. If you are learning Java for the first time, you can skip this section and revisit it later when you gain some more experience in writing complex Java programs.

It is assumed that you have a good understanding of socket programming using `ServerSocket` and `Socket` classes. It is further assumed that you have a basic understanding of *New Input/Output* in Java using buffers and channels. This section uses some classes that are contained in `java.nio`, `java.nio.channels`, and `java.nio.charset` packages.

Let's start by comparing classes that are involved in blocking and non-blocking socket communications. [Table 5-6](#) lists the main classes that are used in blocking and non-blocking socket applications.

Table 5-6. Comparison of Classes Involved in Blocking and Non-Blocking Socket Programming

Classes Used in Blocking Socket-Based Communication	Classes Used in Non-Blocking Socket-Based Communication
---	---

	ServerSocketChannel
ServerSocket	The ServerSocket class still exists behind the scenes.
Socket	SocketChannel
	The Socket class still exists behind the scenes.
InputStream	No corresponding classes exist. A
OutputStream	SocketChannel is used to read/write data
No corresponding class exists.	Selector
No corresponding class exists.	SelectionKey

You will work with a ServerSocketChannel object primarily to accept a new connection request in a server instead of using a ServerSocket. The ServerSocket has not disappeared. It is still at play behind the scenes. If you need the reference of the ServerSocket object being used internally, you can get it by using the `socket()` method of the ServerSocketChannel object. You can think of a ServerSocketChannel object as a wrapper for a ServerSocket object.

You will work with a SocketChannel to communicate between a client and a server instead of a Socket. A Socket object is still at play behind the scenes. You can get the reference of the Socket object using the `socket()` method of the SocketChannel class. You can think of a SocketChannel object as a wrapper for a Socket object.

Before I start discussing the mechanism that is used by the non-blocking sockets to give you a more efficient and scalable application interface, it would be helpful to look at a real-world example. Let's discuss the way orders are placed and served in a fast food restaurant. Suppose the restaurant expects the maximum ten customers and the minimum of zero customers at any time. A customer comes to the restaurant, places his order, and is served the food. How many servers should that restaurant employ? In the best case, it may employ only one server that can handle receiving orders from all customers and serving their food. In the worst case, it can have ten servers—one server reserved for one customer. In the latter case, if there are only three customers in the restaurant, seven servers will be idle.

Let's take the middle path in the restaurant management. Let's have a few servers in the kitchen to cook and one server at the counter to receive orders. A

customer comes, places an order with the server at the counter, the customer gets an order id, the customer leaves the counter, the server at the counter passes on the order to one of the servers in the kitchen, and the server starts taking an order from the next customer. At this point, the customer is free to do something else while his order is being prepared. The server at the counter is dealing with other customers. Servers in the kitchen are busy preparing the food according to the orders placed. No one is waiting for anyone. As soon as the food item in an order is ready, the server at the counter receives it from the server in the kitchen and calls the order number so the customer who placed that order will pick up his food. A customer may get his food in multiple installments. He can eat the food that he has been served while the remaining items in his order are being prepared in the kitchen. This architecture is the most efficient architecture you can have in a restaurant. It keeps everyone busy most of the time and makes efficient use of the resources. This is the approach that non-blocking socket channels follow.

Another approach would be that the customer comes in, places his order, waits until his order is complete and he is served, and then the next customer places his order and so on. This is the approach that blocking sockets follow. If you understand the approach taken by the fast food restaurant for the efficient use of resources, you can understand the non-blocking socket channels easily. I will compare the people used in the restaurant example with objects used in non-blocking sockets in the following discussion.

Let's first discuss the situation on the server side. The server side is your restaurant. The person at the counter, who interfaces with all customers, is called a *selector*. A selector is an object of the `Selector` class. Its sole job is to interact with the outside world. It sits between remote clients interacting with the server and the things inside the server. A remote client never interacts with objects working inside the server, as a customer in the restaurant never interacts directly with servers in the kitchen. [Figure 5-7](#) shows the architecture of non-blocking socket channels communication. It shows where the selector fits into the architecture.

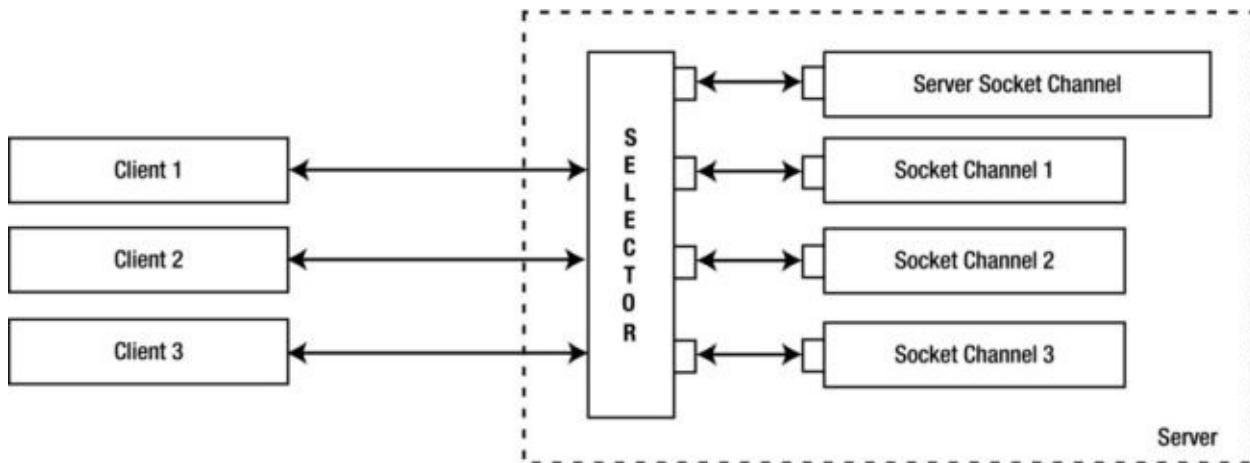


Figure 5-7. Architecture of Non-Blocking Client-Server Sockets

You cannot create a selector object directly using its constructor. You need to call its `open()` static method to get a selector object as shown:

```
// Get a selector object
Selector selector = Selector.open();
```

A `ServerSocketChannel` is used to listen for a new connection request from clients. Again, you cannot create a new `ServerSocketChannel` object using its constructor. You need to call its `open()` static method as shown:

```
// Get a server socket channel
ServerSocketChannel ssChannel
= ServerSocketChannel.open();
```

By default, a server socket channel or a socket channel is a blocking channel. You need to configure it to make it a non-blocking channel as shown:

```
// Configure the server socket channel to be non-
blocking
ssChannel.configureBlocking(false);
```

Your server socket channel needs to be bound to a local IP address and a local port number, so a remote client may contact it for new connections. You bind a server socket channel using its `bind()` method. The `bind()` method has been added to the `ServerSocketChannel` and the `SocketChannel` in Java 7. Prior to Java 7, you need to call the `bind()` method on the socket that is associated with the channels.

```

InetAddress hostIPAddress
= InetAddress.getByName("localhost");
int port = 19000;

// Prior to Java 7
ssChannel.socket().bind(new
InetSocketAddress(hostIPAddress, port));

// Java 7 and later
ssChannel.bind(new InetSocketAddress(hostIPAddress,
port));

```

The most important step is taken now. The server socket has to register itself with the selector showing interest in some kind of operation. It is like a pizza maker in a restaurant letting the server at the counter know that he is ready to make pizza for customers and he needs to be notified when an order for pizza is placed. There are four kinds of operations for which you can register a channel with the selector. They are defined as integer constants in the `SelectionKey` class listed in [Table 5-7](#).

Table 5-7. The List of Operations Recognized by the Selector

Operation Type	Value (Constants in SelectionKey class)	Who Can Register for This Operation	Description
Connect	OP_CONNECT	SocketChannel at client	Selector will notify about the connect operation progress.
Accept	OP_ACCEPT	ServerSocketChannel at server	Selector will notify when a client request for a new connection arrives
Read	OP_READ	SocketChannel at client and server	Selector will notify when the channel is ready to read some data.
Write	OP_WRITE	SocketChannel at client and server	Selector will notify when channel is ready to write some data.

A `ServerSocketChannel` only listens for accepting a new client connection request, and therefore, it can register for only one operation as shown:

```

// Register the server socket channel with the
selector for accept operation
ssChannel.register(selector, SelectionKey.OP_ACCEPT);

```

The `register()` method of `ServerSocketChannel` returns an object of type `SelectionKey`. You can think of this object as a registration certificate with the selector. You can store this key object in a variable if you need to use it later. The example ignores it. The selector has a copy of your key (registration details) and it will use it in the future to notify you of any operation for which your channel is ready.

At this point, your selector is ready to intercept an incoming request for a client connection and pass it on to the server socket channel. Suppose a client attempts to connect to the server socket channel at this time. How does interaction between the selector and the server socket channel take place? When the selector detects that there is a registered key with it, which is ready for an operation, it places that key (an object of the `SelectionKey` class) in a separate group called the *ready set*. A `java.util.Set` object represents a ready set. You can determine the number of keys in a ready state by calling the `select()` method of a `Selector` object.

```
// Get the key count in the ready set  
int readyCount = selector.select();
```

Once you get at least one ready key in the ready set, you need to get the key and look at the details. You can get all ready keys from the ready set as shown:

```
// Get the set of ready keys  
Set readySet = selector.selectedKeys();
```

Note that you register a key for one or more operations. You need to look at the key details for its readiness for a particular operation. If a key is ready for accepting a new connection request, its `isAcceptable()` method will return `true`. If a key is ready for a connection operation, its `isConnectable()` method will return `true`. If a key is ready for read and write operations, its `isReadable()` and `isWritable()` methods will return `true`. You may observe that there is a method to check for the readiness for each operation type. When you are processing a ready set, you will also need to remove the key from the ready set. Here is some typical code that processes the ready set in a server application. An infinite loop is typical on a server application because you need to keep looking for the next ready set once you are done with the current ready set.

```
while(true) {
```

```
        // Get count of keys in the ready set. If ready
key count is
        // greater than zero, process each key in the
ready set.
}
```

The following snippet of code shows the typical logic that you can use to process all keys in a ready set:

```
SelectionKey key = null;
Iterator iterator = readySet.iterator();

while (iterator.hasNext()) {
    // Get the next ready selection key object
    key = (SelectionKey) iterator.next();

    // Remove the key from ready set
    iterator.remove();

    // Process the key according to the operation
    if (key.isAcceptable()) {
        // Process new connection
    }

    if (key.isReadable()) {
        // Read from the channel
    }

    if (key.isWritable()) {
        // Write to the channel
    }
}
```

How do you accept a connection request from a remote client on a server socket channel? The logic is similar to accepting a remote connection request using a `ServerSocket` object. A `SelectionKey` object has a reference to the `ServerSocketChannel` that registered it. You can get to the `ServerSocketChannel` object of a `SelectionKey` object using its `channel()` method. You need to call the `accept()` method on the `ServerSocketChannel` object to accept a new connection request. The

`accept()` method returns an object of the `SocketChannel` class that is used to communicate (read and write) with a remote client. You need to configure the new `SocketChannel` object to be a non-blocking socket channel. The most important point that you need to understand is that the new `SocketChannel` object must register itself for read, write, or both operations with the selector to start reading/writing data on the connection channel. The following snippet of code shows the logic to accept a remote connection request:

```
ServerSocketChannel ssChannel  
= (ServerSocketChannel)key.channel();  
SocketChannel sChannel  
= (SocketChannel)ssChannel.accept();  
sChannel.configureBlocking(false);  
  
// Register only for read. Your message is small and  
you write it back  
// to the client as soon as you read it.  
sChannel.register(key.selector(),  
SelectionKey.OP_READ);
```

If you wish to register the socket channel with a selector for a read and a write, you can do so as shown:

```
// Register for read and write  
sChannel.register(key.selector(), SelectionKey.OP_READ  
| SelectionKey.OP_WRITE);
```

Once your socket channel is registered with the selector, it will be notified through the selector's ready set when it receives any data from the remote client or when you can write data to the remote client on its channel.

If data becomes available on a socket channel, the `key.isReadable()` will return `true` for this socket channel. A typical read operation looks as follows. You must have a basic understanding of Java NIO (New Input/Output) to read data using channels and buffers.

```
SocketChannel sChannel = (SocketChannel)  
key.channel();  
ByteBuffer buffer = ByteBuffer.allocate(1024);  
int bytesCount = sChannel.read(buffer);  
String msg = "";
```

```

if (bytesCount > 0) {
    buffer.flip();
    Charset charset = Charset.forName("UTF-8");
    CharsetDecoder decoder = charset.newDecoder();
    CharBuffer charBuffer = decoder.decode(buffer);
    msg = charBuffer.toString();
    System.out.println("Received Message: " + msg);
}

```

If you can write to a channel, the selector will place the associated key in its ready set whose `isWritable()` method will return `true`. Again, you need to understand Java NIO to use the `ByteBuffer` object to write data on a channel.

```

SocketChannel sChannel = (SocketChannel)key.channel();
String msg = "message to be sent to remote client goes here";
ByteBuffer buffer = ByteBuffer.wrap(msg.getBytes());
sChannel.write(buffer);

```

What happens on a client side is easy to understand. You start with getting a selector object, and you get a `SocketChannel` object by calling the `SocketChannel.open()` method. At this point, you need to configure the socket channel to be non-blocking before you connect to the server. Now you are ready to register your socket channel with the selector. Typically, you register with the selector for connect, read, and write operations. Processing the ready set of the selector is done the same way you processed the ready set of the selector in the server application. The code for reading and writing to the channel is similar to the server side code. The following snippet of code shows the typical logic used in a client application:

```

InetAddress serverIPAddress
= InetAddress.getByName("localhost");
int port = 19000;
InetSocketAddress serverAddress = new
InetSocketAddress(serverIPAddress, port);

// Get a selector
Selector selector = Selector.open();

```

```

// Create and configure a client socket channel
SocketChannel channel = SocketChannel.open();
channel.configureBlocking(false);

// Connect to the server
channel.connect(serverAddress);

// Register the channel for connect, read and write
operations
int operations = SelectionKey.OP_CONNECT
| SelectionKey.OP_READ | SelectionKey.OP_WRITE;
channel.register(selector, operations);

// Process the ready set of the selector here

```

When you get a connect operation on a client side `SocketChannel`, it may mean either a successful or failed connection. You can call the `finishConnect()` method on the `SocketChannel` object to finish the connection process. If the connection has failed, the `finishConnect()` call will throw an `IOException`. Typically, you handle a connect operation as follows:

```

if (key.isConnectable()) {
    try {
        // Call to finishConnect() is in a loop
        // as it is non-blocking
        // for your channel
        while(channel.isConnectionPending()) {
            channel.finishConnect();
        }
    }
    catch (IOException e) {
        // Cancel the channel's registration with
        // the selector
        key.cancel();
        e.printStackTrace();
    }
}

```

It is time to build an echo client application and an echo server application

using these channels. [Listing 5-14](#) and [Listing 5-15](#) contain the complete code for a non-blocking socket channel for an echo server and an echo client, respectively.

Listing 5-14. A Non-Blocking Socket Channel Echo Server Program

```
// NonBlockingEchoServer.java
package com.jdojo.net;

import java.io.IOException;
import java.net.InetAddress;
import java.net.InetSocketAddress;
import java.nio.ByteBuffer;
import java.nio.CharBuffer;
import java.nio.channels.SelectionKey;
import java.nio.channels.Selector;
import java.nio.channels.ServerSocketChannel;
import java.nio.channels.SocketChannel;
import java.nio.charset.Charset;
import java.nio.charset.CharsetDecoder;
import java.util.Iterator;
import java.util.Set;

public class NonBlockingEchoServer {
    public static void main(String[] args) throws
Exception {
        InetAddress hostIPAddress
= InetAddress.getByName("localhost");
        int port = 19000;

        // Get a selector
        Selector selector = Selector.open();

        // Get a server socket channel
        ServerSocketChannel ssChannel
= ServerSocketChannel.open();

        // Make the server socket channel non-
        // blocking and bind it to an address
        ssChannel.configureBlocking(false);
```

```

        ssChannel.socket().bind(new
InetSocketAddress(hostIPAddress, port));

        // Register a socket server channel with
the selector for accept operation,
        // so that it can be notified when a new
connection request arrives
        ssChannel.register(selector,
SelectionKey.OP_ACCEPT);

        // Now we will keep waiting in a loop for
any kind of request
        // that arrives to the server
- connection, read, or write
        // request. If a connection request comes
in, we will accept
        // the request and register a new socket
channel with the selector
        // for read and write operations. If read
or write requests come
        // in, we will forward that request to
the registered channel.
        while (true) {
            if (selector.select() <= 0) {
                continue;
            }
            processReadySet(selector.selectedKe
}
}

public static void processReadySet(Set
readySet) throws Exception {
    SelectionKey key = null;
    Iterator iterator = null;
    iterator = readySet.iterator();
    while (iterator.hasNext()) {
        // Get the next ready selection
key object
        key = (SelectionKey)

```

```

iterator.next();

                // Remove the key from the ready
key set
                iterator.remove();

                // Process the key according to
the operation it is ready for
                if (key.isAcceptable()) {
                    processAccept(key);
                }

                if (key.isReadable()) {
                    String msg
= processRead(key);
                    if (msg.length() > 0) {
                        echoMsg(key, msg);
                    }
                }
            }

public static void processAccept(SelectionKey
key) throws IOException {
    // This method call indicates that we got
a new connection
    // request. Accept the connection request
and register the new
    // socket channel with the selector, so
that client can
    // communicate on a new channel
    ServerSocketChannel ssChannel
= (ServerSocketChannel)key.channel();
    SocketChannel sChannel = (SocketChannel)
ssChannel.accept();
    sChannel.configureBlocking(false);

    // Register only for read. Our message is
small and we write it
    // back to the client as soon as we read

```

```
it
        sChannel.register(key.selector(),
SelectionKey.OP_READ);
    }

    public static String processRead(SelectionKey
key) throws Exception {
        SocketChannel sChannel = (SocketChannel)
key.channel();
        ByteBuffer buffer
= ByteBuffer.allocate(1024);
        int bytesCount = sChannel.read(buffer);
        String msg = "";
        if (bytesCount > 0) {
            buffer.flip();
            Charset charset
= Charset.forName("UTF-8");
            CharsetDecoder decoder
= charset.newDecoder();
            CharBuffer charBuffer
= decoder.decode(buffer);
            msg = charBuffer.toString();
            System.out.println("Received
Message: " + msg);
        }
        return msg;
    }

    public static void echoMsg(SelectionKey key,
String msg) throws IOException {
        SocketChannel sChannel = (SocketChannel)
key.channel();
        ByteBuffer buffer
= ByteBuffer.wrap(msg.getBytes());
        sChannel.write(buffer);
    }
}
```

Listing 5-15. A Non-Blocking Socket Channel Echo Client Program

```
// NonBlockingEchoClient.java
package com.jdojo.net;

import java.io.BufferedReader;
import java.io.IOException;
import java.io.InputStreamReader;
import java.net.InetAddress;
import java.net.InetSocketAddress;
import java.nio.ByteBuffer;
import java.nio.CharBuffer;
import java.nio.channels.SelectionKey;
import java.nio.channels.Selector;
import java.nio.channels.SocketChannel;
import java.nio.charset.Charset;
import java.nio.charset.CharsetDecoder;
import java.util.Iterator;
import java.util.Set;

public class NonBlockingEchoClient {
    private static BufferedReader userInputReader
= null;

    public static void main(String[] args) throws
Exception {
        InetAddress serverIPAddress
= InetAddress.getByName("localhost");
        int port = 19000;
        InetSocketAddress serverAddress = new
InetSocketAddress(serverIPAddress, port);

        // Get a selector
        Selector selector = Selector.open();

        // Create and configure a client socket
channel
        SocketChannel channel
= SocketChannel.open();
        channel.configureBlocking(false);
```

```

        channel.connect(serverAddress);

        // Register the channel for connect, read
and write operations
        int operations =
                SelectionKey.OP_CONNECT
| SelectionKey.OP_READ | SelectionKey.OP_WRITE;
        channel.register(selector, operations);

        userInputElement = new BufferedReader(new
InputStreamReader(System.in));
        while (true) {
            if (selector.select() > 0) {
                boolean doneStatus
= processReadySet(selector.selectedKeys());
                if (doneStatus) {
                    break;
                }
            }
        }

        channel.close();
    }

    public static boolean processReadySet(Set
readySet) throws Exception {
        SelectionKey key = null;
        Iterator iterator = null;
        iterator = readySet.iterator();
        while (iterator.hasNext()) {
            // Get the next ready selection
key object
            key = (SelectionKey)
iterator.next();

            // Remove the key from the ready
key set
            iterator.remove();

            if (key.isConnectable()) {

```

```

        boolean connected
= processConnect(key);
        if (!connected) {
            return true; // Exit
        }
    }

    if (key.isReadable()) {
        String msg
= processRead(key);
        System.out.println([
[Server]: " + msg);
    }

    if (key.isWritable()) {
        String msg = getUserInput();
        if
(msg.equalsIgnoreCase("bye")) {
            return true; // Exit
        }
        processWrite(key, msg);
    }

}

return false; // Not done yet
}

public static boolean
processConnect(SelectionKey key) {
    SocketChannel channel = (SocketChannel)
key.channel();

    try {
        // Call the finishConnect() in
a loop as it is non-blocking
        // for your channel
        while
(channel.isConnectionPending()) {
            channel.finishConnect();
    }
}

```

```
        }
    }
    catch (IOException e) {
        // Cancel the channel's
registration with the selector
        key.cancel();
        e.printStackTrace();
        return false;
    }

    return true;
}

public static String processRead(SelectionKey
key) throws Exception {
    SocketChannel sChannel = (SocketChannel)
key.channel();
    ByteBuffer buffer
= ByteBuffer.allocate(1024);
    sChannel.read(buffer);
    buffer.flip();
    Charset charset = Charset.forName("UTF-
8");
    CharsetDecoder decoder
= charset.newDecoder();
    CharBuffer charBuffer
= decoder.decode(buffer);
    String msg = charBuffer.toString();
    return msg;
}

public static void processWrite(SelectionKey
key, String msg) throws IOException {
    SocketChannel sChannel = (SocketChannel)
key.channel();
    ByteBuffer buffer
= ByteBuffer.wrap(msg.getBytes());
    sChannel.write(buffer);
}
```

```

        public static String getUserInput() throws
IOException {
    String promptMsg = "Please enter
a message (Bye to quit): ";
    System.out.print(promptMsg);
    String userMsg
= userInputReader.readLine();
    return userMsg;
}
}

```

You need to run the NonBlockingEchoServer class first, and then one or more instances of the NonBlockingEchoClient class. They work similar to your other two echo client-server programs. Note that, this time, you may not see the messages from the server just after you enter a message in the client application. The client application sends a message to the server and it does not wait for the message to be echoed back. Rather, it processes the server message when the socket channel receives the notification from the selector. Therefore, it is possible to get the two messages echoed back from the server at one time. Exception handling has been left out in these examples to keep the code simple and readable.

Socket Security Permissions

You can control the access for a Java program to use sockets using an instance of the `java.net.SocketPermission` class. The generic format used to grant a socket permission in a Java policy file is as follows:

```

grant {
    permission java.net.SocketPermission "target",
"actions";
};

```

The target is of the form `<host name>:<port range>`. The possible values of actions are `accept`, `connect`, `listen`, and `resolve`.

The `listen` action is meaningful only when “localhost” is used as the host name. The `resolve` action refers to DNS lookup and it is implied if any of the

other three actions is present.

A host name could be either a DNS name or an IP address. You can use an asterisk (*) as a wildcard character in the DNS host name. If an asterisk is used, it must be used as the leftmost character in the DNS name. If the host name consists only of an asterisk, it refers to any host. The “localhost” for the host name refers to the local machine. You can indicate the port range for the host name in different formats as described below. Here N1 and N2 indicate port numbers (0 to 65535) and it is assumed that N1 is less than N2. [Table 5-8](#) lists the format used for indicating the port range.

Table 5-8. The <port range> Format for
java.net.SocketPermission Security Settings

Port Range Value	Description
N1	Only one port number—N1
N1–N2	Port numbers from N1 to N2
N1–	Port numbers from N1 and greater
–N1	Port numbers from N1 and less

The following are examples of using a `java.net.SocketPermission` in a Java policy file:

```
// Grant to all codebase
grant {
    // Permission to connect with 192.168.10.123 at
    port 5000
    permission java.net.SocketPermission
    "192.168.10.123:5000", "connect";

    // Connect permission to any host at port 80
    permission java.net.SocketPermission "*:80",
    "connect";

    // All socket permissions to on port >=1024 on
    the localhost
    permission java.net.SocketPermission
    "localhost:1024-", "listen, accept, connect";
};
```

Asynchronous Socket Channels

Java 7 added support for asynchronous socket operations such as connect, read, and write. The asynchronous socket operations are performed using the following two socket channel classes:

- `java.nio.channels.AsynchronousServerSocketChannel`
- `java.nio.channels.AsynchronousSocketChannel`

An `AsynchronousServerSocketChannel` serves as a server socket that listens for new incoming client connections. Once it accepts a new client connection, the interaction between the client and the server is handled by an `AsynchronousSocketChannel` at both ends. Asynchronous socket channels are set up very similar to the synchronous sockets. The main difference between the two setups is that the request for an asynchronous socket operation returns immediately and the requestor is notified when the operation is completed, whereas in a synchronous socket operation the request for a socket operation blocks until it is complete. Because of the asynchronous nature of the operations with the asynchronous socket channels, the code to handle the completion or failure of a socket operation is a bit complex.

In an asynchronous socket channel, you request an operation using one of the methods of the asynchronous socket channel classes. The method returns immediately. You receive a notification about the completion or failure of the operation later. The methods that allow you to request asynchronous operations are overloaded. One version returns a `Future` object that lets you check the status of the requested operation. For details on using a `Future` object, please refer to [Chapter 6](#) in the book *Beginning Java Language Features* (ISBN: 978-1-4302-6658-7). Another version of those methods lets you pass a `CompletionHandler`. When the requested operation completes successfully, the `completed()` method of the `CompletionHandler` is called. When the requested operation fails, the `failed()` method of the `CompletionHandler` is called. The following snippet of code demonstrates both approaches of handling the completion/failure of a requested asynchronous socket operation. It shows how a server socket channel accepts a client connection asynchronously.

```
/* Using a Future Object */
```

```
// Get a server socket channel instance
AsynchronousServerSocketChannel server = get a server
instance...;

// Bind the socket to a host and a port
server.bind(your_host, your_port);

// Start accepting a new client connection. Note that
the accept()
// method returns immediately by returning a Future
object
Future<AsynchronousSocketChannel> result
= server.accept();

// Wait for the new client connection by calling the
get() method of
// the Future object. Alternatively, you can poll the
Future object
// periodically using its isDone() method
AsynchronousSocketChannel newClient = result.get();

// Handle the newClient here and call the
server.accept() again to accept
// another client connection

/* Using a CompletionHandler Object */
// Get a server socket channel instance
AsynchronousServerSocketChannel server = get a server
instance...;

// Bind the socket to a host and a port
server.bind(your_host, your_port);

// Start accepting a new client connection. The
accept() method returns
// immediately. The completed() or failed() method of
the ConnectionHandler
// will be called upon completion or failure of the
requested operation
YourAnyClass attach = ...; // Get an attachment
```

```
server.accept(attach, new ConnectionHandler());
```

The above version of the `accept()` method accepts an object of any class as an attachment. It could be a null reference. The attachment is passed to the `completed()` and `failed()` methods of the completion handler, which is an object of `ConnectionHandler` in this case. The `ConnectionHandler` class may look as follows.

```
private static class ConnectionHandler implements CompletionHandler<AsynchronousSocketChannel, YourAnyClass> {
    @Override
    public void completed(AsynchronousSocketChannel client, YourAnyClass attach) {
        // Handle the new client connection here
        and again start
        // accepting a new client connection
    }

    @Override
    public void failed(Throwable e, YourAnyClass attach) {
        // Handle the failure here
    }
}
```

In this section, I will cover the following three steps in detail. During the discussion, I will build an application that consists of an echo server and a client. Clients will send messages to the server asynchronously and the server will echo back the message to the client asynchronously. It is assumed that you are familiar working with buffers and channels.

- Setting up an asynchronous server socket channel
- Setting up an asynchronous client socket channel
- Putting the asynchronous server and client socket channels in action

Setting Up an Asynchronous Server Socket

Channel

An instance of the `AsynchronousServerSocketChannel` class is used as an asynchronous server socket channel to listen to the new incoming client connections. Once a connection to a client is established, an instance of the `AsynchronousSocketChannel` class is used to communicate with the client. The static `open()` method of the

`AsynchronousServerSocketChannel` class returns an object of the `AsynchronousServerSocketChannel` class, which is not yet bound.

```
// Create an asynchronous server socket channel object
AsynchronousServerSocketChannel server
= AsynchronousServerSocketChannel.open();

// Bind the server to the localhost and the port 8989
String host = "localhost";
int port = 8989;
InetSocketAddress sAddr = new InetSocketAddress(host,
port);
server.bind(sAddr);
```

At this point, your server socket channel can be used to accept a new client connection by calling its `accept()` method as follows. The code uses two classes, `Attachment` and `ConnectionHandler`, which are described later.

```
// Prepare the attachment
Attachment attach = new Attachment();
attach.server = server;

// Accept new connections
server.accept(attach, new ConnectionHandler());
```

Typically, a server application runs indefinitely. You can make the server application run forever by waiting on the main thread in the `main()` method as follows:

```
try {
    // Wait indefinitely until someone interrupts
    the main thread
```

```
        Thread.currentThread().join();
    }
catch (InterruptedException e) {
    e.printStackTrace();
}
```

You will use the completion handler mechanism to handle the completion/failure notification for the server socket channel. An object of the following Attachment class will be used to serve as an attachment to the completion handler. An attachment object is used to pass the context for the server socket that may be used inside the completed() and failed() methods of the completion handler.

```
class Attachment {
    AsynchronousServerSocketChannel server;
    AsynchronousSocketChannel client;
    ByteBuffer buffer;
    SocketAddress clientAddr;
    boolean isRead;
}
```

You need a CompletionHandler implementation to handle the completion of an accept() call. Let's call your class as ConnectionHandler as shown:

```
private static class ConnectionHandler implements
CompletionHandler<AsynchronousSocketChannel,
Attachment> {
    @Override
    public void completed(AsynchronousSocketChannel
client, Attachment attach) {
        try {
            // Get the client address
            SocketAddress clientAddr
= client.getRemoteAddress();

            System.out.format("Accepted
a connection from %s%n", clientAddr);

            // Accept another connection
        }
```

```

        attach.server.accept(attach,
this);

        // Handle the client connection by
invoking an asyn read
        Attachment newAttach = new
Attachment();
        newAttach.server = attach.server;
        newAttach.client = client;
        newAttach.buffer
= ByteBuffer.allocate(2048);
        newAttach.isRead = true;
        newAttach.clientAddr = clientAddr;

        // Create a new completion handler
for reading to and writing
        // from the new client
        ReadWriteHandler readWriteHandler
= new ReadWriteHandler();

        // Read from the client
        client.read(newAttach.buffer,
newAttach, readWriteHandler);
    }
    catch (IOException e) {
        e.printStackTrace();
    }

}

@Override
public void failed(Throwable e, Attachment
attach) {
    System.out.println("Failed to accept
a connection.");
    e.printStackTrace();
}
}

```

The ConnectionHandler class is simple. In its failed() method, it

prints the exception stack trace. In its `completed()` method, it prints a message that a new client connection has been established and starts listening for another new client connection by calling the `accept()` method on the server socket again. Note the reuse of the attachment in another `accept()` method call inside the `completed()` method. It uses the same `CompletionHandler` object again. Note that the `attach.server.accept(attach, this)` method call uses the keyword `this` to refer to the same instance of the completion handler. At the end, it prepares a new instance of the `Attachment` class, which wraps the details of handling (reading and writing) the new client connection, and calls the `read()` method on the client socket to read from the client. Note that the `read()` method uses another completion handler, which is an instance of the `ReadWriteHandler` class. The code for the `ReadWriteHandler` is as follows:

```
private static class ReadWriteHandler implements CompletionHandler<Integer, Attachment> {
    @Override
    public void completed(Integer result,
Attachment attach) {
        if (result == -1) {
            try {
                attach.client.close();
                System.out.format("Stopped
listening to the client %s%n",
                                  attach.clientA
            }
            catch (IOException ex) {
                ex.printStackTrace();
            }
            return;
        }

        if (attach.isRead) {
            // A read to the client was
completed

            // Get the buffer ready to read
        }
    }
}
```

```
from it
        attach.buffer.flip();

        int limits
= attach.buffer.limit();
        byte bytes[] = new byte[limits];
attach.buffer.get(bytes, 0,
limits);
        Charset cs = Charset.forName("UTF-
8");
        String msg = new String(bytes,
cs);

        // Print the message from the
client
        System.out.format("Client at %s
says: %s%n", attach.clientAddr, msg);

        // Let us echo back the same
message to the client
        attach.isRead = false; // It is
a write

        // Prepare the buffer to be read
again
        attach.buffer.rewind();

        // Write to the client again
attach.client.write(attach.buffer,
attach, this);
    }
    else {
        // A write to the client was
completed.
        // Perform another read from the
client
        attach.isRead = true;

        // Prepare the buffer to be filled
in
```

```

        attach.buffer.clear();

        // Perform a read from the client
        attach.client.read(attach.buffer,
attach, this);
    }
}

@Override
public void failed(Throwable e, Attachment
attach) {
    e.printStackTrace();
}
}

```

The first argument called `result` of the `completed()` method is the number of bytes that is read from or written to the client. Its value of -1 indicates the end-of-stream, and in that case, the client socket is closed. If a read operation was completed, it displays the read text on the standard output and writes back the same text to the client. If a write operation to a client was completed, it performs a read on the same client.

[Listing 5-16](#) contains the complete code for your asynchronous server socket channel. It uses three inner classes: one for the attachment, one for the connection completion handler, and one for the read/write completion handler. The `AsyncEchoServerSocket` class can be run now. However, it will not do any work as it needs a client to connect to it to echo back messages that are sent from the client. You will develop your asynchronous client socket channel in the next section, and then, in the subsequent section, you will test both server and client socket channels together.

[Listing 5-16](#). A Server Application That Uses Asynchronous Server Socket Channel

```

// AsyncEchoServerSocket.java
package com.jdojo.net;

import java.io.IOException;
import java.net.SocketAddress;
import java.nio.ByteBuffer;

```

```
import java.nio.charset.Charset;
import java.net.InetSocketAddress;
import java.nio.channels.CompletionHandler;
import java.nio.channels.AsynchronousSocketChannel;
import
java.nio.channels.AsynchronousServerSocketChannel;

public class AsyncEchoServerSocket {
    private static class Attachment {
        AsynchronousServerSocketChannel server;
        AsynchronousSocketChannel client;
        ByteBuffer buffer;
        SocketAddress clientAddr;
        boolean isRead;
    }

    private static class ConnectionHandler
implements
        CompletionHandler<AsynchronousSocke
Attachment> {
        @Override
        public void
completed(AsynchronousSocketChannel client, Attachment
attach) {
            try {
                // Get the client address
                SocketAddress clientAddr
= client.getRemoteAddress();
                System.out.format("Accepted
a connection from %s%n",
                    clientAddr);

                // Accept another connection
                attach.server.accept(attach,
this);

                // Handle the client
                connection by using an asyn read
                ReadWriteHandler rwHandler
= new ReadWriteHandler();
```

```
        Attachment newAttach = new
Attachment();
        newAttach.server
= attach.server;
        newAttach.client = client;
        newAttach.buffer
= ByteBuffer.allocate(2048);
        newAttach.isRead = true;
        newAttach.clientAddr
= clientAddr;
        client.read(newAttach.buffer,
newAttach, rwHandler);
    }
    catch (IOException e) {
        e.printStackTrace();
    }
}

@Override
public void failed(Throwable e,
Attachment attach) {
    System.out.println("Failed to
accept a connection.");
    e.printStackTrace();
}
}

private static class ReadWriteHandler
    implements CompletionHandler<Integer,
Attachment> {
    @Override
    public void completed(Integer result,
Attachment attach) {
        if (result == -1) {
            try {
                attach.client.close();
                System.out.format(
                    "Stopped

```

```
listening to the client %s%n",
attach.clientAddr);
}
catch (IOException ex) {
    ex.printStackTrace();
}
return;
}

if (attach.isRead) {
    // A read to the client was
completed

    // Get the buffer ready to
read from it
    attach.buffer.flip();

    int limits
= attach.buffer.limit();
    byte bytes[] = new
byte[limits];
    attach.buffer.get(bytes, 0,
limits);

    Charset cs
= Charset.forName("UTF-8");
    String msg = new
String(bytes, cs);

    // Print the message from
the client
    System.out.format("Client at
%s says: %s%n",
msg);

    // Let us echo back the same
message to the client
    attach.isRead = false; // It
is a write
```

```
        // Prepare the buffer to be
read again
        attach.buffer.rewind();

        // Write to the client
        attach.client.write(attach.bu
attach, this);
    }
    else {
        // A write to the client was
completed. Perform
        // another read from the
client
        attach.isRead = true;

        // Prepare the buffer to be
filled in
        attach.buffer.clear();

        // Perform a read from the
client
        attach.client.read(attach.bu
attach, this);
    }
}

@Override
public void failed(Throwable e,
Attachment attach) {
    e.printStackTrace();
}
}

public static void main(String[] args) {
    try (AsynchronousServerSocketChannel
server =
        AsynchronousServerSocketChannel.o
{
    // Bind the server to the
```

```

localhost and the port 8989
        String host = "localhost";
        int port = 8989;
        InetSocketAddress sAddr =
            new InetSocketAddress(host,
port);
        server.bind(sAddr);

        // Display a message that server
is ready
        System.out.format("Server is
listening at %s%n", sAddr);

        // Prepare the attachment
Attachment attach = new
Attachment();
        attach.server = server;

        // Accept new connections
server.accept(attach, new
ConnectionHandler()));

        try {
            // Wait until the main
thread is interrupted
                Thread.currentThread().join()
}
        catch (InterruptedException e) {
            e.printStackTrace();
}
        catch (IOException e) {
            e.printStackTrace();
}
    }
}

```

Setting up an Asynchronous Client Socket

Channel

An instance of the `AsynchronousSocketChannel` class is used as an asynchronous client socket channel in a client application. The static `open()` method of the `AsynchronousSocketChannel` class returns an open channel of the `AsynchronousSocketChannel` type that is not yet connected to a server socket channel. The channel's `connect()` method is used to connect to a server socket channel. The following snippet of code shows how to create an asynchronous client socket channel and connect it to a server socket channel. It uses a `Future` object to handle the completion of the connection to the server.

```
// Create an asynchronous socket channel
AsynchronousSocketChannel channel
= AsynchronousSocketChannel.open();

// Connect the channel to the server
String serverName = "localhost";
int serverPort = 8989;
SocketAddress serverAddr = new
InetSocketAddress(serverName, serverPort);
Future<Void> result = channel.connect(serverAddr);
System.out.println("Connecting to the server...");

// Wait for the connection to complete
result.get();

// Connection to the server is complete now
System.out.println("Connected to the server...");
```

Once the client socket channel is connected to a server, you can start reading from the server and writing to the server using the channel's `read()` and `write()` methods asynchronously. Both methods let you handle the completion of the operation using a `Future` object or a `CompletionHandler` object. You will use an `Attachment` class as shown to pass the context to the completion handler:

```
class Attachment {
    AsynchronousSocketChannel channel;
```

```

        ByteBuffer buffer;
        Thread mainThread;
        boolean isRead;
    }
}

```

In the Attachment class, the channel instance variable holds the reference to the client channel. The buffer instance variable holds the reference to the data buffer. You will use the same data buffer for reading and writing. The mainThread instance variable holds the reference to the main thread of the application. When the client channel is done, you can interrupt the waiting main thread, so the client application terminates. The isRead instance variable indicates if the operation is a read or a write. If it is true, it means it is a read operation. Otherwise, it is a write operation.

[Listing 5-17](#) contains the complete code for an asynchronous client socket channel. It uses two inner classes called Attachment and ReadWriteHandler. An instance of the Attachment class is used as an attachment to the read() and write() asynchronous operations. An instance of the ReadWriteHandler class is used as a completion handler for the read() and write() operations. Its getTextFromUser() method prompts the user to enter a message on the standard input and returns the user-entered message. The completed() method of the completion handler checks if it is a read or a write operation. If it is a read operation, it prints the text that was read from the server on the standard output. It prompts the user for another message. If the user enters Bye, it terminates the application by interrupting the waiting main thread. Note that the channel is closed automatically when the program exits the try block because it is opened inside a try-with-resources block in the main() method.

[Listing 5-17.](#) An Asynchronous Client Socket Channel

```

// AsyncEchoClientSocket.java
package com.jdojo.net;

import java.io.BufferedReader;
import java.io.IOException;
import java.io.InputStreamReader;
import java.net.InetSocketAddress;
import java.net.SocketAddress;

```

```
import java.nio.ByteBuffer;
import java.nio.charset.Charset;
import java.util.concurrent.Future;
import java.nio.channels.CompletionHandler;
import java.util.concurrent.ExecutionException;
import java.nio.channels.AsynchronousSocketChannel;

public class AsyncEchoClientSocket {
    private static class Attachment {
        AsynchronousSocketChannel channel;
        ByteBuffer buffer;
        Thread mainThread;
        boolean isRead;
    }

    private static class ReadWriteHandler
        implements CompletionHandler<Integer,
Attachment> {

        @Override
        public void completed(Integer result,
Attachment attach) {
            if (attach.isRead) {
                attach.buffer.flip();

                // Get the text read from
the server
                Charset cs
= Charset.forName("UTF-8");

                int limits
= attach.buffer.limit();
                byte bytes[] = new
byte[limits];
                attach.buffer.get(bytes, 0,
limits);
                String msg = new
String(bytes, cs);

                // A read from the server
            }
        }
    }
}
```

```
was completed
                    System.out.format("Server
Responded: %s%n", msg);

                                // Prompt the user for
another message
                                msg
= this.getTextFromUser();
                                if
(msg.equalsIgnoreCase("bye")) {
                                // Interrupt the main
thread, so the program terminates
                                attach.mainThread.inte
return;
}
                                // Prepare buffer to be
filled in again
                                attach.buffer.clear();
byte[] data
= msg.getBytes(cs);
                                attach.buffer.put(data);

                                // Prepared buffer to be
read
                                attach.buffer.flip();

                                attach.isRead = false; // It
is a write

                                // Write to the server
attach.channel.write(attach.k
attach, this);
}
else {
                                // A write to the server was
completed. Perform another
                                // read from the server
attach.isRead = true;
```

```
        // Prepare the buffer to be
filled in
        attach.buffer.clear();

        // Read from the server
        attach.channel.read(attach.buffer,
attach, this);
    }
}

@Override
public void failed(Throwable e,
Attachment attach) {
    e.printStackTrace();
}

private String getTextFromUser() {
    System.out.print("Please enter
a message (Bye to quit):");
    String msg = null;

    BufferedReader consoleReader =
        new BufferedReader(new
InputStreamReader(System.in)));
    try {
        msg
= consoleReader.readLine();
    }
    catch (IOException e) {
        e.printStackTrace();
    }

    return msg;
}
}

public static void main(String[] args) {
    // Use a try-with-resources to open
a channel
    try (AsynchronousSocketChannel channel
```

```
=  
AsynchronousSocketChannel.open() ) {  
    // Connect the client to the  
server  
    String serverName = "localhost";  
    int serverPort = 8989;  
    SocketAddress serverAddr =  
        new  
InetSocketAddress(serverName, serverPort);  
  
    Future<Void> result  
= channel.connect(serverAddr);  
    System.out.println("Connecting to  
the server...");  
  
    // Wait for the connection to  
complete  
    result.get();  
  
    // Connection to the server is  
complete now  
    System.out.println("Connected to  
the server...");  
  
    // Start reading from and writing  
to the server  
    Attachment attach = new  
Attachment();  
    attach.channel = channel;  
    attach.buffer  
= ByteBuffer.allocate(2048);  
    attach.isRead = false;  
    attach.mainThread  
= Thread.currentThread();  
  
    // Place the "Hello" message in  
the buffer  
    Charset cs = Charset.forName("UTF-  
8");  
    String msg = "Hello";
```

```
        byte[] data = msg.getBytes(cs);
        attach.buffer.put(data);
        attach.buffer.flip();

        // Write to the server
        ReadWriteHandler readWriteHandler
= new ReadWriteHandler();
            channel.write(attach.buffer,
attach, readWriteHandler) ;

        // Let this thread wait for ever
on its own death until interrupted
        attach.mainThread.join();
    }
    catch (ExecutionException | IOException
e) {
        e.printStackTrace();
    }
    catch(InterruptedException e) {
        System.out.println("Disconnected
from the server.");
    }
}
```

Putting the Server and the Client Together

At this point, your asynchronous server and client programs are ready. You need to use the following steps to run the server and the client.

Running the Server Application

Run the `AsyncEchoServerSocket` class as listed in [Listing 5-16](#). You should get a message on the standard output as follows:

```
Server is listening at localhost/127.0.0.1:8989
```

If you get the above message, you need to proceed to the next step. If you do not get the above message, it is most likely that the port 8989 is being used by another process. In such a case, you should get the following error message:

```
java.net.BindException: Address already in use: bind
```

If you get “Address already in use” error message, you need to change the port value in the `AsyncEchoServerSocket` class from 8989 to some other value and retry running the `AsyncEchoServerSocket` class. If you change the port number in the server program, you must also change the port number in the client program to match the server port number. The server socket channel listens at a port and the client must connect to the same port on which the server is listening.

Running the Client Applications

Before proceeding with this step, make sure that you were able to perform the previous step successfully. Run one or more instances of the `AsyncEchoClientSocket` class that is listed in [Listing 5-17](#). You should get the following message on the standard output if the client application was able to connect to the server successfully:

```
Connecting to the server...
Connected to the server...
```

```
Server Responded: Hello  
Please enter a message (Bye to quit):
```

You might receive the following error message when you attempt to run the `AsyncEchoClientSocket` class:

```
Connecting to the server...  
java.util.concurrent.ExecutionException:  
java.io.IOException: The remote system refused the  
network connection.
```

Typically, this error message indicates one of the following problems:

- The server is not running. If this is the case, make sure that server is running.
- The client is attempting to connect to the server on a different host and port than the host and the port on which the server is listening. If this is the case, make sure that the server and the client are using the same host names (or IP addresses) and the port numbers.

You will need to stop the server program manually such as by pressing `Ctrl + C` keys on the command prompt on Windows.

Datagram-Oriented Socket Channels

An instance of the `java.nio.channels.DatagramChannel` class represents a datagram channel. By default, it is blocking. You can configure it to be non-blocking by using the `configureBlocking(false)` method.

To create a `DatagramChannel`, you need to invoke one of its `open()` static methods. If you want to use it for IP multicasting, you need to specify the address type (or protocol family) of the multicast group as an argument to its `open()` method. The `open()` method creates a `DatagramChannel` object, which is not connected. If you want your datagram channel to send and receive datagrams only to a specific remote host, you need to use its `connect()` method to connect the channel to that specific host. A datagram channel that is not connected may send datagrams to and receive datagrams from any remote

host. The following sections outline the steps that are typically needed to send/receive datagrams using a datagram channel.

Creating the Datagram Channel

You can create a datagram channel using the `open()` method of the `DatagramChannel` class. The following snippet of code shows three different ways to create a datagram channel:

```
// Create a new datagram channel to send/receive  
datagram  
DatagramChannel channel = DatagramChannel.open();  
  
// Create a datagram channel to receive datagrams from  
a multicast group  
// that uses IPv4 address type  
DatagramChannel ipv4MulticastChannel  
= DatagramChannel.open(StandardProtocolFamily.INET);  
  
// Create a datagram channel to receive datagrams from  
a multicast group  
// that uses IPv6 address type  
DatagramChannel iPV6MulticastChannel  
= DatagramChannel.open(StandardProtocolFamily.INET6);
```

Setting the Channel Options

You can set the channel options using the `setOption()` method of the `DatagramChannel` class. Some options must be set before binding the channel to a specific address, whereas some can be set after the binding. The `setOption()` method was added to the `DatagramChannel` class in Java 7. If you are using a prior Java version, you will need to use the `socket()` method to get the `DatagramSocket` reference and use one of the methods of the `DatagramSocket` class to set the channel options. The following snippet of code shows how to set the channel options. [Table 5-9](#) contains the list of socket options and their descriptions. The socket options are defined as constants in the `StandardSocketOptions` class.

```

// To bind multiple sockets to the same socket
address,
// you need to set the SO_REUSEADDR option for the
socket

// In Java 7 and later
channel.setOption(StandardSocketOptions.SO_REUSEADDR,
true)

// Prior to Java 7
DatagramSocket socket = channel.socket();
socket.setReuseAddress(true);

```

Table 5-9. The List of Standard Socket Options

Socket Option Name	Description
SO_SNDBUF	The size of the socket send buffer in bytes. Its value is of <code>Integer</code> type.
SO_RCVBUF	The size of the socket receive buffer in bytes. Its value is of <code>Integer</code> type.
SO_REUSEADDR	For datagram sockets, it allows multiple programs to bind to the same address. Its value is of <code>Boolean</code> type. This option should be enabled for IP multicasting using the datagram channels.
SO_BROADCAST	Allows transmission of broadcast datagrams. Its value is of type <code>Boolean</code> .
IP_TOS	The Type of Service (ToS) octet in the Internet Protocol (IP) header. Its value is of the <code>Integer</code> type.
IP_MULTICAST_IF	The network interface for Internet Protocol (IP) multicast datagrams. Its value is a reference of <code>NetworkInterface</code> type.
IP_MULTICAST_TTL	The time-to-live for Internet Protocol (IP) multicast datagrams. Its value is of type <code>Integer</code> in the range of 0 to 255.
IP_MULTICAST_LOOP	Loopback for Internet Protocol (IP) multicast datagrams. Its value is of type <code>Boolean</code> .

Binding the Datagram Channel

Bind the datagram channel to a specific local address and port using the `bind()` method of the `DatagramChannel` class. If you use `null` as the bind address, this method will bind the socket to an available address

automatically. The `bind()` method was added to the `DatagramChannel` class in Java 7. If you are using a prior Java version, you can bind a datagram channel using its underlying socket. The following snippet of code shows how to bind a datagram channel:

```
/* In Java 7 and later */
// Bind the channel to any available address
// automatically
channel.bind(null);

// Bind the channel to "localhost" and port 8989
InetSocketAddress sAddr = new
InetSocketAddress("localhost", 8989);
channel.bind(sAddr);

/* Prior to Java 7 */
// Get the socket reference
DatagramSocket socket = channel.socket();

// Bind the channel to any available address
// automatically
socket.bind(null);

// Bind the channel to "localhost" and port 8989
InetSocketAddress sAddr = new
InetSocketAddress("localhost", 8989);
socket.bind(sAddr);
```

Sending Datagrams

To send a datagram to a remote host, use the `send()` method of the `DatagramChannel` class. The method accepts a `ByteBuffer` and a remote `SocketAddress`. If you call the `send()` method on an unbound datagram channel, the `send()` method binds the channel automatically to an available address.

```
// Prepare a message to send
String msg = "Hello";
ByteBuffer buffer = ByteBuffer.wrap(msg.getBytes());
```

```
// Pack the remote address and port into an object  
InetSocketAddress serverAddress = new  
InetSocketAddress("localhost", 8989);  
  
// Send the message to the remote host  
channel.send(buffer, serverAddress);
```

The `receive()` method of the `DatagramChannel` class lets a datagram channel receive a datagram from a remote host. This method requires you to provide a `ByteBuffer` to receive the data. The received data is copied to the specified `ByteBuffer` at its current position. If the `ByteBuffer` has less space available than the received data, the extra data is discarded silently. The `receive()` method returns the address of the remote host. If the datagram channel is in a non-blocking mode, the `receive()` method returns immediately by returning `null`. Otherwise, it waits until it receives a datagram.

```
// Prepare a ByteBuffer to receive data  
ByteBuffer buffer = ByteBuffer.allocate(1024);  
  
// Wait to receive data from a remote host  
SocketAddress remoteAddress = channel.receive(buffer);
```

Close the Channel

Finally, close the datagram channel using its `close()` method.

```
// Close the channel  
channel.close();
```

[Listing 5-18](#) contains a program that acts as an echo server. [Listing 5-19](#) has a program that acts as a client. The echo server waits for a message from a remote client. It echoes the message that it receives from the remote client. You need to start the echo server program before starting the client program. You can run multiple client programs simultaneously.

[Listing 5-18](#). An Echo Server Based on the Datagram Channel

```
// DGCEchoServer.java
```

```
package com.jdojo.net;

import java.io.IOException;
import java.net.InetSocketAddress;
import java.net.SocketAddress;
import java.nio.ByteBuffer;
import java.nio.channels DatagramChannel;

public class DGCEchoServer {
    public static void main(String[] args) {
        DatagramChannel server = null;

        try {
            // Create a datagram channel and
            bind it to localhost at port 8989
            server = DatagramChannel.open();
            InetSocketAddress sAddr = new
InetSocketAddress("localhost", 8989);
            server.bind(sAddr);

            ByteBuffer buffer
= ByteBuffer.allocate(1024);

            // Wait in an infinite loop for
            a client to send data
            while (true) {
                System.out.println("Waiting
for a message from" +
                               " a remote
host at " + sAddr);

                // Wait for a client to send
                a message
                SocketAddress remoteAddr
= server.receive(buffer);

                // Prepare the buffer to
                read the message
                buffer.flip();
```

```
// Convert the buffer data
into a String
int limits = buffer.limit();
byte bytes[] = new
byte[limits];
buffer.get(bytes, 0,
limits);
String msg = new
String(bytes);

System.out.println("Client
at " + remoteAddr +
" says: "
+ msg);

// Reuse the buffer to echo
the message to the client
buffer.rewind();

// Send the message back to
the client
server.send(buffer,
remoteAddr);

// Prepare the buffer to
receive the next message
buffer.clear();
}

}

catch (IOException e) {
e.printStackTrace();
}

finally {
// Close the channel
if (server != null) {
try {
server.close();
}
catch (IOException e) {
e.printStackTrace();
}
}
}
```

```

        }
    }
}
}
```

Listing 5-19. A Client Program Based on the Datagram Channel

```
// DGCEchoClient.java
package com.jdojo.net;

import java.io.IOException;
import java.net.InetSocketAddress;
import java.nio.ByteBuffer;
import java.nio.channels DatagramChannel;

public class DGCEchoClient {
    public static void main(String[] args) {
        DatagramChannel client = null;
        try {
            // Create a new datagram channel
            client = DatagramChannel.open();

            // Bind the client to any
            available local address and port
            client.bind(null);

            // Prepare a message for the
            server
            String msg = "Hello";
            ByteBuffer buffer
= ByteBuffer.wrap(msg.getBytes());
            InetSocketAddress serverAddress =
                new
InetSocketAddress("localhost", 8989);

            // Send the message to the server
            client.send(buffer,
serverAddress);
```

```
        // Reuse the buffer to receive
a response from the server
        buffer.clear();

        // Wait for the server to respond
client.receive(buffer);

        // Prepare the buffer to read the
message
        buffer.flip();

        // Convert the buffer into
a string
        int limits = buffer.limit();
        byte bytes[] = new byte[limits];
        buffer.get(bytes, 0, limits);
        String response = new
String(bytes);

        // Print the server message on the
standard output
        System.out.println("Server
responded: " + response);
    }
    catch (IOException e) {
        e.printStackTrace();
    }
    finally {
        // Close the channel
        if (client != null) {
            try {
                client.close();
            }
            catch (IOException e) {
                e.printStackTrace();
            }
        }
    }
}
```

Multicasting Using Datagram Channels

Java 7 added support for IP multicasting to a datagram channel. A datagram channel that is interested in receiving multicast datagrams joins a multicast group. The datagrams that are sent to a multicast group are delivered to all its members. The following sections outline the steps that are typically needed to set up a client application that is interested in receiving a multicast datagram.

Creating the Datagram Channel

Create a datagram channel to use a specific multicast address type as follows. In your application, you will be using IPv4 or IPv6, not both.

```
// Need to use INET protocol family for an IPv4
addressing scheme
DatagramChannel client
= DatagramChannel.open(StandardProtocolFamily.INET);

// Need to use INET6 protocol family for an IPv6
addressing scheme
DatagramChannel client
= DatagramChannel.open(StandardProtocolFamily.INET6);
```

Setting the Channel Options

Set the options for the client channel using the `setOption()` method as shown:

```
// Let other sockets reuse the same address
client.setOption(StandardSocketOptions.SO_REUSEADDR,
true);
```

Binding the Channel

Bind the client channel to a local address and a port as shown:

```
int MULTICAST_PORT = 8989;  
client.bind(new InetSocketAddress(MULTICAST_PORT));
```

Setting the Multicast Network Interface

Set the socket option `IP_MULTICAST_IF` that specifies the network interface on which the client channel will join the multicast group.

```
// Get the reference of a network interface named  
// "eth1"  
NetworkInterface interf  
= NetworkInterface.getByName("eth1");  
  
// Set the IP_MULTICAST_IF option  
client.setOption(StandardSocketOptions.IP_MULTICAST_IF  
interf);
```

[Listing 5-20](#) contains the complete program that prints the names of all network interfaces available on your machine. It also prints whether a network interface supports multicast and whether it is up. You may get a different output when you run the code on your machine. You will need to use the name of one of the available network interfaces that supports multicast and that network interface should be up. For example, as shown in the output, the network interface named `eth1` is up and support multicast on my machine, so I used `eth1` as the network interface for working with multicast messages.

[Listing 5-20](#). Listing the Available Network Interface on a Machine

```
// ListNetworkInterfaces.java  
package com.jdojo.net;  
  
import java.net.NetworkInterface;  
import java.net.SocketException;
```

```

import java.util.Enumeration;

public class ListNetworkInterfaces {
    public static void main(String[] args) {
        try {
            Enumeration<NetworkInterface> e =
                NetworkInterface.getNetworkInterfaces();
            while (e.hasMoreElements()) {
                NetworkInterface nif
                = e.nextElement();
                System.out.println("Name: " +
                    + nif.getName() +
                    ", Supports Multicast: " +
                    + nif.supportsMulticast() +
                    ", isUp(): " +
                    + nif.isUp());
            }
        } catch (SocketException ex) {
            ex.printStackTrace();
        }
    }
}

```

```

Name: lo,      Supports Multicast: true,   isUp(): true
Name: eth0,    Supports Multicast: true,   isUp(): false
Name: wlan0,   Supports Multicast: true,   isUp(): false
Name: eth1,    Supports Multicast: true,   isUp(): true
Name: net0,    Supports Multicast: false,  isUp(): false
Name: net1,    Supports Multicast: false,  isUp(): true
Name: wlan1,   Supports Multicast: true,   isUp():

```

```
false
Name: eth2,    Supports Multicast: true,   isUp(): false
Name: eth3,    Supports Multicast: true,   isUp(): false
Name: eth4,    Supports Multicast: true,   isUp(): false
Name: wlan2,   Supports Multicast: true,   isUp(): false
Name: wlan3,   Supports Multicast: true,   isUp(): false
Name: wlan4,   Supports Multicast: true,   isUp(): false
Name: wlan5,   Supports Multicast: true,   isUp(): false
Name: wlan6,   Supports Multicast: true,   isUp(): false
Name: wlan7,   Supports Multicast: true,   isUp(): false
Name: wlan8,   Supports Multicast: true,   isUp(): false
Name: wlan9,   Supports Multicast: true,   isUp(): false
Name: wlan10,  Supports Multicast: true,   isUp(): false
```

Joining the Multicast Group

Now it is time to join the multicast group using the `join()` method as follows. Note that you must use a multicast IP address for the group.

```
String MULTICAST_IP = "239.1.1.1";
// Join the multicast group on interf interface
InetAddress group
= InetAddress.getByName(MULTICAST_IP);
MembershipKey key = client.join(group, interf);
```

The `join()` method returns an object of the `MembershipKey` class that represents the membership of the datagram channel with the multicast group. If a datagram channel is not interested in receiving multicast datagrams anymore, it can use the `drop()` method of the `key` to drop its membership from the multicast group.

Tip A datagram channel may decide to receive multicast datagrams only from selective sources. You can use the `block(InetAddress source)` method of the `MembershipKey` class to block a multicast datagram from the specified source address. Its `unblock(InetAddress source)` lets you unblock a previously blocked source address.

Receiving a Message

At this point, receiving datagrams that are addressed to the multicast group is just a matter of calling the `receive()` method on the channel as shown:

```
// Prepare a buffer to receive the message from the
multicast group
ByteBuffer buffer = ByteBuffer.allocate(1048);

// Wait to receive a message from the multicast group
client.receive(buffer);
```

After you are done with the channel, you can drop its membership from the group as shown:

```
// We are no longer interested in receiving multicast
message from the group.
// So, we need to drop the channel's membership from
the group
key.drop();
```

Closing the Channel

Finally, you need to close the channel using its `close()` method as shown:

```
// Close the channel  
client.close();
```

To send a message to a multicast group, you do not need to be a member of that multicast group. You can send a datagram to a multicast group using the `send()` method of the `DatagramChannel` class.

[Listing 5-21](#) contains a class with three constants that are used in the subsequent two classes to build the multicast application. The constants contain the multicast IP address, multicast port number, and multicast network interface name that will be used in the subsequent example. Please make sure that the value `eth1` for the `MULTICAST_INTERFACE_NAME` constant is the network interface name on your machine that supports multicast and it is up. You can get the list of all network interfaces on your machine by running the program in [Listing 5-20](#).

[Listing 5-21](#). A DatagramChannel-Based Multicast Client Program

```
// DGCMulticastUtil.java  
package com.jdojo.net;  
  
public class DGCMulticastUtil {  
    public static final String MULTICAST_IP  
= "239.1.1.1";  
    public static final int MULTICAST_PORT = 8989;  
  
    /* You need to change the following network  
    interface name "eth1"  
        to the network interface name that supports  
    multicast and is up  
        on your machine. Please run class  
    ListNetworkInterfaces to get  
        the list of all available network interface  
    on your machine.  
    */  
    public static final String  
MULTICAST_INTERFACE_NAME = "eth1";  
}
```

[Listing 5-22](#) contains a program that joins a multicast group as a member. It

waits for a message from a multicast group to arrive, prints the message, and quits. [Listing 5-23](#) contains a program that sends a message to the multicast group. You can run multiple instances of the DGCMulticastClient class and then run the DGCMulticastServer class. All client instances should receive and print the same message on the standard output.

Listing 5-22. A DatagramChannel-Based Multicast Client Program

```
// DGCMulticastClient.java
package com.jdojo.net;

import java.io.IOException;
import java.net.InetAddress;
import java.net.InetSocketAddress;
import java.net.NetworkInterface;
import java.net.StandardProtocolFamily;
import java.net.StandardSocketOptions;
import java.nio.ByteBuffer;
import java.nio.channels.DatagramChannel;
import java.nio.channels.MembershipKey;

public class DGCMulticastClient {
    public static void main(String[] args) {
        MembershipKey key = null;

            // Create, configure and bind the client
datagram channel
            try (DatagramChannel client =
                    DatagramChannel.open(Standard
{
            // Get the reference of a network
interface
                NetworkInterface interf
= NetworkInterface.getByName(
                    DGCMulticastUtil.MULTICAST_IN

            client.setOption(StandardSocketOpti
true);
```

```
        client.bind(new
InetSocketAddress(DGCMulticastUtil.MULTICAST_PORT));
        client.setOption(StandardSocketOpti
interf);

        // Join the multicast group on the
interf interface
        InetAddress group =
                InetAddress.getByName(DGCMult
key = client.join(group, interf);

        // Print some useful messages for
the user
        System.out.println("Joined the
multicast group:" + key);
        System.out.println("Waiting for
a message from the" +
                " multicast
group....");

        // Prepare a data buffer to
receive a message from the multicast group
        ByteBuffer buffer
= ByteBuffer.allocate(1048);

        // Wait to receive a message from
the multicast group
        client.receive(buffer);

        // Convert the message in the
ByteBuffer into a string
        buffer.flip();
        int limits = buffer.limit();
        byte bytes[] = new byte[limits];
        buffer.get(bytes, 0, limits);
        String msg = new String(bytes);

        System.out.format("Multicast
Message:%s%n", msg);
    }
```

```

        catch (IOException e) {
            e.printStackTrace();
        }
        finally {
            // Drop the membership from the
            multicast group
            if (key != null) {
                key.drop();
            }
        }
    }
}

```

Listing 5-23. A DatagramChannel-Based Multicast Program That Sends a Message to a Multicast Group

```

// DGCMulticastServer.java
package com.jdojo.net;

import java.io.IOException;
import java.net.InetSocketAddress;
import java.net.NetworkInterface;
import java.net.StandardSocketOptions;
import java.nio.ByteBuffer;
import java.nio.channels DatagramChannel;

public class DGCMulticastServer {
    public static void main(String[] args) {
        // Get a datagram channel object to act
        as a server
        try (DatagramChannel server
= DatagramChannel.open()) {
            // Bind the server to any
            available local address
            server.bind(null);

            // Set the network interface for
            outgoing multicast data
            NetworkInterface interf

```

```

= NetworkInterface.getByName(
                    DGCMulticastUtil.MULTICAST_IN

                server.setOption(StandardSocketOpti
interf);

                    // Prepare a message to send to
the multicast group
                    String msg = "Hello from
multicast!";
                    ByteBuffer buffer
= ByteBuffer.wrap(msg.getBytes());

                    // Get the multicast group
reference to send data to
                    InetSocketAddress group
                    = new
InetSocketAddress(DGCMulticastUtil.MULTICAST_IP,
                    DGCMulticastUtil.MULTI

                    // Send the message to the
multicast group
                    server.send(buffer, group);

                    System.out.println("Sent the
multicast message: " + msg);
                }
                catch (IOException e) {
                    e.printStackTrace();
                }
            }
        }
    }
}

```

Further Reading

Network programming in Java is a vast topic. There are a few books written especially on this topic. This chapter covers only the basics of the network programming support that is available in Java. Java also supports secured socket

communications using a Secured Socket Layer (SSL) protocol. The classes for secured socket communication programming are in the `javax.net.ssl` package. This chapter does not cover SSL sockets. I have not covered many of the options for sockets that you can use in your Java programs. If you want to do advanced level network programming in Java, it is recommended that you read a book that devotes itself solely to network programming in Java after you finish this chapter.

Summary

A network is a group of two or more computers or other types of electronic devices such as printers, linked together with a goal to share information. Each device linked to a network is called a node. A computer that is linked to a network is called a host. Network programming in Java involves writing Java programs that facilitate exchange of information between processes running on different computers on the network.

The communication between two remote hosts is performed by a layered protocol suite called the Internet Reference Model or TCP/IP Layering Model. The protocol suite consists of five layers named application, transport, internet, network interface, and physical. A user application such as a Java program uses the application layer to communicate to a remote application. The transport layer protocol handles the ways messages are transported from one application on one computer to another application on a remote computer. The internet layer accepts the messages from the transport layer and prepares a packet suitable for sending over the internet. It includes the Internet Protocol (IP). The packet prepared by IP is also known as an IP datagram and it consists of a header and a data area, apart from other pieces of information. The network interface layer prepares a packet to be transmitted on the network. The packet is called a frame. The network interface layer sits on top of the physical layer, which involves the hardware. The physical layer consists of the hardware. It is responsible for converting the bits of information into signals and transmitting the signal over the wire.

An IP address uniquely identifies a connection between a computer and a router. There are two versions of Internet Protocol—IPv4 (or simply IP) and IPv6, where v4 and v6 stand for version 4 and version 6. IPv6 is also known as Internet Protocol next generation (IPng). An object of the `InetAddress` class represents an IP address in Java programs. The `InetAddress` class has two

subclasses, `Inet4Address` and `Inet6Address`, which represent IPv4 and IPv6 addresses, respectively.

A port number is a 16-bit unsigned integer ranging from 0 to 65535 that is used to uniquely identify a process for a specific protocol.

An object of the `InetSocketAddress` class represents a socket address that combines an IP address and a port number.

An object of the `ServerSocket` class represents a TCP server socket for accepting connections from remote hosts. An object of the `Socket` class represents a server/client socket. The client and server applications exchange information using objects of the `Socket` class. The `Socket` class provides the `getInputStream()` and `getOutputStream()` methods to obtain the input and output streams of the socket, respectively. The input stream of the socket is used to read the data from the socket and the output stream of the socket is used to write data to the socket.

An object of the `DatagramPacket` class represents a UDP datagram that is the unit of data transmission over a UDP socket. An object of the `DatagramSocket` class represents a UDP server/client socket.

A Uniform Resource Identifier (URI) is a sequence of characters that identifies a resource. A URI that uses a location to identify a resource is called Uniform Resource Locator (URL). A URI that uses a name to identify a resource is called a Uniform Resource Name (URN). URL and URN are subsets of URI. An object of the `java.net.URI` class represents a URI in Java. An object of the `java.net.URL` class represents a URL in Java. Java provides classes to access the contents identified by a URL.

Java supports non-blocking socket channels using the `ServerSocketChannel`, `SocketChannel`, `Selector`, and `SelectionKey` classes in the `java.nio.channels` package.

Java also supports asynchronous socket channels through the `AsynchronousServerSocketChannel` and `AsynchronousSocketChannel` classes in the `java.nio.channels` package.

Java supports datagram-oriented socket channel through the `DatagramChannel` class. IP multicasting is also supported on datagram channels.

CHAPTER 6



JDBC API

In this chapter, you will learn

- What JDBC API is
- Types of JDBC drivers
- A brief overview of Java DB
- How to connect to a database using a JDBC driver
- What transaction isolation levels are
- JDBC-data-types-to-Java-data-types mapping
- How to execute SQL statements in Java programs and processing the results
- Using rowsets, batch updates, and large objects (LOBs)
- How to retrieve SQL warning and enable JDBC tracing

What Is the JDBC API?

The JDBC API provides a standard database-independent interface to interact with any tabular data source. Most of the time, it is used to interact with a relational database management system (RDBMs). However, using the JDBC API, it is possible to interact with any tabular data source, such as an Excel Spreadsheet, a flat file, etc. Typically, you use the JDBC API to connect to a database, query the data, and update the data. It also lets you execute SQL stored procedures in a database using a database-independent syntax.

The main purpose of using a database is to manage business data. Every database provides developers with the following three things to manage data:

- A standard SQL syntax
- An extension to the standard SQL syntax called a proprietary SQL syntax
- A proprietary programming language

For example, Oracle databases use PL/SQL as a programming language that you can use to write stored procedures, functions, and triggers. Microsoft SQL Server uses Transact-SQL (T-SQL) as the programming language to write stored procedures, functions, and triggers. If you want to process a set of rows in a database, you need to know the syntax and logic to process cursors in a specific database-dependent language. Using the JDBC API relieves you of the pain of learning a different syntax to process a cursor in different databases. It requires you to write a query (a SELECT statement) using a standard SQL syntax. It provides Java APIs to process the result set of that query in a database-independent manner.

Using the JDBC API to access data in a database hides the implementation differences that exist in different types of databases. It achieves database transparency by defining most of its API using interfaces and letting the database vendors (or any third-party vendors) provide the implementations for those interfaces. The collection of the implementation classes that is supplied by a vendor to interact with a specific database is called a *JDBC driver*. There are different kinds of JDBC drivers that exist for different databases (or for the same database). They differ in the way they are implemented. Some JDBC drivers are written in pure Java. For purely Java-implemented JDBC drivers, you just need to include the vendor-supplied classes in your application CLASSPATH. Some JDBC drivers need a proprietary software installation on the client machine to interact with a database. The next section discusses the JDBC driver types.


System Requirements

This chapter is all about interacting with databases using Java programs. You must have access to a database such as an Oracle database, Microsoft SQL Server, Sybase database, DB2, MySQL, Java DB, etc. You will also need to have

a JDBC driver for your database. Some JDBC drivers do not need special installation. Rather, you can use them by placing the supplied JDBC driver files (usually a JAR file) in the CLASSPATH on your machine. If you do not have access to a database and the required JDBC driver, you will not be able to run the examples listed in this chapter. All major database vendors make the JDBC driver available for download from their official web sites for free. Whenever necessary, this chapter provides the syntax and the script to create database objects and routines in the few DBMSs—MySQL, Java DB (Apache Derby), Oracle Database, DB2, Microsoft SQL Server, and Sybase Adaptive Server Anywhere. If you are using a DBMS to run the JDBC programs in this chapter, other than the ones listed here, you will need to refer to your DBMS documentation for the syntax to create database objects.

Types of JDBC Drivers

You can use three types of JDBC drivers in your Java programs to connect to a DBMS. [Figure 6-1](#) shows the architecture of those JDBC drivers. This section describes those types of JDBC drivers in brief.

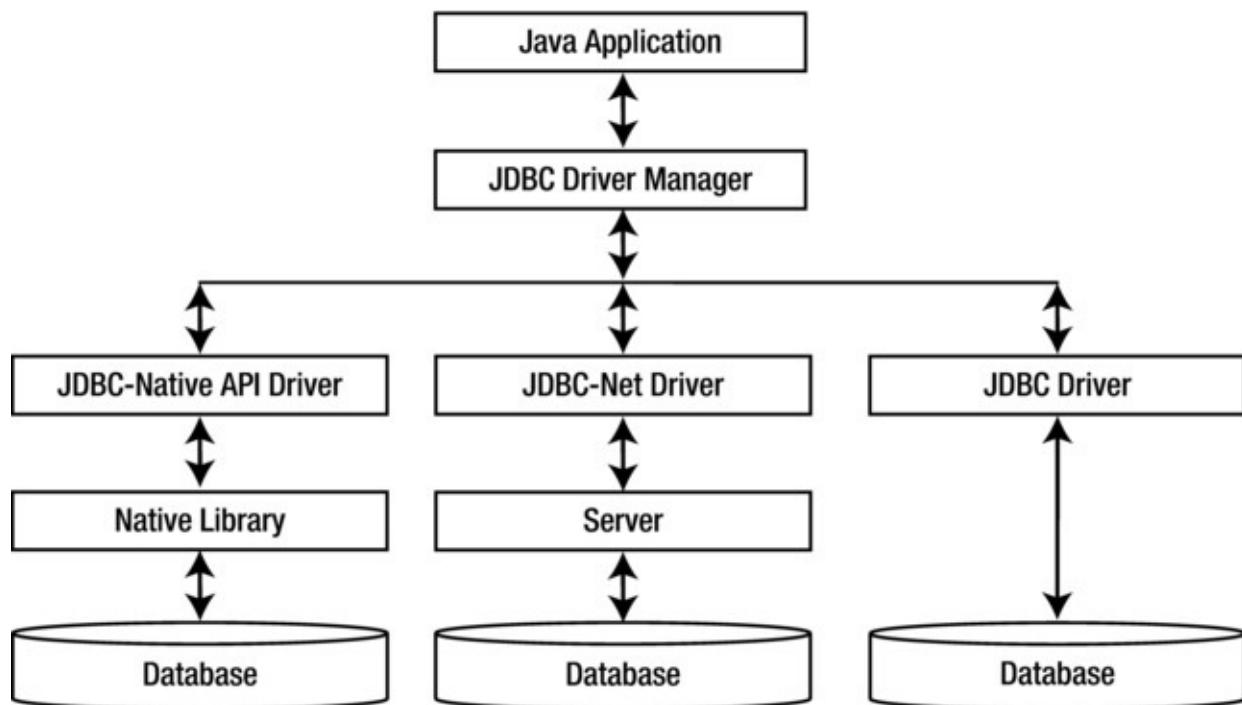

[Figure 6-1](#). The architecture of JDBC drivers

Note Prior to Java 8, the JDBC API provided one more type of JDBC driver called the JDBC-ODBC bridge. This driver has been removed in Java 8.

JDBC Native API Driver

The JDBC-Native API driver uses a DBMS-specific native library to perform all database activities. It translates JDBC calls into DBMS-specific calls, and the DBMS native library communicates with the database. You must install DBMS-specific client software to use this type of driver. It is platform-dependent.

JDBC-Net Driver

The JDBC-Net driver is written in pure Java. It needs a server to work with a database. The driver translates the JDBC calls into a network protocol and passes the calls to the server. The server translates the network calls to DBMS-specific calls. The JDBC driver running at the client machine is unaware of the technology (or DBMS driver types) that the server will use to perform the database activities. The server can use different types of database drivers to connect to different databases and it will be transparent to the client. It is a platform-independent driver. The client machine needs to include only the Java classes required to use the driver. There is no additional installation needed on the client machine.

JDBC Driver

The JDBC driver is also known as a direct-to-database pure Java driver. It is written in pure Java. It converts the JDBC calls into DBMS-specific calls and sends the calls directly to the database. It is the best suitable driver type to be used in applets. All you need to do is to include the driver JAR/ZIP files with your application or applet. All major DBMS vendors supply this type of JDBC driver.

A Brief Overview of Java DB

You will need access to a relational database to run the example in this chapter. If you do not have access to a database, you can use the Java DB database that is installed on your machine when you install the JDK. The Java DB is a relational database management system that is based on the Java programming language and SQL. It is the Oracle release of the Apache Derby project. Technical documentation on the Java DB can be found at <http://docs.oracle.com/javadb/>.

In the following sections, I will discuss the minimum required information to get you started with Java DB, such as how to start, stop, and run SQL commands in Java DB.

Java DB Installation Files

Suppose `JDK_HOME` is the directory where you have installed the JDK. For example, if you have installed the JDK in `C:\java8` on Windows, the value for `JDK_HOME` will be `C:\java8`; if you have installed the JDK in `/home/ksharan/java8` on UNIX-like operating system, the value for `JDK_HOME` will be `/home/ksharan/java8`. The Java DB files are installed in the `db` subdirectory of the `JDK_HOME`. The `db` directory contains two subdirectories called `bin` and `lib`. The `bin` subdirectory contains many command files to work with the database. For example, the `startNetworkServer.bat` file is used to start the network Java DB server on Windows and `startNetworkServer` is used to start the network Java DB server on UNIX; you can use the `ij.bat` command on Windows and the `ij` command on UNIX to connect to the Java DB and run SQL commands (`ij` stands for interactive Java DB). The `lib` subdirectory contains all JAR files that are used to work with Java DB.

Configuring Java DB

Typically, you do not need to configure Java DB when you have installed JDK8. If you come across any errors in starting up the database or running SQL commands from the command line, you need to set the following environment variables:

- Set the `DERBY_HOME` environment variable to the `JDK_HOME\db` directory.
- Set the `JAVA_HOME` environment variable to the `JDK_HOME` directory.
- Include the `JDK_HOME\bin` directory in the `PATH` environment variable.

When you work with Java DB server and client applications, you need to include some Java DB libraries in `CLASSPATH`. All libraries are JAR files located in `JDK_HOME\db\lib` directory. [Table 6-1](#) contains the list of Java DB libraries.

Table 6-1. Libraries Used in Java DB Server and Client Applications

Library Name	Description
<code>derby.jar</code>	Contains the Java DB database engine code. Used for Java DB running in embedded mode. For Java DB running in server mode, it is needed on the server.
<code>derbytools.jar</code>	Required for running all Java DB tools such as <code>i j</code> , <code>dblook</code> , etc.
<code>derbyrun.jar</code>	An executable JAR file used to start Java DB tools. Including this file in the <code>CLASSPATH</code> also includes <code>derby.jar</code> , <code>derbyclient.jar</code> , <code>derbytools.jar</code> , <code>derbynnet.jar</code> files in the <code>CLASSPATH</code> .
<code>derbynnet.jar</code>	Contains the Java DB Network Server code. It is required to start the Java DB Network Server.
<code>derbyclient.jar</code>	Contains the Java DB Network Client JDBC driver. It is required for a Java application to connect to a Java DB server over a network.

Running the Java DB Server

Java DB can run in two modes:

- Embedded Mode
- Server Mode

In embedded mode, Java DB is started for a single user Java application inside the same JVM as the Java application. The Java application starts and stops the Java DB. This is the most suitable mode for learning the database

programming using JDBC API. You will not need to perform any setup to use Java DB in this mode. I will explain how to use this mode in detail later. All examples in this chapter use Java DB running in this mode unless specified otherwise.

In server mode, Java DB can be used by multiple users concurrently over the network. The Java DB runs in a separate JVM. Applications running in separate JVMs may connect to Java DB running in this mode.

You can use command prompts or NetBeans IDE for Java DB administration. The following sections explain both.

Using Command Prompts

Use the following command to start Java DB in server mode:

```
c:\java8\db\bin> startNetworkServer
```

```
Tue Jun 17 23:25:27 CDT 2014 : Security manager  
installed using the Basic server security policy.  
Tue Jun 17 23:25:27 CDT 2014 : Apache Derby Network  
Server - 10.10.1.3 - (1557168) started and ready to  
accept connections on port 1527
```

You may get an `AccessControlException` in starting the server. The error message may read as follows:

```
java.security.AccessControlException: access denied  
("java.net.SocketPermission" "localhost:1527"  
"listen,resolve")
```

To resolve the `AccessControlException`, you can start the server with no security manager installed as follows:

```
c:\java8\db\bin> startNetworkServer -noSecurityManager
```

You can also resolve the `AccessControlException` by granting the `listen` and `resolve` access to the host and port on which the server is starting in the `JRE_HOME\lib\security\java.policy` file. The following entry in the `java.policy` file grants the required access:

```
grant {
```

```
    permission java.net.SocketPermission  
"localhost:1527", "listen";  
};
```

By default, in server mode, Java DB starts at localhost (or the loopback IP address) and at port 1527. If you want to access Java DB from other computers, you need to configure some properties on the command line or in the properties file.

The easiest way to configure the Java DB properties is to set them on the command line. The following command starts the Java DB server that listens at myhost at port number 1537:

```
c:\java8\db\bin>startNetworkServer -h myhost -p 1537
```

You can also use the `java` command to start the Java DB server. The following command starts the Java DB server, additionally setting the `CLASSPATH` and the `derby.system.home` property:

```
C:\java8\db\bin>java -classpath  
C:\java8\db\lib\derbynet.jar -  
Dderby.system.home=C:\myderbyhome  
org.apache.derby.drda.NetworkServerControl start -h  
localhost
```

You can set the Java DB properties in the text file named `derby.properties` located in a directory specified by the `derby.system.home` property. You can specify the `derby.system.home` property when you start the Java DB server. If the `derby.system.home` property is not specified, it defaults to the current working directory.

I used NetBeans to run Java DB on Windows and Linux for the user ksharan. By default, the NetBeans IDE sets the `derby.system.home` property to a `.netbeans-derby` subdirectory under the user's home directory. Using the NetBeans IDE, the `derby.properties` file was placed on my machines as follows:

- On Windows: `C:\Users\ksharan\.netbeans-derby\derby.properties`
- On Linux: `/home/ksharan/.netbeans-`

`derby/derby.properties`

Set the `derby.drda.host` property to the host name or the IP address on which you want to start the Java DB in sever mode. If you set this property to `0.0.0.0`, Java DB listens on all network interfaces. Set the `derby.drda.portNumber` property to listen to a port different from the default port 1527. The following are the contents of the `derby.properties` file that sets a custom host and port number:

```
# Contents of the derby.properties file
# Set the IP address 192.168.1.1 as the host
derby.drda.host=192.168.1.1

# Set 1528 as the port number
derby.drda.portNumber=1528
```

Use the following command to stop the Java DB running in server mode. Note that you will need to run this command using a separate command prompt.

```
c:\java8\db\bin>stopNetworkServer
Tue Jun 17 23:26:49 CDT 2014 : Apache Derby Network
Server - 10.10.1.3 - (1557168) shutdown
```

Tip The Java DB database server can have several databases. A database in Java DB is portable. Files for each database are stored in a separate directory. Moving a Java DB database is as simple as moving the directory for that database. The directory is named the same as the database name. By default, all database directories are stored in the directory specified in the `derby.system.home` property.

After you start the Java DB server, you can connect to it and execute SQL commands, using the `ij` command-line tool. The `ij` tool is located in the `JDK\db\bin` directory. Assuming that the Java DB server is running at localhost at port 1527, the following commands start the `ij` tool, connect to a Java DB database named `beginningJavaDB`, execute a `SELECT` SQL statement, and exit the tool using the `exit` command. If you do not have a `person` table in the database, you may get an error when you execute the `SELECT` statement.


```
c:\java8\db\bin>ij
ij version 10.10
ij> connect
'jdbc:derby://localhost:1527/beginningJavaDB';
ij> select * from person;
PERSON_ID | FIRST_NAME           | LAST_NAME
| & | DOB          | INCOME
-----
-----
0 rows selected
ij> exit;
c:\java8\db\bin>
```

You do not need to start the Java DB server if you want to work with a Java DB database in embedded mode. The following command sets the classpath, sets the `derby.system.home` property, and starts the `ij` tool. Note that the command was entered on one line. After starting the `ij` tool, I connected to the `beginningJavaDB` database in embedded mode and executed SQL commands, as shown. If you do not have a `person` table in the database, you may get an error when you execute the `SELECT` statement.

```
c:\java8\db\bin>java -classpath
C:\java8\db\lib\derbyrun.jar; -
Dderby.system.home=C:\Users\ksharan\.netbeans-derby
org.apache
.derby.tools.ij
ij version 10.10
ij>connect 'jdbc:derby:beginningJavaDB';
ij> select * from person;
PERSON_ID | FIRST_NAME           | LAST_NAME
| & | DOB          | INCOME
-----
-----
0 rows selected
ij> exit;
c:\java8\db\bin>
```

Using the NetBeans IDE

Working with Java DB is easy when you use the NetBeans IDE. You can use the Services tab in Navigator in the NetBeans IDE to start, stop, and run SQL commands in Java DB. [Figure 6-2](#) shows the Java DB under the Databases node on the Services tab in the NetBeans IDE. If you do not see the Services tab, you can show it by choosing the menu option Windows > Services or by pressing Ctrl + 5.

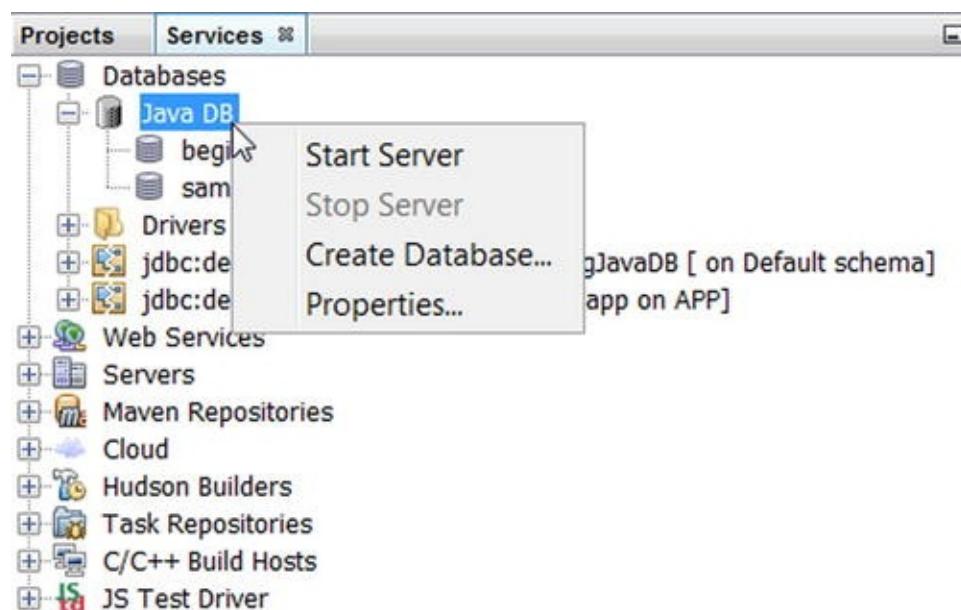

[Figure 6-2](#). Using Java DB on the Services tab from inside the NetBeans IDE

To start and stop the Java DB, select the Java DB node on the Services tab, right-click, and choose the appropriate option.

All databases in Java DB are listed under the Java DB node. Java DB is installed with a pre-built database named `sample`. You can create your own databases by choosing the `Create Database` option as shown in [Figure 6-2](#).

To connect to a specific database, select the database name under the Java DB node, right-click it, and select the `Connect` menu option as shown in [Figure 6-3](#).

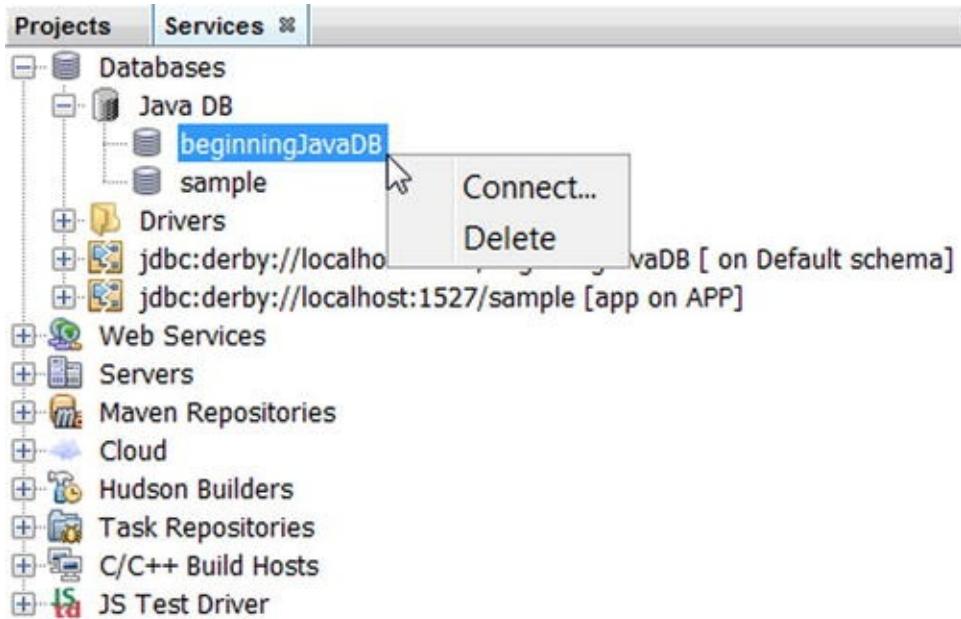


Figure 6-3. Connecting to a Java DB database from inside the NetBeans IDE

After you are connected to a database, you can execute SQL commands in that database using the NetBeans IDE. The `Databases` node in the `Services` tab contains one `Database Connection` node for each Java DB database. Select the `Database Connection` node for your database, right-click, and select the `Execute Command` menu option as shown in [Figure 6-4](#). It will open a SQL editor. You can enter SQL commands in the SQL editor. To execute the SQL command, use the `Run SQL` toolbar button or press `Ctrl + Shift + E`.

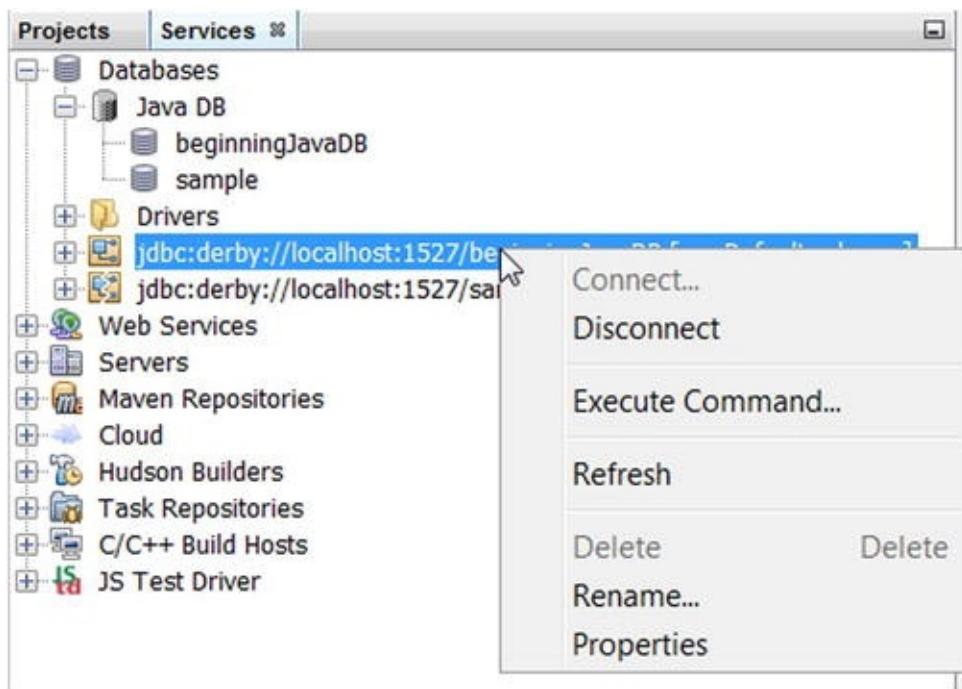


Figure 6-4. Executing SQL commands in Java DB from inside the NetBeans IDE

By default, the NetBeans IDE stores all Java DB databases in the subdirectory named `.netbeans-derby` in the user's home directory. You can change the default location by using the Java DB properties dialog. You can open the Java DB properties dialog by choosing the `Databases > Data DB > Right-click > Properties` menu shown in [Figure 6-5](#).

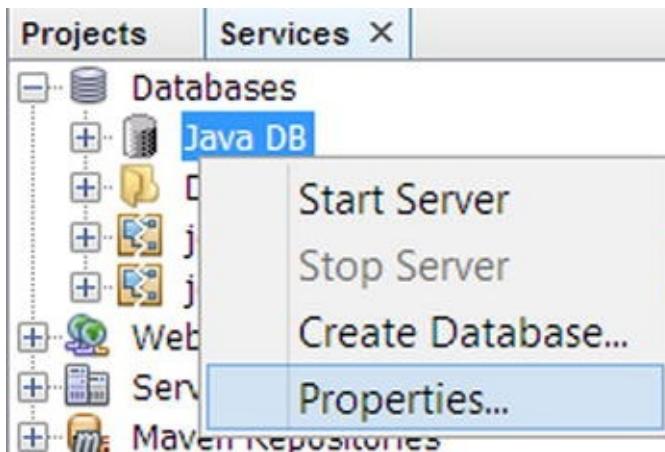


Figure 6-5. Setting properties for Java DB in the NetBeans IDE

You can change the default Java DB installation directory and the database location using the Java DB properties dialog shown in [Figure 6-6](#). The figure

shows that I changed the default database location to the C:\kishori\books\java_8\projects\Test directory on Windows.

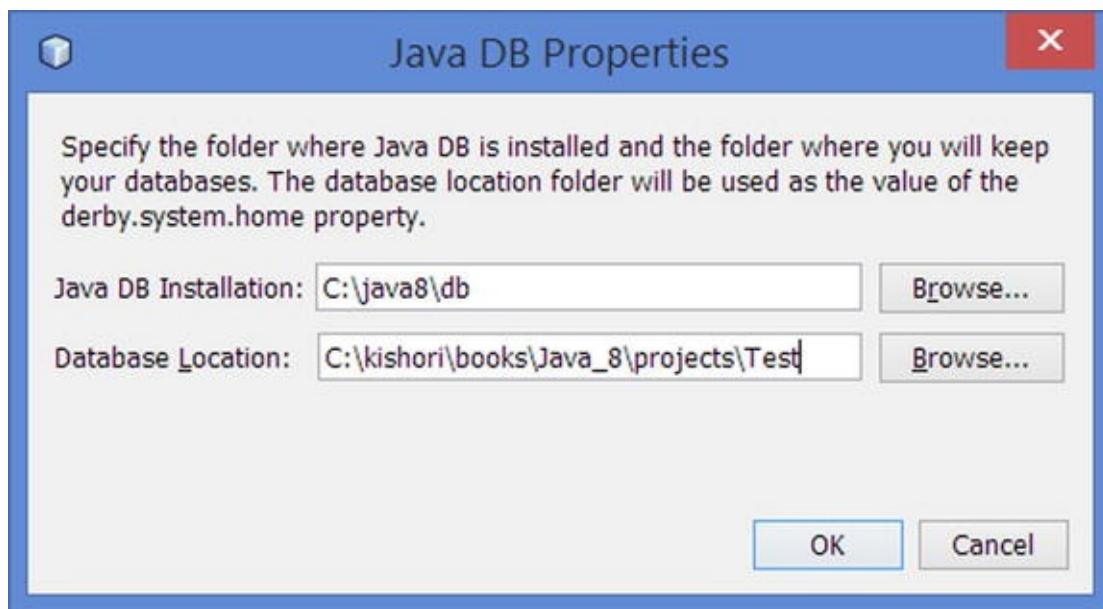


Figure 6-6. The Java Db Properties dialog

Creating a Database Table

The primary goal of using the JDBC API is to manipulate data contained in tables in a database. You may manipulate data in tables using the SQL statements SELECT, INSERT, UPDATE, and DELETE, which use table names directly. Sometimes you may not refer to the table names in your JDBC calls directly. Rather, you may execute a stored procedure using the JDBC API, and the stored procedure uses table names. One way or the other, you end up using tables when you work with JDBC. Most of the time in this chapter, you will work with one table. You will name your table `person`. You may create more tables along the way when you need to work on specific types of database processing using JDBC. It is assumed that you have created a table named `person` in the database of your choice. The table description is shown in [Table 6-2](#).

Table 6-2. Generic Description of a Database Table Named Person

Column Name	Data Type	Length	Null Value Allowed	Comments
person_id	integer		No	Primary Key
first_name	string	20	No	
last_name	string	20	No	
gender	string	1	No	
Dob	date		Yes	
income	double		Yes	

The data types of columns shown in this table are generic. You will need to use data types specific to your DBMS. For example, for the `first_name` column, you can use the data type of `varchar2(20)` in the Oracle database and `varchar(20)` in the SQL Server database. Similarly, for the `person_id` column, you can use a data type of `number(8, 0)` in the Oracle database and `int` in the SQL Server database.

Every DBMS provides a tool, either character-based, graphical, or both, that lets you work with database objects such as tables, stored procedures, functions, etc. For example, you can use the Oracle SQL*PLUS tool for Oracle DBMS from Oracle, the SQL Server Management Studio tool for SQL Server DBMS from Microsoft, the Interactive SQL tool for Adaptive Server Anywhere (ASA) from Sybase, etc.

The following sections show the database scripts to create the `person` table in different databases. You will need to consult the documentation for your database on how to run the script to create the `person` table.

Note All database scripts such as to create tables and stored procedures are available under the `dbscripts\<DBMS-Name>` directory with the source code for this book where `<DBMS-Name>` is the name of the DBMS such as Oracle, DB2 etc.

Oracle Database

```
create table person (
    person_id number(8,0) not null,
```

```
        first_name varchar2(20) not null,
        last_name varchar2(20) not null,
        gender char(1) not null,
        dob date,
        income number(10,2),
        constraint pk_person primary key(person_id)
);
```

Adaptive Server Anywhere Database

```
create table person (
    person_id integer not null default null,
    first_name varchar(20) not null default null,
    last_name varchar(20) not null default null,
    gender char(1) not null default null,
    dob date null default null,
    income double null default null,
    primary key (person_id)
);
```

SQL Server Database

```
create table person (
    person_id int NOT NULL,
    first_name varchar(20) NOT NULL,
    last_name varchar(20) NOT NULL,
    gender char(1) NOT NULL,
    dob datetime NULL,
    income decimal(10,2) NULL,
    constraint pk_person primary key (person_id)
);
```

DB2 Database

```
create table person (
    person_id integer not null,
```

```
        first_name varchar(20) not null,  
        last_name varchar(20) not null,  
        gender character (1) not null,  
        dob date,  
        income double,  
        constraint pk_person_id primary key (person_id)  
    );
```

MySQL Database

```
create table person (  
    person_id integer not null primary key,  
    first_name varchar(20) not null,  
    last_name varchar(20) not null,  
    gender char(1) not null,  
    dob datetime null,  
    income double null  
);
```

Java DB Database

```
create table person (  
    person_id integer not null,  
    first_name varchar(20) not null,  
    last_name varchar(20) not null,  
    gender char(1) not null,  
    dob date,  
    income double,  
    primary key(person_id)  
);
```

You can run the program shown later in [Listing 6-3](#) to create the person table in Java DB. To create the person table in another database, you may have to change the CREATE TABLE syntax in the program.

Connecting to a Database

Here are the steps that you need to follow to connect to a database.

- Obtain the JDBC driver and add it to the CLASSPATH environment variable on your machine.
- Register the JDBC driver with the `DriverManager`.
- Construct a connection URL.
- Use the `getConnection()` static method of `DriverManager` to establish a connection.

The following sections describe these steps in detail.

Obtaining the JDBC Driver

You need to have the JDBC driver for your database before you can connect to the database using JDBC. You can get a JDBC driver from the vendor of your database. For example, if you are using the Oracle DBMS, you can download the JDBC driver from its official web site at www.oracle.com. All database vendors that support JDBC will let you download the JDBC driver for their DBMS from their official web sites for free. Typically, a JDBC driver is bundled in one or more JAR/ZIP files.

If you are using Java DB, the JDBC drivers were copied on your machine when you installed the JDK. You do not need to download any additional JDBC drivers.

Setting up the CLASSPATH

If you are using a JDBC driver, you need to place the JAR/ZIP files for your JDBC driver in the CLASSPATH on your machine, so that your Java programs can use the Java classes that implement the JDBC driver for your database.

If you are using Java DB, please refer to [Table 6-1](#) for the JAR file that you will need to use in your case. To run all examples in this chapter that use Java DB in embedded mode, you will need the `derby.jar` file in the CLASSPATH.

The `derby.jar` file is the JDBC driver needed to use the Java DB in embedded mode. If you are connecting to Java DB over a network, you will need to include the `derbyclient.jar` file in the CLASSPATH.

Registering a JDBC Driver

You need to register a JDBC driver, which you want to use to connect to a database. A JDBC driver is registered with the `java.sql.DriverManager` class.

What is a JDBC driver? Technically, a JDBC driver is a class that implements the `java.sql.Driver` interface. DBMS vendors supply the JDBC driver class along with any other classes it uses. You must know the name of the JDBC driver class before you can register it with the `DriverManager` class. If you do not know the name of the driver class, please refer to the documentation of the JDBC driver for your DBMS.

In the next section, I will list the driver class names for some DBMSs. The name may vary depending on the version of DBMS or the supplier of the driver class. Sometimes different vendors supply the drivers for the same DBMS. Different vendors will use different driver class names and different connection URL formats to connect to the same DBMS.

Why do you need to register a JDBC driver with the `DriverManager`? Java does not know how to connect to a database. It depends on the JDBC driver to connect to a database. Think of a JDBC driver as a Java class whose object will be used by the `DriverManager` to connect to a database. The question is, “How does the `DriverManager` know about the JDBC driver you want to use to connect to a database?” Of course, it has no way to know about the JDBC driver by itself. Therefore, registering a driver with the `DriverManager` is simply telling the `DriverManager` about your JDBC driver class name. By registering a JDBC driver, you are telling the `DriverManager` that if you ask the `DriverManager` to establish a connection to a database, it needs to try using this driver. Can you register multiple JDBC drivers with the `DriverManager`? Yes. You can register multiple JDBC drivers. When you need to establish a connection to a database, you must pass a connection URL to the `DriverManager`. The `DriverManager` passes the connection URL to all registered drivers one by one, and asks them to connect to the database using information that you supply in the connection URL. If a driver recognizes the

connection URL, it connects to the database and returns the connection to the `DriverManager`. An object of the `java.sql.Connection` interface represents a database connection in a Java program. If none of the registered drivers recognize a connection URL, the `DriverManager` will throw a `SQLException` stating that it could not find a suitable driver.

There are three ways to register a JDBC driver with the `DriverManager`:

- By setting the `jdbc.drivers` system property
- By loading the driver class into the JVM
- By using the `registerDriver()` method of the `DriverManager` class

Setting the `jdbc.drivers` System Property

You can register a JDBC driver class name using the `jdbc.drivers` system property. You can set this property in your computer globally; you can pass this property on the command line when you run your application, or you can set this property in your application using the `System.setProperty()` method. A colon separates each driver to be registered. Here are some examples:

```
// Register Sybase and Oracle drivers in the Java code
String drivers
= "com.sybase.jdbc2.jdbc.SybDriver:oracle.jdbc.driver."
System.setProperty("jdbc.drivers", drivers);

// Pass driver names to be registered as command-line
arguments.
// The following command is entered in one line.
java -
Djdbc.drivers=com.sybase.jdbc2.jdbc.SybDriver:oracle.j
com.jdojo.jdbc.Test
```

Loading the Driver Class

You can create an object of the driver class. When the driver class is loaded in

the JVM, it registers itself with the `DriverManager`. For a class to be loaded, you can use a `Class.forName("driver class name")` method or create an object of the class as follows:

```
// Register the Oracle JDBC driver  
new oracle.jdbc.driver.OracleDriver();  
  
// Register the Oracle JDBC driver using the  
Class.forName() method.  
// Exception handling has been omitted.  
Class.forName("oracle.jdbc.driver.OracleDriver")  
  
// Register the Java DB embedded driver  
new org.apache.derby.jdbc.EmbeddedDriver();  
  
// Register the Java DB network client driver  
new org.apache.derby.jdbc.ClientDriver();
```

You do not need to keep the reference of the driver object because the goal is to load the driver class in the JVM. When the driver's class is loaded into the JVM, the static initializer of the driver's class is executed in which the driver class registers itself with the `DriverManager`.

Using the registerDriver() Method

You can call the `registerDriver(java.sql.Driver driver)` static method of the `DriverManager` class with an object of a JDBC driver class to register the JDBC driver.

```
// Register the Oracle JDBC driver with DriverManager  
DriverManager.registerDriver(new  
oracle.jdbc.driver.OracleDriver());  
  
// Register the Java DB embedded driver  
DriverManager.registerDriver(new  
org.apache.derby.jdbc.EmbeddedDriver());  
  
// Register the Java DB network client driver  
DriverManager.registerDriver(new
```

```
org.apache.derby.jdbc.ClientDriver());
```

You can follow one of the above three methods to register a JDBC driver. The first way offers more flexibility. It lets you change the JDBC driver without changing your Java code. You can also specify a connection URL (discussed next) using a system property or as a command-line argument. This way, not only can you use a different JDBC driver, but also a different DBMS without modifying the Java code.

Constructing a Connection URL

A database connection is established using a connection URL. The format of a connection URL is dependent upon the DMBS and a JDBC driver. There are three parts of a connection URL. A colon separates two parts of the connection URL. The syntax to define the connection URL is

```
<protocol>:<sub-protocol>:<data-source-details>
```

The `<protocol>` part is always set to `jdbc`. The `<sub-protocol>` part is vendor-specific. The `<data-source-details>` part is DBMS specific that is used to locate the database. In some cases, you can also specify some connection properties in this last part of the URL. The following is an example of a connection URL that uses Oracle's thin JDBC driver to connect to an Oracle DBMS:

```
jdbc:oracle:thin:@localhost:1521:chanda
```

As always, the protocol part is `jdbc`. The sub-protocol part is `oracle:thin`, which identifies the Oracle Corporation as the vendor, and the type of the driver it will use, which is `thin`. The data source details part is `@localhost:1521:chanda`. It has three subparts. The `@localhost` identifies the server name. You could use an IP address or a machine name of your Oracle database server instead. Then, it contains the port number at which Oracle's Transport Network Substrate (TNS) listener is running. The last part is an Oracle's instance name, which is `chanda` in this example. The following is another example of a connection URL that identifies a database in a Java DB server:

```
jdbc:derby://192.168.1.3:1527/beginningJavaDB;create=t
```

As always, the protocol part is `jdbc`. The subprotocol part is `derby`, which identifies the Apache Derby DBMS. Recall that Java DB is an Oracle's release of the Apache Derby project. The `192.168.1.3:1527` part the machine's IP address and the port number where Java DB server is running. The database name is `beginningJavaDB`. The last part, `create=true`, is the connection property that indicates that if a database named `beginningJavaDB` does not exist, create a new database with this name.

The following sections describe the formats for a connection URL for some DBMSs. You need to visit the official web site of a vendor to download a specific JDBC driver. You can also get the detailed information about using the JDBC drivers at the vendor's web site.

Oracle Database

DBMS: Oracle 10g
Vendor: Oracle Corporation
Web Site: <http://www.oracle.com>
Driver Type: JDBC Driver (thin - Pure Java)
URL Format: `jdbc:oracle:thin:@<server>:<port>:<instance>`
URL Example: `jdbc:oracle:thin:@localhost:1521:chanda`
Driver Class: `oracle.jdbc.driver.OracleDriver`

It is implemented 100% in Java. If you are using a thin Oracle driver, you do not need to install any Oracle-specific configuration software. If you are using JDBC to connect to an Oracle database in an applet, this is the driver you should use:

DBMS: Oracle 10g
Vendor: Oracle Corporation
Web Site: <http://www.oracle.com>
Driver Type: JDBC-Native Driver (OCI - Oracle Call Interface)
URL Format: `jdbc:oracle:oci:@<tns-alias>`
URL Example: `jdbc:oracle:oci:@orcl`
Driver Class: `oracle.jdbc.driver.OracleDriver`

You need to install the Oracle client software to use the OCI driver. The JDBC driver converts the standard JDBC calls to OCI calls, which are sent to the

database. The <tns-alias> part of the URL comes from an entry in the tnsnames.ora file. A typical TNS alias entry in a tnsnames.ora file looks as follows:

```
ORCL =
  (DESCRIPTION =
    (ADDRESS = (PROTOCOL = TCP) (HOST = HYE6754) (PORT
= 1521))
    (CONNECT_DATA =
      (SERVER = DEDICATED)
      (SERVICE_NAME = orcl)
    )
  )
```

The Oracle JDBC driver also lets you specify the entire text for a TNS alias as the part of the JDBC connection URL as shown:

```
String dbURL="jdbc:oracle:oci:@(DESCRIPTION =
  "(ADDRESS = (PROTOCOL = TCP) (HOST = HYE6754) (PORT
= 1521))" +
  "(CONNECT_DATA =(SERVER = DEDICATED) (SERVICE_NAME
= orcl))";
```

Adaptive Server Anywhere Database

DBMS: Adaptive Server Anywhere 9.0

Driver Type: JDBC Driver (Pure Java)

Vendor: Sybase Inc.

Web Site: <http://www.sybase.com>

URL Format: jdbc:sybase:Tds:<server>:<port>

URL Example: jdbc:sybase:Tds:localhost:2638

Driver Class: com.sybase.jdbc2.jdbc.SybDriver

SQL Server Database

You can use either of the following two JDBC drivers to connect to a SQL Server database:

```
// Driver #1
DBMS: SQL Server
Vendor: Microsoft Corporation
Web Site: http://www.microsoft.com
Driver Type: JDBC Driver (Pure Java)
URL Format: jdbc:SQLserver://<server>:<port>
URL Example:
jdbc:SQLserver://HYE6754:1433;Database=chanda
Driver Class:
com.microsoft.SQLserver.jdbc.SQLServerDriver

// Driver #2
DBMS: SQL Server
Vendor: SourceForge Inc.
Web Site: http://www.sourceforge.net
Driver Type: JDBC Driver (Pure Java)
URL Format: jdbc:jtds:<server_type>://<server>:
<port>/<database>;<props>
URL Example: jdbc:jtds:sqlserver://HYE6754:1433/chanda
Driver Class: net.sourceforge.jtds.jdbc.Driver
```

When you use the driver #2, you can specify `sqlserver` or `sybase` as `<server_type>` to connect to SQL Server or Sybase DBMS, respectively. `<props>` is a comma-separated list of `property=value` pairs, where `property` is the name of the database property and `value` is its value. For example, if you want to specify the user and password as part of the URL, you can use `<props>` as `user=myuserid;password=mysecretpassword`.

The parts of the URL, `<port>`, `<database>`, and `<props>`, are optional. If you do not specify them, their default values will be used. The default value for `<port>` is 1433 for SQL Server and 7100 for Sybase.

MySQL Database

```
DBMS: MySQL Server 5.0
Vendor: Oracle Corporation
Web Site: http://www.oracle.com
Driver Type: JDBC Driver (Pure Java)
URL Format: jdbc:mysql://<server>:<port>/<database>?
```

```
<props>
URL Example: jdbc:mysql://HYE6754:3306/chanda
Driver Class: com.mysql.jdbc.Driver
```

Most parts in the connection URL are optional for MySQL databases. For example, you can use the shortest connection URL for MySQL as `jdbc:mysql://`, and all other parts will be assumed as their default values. The default value for `<server>` and `<port>` are `localhost` and `3306`. You can supply a comma-separated list of `<server>:<port>` values to be used as fail-over servers. If you do not supply the value for `<database>`, you can either call the `setCatalog ("catalog name")` method on the `Connection` object after establishing the connection, or supply the catalog name as part of all your queries. You have specified `chanda` as your database in the example URL. The `<props>` is an ampersand(&)-separated list of `name=value` pairs. For example, you can pass the user id and password with the connection URL as follows. It uses `root` as the user id and `chanda` as the password.

```
jdbc:mysql://localhost:3306/chanda?
user=root&password=chanda .
```

DB2 Database

DBMS: DB2
Vendor: IBM
Web Site: <http://www.ibm.com>
Driver Type: JDBC Driver (Pure Java)
URL Format: `jdbc:db2://<server>:<port>/<database>?`
<props>
URL Example: `jdbc:db2://localhost:50000/chandaDB`
Driver Class: `com.ibm.db2.jcc.DB2Driver`

You can use `jdbc:db2:` or `jdbc:db2j:net:` as the initial part of the URL. If the URL starts with `jdbc:db2:`, it indicates that the connection is to a server in the DB2 UDB family. If the URL starts with `jdbc:db2j:net:`, it indicates that the connection is to a remote IBM^(R) Cloudscape^(TM) server. The `<props>` part in the URL is a comma-separated list of `name=value` pairs of properties for the database connection. For example, the following URL

specifies the user and password properties as admin and secret, respectively:

```
jdbc:db2://localhost:5021/chandaDB:user=admin;password=
```

Please visit IBM's official web site for more details about the properties that you can set in the JDBC connection URL.

Java DB Database

DBMS: Java DB (Apache Derby)

Web Site: <http://www.oracle.com>

Driver Type: JDBC Driver (Pure Java)

URL Format: jdbc:derby://<server>:<port>/<database>;

<props>

URL Example:

```
jdbc:derby://localhost:1527/beginningJavaDB;create=true
```

Driver Class: org.apache.derby.jdbc.ClientDriver

The default user name and password are app and app, respectively. The property create=true is specified to create an empty database, if it does not exist. There are other types of JDBC drivers for Java DB. The client driver lets you connect to it when the Java DB is running as a server and your application accesses it as a client. You can also start the Java DB in the same JVM your application is running, and your application and Java DB will run in the same process. When Java DB runs in the same process as your application, you can use the embedded JDBC driver to access the database.

Loading the JDBC driver for the embedded Java DB starts the Java DB database. The following is an example of the connection URL to start the Java DB in embedded mode and connect to a database named beginningJavaDB:

```
jdbc:derby:beginningJavaDB
```

Recall that a Java DB database has a directory with the same name as the database name. How will the JDBC driver find the beginningJavaDB directory using this connection URL? It will use the directory specified by the derby.system.home property. If the property is not specified, it will use the current directory. The following java command starts a Java application by specifying the derby.system.home property:

```
java -Dderby.system.home=C:\myDatabases  
com.jdojo.jdbc.MyApp
```

If you use the database name inside the `MyApp` class, it will be searched in the `C:\myDatabases` directory.

You can also specify the full path of the database directory in the connection URL. The following connection URL specifies the full path of the database on Windows:

```
jdbc:derby:C:/myDatabases/beginningJavaDB
```

In the database full path, you can use a forward slash as the path separator on Windows as well as UNIX.

If your database directory is in the CLASSPATH, you can construct a connection URL using the `classpath` sub-protocol as follows:

```
jdbc:derby:classpath:beginningJavaDB
```

The connection URL will look for a `beginningJavaDB` directory in the CLASSPATH. If your database in the `test` directory under a directory in the CLASSPATH, you can construct the connection URL as follows:

```
jdbc:derby:classpath:test/beginningJavaDB
```

Java DB is very flexible in letting you specify the connection URL. It also lets you access a read-only database from a JAR/ZIP file. The following connection URL looks for the `beginningJavaDB` database under the `test` directory in the `C:\myDatabases.jar` file:

```
jdbc:derby:jar:  
(C:/myDatabases.jar)test/beginningJavaDB
```

Establishing the Database Connection

It is time to connect to the database. You need to use the `getConnection()` static method of the `DriverManager` class to establish a connection to a database. It returns an object of the `java.sql.Connection` interface, which represents the database connection. The `getConnection()` method takes a connection URL, a user id, a password, and any number of name-value pairs

using a `java.util.Properties` object. The `getConnection()` method is overloaded:

- `static Connection getConnection(String url) throws SQLException`
- `static Connection getConnection(String url, Properties info) throws SQLException`
- `static Connection getConnection(String url, String user, String password) throws SQLException`

You will find it annoying that you need to handle the `java.sql.SQLException` exception for almost every operation with a database using a JDBC driver. It is a checked exception and the compiler will force you to handle it either by placing your code in a `try-catch` block or by using a `throws` clause. Even though you write only one line of code, you will end up using a `try-catch` block. You will create a utility class with some static methods for a one-liner code that will handle the exceptions for you. Whenever you need to use that one-liner code functionality, you will use the utility class methods instead of using the JDBC methods directly. This approach will avoid bloated code in the examples in this chapter.

The following snippet of code establishes a connection to a database named `beginningJavaDB` in Java DB running in embedded mode:

```
// Register the JDBC driver
Driver derbyEmbeddedDriver = new
org.apache.derby.jdbc.EmbeddedDriver();
DriverManager.registerDriver(derbyEmbeddedDriver);

// Prepare the connection URL
String dbURL
= "jdbc:derby:beginningJavaDB;create=true";

Connection conn = null;

try {
    conn = DriverManager.getConnection(dbURL,
```

```

        "root", "chanda");
        System.out.println("Connected to database
successfully");

        // Perform database activities here...
    }
catch(SQLException e) {
    e.printStackTrace();
}
finally {
    if (conn != null) {
        try {
            // Close the connection
            conn.close();
        }
        catch (SQLException e) {
            e.printStackTrace();
        }
    }
}
}

```

The Connection interface inherits from the `java.lang.AutoCloseable` interface. That means you can also use a `try-with-resources` block to obtain a Connection that will be automatically closed when the control exits the `try` block. You can rewrite the above code using a `try-with-resources` block as follows:

```

// Register the JDBC driver
Driver derbyEmbeddedDriver = new
org.apache.derby.jdbc.EmbeddedDriver();
DriverManager.registerDriver(derbyEmbeddedDriver);

// Prepare the connection URL
String dbURL
= "jdbc:derby:beginningJavaDB;create=true";

try (Connection conn = DriverManager.getConnection(dbURL, "root",
"chanda")) {

    System.out.println("Connected to database

```

```

        successfully");

        // Perform database activities here...
    }
catch (SQLException e) {
    e.printStackTrace();
}

```

If you need to connect to any other database, you will need to change two things: the JDBC driver that you register and the connection URL. Both the driver and the connection URL are DBMS-specific. Note the use of a `try-catch-finally` block in the code. When you are done with a database connection, you need to close it by using the `close()` method of the `Connection` object. The `close()` method of the `Connection` object throws a `SQLException`, which forces you to use another `try-catch` block. In a typical Java program, you will not close a connection just after connecting to a database. You will use the `Connection` object to perform some database activities, and then, you close the connection.

[Listing 6-1](#) contains the code for a `JDBCUtil` class, which you will use throughout this chapter to work with database connections. All of its methods are static and they are used to establish and close a database connection, close a `Statement`, close a `ResultSet`, commit a transaction, rollback a transaction, etc. I will discuss the `Statement` and `ResultSet` objects later in this chapter.

Listing 6-1. A Utility Class That Will be Used to Work With a Database

```

// JDBCUtil.java
package com.jdojo.jdbc;

import java.sql.Connection;
import java.sql.Driver;
import java.sql.DriverManager;
import java.sql.ResultSet;
import java.sql.SQLException;
import java.sql.Statement;

public class JDBCUtil {
    public static Connection getConnection() throws

```

```
SQLException {
    // Register the Java DB embedded JDBC
    driver
        Driver derbyEmbeddedDriver = new
org.apache.derby.jdbc.EmbeddedDriver();
        DriverManager.registerDriver(derbyEmbeddedDriver);

    // Construct the connection URL
    String dbURL
= "jdbc:derby:beginningJavaDB;create=true;";
    String userId = "root";
    String password = "chanda";

    // Get a connection
    Connection conn
= DriverManager.getConnection(dbURL, userId,
password);

    // Set the auto-commit off
    conn.setAutoCommit(false);

    return conn;
}

public static void closeConnection(Connection
conn) {
    try {
        if (conn != null) {
            conn.close();
        }
    }
    catch (SQLException e) {
        e.printStackTrace();
    }
}

public static void closeStatement(Statement
stmt) {
    try {
        if (stmt != null) {
```

```
                stmt.close();
            }
        }
        catch (SQLException e) {
            e.printStackTrace();
        }
    }

public static void closeResultSet(ResultSet rs)
{
    try {
        if (rs != null) {
            rs.close();
        }
    }
    catch (SQLException e) {
        e.printStackTrace();
    }
}

public static void commit(Connection conn) {
    try {
        if (conn != null) {
            conn.commit();
        }
    }
    catch (SQLException e) {
        e.printStackTrace();
    }
}

public static void rollback(Connection conn) {
    try {
        if (conn != null) {
            conn.rollback();
        }
    }
    catch (SQLException e) {
        e.printStackTrace();
    }
}
```

```
        }
    }

public static void main(String[] args) {
    Connection conn = null;
    try {
        conn = JDBCUtil.getConnection();
        System.out.println("Connected to
the database.");
    }
    catch (SQLException e) {
        e.printStackTrace();
    }
    finally {
        JDBCUtil.closeConnection(conn);
    }
}
}
```

To connect to a database, you will use the `JDBCUtil.getConnection()` method. To close a connection, you will use the `JDBCUtil.closeConnection()` method. The `getConnection()` method uses Java DB-specific JDBC driver class and connection URL format. You must change the code in the `getConnection()` method, which will be specific to the DBMS that you want to connect to. It is important to note that you must be able to run the `JDBCUtil` class and make sure that you are able to connect to a DBMS successfully, before you can run other examples in this chapter.

Tip One of the most common mistakes that beginners make is not including the JDBC driver's Java classes (usually a JAR/ZIP file) in the CLASSPATH. Make sure that you have your JDBC driver-related classes included in the CLASSPATH. For example, include the `derby.jar` file in the CLASSPATH to use the Java DB embedded JDBC driver.

Setting the Auto-Commit Mode

When you connect to a database, the auto-commit property for the `Connection` object is set to `true` by default. If a connection is in an auto-commit mode, a SQL statement is committed automatically after its successful execution. If a connection is not in an auto-commit mode, you must call the `commit()` or `rollback()` method of the `Connection` object to commit or rollback a transaction. Typically, you disable the auto-commit mode for a connection in a JDBC application, so your application logic controls the final outcome of the transaction. To disable the auto-commit mode, you need to call the `setAutoCommit(false)` on the `Connection` object after connection has been established. If a connection URL allows you to set the auto-commit mode, you can also specify it as part of the connection URL. You set the auto-commit mode of your connection in the `JDBCUtil.getConnection()` method to `false` after you get a `Connection` object.

```
// Get a connection
Connection conn = DriverManager.getConnection(dbURL,
userId, password);

// Set the auto-commit off
conn.setAutoCommit(false);
```

If you have enabled the auto-commit mode for your connection, you cannot use its `commit()` and `rollback()` methods. Calling the `commit()` and `rollback()` methods on a `Connection` object, which has enabled the auto-commit mode, throws an exception. JDBC also lets you use save points in a transaction, so that you can apply a partial rollback to a transaction. I will have an example of using save points later in this chapter.

If the `setAutoCommit()` method is called to change the auto-commit mode of a connection in the middle of a transaction, the transaction is committed at that time. Typically, you would set the auto-commit mode of a connection just after connecting to the database.

Committing and Rolling Back

Transactions

If the auto-commit mode is disabled for a connection, you can use the `commit()` or `rollback()` method to commit or rollback a transaction. A typical pseudo code in a JDBC application that performs a database transaction is as shown:

```
Connection conn = get a connection;

// Disable auto-commit mode
conn.setAutoCommit(false);

// Perform database transaction activities here

IF transaction is successful THEN
    conn.commit(); // Commit the transaction
ELSE
    conn.rollback(); // Rollback the transaction
END IF

conn.close(); // Close the connection
```

The error handling code is not shown. Typically, a `try-catch` or `try-catch-finally` block replaces the `IF` statement shown above.

Transaction Isolation Level

In a multi-user database, you will often come across the following two terms:

- Data concurrency
- Data consistency

Data concurrency refers to the ability of multiple users to use the same data concurrently. Data consistency refers to the accuracy of the data that is maintained when multiple users are manipulating the data concurrently. As the data concurrency increases (i.e. more users work on the same data), care must be taken to maintain a desired level of data consistency. A database maintains data

consistency using locks and by isolating one transaction from another. How much a transaction is isolated from another transaction depends on the desired level of data consistency. Let's look at three phenomena where data consistency may be compromised in a multi-user environment where multiple concurrent transactions are supported.

Dirty Read

In a dirty read, a transaction reads uncommitted data from another transaction. Consider the following sequence of steps, which results in inconsistent data because of a dirty read:

- Transaction A inserts a new row in a table and it has not committed it yet.
- Transaction B reads the uncommitted row inserted by the transaction A.
- Transaction A rollbacks the changes.
- At this point, transaction B is left with data for a row that does not exist.

Non-Repeatable Read

In a non-repeatable read, when a transaction re-reads the data, it finds that the data has been modified by another transaction that has been already committed. Consider the following sequence of steps, which results in inconsistent data because of a non-repeatable read:

- Transaction A reads a row.
- Transaction B modifies or deletes the same row and commits the changes.
- Transaction A re-reads the same row and finds that the row has been modified or deleted.

Phantom Read

In a phantom read, when a transaction re-executes the same query, it finds more data that satisfies the query. Consider the following sequence of steps, which results in inconsistent data, because of a phantom read:

- Transaction A executes a query (say Q) and finds X number of rows matching the query.
- Transaction B inserts some rows that satisfy the query Q criteria and commits.
- Transaction A re-executes the same query (Q) and finds Y number of rows ($Y > X$) matching the query.

Note that the difference between a non-repeatable read and a phantom read is that the former finds that the rows have changed between reads and the latter finds that there are more rows matching the same query.

The ANSI SQL-92 standard defines four transaction isolation levels in terms of the above-described three situations for data consistency. Each isolation level defines what kinds of data inconsistencies are allowed, or not allowed. The four transaction isolation levels are as follows:

- Read Uncommitted
- Read Committed
- Repeatable Read
- Serializable

[Table 6-3](#) shows the four isolation levels and the three permitted situations. It is up to a DBMS to decide how they implement these isolation levels. A DBMS may offer additional isolation levels. A DBMS may implement the same isolation level a little differently. Please consult your DBMS documentation for more details about the isolation levels that your DBMS supports.

Table 6-3. Four Isolation Levels Defined by ANSI SQL-92

Isolation Level	Dirty Read	Non-Repeatable Read	Phantom Read
Read Uncommitted	Permitted	Permitted	Permitted
Read Committed	Not Permitted	Permitted	Permitted
Repeatable Read	Not Permitted	Not Permitted	Permitted
Serializable	Not Permitted	Not Permitted	Not Permitted

Java defines the following four constants in the `Connection` interface that correspond to the four isolation levels defined by the ANSI SQL-92 standard:

- `TRANSACTION_READ_UNCOMMITTED`
- `TRANSACTION_READ_COMMITTED`
- `TRANSACTION_REPEATABLE_READ`
- `TRANSACTION_SERIALIZABLE`

You can set the isolation level of a transaction for a database connection using the `setTransactionIsolation(int level)` method of the `Connection` interface.

```
// Get a Connection object
Connection conn = get a connection object...;

// Set the transaction isolation level to read
committed
conn.setTransactionIsolation(Connection.TRANSACTION_
```

You can use the `getTransactionIsolation()` method of the `Connection` interface to get the current setting for the transaction isolation level for the connection. The default transaction isolation level is JDBC driver-dependent. You can also use the following three methods of the `DatabaseMetaData` interface to get more insight about the transaction isolation levels supported by a DBMS. The method names are self-explanatory.

- `int getDefaultTransactionIsolation()`
`throws SQLException`
- `boolean supportsTransactions()` `throws`

```

SQLException
• boolean
    supportsTransactionIsolationLevel(int
        level) throws SQLException

```

The Connection interface defines a TRANSACTION_NONE constant to indicate that a JDBC driver does not support transactions and it is not a JDBC-compliant driver. This constant is not used with the setTransactionIsolation() method. The getTransactionIsolation() method may return this constant. You can change the transaction isolation for a Connection object any time. However, the effect of changing the transaction isolation of a connection is JDBC driver-dependent if it is changed when a transaction is in progress.

JDBC-Types-to-Java-Types Mapping

The JDBC API allows you to access and manipulate data stored in a database in a Java environment. The database uses its own data types, whereas Java uses its own. [Table 6-4](#) lists the mappings between JDBC data types and Java data types.

Table 6-4. Data Types Mapping Between JDBC and Java

JDBC Type	Java Type
ARRAY	java.sql.Array
BIGINT	long
BINARY	byte[]
BIT	boolean
BLOB	java.sql.Blob
BOOLEAN	boolean
CHAR	String
CLOB	java.sql.Clob
DATALINK	java.net.URL
DATE	java.sql.Date

DATE	java.time.LocalDate
DECIMAL	java.math.BigDecimal
DISTINCT	Mapping of underlying type
DOUBLE	double
FLOAT	double
INTEGER	int
JAVA_OBJECT	underlying Java class
LONGNVARCHAR	String
LONGVARBINARY	byte[]
LONGVARCHAR	String
NCHAR	String
NCLOB	java.sql.NClob
NUMERIC	java.math.BigDecimal
NVARCHAR	String
REAL	float
REF	java.sql.Ref
REF_CURSOR	Java.sql.ResultSet
ROWID	java.sql.RowId
SMALLINT	short
SQLXML	java.sql.SQLXML
STRUCT	java.sql.Struct
TIME	java.sql.Time
TIME	java.time.LocalTime
TIME_WITH_TIMEZONE	java.time.OffsetTime
TIMESTAMP	java.sql.Timestamp
TIMESTAMP_WITH_TIMEZONE	java.time.OffsetDateTime
TINYINT	byte
VARBINARY	byte[]
VARCHAR	String

Java 8 added the JDBC types named REF_CURSOR, TIME_WITH_TIMEZONE, and TIMESTAMP_WITH_TIMEZONE. Prior to Java

8, you could work with date, time, and timestamp JDBC types using the Date, Time, and Timestamp classes in the `java.sql` package. In Java 8, the date- and time-related JDBC types have also been mapped to the new date and time classes in the `java.time` package. For example, you can use a `java.sql.Date` or a `java.time.LocalDate` object for the DATE JDBC type. If you are using the date- and time-related objects from the `java.time` package for a JDBC DATE type, you will need to use them as objects and use methods like `getObject()` and `setObject()` to get and set their values. Several methods have been added in the Date, Time, and Timestamp classes in the `java.sql` package to facilitate conversion between SQL dates/times and new dates/times in the `java.time` package.

Tip At the time of this writing, there is no support for new JDBC types in the JDBC drivers offered by Java DB and Oracle DBMSs.

All values listed in the JDBC Type column are defined as constants in the `Types` class. Java 8 added a new enum type called `JDBCType` that contains constants with the same name as the constants in the `Types` class. The `JDBCType` enum inherits from the `SQLType` interface that was also added in Java 8. When a data type expected in a method's argument, you will see the argument's type as `int` in old methods and you will need to pass one of the constants in the `Type` class. Java 8 has overloaded some of these methods to use the `JDBCType` enum instead. Whenever possible, use the constants in the `JDBCType` enum for the data types for type safety.

If you have to refer to a JDBC type in your Java code, you need to use the corresponding constant from the `Types` class. For example, suppose you need to set a `null` value for a parameter in a `PreparedStatement` object. The parameter type is of `int` type. The `PreparedStatement` interface provides a `setNull()` method as follows:

- `void setNull(int parameterIndex, int sqlType) throws SQLException`

The second parameter to the `setNull()` method accepts `sqlType`, which is the JDBC data type and is defined by the constants in the `java.sql.Types`

class. Suppose the index of the parameter in `PreparedStatement` is 2. You will call the `setNull()` method as shown:

```
myPreparedStatement.setNull(2, java.sql.Types.INTEGER);
```

This table also tells you about the type of the Java variables you need to use to read data from a database. Suppose a column is declared `varchar(20)` in a database table. [Table 6-4](#) maps the JDBC `VARCHAR` data type to the Java `String` type. It means that you need to use a `String` reference type variable in your Java program to hold the value of a `VARCHAR` type in the database. Suppose you are reading the value of a `first_name` column from a database table using a `ResultSet` object, which is declared as `varchar(20)`. Your code would be similar to the following code:

```
String firstName  
= myResultSet.getString("first_name");
```

The mapping shown in this table is used throughout this chapter when you get, set, or update values that cross a JDBC–JAVA boundary. You will be using three sets of methods while working with data in JDBC programs: `getXxx()`, `setXxx()`, and `updateXxx()`, where `Xxx` indicates a data type such as `int`, `String`, `Date`, etc. These methods are found in many interfaces that are used in this chapter such as `PreparedStatement`, `ResultSet`, etc.

A `getXxx()` method is used to read data from a JDBC environment to a Java program. A `setXxx()` method is used to set a value in a Java program that will finally be passed to a JDBC environment. An `updateXxx()` method is used to update a data element that was retrieved from a JDBC environment and the updated value will be passed again to a JDBC environment. For example, you use `getInt()`, `setInt()`, and `updateInt()` to read, set, and update a value that is of type `INTEGER` in a database and is represented as `int` data type in Java code. You can use the `getObject()`, `setObject()`, and `updateObject()` methods to work with all data types provided the supplied arguments to the method are assignment compatible with the actual data types. Wherever possible, an implicit data type conversion is performed internally by the JDBC API. For example, if a JDBC type maps to a short type in Java, you can use the `getShort()` method to read its value. If you use the `getInt()` method to read a short value, the short value is implicitly converted to `int`. Another example of this is to read a JDBC `INTEGER` value using a

`getString()` method. Suppose you want to read the value of an INTEGER type column, `person_id`, from a result set. You can use either of the following two statements. The JDBC driver will perform implicit conversion from `int` to `String` in the second statement.

```
int personIdInt = myResultSet.getInt("person_id");
String personIdStr
= myResultSet.getString("person_id");
```

Knowing About the Database

The same database feature may be supported differently, or not supported at all, by different DBMSs. Sometimes a JDBC driver may implement a wrapper around the feature supported by the underlying DBMS. An instance of the `DatabaseMetaData` interface gives you detailed information about the features supported by a DBMS through the JDBC driver. The JDBC driver vendor supplies the implementation class for the `DatabaseMetaData` interface. You can get a `DatabaseMetaData` object using the `getMetaData()` method of the `Connection` object as shown:

```
Connection conn = JDBCUtil.getConnection();
// Get DatabaseMetaData object
DatabaseMetaData dbmd = conn.getMetaData();
```

[Listing 6-2](#) contains the complete code that prints some pieces of information about the database you are connected to. The output shows the database information about the Java DB, supported features, and JDBC driver. You may get a different output.

Listing 6-2. Using a `DatabaseMetaData` Object to Know About a DBMS

```
// DatabaseMetaDataTest.java
package com.jdojo.jdbc;

import java.sql.Connection;
import java.sql.SQLException;
```

```
import java.sql.DatabaseMetaData;

public class DatabaseMetaDataTest {
    public static void main(String[] args) {
        Connection conn = null;
        try {
            conn = JDBCUtil.getConnection();

            // Get DatabaseMetaData object
            DatabaseMetaData dbmd
            = conn.getMetaData();

            System.out.println("About the
database...");

            String dbName
            = dbmd.getDatabaseProductName();
            String dbVersion
            = dbmd.getDatabaseProductVersion();
            String dbURL = dbmd.getURL();
            System.out.println("Database
Name:" + dbName);
            System.out.println("Database
Version:" + dbVersion);
            System.out.println("Database URL:"
+ dbURL);

            System.out.printf("%nAbout JDBC
driver...%n");
            String driverName
            = dbmd.getDriverName();
            String driverVersion
            = dbmd.getDriverVersion();
            System.out.println("Driver Name:"
+ driverName);
            System.out.println("Driver
Version:" + driverVersion);

            System.out.printf("%nAbout
supported features...%n");
        }
    }
}
```

```

        boolean ansi92BiEntry
= dbmd.supportsANSI92EntryLevelSQL();
        boolean ansi92Intermediate =
            dbmd.supportsANSI92Intermediate;
        boolean ansi92Full
= dbmd.supportsANSI92FullSQL();
        boolean supportsBatchUpdates
= dbmd.supportsBatchUpdates();
        System.out.println("Supports Entry
Level ANSI92 SQL:" +
                                ansi92BiEntry);
        System.out.println("Supports
Intermediate Level ANSI92 SQL:" +
                                ansi92Intermediate);
        System.out.println("Supports Full
Level ANSI92 SQL:" +
                                ansi92Full);
        System.out.println("Supports batch
updates:" +
supportsBatchUpdates);
    }
    catch (SQLException e) {
        e.printStackTrace();
    }
    finally {
        JDBCUtil.closeConnection(conn);
    }
}

```

About the database...

Database Name:Apache Derby
 Database Version:10.10.1.3 - (1557168)
 Database URL:jdbc:derby:beginningJavaDB

About JDBC driver...

Driver Name:Apache Derby Embedded JDBC Driver

Driver Version:10.10.1.3 - (1557168)

About supported features...

Supports Entry Level ANSI92 SQL:true

Supports Intermediate Level ANSI92 SQL:false

Supports Full Level ANSI92 SQL:false

Supports batch updates:true

The DatabaseMetaData interface has many methods. Please refer to the API documentation on this interface for more details. Typically, a tool uses this interface to present the user with features supported by a DBMS. If you are working on a JDBC project that may use different DBMS and JDBC drivers, you will need to use a DatabaseMetaData object, so you can inform the user at runtime what features your application will support based on the JDBC driver and the DBMS they use.

Executing SQL Statements

You can execute different types of SQL statements using a JDBC driver. Based on the type of work that a SQL statement performs in a DBMS, it can be categorized as follows:

- **A Data Definition Language (DDL) Statement:** Examples of DDL statements are CREATE TABLE, ALTER TABLE, etc.
- **A Data Manipulation Language (DML) Statement:** Examples of DML statements are SELECT, INSERT, UPDATE, DELETE, etc.
- **A Data Control Language (DCL) Statement:** Examples of DCL statements are GRANT and REVOKE.
- **A Transaction Control Language (TCL) Statement:** Examples of TCL statements are COMMIT, ROLLBACK, SAVEPOINT, etc.

You can execute DDL, DML, and DCL statements using different types of

JDBC statement objects. An instance of the Statement interface represents a SQL statement in a Java program. You can execute TCL statements using the methods of a Connection object.

Java uses three different interfaces to represent SQL statements in different formats:

- Statement
- PreparedStatement
- CallableStatement

The PreparedStatement interface inherits from the Statement interface and the CallableStatement interface inherits from the PreparedStatement interface. You need not worry about the implementation details of these interfaces at all. The vendor of the JDBC driver will supply the implementation classes for these interfaces. You just need to know which method to call on a Connection object to get a specific type of the Statement object.

If you have a SQL statement in the form of a string, you can use a Statement object to execute it. The SQL statement may or may not return a result set. Typically, a SELECT statement returns a result set with zero or more records. The SQL statements in the string format are compiled each time they are executed.

You can use a PreparedStatement, if you want to precompile a SQL statement once and execute it multiple times. It lets you specify a SQL statement in the form of a string that uses placeholders. You need to supply the values of the placeholders before you execute the statement. Using a PreparedStatement object is preferred over using a Statement object for the following three reasons:

- The SQL statement in a string form may be subject to hackers attack using a SQL injection technique. Consider a trivial example of a SQL injection as shown in the following code for a getSQL() method:

```
public String getSQL(String personID) {  
    String SQL = "select * from person  
    " +
```

```

        "where person_id = "
+ personId;
        return SQL;
}

```

- The method accepts a `personId` and returns a SELECT statement. If this method is called as `getSQL("101")`, you do not have any problems. You will get a SQL statement as shown:

```

select * from person where person_id
= 101

```

- This query will return a maximum of one record from the database assuming that `person_id` is the primary key for the `person` table.
- However, if this method is called as `getSQL("101 or 1 = 1")`, it will return a SELECT statement as follows:

```

select * from person where person_id
= 101 or 1 = 1

```

- The above statement is dangerous to execute in a production database. It will return all records from the `person` table to the client, which may pose a security risk. It may also degrade the performance of the database server and/or application server, which may result in a denial of service for other users.
- A `PreparedStatement` constructs a SQL in a string format using placeholders. The above SELECT statement will be written as follows:

```

String pSQL = "select * from person
where person_id = ?";

```

- Note the use of the question mark in the statement. A question mark is used as a placeholder. Its value is supplied later using a method of the `PreparedStatement` object. Using a `PreparedStatement` eliminates the threat of a

SQL injection.

- The `PreparedStatement` improves the performance of your JDBC application by compiling a statement once and executing it multiple times.
- A `PreparedStatement` lets you use Java data types to supply values in a SQL statement instead of using strings. For example, say you want to write a query to get person records whose birth date is later than January 1, 1970. You may write a query as follows:

```
select * from person where dob > '1970-01-01'
```

- However, this query will not execute properly in all databases. It assumes that a date literal can be specified in the `yyyy-mm-dd` format. Different databases use different formats for a date string literal. If you use a `PreparedStatement`, you can rewrite this query as shown:

```
select * from person where dob > ?
```

- You can use a `java.sql.Date` object to specify the value for the `dob` criterion and the JDBC driver will take care of converting it into a DBMS-specific value of the date data type.

You can use a `CallableStatement` object to execute a database-stored procedure or function in a database. The stored procedure may return result sets.

Let's look at the three types of `Statement` objects one at a time in subsequent sections.

Results of Executing a SQL Statement

When you execute a SQL statement, the DBMS may return zero or more results. The results may include update counts (number of records affected in the database) or result sets (a group of records).

When you execute a SELECT statement, it returns a result set. When you execute an UPDATE or DELETE statement, it returns an update count, which is the number of records affected in the database by the SQL.

When you execute a stored procedure, it may return multiple update counts as well as multiple result sets. When there is a possibility of mixed results of update counts and result sets being returned from a SQL execution, it becomes trickier to process the results. A JDBC driver will let you get to the results in the order they were returned from the database. Please refer to the “Handling Multiple Results from a Statement” section later in this chapter for a complete discussion and examples of how to process multiple result sets and update counts.

Using the Statement Interface

You can use a Statement to execute any kind of SQL statement, provided the SQL statement is supported by the JDBC driver and the DBMS. Typically, you use one of its three methods called `execute()`, `executeUpdate()`, and `executeQuery()` to execute a SQL statement. These methods are overloaded. The following is a list of one of their versions that accept a SQL statement as a string:

- `boolean execute(String SQL) throws SQLException`
- `int executeUpdate(String SQL) throws SQLException`
- `ResultSet executeQuery(String SQL) throws SQLException`

Before I discuss which one the three methods of a Statement object to use in the code, here are the steps to execute a SQL statement using a Statement object:

1. Get a connection object.

```
Connection conn  
= JDBCUtil.getConnection();
```

2. Create a Statement object using the `createStatement()` method of the Connection object.

```
Statement stmt  
= conn.createStatement();
```

3. Execute one or more SQL statements by calling one of the three methods of the Statement object.

```
// Increase everyone's income by 10%  
String sql = "update person set income  
= income * 1.1";  
int rowsUpdated  
= stmt.executeUpdate(sql);  
  
// Execute other SQL statements using  
stmt
```

4. Close the Statement object to release the resources.

```
stmt.close();
```

5. Commit the transaction.

```
conn.commit();
```

The `execute()` method in the Statement interface is a general-purpose method that you can use to execute any types of SQL statements. Typically, it is used to execute a SQL statement that does not return a result set, such as a DDL statement like `CREATE TABLE`. The returned value from the `execute()` method indicates the status of the returned result set. If the first result is a `ResultSet` object, it returns `true`. It returns `false` if the first result is an update count or no result is returned from the DBMS.

The `executeUpdate()` method is used to execute a SQL statement that updates the data in the database such as `INSERT`, `UPDATE` and `DELETE` statements. It returns the number of rows affected in the database by the execution of the statement. You may use this method to execute other kinds of SQL statements, such as a `CREATE TABLE` statement, which do not return anything. The method returns zero when the SQL statement does not return

anything. You should not use this method to execute a SELECT statement.

Tip Java 8 has added a `executeLargeUpdate()` method that works the same as the `executeUpdate()` method, except that it returns a `long` instead of an `int`. Use this method when you expect the update count to exceed `Integer.MAX_VALUE`.

The `executeQuery()` method is especially designed to execute a SQL statement that produces one and only one result set. It is best suited for executing a SELECT statement. Although you can execute a stored procedure, which produces a result set, using this method of the Statement interface, you should instead use the specially designed CallableStatement interface's `execute()` method to execute a stored procedure.

A Statement object executes a SQL statement stored in a string. Databases have their own data types. How do you pass everything in a string format? Sometimes you may need to use some objects in a SQL statement that may not be expressed in a string format such as a binary large object. You can use a PreparedStatement to have more control over preparing a SQL statement, which cannot be expressed in a string format.

Most commonly, you will encounter problems in expressing date, time, and timestamp values in a string format. Suppose you want to increase the income of all persons by 20% whose date of birth is greater than January 25, 1970. Your update statement may look like the one shown:

```
String sql = "update person " +
    "set income = income * 1.2 " +
    "where dob > '1970-01-25';"
```

Not all DBMSs will recognize '1970-01-25' as a date. JDBC defines escape sequences for the date, time, and timestamp data types. It is of the form

```
{<type> '<value>' }
```

[Table 6-5](#) lists the format and examples for date, time and timestamp escape sequences that you need to use in your SQL strings. A JDBC driver will convert the escape sequences in a format, which is appropriate for the database. You can rewrite the above update statement using a date escape sequence as follows:

```

String sql = "update person " +
    "set income = income * 1.2 " +
    "where dob > {d '1970-01-25'}";

```

Table 6-5. JDBC Escape Sequences for Date, Time, and Timestamp Data Types

Data Type	<type>	<value> format	Example
Date	d	yyyy-mm-dd	{d '1970-01-25'}
Time	t	hh:mm:ss	{t '01:09:50'}
Timestamp	ts	yyyy-mm-dd hh:mm:ss.f...	{ts '1970-01-25 01:09:50'}

Most of the examples in this chapter use the person table in the database. It is assumed that you have created the person table in the database you are using. The generic definition of the person table is shown in [Table 6-2](#). If you have not created the table yet, you can run the program in [Listing 6-3](#). The program uses the CREATE TABLE syntax for Java DB. If you are using a DBMS other than Java DB, please change the syntax before running the program. It prints the following message when the person table is created successfully:

Person table created.

If the person table already exists, the program prints the following error message for Java DB:

Table/View 'PERSON' already exists in Schema 'ROOT'.

The error message may be different for the DBMS other than Java DB, but it will convey the same meaning that the person table already exists in the database.

[Listing 6-3.](#) Creating the person Table in the Database

```

// CreatePersonTable.java
package com.jdojo.jdbc;

import java.sql.Connection;
import java.sql.SQLException;
import java.sql.Statement;

```

```
public class CreatePersonTable {  
    public static void main(String[] args) {  
        Connection conn = null;  
        try {  
            conn = JDBCUtil.getConnection();  
  
            // Create a SQL string  
            String SQL = "create table person  
( " +  
                "person_id integer not  
null, " +  
                "first_name varchar(20)  
not null, " +  
                "last_name varchar(20)  
not null, " +  
                "gender char(1) not  
null, " +  
                "dob date, " +  
                "income double," +  
                "primary  
key(person_id))";  
  
            Statement stmt = null;  
            try {  
                stmt  
= conn.createStatement();  
                stmt.executeUpdate(SQL);  
            }  
            finally {  
                JDBCUtil.closeStatement(stmt)  
            }  
  
            // Commit the transaction  
            JDBCUtil.commit(conn);  
  
            System.out.println("Person table  
created.");  
        }  
        catch (SQLException e) {  
            System.out.println(e.getMessage());  
        }  
    }  
}
```

```
                JDBCUtil.rollback(conn);
            }
        finally {
            JDBCUtil.closeConnection(conn);
        }
    }
}
```

[Listing 6-4](#) contains the complete code that inserts three records in the person table. Note that it uses utility methods of the JDBCUtil class (see [Listing 6-1](#)) to perform some of the activities such as getting a Connection object, closing Statement object, committing/rolling back a transaction, etc. If you run the program in [Listing 6-4](#) more than once, it will print an error message stating that you are trying to insert duplicate key in the person table because you have defined the person_id as the primary key in the table, and every time you run the program, it inserts the same set of person_id values.

Listing 6-4. Executing a SQL INSERT Statement Using a Statement Object

```
// InsertPersonTest.java
package com.jdojo.jdbc;

import java.sql.Connection;
import java.sql.SQLException;
import java.sql.Statement;

public class InsertPersonTest {
    public static void main(String[] args) {
        Connection conn = null;
        try {
            conn = JDBCUtil.getConnection();

            // Insert 3 person records
            insertPerson(conn, 101, "John",
"Jacobs",
60000);
            insertPerson(conn, 102, "Donna",
"Duncan",
```

```

        "F", "{d '1960-01-01'}",
70000);
        insertPerson(conn, 103, "Buddy",
"Rice",
        "M", "{d '1975-01-01'}",
45000);

        // Commit the transaction
        JDBCUtil.commit(conn);

        System.out.println("Inserted
persons successfully.");
    }
    catch (SQLException e) {
        System.out.println(e.getMessage());
        JDBCUtil.rollback(conn);
    }
    finally {
        JDBCUtil.closeConnection(conn);
    }
}

public static void insertPerson(Connection
conn, int personId,
        String firstName, String lastName, String
gender, String dob,
        double income) throws SQLException {

        // Create a SQL string
        String SQL = "insert into person " +
                    "(person_id, first_name,
last_name," +
                    " gender, dob, income) " +
                    "values " +
                    "(" + personId + ", " +
                    "'" + firstName + "'" + ", " +
                    "'" + lastName + "'" + ", " +
                    "'" + gender + "'" + ", " +
                    dob + ", " +
                    income + ")";
}

```

```

        Statement stmt = null;
        try {
            stmt = conn.createStatement();
            stmt.executeUpdate(SQL);
        }
        finally {
            JDBCUtil.closeStatement(stmt);
        }
    }
}

```

You can execute any other SQL statements such as an UPDATE or DELETE statement using a Statement object. [Listing 6-5](#) and [Listing 6-6](#) demonstrate how to execute UPDATE and DELETE statements using a Statement object.

[Listing 6-5.](#) Executing a SQL UPDATE Statement Using a Statement Object

```

// UpdatePersonTest.java
package com.jdojo.jdbc;

import java.sql.Connection;
import java.sql.SQLException;
import java.sql.Statement;

public class UpdatePersonTest {
    public static void main(String[] args) {
        Connection conn = null;
        try {
            conn = JDBCUtil.getConnection();

            // Give everyone a 5% raise
            giveRaise(conn, 5.0);

            // Commit the transaction
            JDBCUtil.commit(conn);

            System.out.println("Updated person
records successfully.");
        }
    }
}

```

```

        catch (SQLException e) {
            System.out.println(e.getMessage());
            JDBCUtil.rollback(conn);
        }
    finally {
        JDBCUtil.closeConnection(conn);
    }
}

public static void giveRaise(Connection conn,
double percentRaise)
throws SQLException {
String SQL = "update person " +
    "set income = income + income * " +
    (percentRaise/100);
Statement stmt = null;
try {
    stmt = conn.createStatement();
    int updatedCount
= stmt.executeUpdate(SQL);

        // Print how many records were
updated
    System.out.println("Gave raise to
" +
                    updatedCount +
person(s));
}
finally {
    JDBCUtil.closeStatement(stmt);
}
}
}

```

Listing 6-6. Executing a SQL DELETE Statement Using a Statement Object

```
// DeletePersonTest.java
package com.jdojo.jdbc;
```

```
import java.sql.Connection;
import java.sql.SQLException;
import java.sql.Statement;

public class DeletePersonTest {
    public static void main(String[] args) {
        Connection conn = null;
        try {
            conn = JDBCUtil.getConnection();

            // Delete the person with
person_id = 101
            deletePerson(conn, 101);

            // Commit the transaction
            JDBCUtil.commit(conn);
        }
        catch (SQLException e) {
            System.out.println(e.getMessage());
            JDBCUtil.rollback(conn);
        }
        finally {
            JDBCUtil.closeConnection(conn);
        }
    }

    public static void deletePerson(Connection
conn, int personId)
            throws SQLException {
        String SQL = "delete from person " +
                    "where person_id = "
+ personId;
        Statement stmt = null;
        try {
            stmt = conn.createStatement();
            int deletedCount
= stmt.executeUpdate(SQL);

            // Print how many persons were
deleted
        }
    }
}
```

```

        System.out.println("Deleted " +
                           deletedCount + "
person(s));
    }
    finally {
        JDBCUtil.closeStatement(stmt);
    }
}
}

```

Using the PreparedStatement Interface

The `PreparedStatement` interface inherits from the `Statement` interface. It is preferred over the `Statement` interface to execute a SQL statement. It precompiles the SQL statement provided DBMS supports a SQL statement precompilation. It reuses the precompiled SQL statement if the statement is executed multiple times. It lets you prepare a SQL statement, which is in a string format, using placeholders for input parameters.

A question mark in a SQL string is a placeholder for an input parameter whose value will be supplied before the statement is executed. Suppose you want to use a `PreparedStatement` to insert a record in the `person` table. Your SQL statement in a string format would be as follows:

```

String sql = "insert into person " +
             "(person_id, first_name, last_name, gender,
dob, income) " +
             "values " +
             "(?, ?, ?, ?, ?, ?)";

```

In this example, each of the six question marks is a placeholder for a value. The first question mark is a placeholder for `person_id`, the second one for `first_name`, and so on. Each placeholder has an index. The first placeholder in a SQL string is given an index of 1, the second placeholder an index of 2, and so on. Note that the index of the placeholder starts at 1, not 0.

You can create a `PreparedStatement` using the `prepareStatement()` method of the `Connection` object. The `prepareStatement()` method is overloaded. In its simplest form, it accepts

a SQL string as follows:

```
String sql = "your sql statement goes here";
Connection conn = JDBCUtil.getConnection();

// Obtain a PreparedStatement for the sql
PreparedStatement pstmt = conn.prepareStatement(sql);
```

The next step is to supply the values for the placeholders one-by-one using a `setXxx()` method of the `PreparedStatement` interface, where `Xxx` is the data type of the placeholder. The `setXxx()` method accepts two parameters: the first one is the index of the placeholder and the second one is the value for the placeholder. The second argument for the `setXxx()` method must be compatible with `Xxx`, which is the data type of the placeholder. If you want to set the values for the six placeholders for the `INSERT` statement to insert a record in the `person` table, you do it as follows:

```
pstmt.setInt(1, 301);           // person_id
pstmt.setString(2, "Tom");     // first name
pstmt.setString(3, "Baker");   // last name
pstmt.setString(4, "M");       // gender

/* Set dob as January 25, 1970. This time, you have
a lot more control
on the data type. You need to use the java.sql.Date
data type to set
the dob. You can use the valueOf() static method to
get a java.sql.Date
object from a date in a string format
*/
java.sql.Date dob = java.sql.Date.valueOf("1970-01-
25");

pstmt.setDate(5, dob);        // dob
pstmt.setDouble(6, 45900);    // income
```

Now it is time to send the SQL statement with the values for the placeholders to the database. You execute a SQL statement in a `PreparedStatement` using one of its `execute()`, `executeUpdate()`, and `executeQuery()` methods. These methods take no arguments. Recall that the `Statement`

interface has the same methods, which take SQL strings as their arguments. The PreparedStatement interface has added three methods with the same name, which take no arguments, because it gets its SQL string when it is created.

```
// Execute the INSERT statement in pstmt  
stmt.executeUpdate();
```

How do you reuse a PreparedStatement? Simply repopulate the placeholder values and call one of its execute() methods again. When you invoke the setXXX() method on a PreparedStatement object again, its previously set value for the specified placeholder is overwritten with the new value. A PreparedStatement keeps holding the set values for its placeholder even after it is executed. Therefore, if you want to set the same value for a placeholder for multiple executions, you need to set the value for that placeholder only once. If you want to clear the values of all placeholders, you can use the clearParameters() method of the PreparedStatement interface. The following snippet of code sets the values for all six placeholders again, and executes the statement:

```
// Set new values for placeholder  
stmt.setInt(1, 401);           // person_id  
stmt.setString(2, "Pam");     // first name  
stmt.setString(3, "Baker");   // last name  
stmt.setString(4, "F");       // gender  
stmt.setDate(5, java.sql.Date.valueOf("1970-01-25"));  
// dob  
stmt.setDouble(6, 25900);      // income  
  
// Execute the INSERT statement in stmt to insert  
another row  
stmt.executeUpdate();
```

When you are done with executing the statement in a PreparedStatement object, you need to close it using its close() method.

```
// Close the PreparedStatement  
stmt.close();
```

[Listing 6-7](#) demonstrates how to use a PreparedStatement object to

execute an `INSERT SQL` statement. Note that this example reuses the `PreparedStatement` to insert two records in the `person` table.

Listing 6-7. Using a `PreparedStatement` Object to Execute an `INSERT` Statement

```
// PreparedStatementTest.java
package com.jdojo.jdbc;

import java.sql.Connection;
import java.sql.Date;
import java.sql.PreparedStatement;
import java.sql.SQLException;
import java.sql.Types;

public class PreparedStatementTest {
    public static void main(String[] args) {
        Connection conn = null;
        PreparedStatement pstmt = null;
        try {
            conn = JDBCUtil.getConnection();
            pstmt = getInsertSQL(conn);

            // Need to get dob in
            java.sql.Date object
            Date dob = Date.valueOf("1970-01-
01");

            // Insert two person records
            insertPerson(pstmt, 401, "Sara",
"Jain", "F", dob, 0.0);
            insertPerson(pstmt, 501, "Su",
"Chi", "F", null, 10000.0);

            // Commit the transaction
            JDBCUtil.commit(conn);

            System.out.println("Updated person
records successfully.");
        }
        catch (SQLException e) {
```

```
        System.out.println(e.getMessage());
        JDBCUtil.rollback(conn);
    }
    finally {
        JDBCUtil.closeStatement(pstmt);
        JDBCUtil.closeConnection(conn);
    }
}

public static void
insertPerson(PreparedStatement pstmt,
            int personId, String firstName, String
lastName,
            String gender, Date dob, double income)
throws SQLException {
    // Set all the input parameters
    pstmt.setInt(1, personId);
    pstmt.setString(2, firstName);
    pstmt.setString(3, lastName);
    pstmt.setString(4, gender);

    // Set the dob value properly if it is
null
    if (dob == null) {
        pstmt.setNull(5, Types.DATE);
    }
    else {
        pstmt.setDate(5, dob);
    }

    pstmt.setDouble(6, income);

    // Execute the statement
    pstmt.executeUpdate();
}

public static PreparedStatement
getInsertSQL(Connection conn)
    throws SQLException {
String SQL = "insert into person " +
```

```

        " (person_id, first_name, last_name,
gender, dob, income) " +
        "values " +
        "(?, ?, ?, ?, ?, ?, ?)";
        PreparedStatement pstmt
= conn.prepareStatement(SQL);
        return pstmt;
    }
}

```

CallableStatement Interface

The CallableStatement interface inherits from the PreparedStatement interface. It is used to call a SQL stored procedure or a function in a database. You can also call a stored procedure or a function using the Statement object. However, using a CallableStatement is the preferred way.

The JDBC API makes it possible to call SQL stored procedures and functions using a standard syntax. To execute a stored procedure, a different DBMS may use a different syntax. If you are using the JDBC API to call a stored procedure, you need to learn only one standard way to execute stored procedures in all DBMSs. The JDBC specification defines an escape sequence for stored procedures/functions to execute them in a database.

To find out if your DBMS supports stored procedures, you can call the supportsStoredProcedures() method of a DatabaseMetaData object. It returns true if the DBMS supports stored procedures. A JDBC driver may let you call a DBMS function using the same syntax. To know if you can call a DBMS function using the same syntax, use the supportsStoredFunctionsUsingCallSyntax() method of a DatabaseMetaData object. If it returns true, you can use the same syntax to call a database function. From here on, I will use the phrase “stored procedure” to mean both database stored procedures and functions.

The general syntax for calling a stored procedure is as follows:

```
{? = call <procedure_name>(param1, param2, param3,
... ) }
```

The call to a stored procedure is placed within braces ({}). The first question mark is a placeholder for the return value from the stored procedure. The placeholder for the return value is followed by = call. If the stored procedure does not return a value, the ? = part is omitted. <procedure_name> is the name of a stored procedure. If the stored procedure accepts any parameters, the list of parameters is enclosed in parentheses after the procedure name. If a stored procedure does not accept any parameters, the opening parenthesis, parameter lists, and closing parenthesis after <procedure_name> are omitted. [Table 6-6](#) lists some examples using the general syntax for calling stored procedures.

Table 6-6. Examples of Using Stored Procedure Escape Syntax for Calling Database Stored Procedures

Stored Procedure Description	The Syntax to Call the Stored Procedure
Accepts no parameters Returns no value	{call <procedure_name>}
Accepts two IN parameters Returns no value	{call <procedure_name>(?, ?)}
Accepts two IN and one OUT parameters Returns no value	{call <procedure_name>(?, ?, ?)}
Accepts no parameters Returns a value	{? = call <procedure_name>}
Accepts two IN parameters Returns a value	{? = call <procedure_name>(?, ?)}
Accepts two IN and one OUT parameters Returns a value	{? = call <procedure_name>(?, ?, ?)}

A stored procedure may accept different type of parameters: IN, OUT, and INOUT. You can use placeholders (question marks) for all types of parameters. You cannot distinguish the type of parameters by just looking at a SQL string that uses placeholders. It is up to you to know which placeholder is of type IN, OUT, or INOUT parameter, and treat them accordingly. The next three sections will describe how to treat IN, OUT and INOUT parameter types in a CallableStatement.

Using IN Parameters

An `IN` parameter type means that caller has to pass a value for that parameter when it calls the stored procedure. Before executing a `CallableStatement`, you must call one of the `setXxx()` methods to set the value for all `IN` type parameters. Otherwise, you will get an error when you try to execute a `CallableStatement` with some `IN` parameters not set.

Suppose there are two `IN` parameters in a SQL statement and their placeholders are at index 1 and index 2. The `IN` parameter at index 1 is of `int` type and at index 2 is of `double` type. Your code logic would resemble the code shown:

```
CallableStatement cstmt = prepare the call...;

// Set the value of the IN parameter at index 1
cstmt.setInt(1, 101);

// Set the value of the IN parameter at index 2
cstmt.setDouble(2, 22.56);

// Execute the statement here
```

Using `OUT` Parameters

An `OUT` parameter type means that the caller has to pass a placeholder to the stored procedure for that parameter and the stored procedure will set the value, which the caller can read after the stored procedure has finished executing. Before executing a `CallableStatement`, you must register an `OUT` parameter by calling the `registerOutParameter(int placeholderIndex, int sqlType)` or the `registerOutParameter(int parameterIndex, java.sql.SQLType sqlType)` method of the `CallableStatement` interface. After executing the stored procedure, you need to use one of the `getXxx()` methods to read the value of the `OUT` parameter.

Suppose there is an `OUT` parameter in a SQL statement that is at index 2 and it is of type `double`. Here is how you would register it and read its value:

```
CallableStatement cstmt = prepare the call...;

// Register the OUT parameter at index 2
```

```
cstmt.registerOutParameter(2, java.sql.Types.DOUBLE);  
  
// Execute the statement here  
  
// Read the value of the OUT parameter  
double outParamValue = cstmt.getDouble(2);
```

Using INOUT Parameters

An INOUT parameter works as a combination of IN and OUT parameter types. The caller can pass a value to the stored procedure using an INOUT parameter type. The stored procedure changes the value of the INOUT parameter during its execution and the caller can read the value set by the stored procedure after the stored procedure has finished executing. You must register the INOUT parameter using the `registerOutParameter(int placeholderIndex, int sqlType)` or the `registerOutParameter(int parameterIndex, java.sql.SQLType sqlType)` method of the `CallableStatement` interface before executing the stored procedure. You need to use one of the `setXxx()` methods of the `CallableStatement` interface to set the value for an INOUT parameter. After a stored procedure has been executed, you need to use one of the `getXxx()` methods of the `CallableStatement` interface to read the value passed back from the stored procedure.

Suppose there is an INOUT parameter in a SQL statement that is at index 1 and it is of type `double`. Here is how you would register it, pass a value in it, and read its value:

```
CallableStatement cstmt = prepare the call...;  
  
// Register the INOUT parameter at index 1  
cstmt.registerOutParameter(1, java.sql.Types.DOUBLE);  
  
// Set a value of 55.78 for the INOUT parameter  
cstmt.setDouble(1, 55.78);  
  
// Execute the statement here  
  
// Read the value of the INOUT parameter  
double inOutParamValue = cstmt.getDouble(1);
```

Return Parameter is OUT Parameter Type

If a stored procedure returns a value and you want to capture the returned value, its placeholder (the first question mark) must be registered as an OUT parameter using the `registerOutParameter()` method of the `CallableStatement` interface. If a return value placeholder is present in the call syntax, it is always the first OUT parameter and you need to use 1 as its index in the `registerOutParameter()` and `getXXX()` methods

Executing a CallableStatement

Before you execute a stored procedure, you need to prepare a `CallableStatement` by calling the `prepareCall()` method of the `Connection` object. The `prepareCall()` method accepts a SQL string as a parameter. The following snippet of code shows how to prepare a `CallableStatement`:

```
Connection conn = JDBCUtil.getConnection();
String SQL = "{call myProcedure}";
CallableStatement cstmt = conn.prepareCall(SQL);
```

The `CallableStatement` interface does not add any new methods to execute a SQL statement. To execute the SQL statement, you need to call one of the following three methods with no parameters. All three methods are inherited from the `PreparedStatement` interface.

- `execute()`
- `executeUpdate()`
- `executeQuery()`

The method you need to use to execute a SQL statement in a `CallableStatement` object depends on what is returned from the execution of the stored procedure.

- If it returns mixed results (result sets and update counts), use the `execute()` method.

- If it returns an update count, use the `executeUpdate()` method.
- If it returns a `ResultSet`, use the `executeQuery()` method.

Let's look at some examples of calling a stored procedure with different types of parameters and with/without a return value.

Example #1

Stored Procedure: `process_salary`

Comments: It accepts no parameters and returns no value

```
Connection conn = JDBCUtil.getConnection();
String sql = "{call process_salary}";
CallableStatement cstmt = conn.prepareCall(sql);
cstmt.execute();
```

Example #2

Stored Procedure: `give_raise(integer person_id IN, double raise IN)`

Comments: It accepts two `IN` parameters and does not return any value.

```
Connection conn = JDBCUtil.getConnection();
String sql = "{call give_raise(?, ?)}";
CallableStatement cstmt = conn.prepareCall(sql);

// Set the value for person_id parameter at index 1
cstmt.setInt(1, 101);

// Set the value for raise parameter at index 2
cstmt.setDouble(2, 4.5);

// Execute the stored procedure
cstmt.execute();
```

Example #3

Stored Procedure: get_employee_count(integer dept_id IN)
RETURNS integer

Comments: It accepts an IN parameter and returns an integer value.

```
Connection conn = JDBCUtil.getConnection();
String sql = "{? = call get_employee_count(?)}";
CallableStatement cstmt = conn.prepareCall(sql);

// Register the first placeholder - the return value
// as an OUT parameter
cstmt.registerOutParameter(1, java.sql.Types.INTEGER);

// Set the value for dept_id parameter at index 2
cstmt.setInt(2, 1001);

// Execute the stored procedure
cstmt.execute();

// Read the returned value - our first OUT parameter
// has an index of 1
int employeeCount = cstmt.getInt(1);

System.out.println("Employee Count is "
+ employeeCount);
```

Example #4

Stored Procedure: give_raise(person_id int IN, raise double IN, old_income double OUT, new_income double OUT)

Comments: It accepts two IN parameters and two OUT parameters.

```
Connection conn = JDBCUtil.getConnection();
String sql = "{call give_raise(?, ?, ?, ?)}";

CallableStatement cstmt = conn.prepareCall(sql);

// Register the OUT parameters: old_income(index 3),
```

```
new_income(index 4)
cstmt.registerOutParameter(3, Types.DOUBLE);
cstmt.registerOutParameter(4, Types.DOUBLE);

// Set values for person_id at index 1 and for raise
at index 2
cstmt.setInt(1, 1001);
cstmt.setDouble(2, 4.5);

// Execute the stored procedure
cstmt.execute();

// Read the values of the OUT parameters
old_income(index 3)
// and new_income (index 4)
double oldIncome = cstmt.getDouble(3);
double newIncome = cstmt.getDouble(4);
System.out.println("Old Income:" + oldIncome);
System.out.println("New Income:" + newIncome);
```

Tip You can pass the value for an IN parameter using a literal value or a placeholder. If you use a placeholder for an IN parameter, you will need to use the setXXX() method to set its value before executing the stored procedure. It is preferred to use a placeholder for an IN parameter and use a setXXX() to set its value. For example, suppose a stored procedure,
process_person(integer person_id IN), accepts an IN type parameter. You can prepare the call syntax as "{call process_person(1001)}" or "{call process_person(?) }". In the latter case, you will need to use the setInt(1, 1001) method to set the value for the person_id parameter.

Let's discuss an example in which you create a stored procedure in a database and call it using a CallableStatement in a Java program. You create a stored procedure named give_raise. It accepts two IN parameters called person_id and raise. It accepts two OUT parameters to pass back the old and new values of the income for a person_id. If the person's income is

null, it sets the income to 20000. If a person is not found, it passes back null in both OUT parameters.

The following are the SQL scripts for `give_raise` procedure for some DBMSs. You need to run the script for your DBMS before you can run the program in [Listing 6-9](#). If you do not find a script for the DBMS you are using, you can easily write the code for your DBMS by looking at the code in this table for any DBMS whose syntax looks familiar to you. You will see an example of a stored procedure that generates a result set later in this chapter.

Adaptive Server Anywhere Database

```
create procedure give_raise(IN @person_id integer, IN
@raise double,
                           OUT @old_income double, OUT
@new_income double)
begin
    select @old_income = null, @new_income = null;

    if exists(select null from person where person_id
= @person_id) then
        select income into @old_income
        from person
        where person_id = @person_id;

        if @old_income is null then
            select 20000.00 into @new_income;
        else
            select @old_income * (1 + @raise/100) into
@new_income;
        end if;

        update person
            set income = @new_income
            where person_id = @person_id;
    end if;
end;
```

MySQL Database

```
DELIMITER $$

DROP PROCEDURE IF EXISTS give_raise $$

CREATE PROCEDURE give_raise(in person_id_param int, in
raise double,
                           out old_income double, out
new_income double)
BEGIN

set old_income = null, new_income = null;

if exists(select null from person where
person_id=person_id_param) then
    select income into old_income
    from person
    where person_id = person_id_param;

if old_income is null then
    select 20000.00 into new_income;
else
    select old_income * (1 + raise/100) into
new_income;
end if;

update person
    set income = new_income
    where person_id = person_id_param;
end if;

END $$

DELIMITER ;
```

Oracle Database

```
create or replace procedure give_raise(person_id_param
number,
```

```

                    raise_param number,
old_income out number,
new_income out number)
is
    person_count number;
begin
    old_income := null;
    new_income := null;

    select count(*)
        into person_count
        from person
        where person_id = person_id_param;

    if person_count = 1 then
        select income into old_income
            from person
            where person_id = person_id_param;

        if old_income is null then
            new_income := 20000.00;
        else
            new_income := old_income * (1
+ raise_param/100) ;
        end if;
        update person
            set income = new_income
            where person_id = person_id_param;
    end if;

end give_raise;

```

SQL Server Database

```

-- Drop stored procedure if it already exists
IF EXISTS (
    SELECT *
        FROM INFORMATION_SCHEMA.ROUTINES
        WHERE SPECIFIC_SCHEMA = N'dbo'

```

```

        AND SPECIFIC_NAME = N'give_raise'
)
DROP PROCEDURE dbo.give_raise
GO

CREATE PROCEDURE dbo.give_raise
    @person_id int,
    @raise decimal(5, 2),
    @old_income decimal(10, 2) OUTPUT,
    @new_income decimal(10, 2) OUTPUT
AS
BEGIN
    SET NOCOUNT OFF

    SELECT @old_income = null, @new_income = null;

    IF EXISTS (SELECT null FROM person WHERE
    person_id = @person_id)
        BEGIN
            SELECT @old_income = income
            FROM person
            WHERE person_id = @person_id;

            IF @old_income is null
                SELECT @new_income = 20000.00;
            ELSE
                SELECT @new_income = @old_income
                *
                (1 + @raise/100);

            update person
            set income = @new_income
            WHERE person_id = @person_id;
        END;
    END;
    GO

```

DB2 Database

```
create procedure give_raise(IN person_id_param int,
```

```

        IN raise_param double,
        OUT old_income double,
        OUT new_income double)
language sql
begin

declare person_count int;

set old_income = null;
set new_income = null;

select count(*) into person_count
  from person
 where person_id = person_id_param;

if person_count = 1 then
  select income into old_income
    from person
   where person_id = person_id_param;

  if old_income is null then
    set new_income = 20000.00;
  else
    set new_income = old_income * (1
+ raise_param/100) ;
  end if;

  update person
    set income = new_income
   where person_id = person_id_param;
end if;
end
@

```

Note: @ is used as statement terminator in the above syntax to create the stored procedure.

Java DB Database

Java DB lets you write stored procedure using the Java programming language. You can use a static method of a class as a stored procedure in Java DB. To get the reference of the database connection that executes the stored procedure, you pass `jdbc:default:connection` as the connection URL to the `DriverManager`. [Listing 6-8](#) contains the code for the `JavaDBGiveRaiseSp` class whose `giveRaise()` static method will be used as a stored procedure. You will need to do some setup work, which is described next, before you can use this method as a stored procedure. For now, just compile the class and include it in CLASSPATH.

[Listing 6-8](#). The Java Code for the `give_raise` Stored Procedure in Java DB

```
// JavaDBGiveRaiseSp.java
package com.jdojo.jdbc;

import java.sql.SQLException;
import java.sql.PreparedStatement;
import java.sql.Connection;
import java.sql.DriverManager;
import java.sql.ResultSet;

public class JavaDBGiveRaiseSp {
    public static void giveRaise(int personId,
        double raise,
        double[] oldIncomeOut, double[]
        newIncomeOut) throws SQLException {
        double oldIncome = 0.0;
        double newIncome = 0.0;

        // Must use the following URL to get the
        // reference of the Conenction
        // object in whose context this method is
        // called.
        String dbURL = "jdbc:default:connection";
        Connection conn
        = DriverManager.getConnection(dbURL);

        String sql = "select income from person
        where person_id = ?";
```

```
        PreparedStatement pstmt
= conn.prepareStatement(sql);
        pstmt.setInt(1, personId);

        ResultSet rs = pstmt.executeQuery();
        if (!rs.next()) {
            return;
        }

        oldIncome = rs.getDouble("income");
        if (rs.wasNull()) {
            newIncome = 20000.00;
        }
        else {
            newIncome = oldIncome * (1 + raise
/ 100);
        }

        String updateSql = "update person " +
                "set income = ? " +
                "where person_id = ?";
        PreparedStatement updateStmt =
                conn.prepareStatement(updateSql);
        updateStmt.setDouble(1, newIncome);
        updateStmt.setInt(2, personId);
        updateStmt.executeUpdate();

        // Close the statement
        updateStmt.close();

        oldIncomeOut[0] = oldIncome;
        newIncomeOut[0] = newIncome;
    }
}
```

After you have written the Java code for the stored procedure, you need to create the stored procedure in your Java DB database. Use the following command to create the `give_raise` stored procedure:

```
--Command to create a stored procedure
CREATE PROCEDURE give_raise(IN person_id integer, IN
raise double, OUT old_income Double, OUT new_income
Double)
PARAMETER STYLE JAVA
LANGUAGE JAVA
MODIFIES SQL DATA
EXTERNAL NAME
'com.jdojo.jdbc.JavaDBGiveRaiseSp.giveRaise';
```

You can execute the command using the `i j` command-line tool or NetBeans IDE. Please refer to the “A Brief Overview of Java DB” section earlier in this chapter for more details on how to execute SQL commands in Java DB.

To get the `give_raise` stored procedure working in Java DB, you need to install the `JavaDBGiveRaiseSp` class into the database after bundling it into a JAR file. Please refer to the Java DB documentation on how to install a Java JAR into the database. Another way (and the easier way) of making the Java stored procedure code available to the Java DB is to include the class in the user’s CLASSPATH. You do not need to perform this step if you are running the examples in this chapter using the NetBeans IDE. The `JavaDBGiveRaiseSp` class is included in the NetBeans project, and therefore, the class is already in the CLASSPATH when the examples are run from inside the NetBeans IDE.

[Listing 6-9](#) shows the complete code to execute the stored procedure `give_raise`. You can run the `CallableStatementTest` class by using different values for `person_id` and `raise` in its `main()` method.

Listing 6-9. Using a CallableStatement Statement to Call a Stored Procedure

```
// CallableStatementTest.java
package com.jdojo.jdbc;

import java.sql.CallableStatement;
import java.sql.Connection;
import java.sql.SQLException;
```

```
import java.sql.Types;

public class CallableStatementTest {
    public static void main(String[] args) {
        Connection conn = null;
        try {
            conn = JDBCUtil.getConnection();

            // Give a 5% raise to person_id
101
            giveRaise(conn, 102, 5.0);

            // Give a 5% raise to dummy
person_id
            giveRaise(conn, -100, 5.0);

            // Commit the transaction
            JDBCUtil.commit(conn);
        }
        catch (SQLException e) {
            System.out.println(e.getMessage());
            JDBCUtil.rollback(conn);
        }
        finally {
            JDBCUtil.closeConnection(conn);
        }
    }

    public static void giveRaise(Connection conn,
int personId,
                               double raise) throws
SQLException {
        String SQL = "{call app.give_raise(?, ?, ?, ?)}";
        CallableStatement cstmt = null;
        try {
            // Prepare the call
            cstmt = conn.prepareCall(SQL);

            // Set the IN parameters

```

```

cstmt.setInt(1, personId);
cstmt.setDouble(2, raise);

// Register the OUT parameters
cstmt.registerOutParameter(3,
Types.DOUBLE);
cstmt.registerOutParameter(4,
Types.DOUBLE);

// Execute the stored procedure
int updatedCount
= cstmt.executeUpdate();

// Read the OUT parameters values
double oldIncome
= cstmt.getDouble(3);
boolean oldIncomeisNull
= cstmt.wasNull();

double newIncome
= cstmt.getDouble(4);
boolean newIncomeisNull
= cstmt.wasNull();

// Display the results
System.out.println("Updated
Record: " + updatedCount);

System.out.println("Old Income: "
+ oldIncome +
", New Income: "
+ newIncome);

System.out.println("Old Income was
null: " +
oldIncomeisNull +
", New Income is
null: " +
newIncomeisNull);
}

```

```
        finally {
            JDBCUtil.closeStatement(cstmt);
        }
    }
}
```

Processing Result Sets

A set of rows obtained by executing a SQL SELECT statement in a database is known as a result set. JDBC lets you execute a SELECT statement in the database and process the returned result set in the Java program using an instance of the `ResultSet` interface. The following sections discuss different ways of processing result sets using the JDBC API.

What Is a ResultSet?

When you execute a query (a SELECT statement) in a database, it returns the matching records in the form of a result set. You can consider a result set as a data arranged in rows and columns. The SELECT statement determines the number of rows and columns that is contained in the result set. The Statement (or PreparedStatement or CallableStatement) object returns the result of a query as a `ResultSet` object. I am using two phrases here: “result set” and “ResultSet.” By “result set,” I mean the data in the form of rows and columns, and by “ResultSet,” I mean an instance of a class that implements the `ResultSet` interface that lets you access and manipulate that data. A `ResultSet` object also contains information about the properties of the columns in the result set such as the data types of the columns, names of the columns, etc.

A `ResultSet` object maintains a cursor, which points to a row in the result set. It works similar to a cursor object in database programs. You can scroll the cursor to a specific row in the result set to access or manipulate the column values for that row. The cursor can point to only one row at a time. The row to which it points at a particular point in time is called the *current row*. There are different ways to move the cursor of a `ResultSet` object to a row in the result set. I will discuss all different ways to move the cursor shortly.

The following three properties of a `ResultSet` object need to be discussed before you can look at an example:

- Scrollability
- Concurrency
- Holdability

Scrollability determines the ability of the `ResultSet` to scroll through the rows. By default, a `ResultSet` is scrollable only in the forward direction. When you have a forward-only scrollable `ResultSet`, you can move the cursor starting from the first row to the last row. Once you move to the last row, you cannot reuse the `ResultSet` object because you cannot scroll back in a forward-only scrollable `ResultSet`. You can also create a `ResultSet` that can scroll in the forward as well as the backward direction. I will call this `ResultSet` a *bidirectional scrollable* `ResultSet`. A bidirectional scrollable `ResultSet` has another property called *update sensitivity*. It determines whether the changes in the underlying database will be reflected in the result set while you are scrolling through its rows. A scroll *sensitive* `ResultSet` shows you changes made in the database, whereas a scroll *insensitive* one would not show you the changes made in the database after you have opened the `ResultSet`. The following three constants in the `ResultSet` interface are used to specify the scrollability of a `ResultSet`:

- `TYPE_FORWARD_ONLY`: Allows a `ResultSet` object to move only in the forward direction.
- `TYPE_SCROLL_SENSITIVE`: Allows a `ResultSet` object to move in the forward and backward directions. It makes the changes in the underlying database made by other transactions or statements in the same transaction visible to the `ResultSet` object. This type of `ResultSet` is aware of the changes made to its data by other means.
- `TYPE_SCROLL_INSENSITIVE`: Allows a `ResultSet` object to move in the forward and backward directions. It does not make the changes in the underlying database made by other transactions or statements in the same transaction visible to the `ResultSet` object while scrolling. This type

of `ResultSet` determines its data set when it is open and the data set does not change if it is updated through any other means except through this `ResultSet` object itself. If you want to get up-to-date data, you must re-execute the query.

Concurrency refers to its ability of the `ResultSet` to update data. By default, a `ResultSet` is read-only and it does not let you update its data. If you want to update data in a database through a `ResultSet`, you need to request an updatable result set from the JDBC driver. The following two constants in the `ResultSet` interface are used to specify the concurrency of a `ResultSet`:

- `CONCUR_READ_ONLY`: Makes a result set read-only.
- `CONCUR_UPDATABLE`: Makes a result set updatable.

Holdability refers to the state of the `ResultSet` after a transaction that it is associated with has been committed. A `ResultSet` may be closed or kept open when the transaction is committed. The default value of the holdability of a `ResultSet` is dependent on the JDBC driver. The holdability of a `ResultSet` is specified using one of the following two constants defined in the `ResultSet` interface:

- `HOLD_CURSORS_OVER_COMMIT`: Keeps the `ResultSet` open after the transaction is committed.
- `CLOSE_CURSORS_AT_COMMIT`: Closes the `ResultSet` after the transaction is committed.

You need to verify your JDBC driver's documentation for support for these properties before using them. You can get information about the supported properties by a JDBC driver of a `ResultSet` object using the following three methods of the `DatabaseMetaData` interface. Recall that you can get a `DatabaseMetaData` object using the `getMetaData()` method of a `Connection` object.

- `supportsResultSetType()`
- `supportsResultSetConcurrency()`

- `supportsResultSetHoldability()`

[Listing 6-10](#) demonstrates how to use these methods to check for these `ResultSet` properties. The calls to these methods are placed inside a `try-catch` block to catch a `Throwable`, because some JDBC drivers throw a runtime exception when they do not support a feature. The output is for the Java DB DBMS. You may get a different output when you are connected to a different DBMS.

Listing 6-10. Checking for Properties of a `ResultSet` Supported by a JDBC Driver

```
// SupportedResultSetProperties.java
package com.jdojo.jdbc;

import java.sql.Connection;
import java.sql.DatabaseMetaData;
import static
java.sql.ResultSet.CLOSE_CURSORS_AT_COMMIT;
import static java.sql.ResultSet.CONCUR_READ_ONLY;
import static java.sql.ResultSet.CONCUR_UPDATABLE;
import static
java.sql.ResultSet.HOLD_CURSORS_OVER_COMMIT;
import static java.sql.ResultSet.TYPE_FORWARD_ONLY;
import static
java.sql.ResultSet.TYPE_SCROLL_INSENSITIVE;
import static
java.sql.ResultSet.TYPE_SCROLL_SENSITIVE;
import java.sql.SQLException;

public class SupportedResultSetProperties {
    public static void main(String[] args) {
        Connection conn = null;
        try {
            conn = JDBCUtil.getConnection();
            DatabaseMetaData dbmd
= conn.getMetaData();
            System.out.println("Supported

```

```
        result set scrollability.");
                printScrollabilityInfo(dbmd);

                System.out.println();
                System.out.println("Supported
result set concurrency.");
                printConcurrencyInfo(dbmd);

                System.out.println();
                System.out.println("Supported
result set holdability.");
                printHoldabilityInfo(dbmd);
            }
            catch (SQLException e) {
                e.printStackTrace();
            }
            finally {
                JDBCUtil.closeConnection(conn);
            }
        }

    public static void
printScrollabilityInfo(DatabaseMetaData dbmd) {
    try {
        boolean forwardOnly
        =
dbmd.supportsResultSetType(TYPE_FORWARD_ONLY);

        boolean scrollSensitive
        =
dbmd.supportsResultSetType(TYPE_SCROLL_SENSITIVE);

        boolean scrollInsensitive
        =
dbmd.supportsResultSetType(TYPE_SCROLL_INSENSITIVE);

        System.out.println("Forward-Only:
" + forwardOnly);
        System.out.println("Scroll-
Sensitive: " + scrollSensitive);
    }
}
```

```
        System.out.println("Scroll-
Insensitive: " + scrollInsensitive);
    }
    catch (SQLException e) {
        System.out.println("Could not get
scrollability information.");
        System.out.println("Error
Message:" + e.getMessage());
    }
}

public static void
printConcurrencyInfo(DatabaseMetaData dbmd) {
    try {
        boolean forwardOnlyReadOnly
            =
dbmd.supportsResultSetConcurrency(TYPE_FORWARD_ONLY,
                                  CONCUR_READ_ONLY);

        boolean forwardOnlyUpdatable
            =
dbmd.supportsResultSetConcurrency(TYPE_FORWARD_ONLY,
                                  CONCUR_UPDATABLE);

        boolean scrollSensitiveReadOnly
            =
dbmd.supportsResultSetConcurrency(
                TYPE_SCROLL_SENSITIVE,
                CONCUR_READ_ONLY);

        boolean scrollSensitiveUpdatable
            =
dbmd.supportsResultSetConcurrency(
                TYPE_SCROLL_SENSITIVE,
                CONCUR_UPDATABLE);

        boolean scrollInsensitiveReadOnly
            =
dbmd.supportsResultSetConcurrency(
                TYPE_SCROLL_INSENSITIVE,
```

```
        CONCUR_READ_ONLY);

        boolean scrollInsensitiveUpdatable
        =
dbmd.supportsResultSetConcurrency(
                TYPE_SCROLL_INSENSITIVE,
                CONCUR_UPDATABLE);

        System.out.println("Scroll
Forward-Only and " +
                "Concurrency Read-Only: " +
forwardOnlyReadOnly);

        System.out.println("Scroll
Forward-Only and " +
                "Concurrency Updatable: " +
forwardOnlyUpdatable);

        System.out.println("Scroll
Sensitive and " +
                "Concurrency Read-Only: " +
scrollSensitiveReadOnly);

        System.out.println("Scroll
Sensitive and " +
                "Concurrency Updatable: " +
scrollSensitiveUpdatable);

        System.out.println("Scroll
Insensitive and " +
                "Concurrency Read-Only: " +
scrollInsensitiveReadOnly);

        System.out.println("Scroll
Insensitive and " +
                "Concurrency Updatable: " +
scrollInsensitiveUpdatable);
}

catch (SQLException e) {
        System.out.println("Could not get
```

```

concurrency information.");
                System.out.println("Error
Message:" + e.getMessage());
            }
        }

        public static void
printHoldabilityInfo(DatabaseMetaData dbmd) {
            try {
                boolean holdOverCommit
                    =
dbmd.supportsResultSetHoldability(
                        HOLD_CURSORS_OVER_COMMIT

                boolean closeAtCommit
                    =
dbmd.supportsResultSetHoldability(
                        CLOSE_CURSORS_AT_COMMIT

                System.out.println("Hold Over
Commit: " + holdOverCommit);
                System.out.println("Close At
Commit: " + closeAtCommit);
            }
            catch (SQLException e) {
                System.out.println("Could not get
concurrency information.");
                System.out.println("Error
Message:" + e.getMessage());
            }
        }
    }
}

```

Supported result set scrollability.

Forward-Only: true

Scroll-Sensitive: false

Scroll-Insensitive: true

Supported result set concurrency.

```
Scroll Forward-Only and Concurrency Read-Only: true
Scroll Forward-Only and Concurrency Updatable: true
Scroll Sensitive and Concurrency Read-Only: false
Scroll Sensitive and Concurrency Updatable: false
Scroll Insensitive and Concurrency Read-Only: true
Scroll Insensitive and Concurrency Updatable: true
```

Supported result set holdability.

Hold Over Commit: true

Close At Commit: true

Getting a ResultSet

You can get a result set from a database using a Statement, a PreparedStatement, or a CallableStatement. In simple cases, you call `executeQuery()` method of a Statement object or a PreparedStatement object with a SELECT statement that will return a ResultSet. Here is a typical way to get a forward-only scrollable result set:

```
Connection conn = JDBCUtil.getConnection();
Statement stmt = conn.createStatement();
String sql = "select person_id, first_name, last_name,
dob, income " +
        "from person";

// Execute the query to get the result set
ResultSet rs = stmt.executeQuery(sql);

// Process the result set using the rs variable
```

The returned ResultSet from the `executeQuery()` method is already open, and it is ready to be looped through to get the associated data. In the beginning, the cursor points before the first row in the result set. You must move the cursor to a valid row before you can access the column's values for that row. The `next()` method of the ResultSet is used to move the cursor to the next row. When the `next()` method is called for the first time, it moves the cursor to the first row in the result set.

It is very important to consider the return value of the `next()` method. It returns a boolean value. It returns `true` if the cursor is positioned to a valid row. Otherwise, it returns `false`. If you call the `next()` method on an empty `ResultSet` object for the first time, it will return `false`, because there is no valid row to move to. If the current row is the last row in the result set, calling the `next()` method will position the cursor after the last row and it will return `false`. A typical snippet of code for processing a forward-only scrollable `ResultSet` object is as follows:

```
ResultSet rs = get a result set object;

// Move the cursor to the next row by calling the
next() method
while(rs.next()) {
    // Process the current row in rs here
}
// Done with the ResultSet
```

When a cursor is positioned after the last row in a forward-only scrollable `ResultSet` object, you cannot do anything with it, except close it using its `close()` method. A forward-only scrollable object is like a `create-use-and-throw` item. You cannot reopen a `ResultSet` either. To iterate through the result set data again, you must re-execute the query and obtain a new `ResultSet`. However, things are different for a bidirectional scrollable `ResultSet`, which lets you iterate through the rows as many times as you want. You will look at a bidirectional scrollable `ResultSet` object shortly.

After the program exits the while-loop, the cursor points to the row after the last row in the result set. What is the row after the last row and before the first row? They are just two imaginary rows. They do not exist in reality. These two positions of the cursor of the `ResultSet` object let you make decisions when you want to loop through the result set multiple times or when you get a `ResultSet` object as an argument in your method. When you do not create the `ResultSet`, you must know the cursor position correctly in order to process the rows in a specific order. The following four methods of the `ResultSet` interface let you know if the cursor is before the first row, on the first row, on the last row, or after the last row.

- `boolean isBeforeFirst() throws`

- ```
SQLException
• boolean isFirst() throws SQLException
• boolean isLast() throws SQLException
• boolean isAfterLast() throws
SQLException
```

The method names are self-explanatory. Support for these methods is optional for a forward-only scrollable `ResultSet`. Typically, you do not need to use these methods for a forward-only scrollable `ResultSet`.

A `ResultSet` object lets you read the value of a column from its current row using one of its `getXXX()` method, where `Xxx` is the data type of the column. There is one `getXXX()` method for each `Xxx` data type supported by JDBC. For example, to read an `int`, `double`, `String`, `Object`, and `Blob` value from a column, you can use the `getInt()`, `getDouble()`, `getString()`, `getObject()`, and `getBlob()` methods of the `ResultSet` interface, respectively. You must specify the index or name of the column in the `getXXX()` method whose value you want to read. The `getXXX()` methods are overloaded. One version accepts an `int` parameter, which lets you use the column index and another version accepts a `String` parameter, which lets you use the column label. If the column label is not specified in the query, you can specify the column name. The first column in the result set has an index of 1. Suppose you have the following `ResultSet` of a query:

```
select person_id as "Person ID", first_name, last_name
from person
```

In the `ResultSet`, the `person_id` column has a column index of 1, the `first_name` column has a column index of 2, and the `last_name` column has a column index of 3. You have specified `Person ID` as the column label for the `person_id` column. You have not specified the column labels for the `first_name` and `last_name` columns. To get the value of the `person_id` column, you need to use either `getInt(1)` or `getInt("PERSON ID")`. To get the value of the `first_name` column, you need to use either `getString(2)` or `getString("first_name")`.

---

**Tip** Using a column label or name in the `getXXX()` methods is case-insensitive. That is, you can use `getInt("person_id")` or `getInt("PERSON_ID")` to get the value of a `person_id` column. I will use the term “column name” in this chapter to refer to the column label or name.

---

The following snippet of code shows how to read column’s values of the current row in a result set:

```
Connection conn = JDBCUtil.getConnection();
Statement stmt = conn.createStatement();
String SQL = "select person_id, first_name, last_name,
dob, income " +
 "from person";
ResultSet rs = stmt.executeQuery(SQL);

// Move the cursor to the next row one by one
while(rs.next()) {
 // Process the current row in rs
 int personId = rs.getInt("person_id");
 String firstName = rs.getString("first_name");
 String lastName = rs.getString("last_name");
 java.sql.Date dob = rs.getDate("dob");
 double income = rs.getDouble("income");

 // Do something with column values
}
```

You can rewrite the code inside the while-loop using the column indexes.

```
while(rs.next()) {
 // Process the current row in rs
 int personId = rs.getInt(1);
 String firstName = rs.getString(2);
 String lastName = rs.getString(3);
 java.sql.Date dob = rs.getDate(4);
 double income = rs.getDouble(5);

 // Do something with column values
}
```

It is a matter of personal preference whether to use a column index or a column name in a `getXXX()` method of the `ResultSet`. Sometimes you may not know the name of the columns in advance, such as when the user passes you a query to execute, and you have to use the data from the result set. When you do not know the column names, you should use the column indexes. You can get the names of columns in a `ResultSet` object using the `ResultSetMetaData` object. Please refer to the “`ResultSetMetaData`” section for more details.

In a `ResultSet`, when a column has a `null` value, the `getXXX()` method returns the default value for the `XXX` data type. For example, for numeric data types (`int`, `double`, `byte`, etc.), the `getXXX()` method returns zero when the column has a `null` value. The reason behind returning the default value for the data type instead of returning a `null` is that a primitive data type cannot have a `null` value in Java. A `getXXX()` method returns `false` for the `boolean` data type when the column has a `null` value. The `getXXX()` returns `null` if `XXX` is a reference type. If you want to know whether the column value, which you read using a `getXXX()` method, is `null`, you need to call the `wasNull()` method immediately after calling the `getXXX()` method. If the `wasNull()` method returns `true`, the column value is `null` in the result set. If the `wasNull()` method returns `false`, the column value is not `null` in the result set. Note that the `wasNull()` method does not accept any parameter and it returns `null` value status of the last read column using a `getXXX()` method. Here is a snippet of code to demonstrate the `null` value check for a column:

```
ResultSet rs = get a result set object;
java.sql.Date dob = rs.getDate("dob");
if (rs.wasNull()) {
 System.out.println("DOB is null");
}
else {
 System.out.println("DOB is " + dob);
}
```

The `getDate()` method of the `ResultSet` object returns a `java.sql.Date` object. The `toString()` method of the `java.sql.Date` class returns a string in a `yyyy-mm-dd` format. If you need

the date value converted to any other format, you need to work with an object of the `java.text.SimpleDateFormat` class to format your date value. The `getTime()` and `getTimestamp()` methods of a `ResultSet` return a `java.sql.Time` object and a `java.sql.Timestamp` object, respectively. The `toString()` method of the `java.sql.Time` class returns a string in an `hh:mm:ss` format. The `toString()` method of the `java.sql.Timestamp` class returns a string in a `yyyy-mm-dd hh:mm:ss.ffffffffffff` format.

Let's look at a complete example of processing a `ResultSet` using a `Statement` object and a `PreparedStatement` object. [Listing 6-11](#) demonstrates how to execute a query in a database and process the results.

### ***[Listing 6-11](#). Getting and Processing a ResultSet Using a Statement and a PreparedStatement***

```
// QueryPersonTest.java
package com.jdojo.jdbc;

import java.sql.Connection;
import java.sql.PreparedStatement;
import java.util.Date;
import java.sql.ResultSet;
import java.sql.SQLException;
import java.sql.Statement;
import java.text.SimpleDateFormat;

public class QueryPersonTest {
 // Will be used to format dates
 private static final SimpleDateFormat sdf =
 new
 SimpleDateFormat("MM/dd/yyyy");

 public static void main(String[] args) {
 Connection conn = null;
 try {
 conn = JDBCUtil.getConnection();
 System.out.println("Using
```

```
Statement Object...");
 displayPersonUsingStatement(conn,
101);
 displayPersonUsingStatement(conn,
102);

 System.out.println("Using
PreparedStatement Object...");
 displayPersonUsingPreparedStatement
101);
 displayPersonUsingPreparedStatement
102);

 // Commit the transaction
 JDBCUtil.commit(conn);
 }
 catch (SQLException e) {
 System.out.println(e.getMessage());
 JDBCUtil.rollback(conn);
 }
 finally {
 JDBCUtil.closeConnection(conn);
 }
}

public static void
displayPersonUsingStatement(Connection conn,
 int inputPersonId) throws
SQLException {
 String SQL = "select person_id,
first_name, last_name, " +
 " gender, dob, income from
person " +
 " where person_id = "
+ inputPersonId;

 Statement stmt = null;
 ResultSet rs = null;
 try {
 stmt = conn.createStatement(
101);
 rs = stmt.executeQuery(SQL);
 displayPerson(rs);
 }
 catch (SQLException e) {
 System.out.println(e.getMessage());
 }
 finally {
 JDBCUtil.closeResultSet(rs);
 JDBCUtil.closeStatement(stmt);
 }
}
```

```

 ResultSet.TYPE_SCROLL_
 ResultSet.CONCUR_UPDATABLE;
 rs = stmt.executeQuery(SQL);
 printResultSet(rs);
 }
 finally {
 // Closing the Statement closes
the associated ResultSet
 JDBCUtil.closeStatement(stmt);
 }
}

public static void
displayPersonUsingPreparedStatement(
 Connection conn, int
inputPersonId) throws SQLException {

 String SQL = "select person_id,
first_name, last_name, " +
 " gender, dob, income from
person " +
 " where person_id = ?";

 PreparedStatement pstmt = null;
 ResultSet rs = null;
 try {
 pstmt
= conn.prepareStatement(SQL);

 // Set the IN parameter for
person_id
 pstmt.setInt(1, inputPersonId);

 // Execute the query
 rs = pstmt.executeQuery();
 printResultSet(rs);
 }
 finally {
 // Closing the Statement closes
the ResultSet
 }
}

```

```

 JDBCUtil.closeStatement(pstmt);
 }
}

public static void printResultSet(ResultSet rs)
throws SQLException {
 while (rs.next()) {
 int personId
= rs.getInt("person_id");
 String firstName
= rs.getString("first_name");
 String lastName
= rs.getString("last_name");
 String gender
= rs.getString("gender");
 Date dob = rs.getDate("dob");
 boolean isDobNull = rs.wasNull();

 double income
= rs.getDouble("income");
 boolean isIncomeNull
= rs.wasNull();

 // Format the dob in MM/dd/YYYY
format
 String formattedDob = null;
 if (!isDobNull) {
 formattedDob
= formatDate(dob);
 }

 System.out.print("Person ID:"
+ personId);
 System.out.print(", First Name:"
+ firstName);
 System.out.print(", Last Name:"
+ lastName);
 System.out.print(", Gender:"
+ gender);
 }
}

```

```

 if (isDobNull) {
 System.out.print(", "
DOB:null");
 }
 else {
 System.out.print(", DOB:"
+ formattedDob);
 }

 if (isIncomeNull) {
 System.out.println(", "
Income:null");
 }
 else {
 System.out.println(", "
Income:" + income);
 }
 }

 public static String formatDate(Date dt) {
 if (dt == null) {
 return "";
 }

 String formattedDate = sdf.format(dt);
 return formattedDate;
 }
}

```

The `displayPersonUsingStatement()` method accepts a `Connection` object and a person id as parameters. It uses a `Statement` object to retrieve the person details in a `ResultSet`. It calls the `printResultSet()` method to print all rows in the `ResultSet`. Your `ResultSet` will have a maximum of one row, because `person_id` is a primary key in your `person` table, and you are using it in the `where` clause of the query. Look at the details of how the cursor is moved in a while-loop, and each column's value is read using an appropriate `getXXX()` method in the `printResultSet()` method. The value for the `dob` column is formatted in

the mm/dd/yyyy format before printing it.

The `displayPersonUsingPreparedStatement()` method uses a `PreparedStatement` object to execute the query. Note that you must use a `setXxx()` method on a `PreparedStatement` to set the input parameter for the query. The code uses `pstmt.setInt(1, inputPersonId)` to set the person id value in the where clause of the query.

The `main()` method calls both of these methods to print the details of the same person id. In this example, you are not benefiting from precompilation of the `PreparedStatement` object, because you are calling this method separately for each person id. If you want to execute the same `PreparedStatement` with different inputs multiple times, you store the reference of the `PreparedStatement` in your program and reuse it. The intent of this example is to show you how to use a `PreparedStatement` to process a query, and I tried to keep the program logic as simple as possible.

## Getting the Number of Rows in a ResultSet

How would you know the number of rows in a `ResultSet`? The simple answer is that a `ResultSet` does not know how many rows it contains. There is no method in the `ResultSet` interface that returns the number of rows in the result set.

The `ResultSet` interface contains a `getRow()` method that returns the current row number in the `ResultSet`. It returns zero if there is no current row, such as when the cursor is before the first row or after the last row. The support for the `getRow()` method is optional in a forward-only scrollable `ResultSet`. You can say that the `getRow()` method is of no help in determining the number of rows in a `ResultSet` object. You will need to apply some custom logic to get the number of rows in a result set. The following are some of the methods you can use to get the number of rows in a result set. None of them are without disadvantages.

## Scrolling Through All Rows

This method applies a logic that loops through all rows using the `next()` method after getting the `ResultSet`. It maintains a counter variable, which is

incremented by one for each loop-iteration. After exiting the loop, the counter variable contains the number of rows in the `ResultSet`. The following snippet of code shows this logic:

```
ResultSet rs = get a result set object;

// Initialize rowCount to 0
int rowCount = 0;

while(rs.next()) {
 // Increment rowCount by 1
 rowCount++;

 // Process the result set data for the current
row
}

// Now, the rowCount variable contains the number of
rows in rs
System.out.println("Row Count: " + rowCount);
```

If you need the number of rows in a result set before you process its rows, this logic will force you to get the result set twice: once for getting the number of rows and once for processing the rows. Between the time when you get the first result set and when you get the second result set, the data in the database might change, which will make the row count from the first execution invalid. This method is foolproof only if you need the number of rows in the result set after you have looped through all the rows.

## Executing a Separate Query

This method executes a separate query to get the number of rows in a result set. Suppose you want to know the number of rows returned in a result set by executing a query, as shown:

```
select person_id, first_name, last_name, gender, dob,
income
from person
where dob > {d '1970-01-25'}
```

To get the number of rows returned by this query, you may execute a query as follows:

```
select count(*)
 from person
 where dob > {d '1970-01-25'}
```

The value for the first column of the first row in the result set will give you the number of rows returned from your main query. However, this method suffers from the same drawback that rows in the database may change between the executions of the two queries.

## Using a Bidirectional Scrollable ResultSet

In this method, you will need to create a `ResultSet` object that can scroll in both directions, forward and backward. You can specify the scrollable property of a `ResultSet` when you create a `Statement` object. Please refer to the next section for more details on creating a scrollable `ResultSet` object that can scroll in both directions. Make sure that your JDBC driver supports a `ResultSet` that can scroll in both directions. After you get the `ResultSet`, call its `last()` method to move its cursor to the last row in the result set. Call the `getRow()` method when the cursor is at the last row. The `getRow()` method will return the row number of the last row, which will be the number of rows in the result set. If you want to process the result set after getting the number of rows, you can call its `beforeFirst()` method to scroll the cursor before the first row and start a while-loop to process the rows in the result set again.

A JDBC driver may not support a `ResultSet` object that can scroll in both directions. In such cases, it may return a forward-only scrollable `ResultSet` object. After getting a `ResultSet` object, it is very important to check if it supports bidirectional scrolling before you call the `last()` method on it. A forward-only `ResultSet` object will throw a `SQLException` if you call the `last()` method. You can get the scrollable property of a `ResultSet` object by calling its `getTipo()` method. [Listing 6-12](#) demonstrates this approach to get the number of rows in a result set.

[\*\*Listing 6-12.\*\*](#) Getting the Number of Rows in a Bidirectional Scrollable

## ResultSet

```
// ResultSetRowCountTest.java
package com.jdojo.jdbc;

import java.sql.Connection;
import java.sql.ResultSet;
import java.sql.SQLException;
import java.sql.Statement;
import static java.sql.ResultSet.CONCUR_READ_ONLY;
import static
java.sql.ResultSet.TYPE_SCROLL_INSENSITIVE;

public class ResultSetRowCountTest {
 public static void main(String[] args) {
 Connection conn = null;
 Statement stmt = null;

 try {
 // Get a Connection
 conn = JDBCUtil.getConnection();

 // Request a bi-directional
scrollable ResultSet
 stmt
= conn.createStatement(TYPE_SCROLL_INSENSITIVE,
 CONCUR_READ_C
 String SQL = "select person_id,
first_name, last_name, dob, " +
 "income from person";

 // Execute the query
 ResultSet rs
= stmt.executeQuery(SQL);

 // Make sure you got a bi-
directional ReseutSet
 int cursorType = rs.getType();
 if (cursorType ==
ResultSet.TYPE_FORWARD_ONLY) {
```

```
 System.out.println("JDBC
driver returned a " +
 "forward
- only cursor.");
 }
 else {
 // Move the cursor to the
last row
 rs.last();

 // Get the last row number,
which is the row count
 int rowCount = rs.getRow();
 System.out.println("Row
Count: " + rowCount);

 // Place the cursor before
the first row to
 // process all rows again
 rs.beforeFirst();
 }

 // Process the result set
 while (rs.next()) {
 System.out.println("Person
ID: " + rs.getInt(1));
 }
}
catch (SQLException e) {
 e.printStackTrace();
}
finally {
 JDBCUtil.closeStatement(stmt);
 JDBCUtil.commit(conn);
 JDBCUtil.closeConnection(conn);
}
}
}
```

# Bidirectional Scrollable ResultSets

You can request a JDBC driver for a bidirectional scrollable ResultSet by specifying the scrollability property when you create a Statement, prepare a PreparedStatement, or prepare a CallableStatement using different methods of the Connection interface. The following is the list of methods of the Connection interface that implicitly or explicitly let you specify the scrollability property of a ResultSet object. The throws clause from the methods declarations has been excluded. They all throw a SQLException.

- Statement createStatement()
- Statement createStatement(int scrollability, int concurrency)
- Statement createStatement(int scrollability, int concurrency, int holdability)
- PreparedStatement  
    prepareStatement(String SQL)
- PreparedStatement  
    prepareStatement(String SQL, int scrollability, int concurrency)
- PreparedStatement  
    prepareStatement(String SQL, int scrollability, int concurrency, int holdability)
- CallableStatement prepareCall(String SQL)
- CallableStatement prepareCall(String SQL, int scrollability, int concurrency)
- CallableStatement prepareCall(String SQL, int scrollability, int concurrency, int holdability)

Not all JDBC drivers support all three types of scrollability properties for a result set. However, all drivers will support at least the forward-only result set. The default value of the scrollability of a `ResultSet` object is `TYPE_FORWARD_ONLY`. When you specify a result set's scrollability in one of these methods and if the JDBC driver does not support that type of scrollability, the driver will not generate an error. Rather, it will return a result set with the scrollability type that closely matches the requested scrollability type. If you specify a scrollability of a `ResultSet` other than forward-only, it is good practice to check the scrollability type of the returned `ResultSet` object using the `getType()` method. The following snippet of code shows how to test for the scrollability property of a `ResultSet` object:

```
Connection conn = JDBCUtil.getConnection();

// Request a bi-directional change insensitive
ResultSet
Statement stmt
= conn.createStatement(ResultSet.TYPE_SCROLL_INSENSITIVE
 ResultSet.CONCUR_READ_ONLY

String SQL = "your select statement goes here";

// Get a result set
ResultSet rs = stmt.executeQuery(SQL);

// Let's see what type of result set the JDBC driver
returned
int cursorType = rs.getType();

if (cursorType == ResultSet.TYPE_FORWARD_ONLY) {
 System.out.println("ResultSet is
TYPE_FORWARD_ONLY");
}
else if (cursorType ==
ResultSet.TYPE_SCROLL_SENSITIVE) {
 System.out.println("ResultSet is
TYPE_SCROLL_SENSITIVE");
}
else if (cursorType ==
ResultSet.TYPE_SCROLL_INSENSITIVE) {
```

```
 System.out.println("ResultSet is
TYPE_SCROLL_INSENSITIVE");
 }
```

The default value for the concurrency of a ResultSet is read-only, as indicated by the constant ResultSet.CONCUR\_READ\_ONLY. You can only read data from a ResultSet that has read-only concurrency. If you want to update data using a ResultSet such as change a column's value, insert new rows, or delete existing rows, you must have a ResultSet whose concurrency is ResultSet.CONCUR\_UPDATABLE. Not all JDBC drivers support the updatable concurrency. You may request a JDBC driver that you want a ResultSet object with an updatable concurrency. If a JDBC driver does not support it, it will return a read-only ResultSet object. You can check for the concurrency of a ResultSet object as follows:

```
Connection conn = JDBCUtil.getConnection();

// Request a bidirectional change insensitive
ResultSet
// with concurrency as CONCUR_UPDATABLE
Statement stmt
= conn.createStatement(ResultSet.TYPE_SCROLL_INSENSITI'
 ResultSet.CONCUR_UPDATAB

String SQL = "your select statement goes here";

// Get a result set
ResultSet rs = stmt.executeQuery(SQL);

// Let's see what type of concurrency the JDBC driver
returned
int concurrency = rs.getConcurrency();

if (concurrency == ResultSet.CONCUR_READ_ONLY) {
 System.out.println("ResultSet is
CONCUR_READ_ONLY");
}
else if (concurrency == ResultSet.CONCUR_UPDATABLE) {
 System.out.println("ResultSet is
CONCUR_UPDATABLE");
```

```
}
```

The JDBC driver determines the default value for the holdability of a ResultSet. Different JDBC drivers have different default values for this property. You can check for the holdability of a ResultSet using the getHoldability() method of the ResultSet. You can also use the getHoldability() method of the Connection to get this property of a ResultSet object. Here is how you check the holdability of a ResultSet:

```
Connection conn = JDBCUtil.getConnection();

// Request a bidirectional change insensitive
ResultSet with concurrency
// as CONCUR_UPDATABLE and holdability of
HOLD_CURSORS_OVER_COMMIT
Statement stmt
= conn.createStatement(resultSet.TYPE_SCROLL_INSENSITIVE
 resultSet.CONCUR_UPDATABLE);

String SQL = "your select statement goes here";

// Get a result set
ResultSet rs = stmt.executeQuery(SQL);

// Let's see what type of holdability the JDBC driver
returned
int holdability = conn.getHoldability(); // Java 1.4
and later
//int holdability = rs.getHoldability(); // Java 6 and
later

if (holdability == resultSet.HOLD_CURSORS_OVER_COMMIT)
{
 System.out.println("ResultSet is
HOLD_CURSORS_OVER_COMMIT");
}
else if (holdability ==
resultSet.CLOSE_CURSORS_AT_COMMIT) {
 System.out.println("ResultSet is
CLOSE_CURSORS_AT_COMMIT");
```

```
}
```

---

**Tip** The `getType()`, `getConcurrency()`, and `getHoldability()` methods throw a `SQLException` that you will have to handle in your code.

---

## Scrolling Through Rows of a ResultSet

There are many methods in the `ResultSet` interface that let you move the cursor position to a row in the result set. There are two sets of rows that a cursor may point to. One set of rows consists of two imaginary rows—one before the first row and one after the last row. Another set of rows consists of the rows that match the query. [Table 6-7](#) shows the rows and column structure of a `ResultSet`. The cursor in a `ResultSet` is positioned before the first row when it is created as shown by `>` in the table.

**Table 6-7.** Rows and Column Structures of a `ResultSet`

|                    | Column 1 | Column 2 | Column 3         | Column 4 | Column 5   | Column 6 |
|--------------------|----------|----------|------------------|----------|------------|----------|
| Before First Row > |          |          | An imaginary row |          |            |          |
| Row 1              | 101      | John     | Jacobs           | M        | 01/01/1970 | 45000.00 |
| Row 2              | 102      | Donna    | Duncan           | F        | 01/01/1960 | 35000.00 |
| Row 3              | 102      | Buddy    | Rice             | M        | 01/01/1965 | 25000.00 |
| After Last Row     |          |          | An imaginary row |          |            |          |

The table shows three rows in the result set with data that match the query criteria. Note that a `ResultSet` does not retrieve all rows for a query at once. The number of rows a `ResultSet` will retrieve from the database is JDBC driver-dependent. It may choose to retrieve one row at a time from a database. You can give a hint to the JDBC driver using the `setFetchSize(int fetchSize)` method of the `ResultSet` object to fetch a specified number of rows from the database whenever more rows are needed. When does a `ResultSet` need to fetch more rows from the database? A `ResultSet` needs to fetch more rows if you position its cursor to a row that is not in its cache. For example, calling the `next()` method of a `ResultSet` may trigger a fetch from the database. Suppose a `ResultSet` fetches 10 records at a time. If you

call the `next()` method the first time, it will fetch and cache 10 records and, for nine subsequent calls to its `next()` method, it will give you rows from its cache. Fetching and caching rows for a `ResultSet` is dependent on a JDBC driver and the underlying DBMS.

You can use the `getRow()` method of the `ResultSet` interface to get the row number of the row at which the cursor is currently positioned. If the cursor is positioned before the first row or after the last row, the `getRow()` method returns zero.

If you have a `ResultSet` object that has its scrollability set to forward-only, you can only use its `next()` method to move the cursor, which moves its cursor one row in the forward direction. Once the cursor is pointing after the last row, calling the `next()` method has no effect. The `next()` method returns `true` if it is pointing to a row that was returned from the query. Otherwise, it returns `false`.

If a `ResultSet` has a bidirectional scrollability, you have many methods to change its cursor position. The `next()` method can also be used in this type of `ResultSet` to move the cursor one row forward from its current position. All cursor movement methods can be put into two categories:

- Relative cursor movement methods
- Absolute cursor movement methods

The relative cursor movement methods move the cursor in the forward or backward direction relative to the current position of the cursor. You have two types of methods in this category: one that moves the cursor one row forward or backward from the current position, and one that moves the cursor forward or backward a specified number of rows. An example of this type of cursor movement is moving the cursor to the next/previous row from the current position. [Table 6-8](#) lists relative cursor movement methods whose categories are shown as Relative.

**Table 6-8.** The Cursor Movement Methods of the `ResultSet` Interface

| Method | Category | Description                                                                                                                                                                                                            |
|--------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|        |          | Moves the cursor one row forward from its current position. It returns <code>true</code> if the cursor is positioned to a valid row in the result set. It returns <code>false</code> if the cursor is positioned after |

|                                         |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----------------------------------------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>boolean next()</code>             | Relative | the last row. It may throw an exception or return <code>false</code> if you call it when cursor is already positioned after the last row. This behavior is JDBC driver-dependent.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <code>boolean previous()</code>         | Relative | It is the counterpart of the <code>next()</code> method. It moves the cursor one row backward from its current position. It returns <code>true</code> if the cursor is positioned to a valid row in the result set. It returns <code>false</code> if the cursor is positioned before the first row.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <code>boolean relative(int rows)</code> | Relative | Moves the cursor forward or backward by the specified number of <code>rows</code> from its current position. A positive value for <code>rows</code> such as <code>relative(5)</code> moves the cursor forward. A negative value for <code>rows</code> such as <code>relative(-5)</code> moves the cursor backward. Calling <code>relative(0)</code> has no effect. Calling <code>relative(1)</code> and <code>relative(-1)</code> has the same effect as calling <code>next()</code> and <code>previous()</code> , respectively.<br>If the number of specified rows to move is beyond the range of rows (including before the first row and after the last row), the cursor will be positioned before the first row or after the last row depending on the direction of the specified movement.<br>It returns <code>true</code> if the cursor is positioned to a valid row. Otherwise, it returns <code>false</code> . Some JDBC drivers throw a <code>SQLException</code> when you call this method and the cursor is not positioned to a valid row, for example, when it is positioned before the first or after the last row. Some JDBC drivers just return <code>false</code> in such cases. |
| <code>boolean first()</code>            | Absolute | Moves the cursor to the first row in the result set. It returns <code>true</code> if the cursor is positioned to the first row. It returns <code>false</code> if the result set is empty.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <code>boolean last()</code>             | Absolute | Moves the cursor to the last row in the result set. It returns <code>true</code> if the cursor is positioned to the last row. It returns <code>false</code> if the result set is empty.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <code>void beforeFirst()</code>         | Absolute | Positions the cursor before the first row. Calling this method has no effect on an empty result set.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|                                         |          | Positions the cursor after the last row. Calling                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

|                           |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| void afterLast()          | Absolute | this method has no effect on an empty result set.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| boolean absolute(int row) | Absolute | <p>Moves the cursor to the specified <code>row</code> number. It accepts a positive as well as a negative row number. If a positive row number is specified, the row is counted from the beginning. If a negative row number is specified, the row number is counted from the end.</p> <p>Suppose there are 10 rows in a result set. Calling <code>absolute(1)</code> will position the cursor to the first row. Calling <code>absolute(2)</code> will position the cursor to the second row. Calling <code>absolute(-1)</code> will position the cursor to the first row from the end, which would be the last row. Calling <code>absolute(-2)</code> will position the cursor to the second-last row. Calling <code>absolute(8)</code> and <code>absolute(-3)</code> will have the same effect as positioning the cursor on the eighth row in a 10-row result set. Calling <code>absolute(0)</code> positions the cursor before the first row.</p> <p>It returns <code>true</code> if the cursor is positioned to a valid row. Otherwise, it returns <code>false</code>. Any attempt to move the cursor beyond the valid row range will position the cursor either before the first row or after the last row depending on the direction of the movement. Calling <code>absolute(1)</code> is same as calling <code>first()</code>. Calling <code>absolute(-1)</code> is same as calling <code>last()</code>.</p> |

---

The absolute cursor movement methods move the cursor to a specific row irrespective of the current cursor position. You have two types of methods in this category: one that accepts a row number to move the cursor to that row such as the row number 8 and another that moves the cursor to a known position such as to the last row. Examples of this type of cursor movement are moving the cursor to the eighth row, the first row, the last row, before the first row, or after the last row, etc. [Table 6-8](#) lists the absolute cursor movement methods whose categories are shown as `Absolute`. All methods in the table throw a `SQLException`.

---

**Tip** You can only use the `next()` method to move the cursor in a forward-only scrollable `ResultSet`. Using any other methods on a forward-only scrollable `ResultSet` will throw an exception. All cursor movement methods

can be used with a bidirectional scrollable `ResultSet` object. Use the `last()` method with caution. This method call will force the JDBC driver to retrieve all rows from the database. If a DBMS does not support a bidirectional scrollable cursor, a JDBC driver will have to cache all rows on the client. For a very large result set, it may affect the performance of the application adversely.

---

## Knowing the Cursor Position in a `ResultSet`

The five methods in the `ResultSet` interface let you know where the cursor is currently positioned. Four methods return a boolean value of `true` if cursor is at the specific position. These methods are `isBeforeFirst()`, `isFirst()`, `isLast()`, and `isAfterLast()`. The method names are self-explanatory. They return `false` if they are called on an empty result set. The fifth method, called `getRow()`, returns the current row number as an `int`. It returns 0 If the cursor is positioned before the first row, after the last row, or result set is empty.

## Closing a `ResultSet`

You can close a `ResultSet` object by calling its `close()` method. Calling the `close()` method on an already closed `ResultSet` has no effect.

```
ResultSet rs = get a result set object;

// Process the rs object...

// Close the result set
rs.close();
```

Closing the `ResultSet` object frees the resources associated with it. A `ResultSet` object can also be closed implicitly in the following situations:

- When the `Statement` object that produces the `ResultSet` object is closed, it automatically closes the `ResultSet` object.

- When a Statement object is re-executed, its previously opened ResultSet object is closed.
- If a Statement object produces multiple result sets, retrieving the next result set closes the previously retrieved ResultSet.
- If it is a forward-only scrollable ResultSet, a JDBC driver may choose to close it when its next () method returns false as the part of optimization. Once the next () method returns false for a forward-only scrollable ResultSet, you cannot do anything with that ResultSet anyway.

You cannot perform any activities on a closed ResultSet, except calling its close () or isClosed() method. Calling any other methods will throw a SQLException. However, all is not lost when a ResultSet object is closed. You can still get to the following pieces of information on a closed ResultSet:

- If you have accessed a Blob, Clob, NClob, or SQLXML object from a result set when it was open, those objects are still valid after the ResultSet has been closed. They are valid at least until the duration of the transaction.
- If you have a ResultSetMetaData object from a ResultSet object when it was open, you can still use it to get metadata information about the result set. The following snippet of code shows the correct and incorrect sequence of statements:

```

ResultSet rs = get a result set object;
ResultSetMetaData rsmd
= rs.getMetaData();
rs.close(); // rs is closed

// You can still use rsmd object to get
info about rs
System.out.println("Column Count:"
+ rsmd.getColumnCount());

```

```
// Can use only isClosed() and close()
method on rs because it is closed.
ResultSetMetaData rsmd
= rs.getMetaData(); // An error
```

# Making Changes to a ResultSet

You can use a `ResultSet` to perform insert, update, and delete operations on database tables. The concurrency for the `ResultSet` object must be `ResultSet.CONCUR_UPDATABLE` in order to perform updates on the `ResultSet`. Inserting a new row and updating an existing row in a `ResultSet` is a two-step process, whereas deleting a row is a one-step process. In the two-step process, you need to make changes in the `ResultSet` object first and then call one of its methods to send changes to the database. In the one-step process, changes to the `ResultSet` are propagated to the database automatically.

## Inserting a Row Using a ResultSet

So far, you are aware of only two imaginary rows in a result set. They were rows before the first row and after the last row. However, there is one more imaginary row that exists in a `ResultSet` and that is called an *insert row*. You can think of this row as an empty new row, which acts as a staging area for a new row that you want to insert. You can position the cursor to the insert row using the `ResultSet` object's `moveToInsertRow()` method. When the cursor moves to the insert row, it remembers its previous position. You can call the `moveToCurrentRow()` method to move the cursor from the insert row back to the previously current row. So, the first step in inserting a new row is to move the cursor to the insert row.

```
// Move the cursor to an insert row to add a new row
rs.moveToInsertRow();
```

At this point, a new row has been inserted in the staging area and all columns have undefined values. Calling a `getXXX()` method to read column values may

throw an exception at this point. Once the cursor is positioned at the insert-row, you need to set the values for all the columns (at least for non-nullable columns) using one of the `updateXXX()` methods of the `ResultSet` interface, where `Xxx` is the data type of the column. The first argument to an `updateXXX()` method is either the column index or the column name, and the second argument is the column value. If you want to insert a new row in the `person` table using a `ResultSet`, your `updateXXX()` method call will look as follows:

```
// Leave dob and income unset to use null values for
// them
rs.updateInt("person_id", 501);
rs.updateString("first_name", "Richard");
rs.updateString("last_name", "Castillo");
rs.updateString("gender", "M");
```

Once you update the value for a column, you can use a `getXXX()` method to retrieve the new values from the `ResultSet`.

You are not done yet with the new row. You must send the changes to the database before your new row becomes part of the `ResultSet`. You can send the newly inserted row to the database by calling the `insertRow()` method of the `ResultSet` interface as shown:

```
// Send changes to the database
rs.insertRow();
```

The call to the `insertRow()` method may or may not make the inserted row a permanent row in the database. If the auto-commit mode is enabled for the `Connection`, the `insertRow()` call will also commit your transaction. In that case, the new row becomes part of the database permanently. If the auto-commit mode is disabled for the `Connection`, you can make the insert permanent by committing the transaction, or cancel the insert by rolling back the transaction. Note that committing or rolling back a transaction will commit or rollback all pending activities, not only the newly inserted row.

Once you have sent your inserted row to the database, you can move to the previously current row by calling the `moveToCurrentRow()` method. Moving to another row before calling the `insertRow()` method after calling the `moveToInsertRow()` method discards the new row.

[Listing 6-13](#) demonstrates how to use a `ResultSet` to insert a new row.

After getting the `ResultSet` object in the `addRow()` method, it checks if it is updatable. If the `ResultSet` object is not updatable, it prints a message to indicate that and does not do anything. In the end, it prints all rows in the result set. The printed records also include the new row. Note that you do not update the values for `dob` and `income` columns for new rows and the JDBC driver will use `null` values for them when it inserts a new row in the `person` table. If you run the program more than once in the same database, an error message is printed because the program will attempt to insert a person record with the same `person_id` again causing a duplicate row in the table.

***Listing 6-13.*** Inserting a New Row Using a `ResultSet`

```
// ResultSetInsert.java
package com.jdojo.jdbc;

import java.sql.Connection;
import java.sql.ResultSet;
import java.sql.SQLException;
import java.sql.Statement;
import static java.sql.ResultSet.CONCUR_UPDATABLE;
import static java.sql.ResultSet.TYPE_FORWARD_ONLY;

public class ResultSetInsert {
 public static void main(String[] args) {
 Connection conn = null;
 try {
 conn = JDBCUtil.getConnection();

 // Add a new row
 addRow(conn);

 // Commit the transaction
 JDBCUtil.commit(conn);
 }
 catch (SQLException e) {
 System.out.println(e.getMessage());
 JDBCUtil.rollback(conn);
 }
 finally {
```

```

 JDBCUtil.closeConnection(conn);
 }
}

public static void addRow(Connection conn)
throws SQLException {
 String SQL = "select person_id,
first_name, "
 + "last_name, gender, dob,
income "
 + "from person";

 Statement stmt = null;
 try {
 stmt
= conn.createStatement(TYPE_FORWARD_ONLY,
CONCUR_UPDATABLE

 // Get the result set
 ResultSet rs
= stmt.executeQuery(SQL);

 // Make sure your resultset is
updatable
 int concurrency
= rs.getConcurrency();

 if (concurrency !=
ResultSet.CONCUR_UPDATABLE) {
 System.out.println("The JDBC
driver does not " +
 "support updatable
result sets.");
 return;
 }

 // First insert a new row to the
ResultSet
 rs.moveToInsertRow();
 rs.updateInt("person_id", 501);
 }
}

```

```

 rs.updateString("first_name",
"Richard");
 rs.updateString("last_name",
"Castillo");
 rs.updateString("gender", "M");

 // Send the new row to the
database
 rs.insertRow();

 // Move back to the current row
rs.moveToCurrentRow();

 // Print all rows in the result
set
 while (rs.next()) {
 System.out.print("Person ID:
" +
 rs.getInt("person_id") +
 ", First Name: " +
 rs.getString("first_na" +
 ", Last Name: " +
 rs.getString("last_nam"
System.out.println();
 }
 }
finally {
 JDBCUtil.closeStatement(stmt);
}
}
}

```

## Updating a Row Using a ResultSet

Here are the steps involved in updating an existing row in a ResultSet object.

1. Move the cursor to a valid row in the result set. Note that you can update data only for an existing row. It is obvious that the cursor should not be positioned before the first row or after the last row if you want to update the data in a row.
2. Call an `updateXXX()` method for a column to update the column's value.
3. If you do not want to go ahead with the changes made using `updateXXX()` method calls, you need to call the `cancelRowUpdates()` method of the `ResultSet` to cancel the changes.
4. When you are done updating all the column's values for the current row, call the `updateRow()` method to send the changes to the database. If the auto-commit mode is enabled for the `Connection`, changes will be committed. Otherwise, you need to commit the changes to the database.
5. If you move the cursor to a different row before calling the `updateRow()`, all your changes made using the `updateXXX()` method calls will be discarded.
6. There is another way to lose your updates to columns in a row. If you call the `refreshRow()` method after calling `updateXXX()`, but before calling `updateRow()`, your changes will be lost because the JDBC driver will refresh the row's data from the database.

***Listing 6-14*** demonstrates how to update a row using a `ResultSet` object. It increases the income of every person with non-null income by 10%. If a person's income is `null`, it updates the income to 10000.00.

#### ***Listing 6-14.*** Updating Data Using a `ResultSet`

```
// ResultSetUpdate.java
package com.jdojo.jdbc;

import java.sql.Connection;
```

```
import java.sql.ResultSet;
import static java.sql.ResultSet.CONCUR_UPDATABLE;
import static java.sql.ResultSet.TYPE_FORWARD_ONLY;
import java.sql.SQLException;
import java.sql.Statement;

public class ResultSetUpdate {
 public static void main(String[] args) {
 Connection conn = null;
 try {
 conn = JDBCUtil.getConnection();

 // Give everyone a 10% raise
 giveRaise(conn, 10.0);

 // Commit the transaction
 JDBCUtil.commit(conn);
 }
 catch (SQLException e) {
 System.out.println(e.getMessage());
 JDBCUtil.rollback(conn);
 e.printStackTrace();
 }
 finally {
 JDBCUtil.closeConnection(conn);
 }
 }

 public static void giveRaise(Connection conn,
 double raise) throws
SQLException {
 String SQL = "select person_id,
first_name, last_name, " +
 "income from person";

 Statement stmt = null;

 try {
 stmt
= conn.createStatement(TYPE_FORWARD_ONLY,
```

```
CONCUR_UPDATABLE

 // Get the result set
 ResultSet rs
= stmt.executeQuery(SQL);

 // Make sure our resultset is
updatable
 int concurrency
= rs.getConcurrency();

 if (concurrency != CONCUR_UPDATABLE) {
 System.out.println("The JDBC
driver does not "+
 "support updatable
result sets.");
 return;
}

 // Give everyone a raise
 while (rs.next()) {
 double oldIncome
= rs.getDouble("income");
 double newIncome = 0.0;

 if (rs.wasNull()) {
 // null income starts
at 10000.00
 oldIncome = 10000.00;
 newIncome = oldIncome;
}
 else {
 // Increase the income
 newIncome =
oldIncome + oldIncome
* (raise / 100.0);
}
}

 // Update the income column
```

```
with the new value
newIncome);
// Print the details about
the changes
int personId
= rs.getInt("person_id");
String firstName
= rs.getString("first_name");
String lastName
= rs.getString("last_name");
System.out.println(firstName
+ " " + lastName +
" (person id="
+ personId +
") income changed from
" +
oldIncome + " to "
+ newIncome);

// Send the changes to the
database
rs.updateRow();
}
}
finally {
JDBCUtil.closeStatement(stmt);
}
}
```

# Deleting a Row Using a ResultSet

Deleting a row from a `ResultSet` is easier than updating and inserting a row. Here are the steps to delete a row.

1. Position the cursor at a valid row.
2. Call the `deleteRow()` method of the `ResultSet` to delete the current row.

The `deleteRow()` method deletes the row from the `ResultSet` object and, at the same time, it deletes the row from the database. There is no way to cancel the delete operation except by rolling back the transaction. If the auto-commit mode is enabled on the `Connection` object, `deleteRow()` will permanently delete the row from the database.

Typical code for deleting a row from a `ResultSet` object is as follows:

```
ResultSet rs = get an updatable result set object;

// Scroll to the row you want to delete, say the first
row
rs.next();

// Delete the current row
rs.delete(); // Row is deleted from the result set and
the database

// Commit or rollback changes depending on your
processing logic
```

## Handling Multiple Results from a Statement

Sometimes executing a SQL statement may return multiple results. Typically, you get multiple results by executing a stored procedure. The results include the update counts and result sets. For example, if you execute a stored procedure that updates some records and returns a result set, you get two results. The first one will be the update count and the second will be the result set. Some DBMSs let you suppress sending back the update counts. For example, you can use `SET NOCOUNT ON` and `SET NOCOUNT OFF` options inside your stored procedure in SQL Server DBMS to disable or enable the update count results. Consult your DBMS documentation for the options that are available to suppress the update

count results.

Use the `execute()` method of the `Statement` object if it may return multiple results. You need to work with four things to process multiple results. You may or may not know the order in which the results are returned. The first thing you need to consider is the return value of the `execute()` method. You need to work with the following three methods of the `Statement` interface to access all results:

- `getMoreResults()`
- `getUpdateCount()`
- `getResultSet()`

The `execute()` method may generate many results or no results. You must read one result at a time. You must first scroll to a result before you can read it. The `execute()` method scrolls to the first result, if there is one. If the first result is a `ResultSet`, the `execute()` method returns `true`. If the first result is an update count or there is no result, it returns `false`. You can retrieve a `ResultSet` result by calling the `Statement` object's `getResultSet()` method. You can retrieve an update count by calling its `getUpdateCount()` method.

You can scroll to the next result by calling the `getMoreResults()` method of a `Statement`. The `getMoreResults()` method returns `true` if it scrolls to a `ResultSet` result. It returns `false` if it scrolls to an update count result or there are no more results.

Aren't the rules to process multiple results confusing? So, what criteria determine that you do have more results to process? It is a little tricky to tell. You will need to write a few lines of code to process multiple results returned by executing a statement. The following snippet of code puts the logic together. It uses a `CallableStatement` object. You can also use a `Statement` or `PreparedStatement` object. The following logic does not depend on the order or the count of the multiple results:

```
Callable cstmt = get a callable statement object;
boolean hasResultSet = cstmt.execute();
int updateCount = cstmt.getUpdateCount();

while (hasResultSet || updateCount != -1) {
```

```

 if (hasResultSet) {
 // The cursor is pointing to a ResultSet
 object
 ResultSet rs = cstmt.getResultSet();

 // Process the result set here
 System.out.println("Got a result set");
 }
 else {
 System.out.println("Got an update Count:
" + updateCount);
 }

 // Move the cursor to the next result
 hasResultSet = cstmt.getMoreResults();

 // Get the new update count
 updateCount = cstmt.getUpdateCount();
 }

 // When we get to this point, all results have been
 processed.
 }

```

---

**Tip** When you call the `getMoreResults()` method, the `ResultSet` that was previously obtained by using the `getResultSet()` method is closed. If you want to keep the previously accessed `ResultSet`, you can use another version of the `getMoreResults()` method that accepts an argument, which lets you specify what to do with the open `ResultSet` objects. As usual, closing the `Statement` object will close all `ResultSets`.

---

## Getting a ResultSet from a Stored Procedure

I have covered a great deal of details on processing result sets that are produced by executing a `SELECT` statement (see [Listing 6-11](#)). A stored procedure can

also produce a result set. Producing a result set in a stored procedure is easy in most of the databases. It is just a matter of writing a SELECT statement inside a stored procedure. The following is an example of creating a stored procedure in Adaptive Server Anywhere DBMS that returns a result set. The name of the stored procedure is `get_person_details`. It accepts one parameter, which is of type integer and is the value for `person_id`. To return a result set, it simply selects columns from the `person` table for the `person_id` that is passed in.

```
-- Adaptive Server Anywhere 9.0
create procedure get_person_details(@person_id
integer)
as
begin
 select person_id, first_name, last_name, gender,
dob, income
 from person
 where person_id = @person_id
end
```

Producing a result set inside a stored procedure in Oracle database is a little different. You need to work with a `REF_CURSOR` type in an Oracle database to produce a result set. First, you work with an example of dealing with result sets produced by a stored procedure by a DBMS other than Oracle. Please refer to your DBMS and its JDBC documentation on how it supports producing a result set inside a stored procedure. At the end of this section, you will see an example of producing a result set in a stored procedure using Oracle DBMS.

This section contains the database script to create a `get_person_details` stored procedure in some DBMSs. If you are working with one of these DBMSs, you need to run the script for your DBMS before you can run the examples in this section. If your DBMS is not listed, you can duplicate the logic and create a `get_person_details` stored procedure in your DBMS, which produces a result set.

If your stored procedure produces only one result set, it is straightforward to process that result set. Here are the steps to process one result set from a stored procedure:

- Construct the stored procedure call in a string format using the JDBC standard syntax.

```
String sql = "{call
get_person_details(?) }";
```

- Prepare a CallableStatement using the SQL syntax created in the previous step.

```
CallableStatement cstmt
= conn.prepareCall(sql);
```

- Set any IN parameters that need to be passed to the stored procedure. In your case, you will pass a person\_id to the stored procedure and you need to set a person\_id as the IN parameter.

```
cstmt.setInt(1, 101);
```

- Call the executeQuery() method of the CallableStatement object, which will return the result set produced by the stored procedure as a ResultSet.

```
ResultSet rs = cstmt.executeQuery();
```

- Process the ResultSet object as usual by looping through its rows and using the getXXX() methods to read the columns values.

---

**Tip** If your stored procedure returns multiple result sets, you need to use the execute() method of the CallableStatement interface instead of the executeQuery() method. Please refer to the “Handling Multiple Results from a Statement” section for more details on how to handle multiple result sets produced by a stored procedure.

---

The following are the database scripts for creating the get\_person\_details stored procedure in different DBMSs.

## MySQL Database

```

DELIMITER $$

DROP PROCEDURE IF EXISTS get_person_details $$

CREATE PROCEDURE get_person_details(in person_id_param
int)
BEGIN
 select person_id, first_name, last_name, gender, dob,
income
 from person
 where person_id = person_id_param;
END $$

DELIMITER ;

```

## Adaptive Server Anywhere Database

```

create procedure get_person_details(@person_id
integer)
as
begin
 select person_id, first_name, last_name, gender,
dob, income
 from person
 where person_id = @person_id
end

```

## Oracle Database

```

CREATE OR REPLACE
PACKAGE JDBC_TEST_PKG
AS
 type person_cursor_type is ref cursor;
END JDBC_TEST_PKG;

```

```

create or replace PROCEDURE GET_PERSON_DETAILS
(person_id_param IN NUMBER,

```

```

 person_cursor OUT jdbc_test_pkg.person_cursor_type
)
AS
BEGIN
 open person_cursor for
 select person_id, first_name, last_name, gender,
 dob, income
 from person
 where person_id = person_id_param;
END GET_PERSON_DETAILS;

```

## SQL Server Database

```

-- Drop stored procedure if it already exists
IF EXISTS (
 SELECT *
 FROM INFORMATION_SCHEMA.ROUTINES
 WHERE SPECIFIC_SCHEMA = N'dbo'
 AND SPECIFIC_NAME = N'get_person_details'
)
 DROP PROCEDURE dbo.get_person_details
GO

CREATE PROCEDURE dbo.get_person_details
 @person_id int
AS
BEGIN
 SELECT person_id, first_name, last_name, gender,
 dob, income
 FROM person
 WHERE person_id = @person_id;
END;
GO

```

## DB2 Database

```
create procedure get_person_details(in person_id_param
```

```

int)
result sets 1
language sql
begin
 declare c1 cursor with return for
 select person_id, first_name, last_name, gender,
dob, income
 from person
 where person_id = person_id_param;
 open c1;
end
@

```

The @ sign is used as the statement terminator in the above syntax.

## Java DB Database

For the Java DB database, you need to write the stored procedure as a method in a Java class as shown in [Listing 6-15](#).

**[Listing 6-15](#)**. The Java Code for the get\_person\_details Stored Procedure in Java DB

```

// JavaDBGetPersonDetailsSp.java
package com.jdojo.jdbc;

import java.sql.Connection;
import java.sql.DriverManager;
import java.sql.PreparedStatement;
import java.sql.ResultSet;
import java.sql.SQLException;

public class JavaDBGetPersonDetailsSp {
 public static void getPersonDetails(int
personId,
 ResultSet[] personDetailRs) throws
SQLException {

```

```

 // Must use the following URL to get the
reference of
 // the Connection object in whose context
this method
 // is called.
String dbURL = "jdbc:default:connection";
Connection conn
= DriverManager.getConnection(dbURL);

 String sql = "select person_id,
first_name, " +
 "last_name, gender, dob,
income " +
 "from person " +
 "where person_id = ?";
PreparedStatement pstmt
= conn.prepareStatement(sql);
pstmt.setInt(1, personId);
ResultSet rs = pstmt.executeQuery();
personDetailRs[0] = rs;

/* Do not close pstmt or rs here. They
are meant to be
procssed and closed by the caller of
this stored
procedure.
*/
}
}

```

The command to create the `get_person_details` stored procedure in the Java DB database is as follows. For more details on working with stored procedures in Java DB, please refer to [Listing 6-8](#) and the related steps in the section containing this listing.

```

-- Command to create the stored procedure
CREATE PROCEDURE get_person_details(IN person_id
integer)
PARAMETER STYLE JAVA
LANGUAGE JAVA

```

```
READS SQL DATA
DYNAMIC RESULT SETS 1
EXTERNAL NAME
'com.jdojo.jdbc.JavaDBGetPersonDetailsSp.getPersonData'
```

[Listing 6-16](#) contains the complete code that executes a stored procedure and processes the result set produced by the stored procedure. It uses the `printResultSet()` static method of the `QueryPersonTest` class (see [Listing 6-11](#)) to print a person's details. This program is valid for a database that has native support for a result set on the server side. Please refer to the example later in this section to process a result set produced by a stored procedure in an Oracle database.

### ***Listing 6-16.*** Processing a ResultSet Produced by a Stored Procedure

```
// StoredProcedureResultSetTest.java
package com.jdojo.jdbc;

import java.sql.CallableStatement;
import java.sql.Connection;
import java.sql.ResultSet;
import java.sql.SQLException;

public class StoredProcedureResultSetTest {
 public static void main(String[] args) {
 Connection conn = null;
 try {
 conn = JDBCUtil.getConnection();

 // Print details for person_id 101
 printPersonDetails(conn, 101);

 JDBCUtil.commit(conn);
 }
 catch (SQLException e) {
 System.out.println(e.getMessage());
 JDBCUtil.rollback(conn);
 }
 finally {
 JDBCUtil.closeConnection(conn);
 }
 }
}
```

```

 }

 public static void
printPersonDetails(Connection conn,
 int personId) throws SQLException {
 String SQL = "{ call
get_person_details(?) }";
 CallableStatement cstmt = null;
 try {
 cstmt = conn.prepareCall(SQL);

 // Set the IN parameters
 cstmt.setInt(1, personId);
 ResultSet rs
= cstmt.executeQuery();

 // Process the result set
 QueryPersonTest.printResultSet(rs);
 }
 finally {
 JDBCUtil.closeStatement(cstmt);
 }
}
}

```

Now, it is time to work with an Oracle database only. Here are the steps that you will need to use to process a result set produced by a stored procedure in an Oracle database.

1. Construct the stored procedure call in a string format using the JDBC standard syntax. You will have an additional OUT parameter for an Oracle stored procedure. In an Oracle database, the stored procedure will pass back the reference of a REF CURSOR type in that OUT parameter. In your case, the first parameter is of the IN type and it will be used to pass a person\_id. The second parameter is an OUT parameter of type oracle.jdbc.OracleTypes.CURSOR. Note that

you must have the JAR file(s) for the Oracle JDBC driver included in the CLASSPATH to use the `oracle.jdbc.OracleTypes.CURSOR` interface.

```
String sql = "{call
get_person_details(?, ?)}";
```

2. Prepare a CallableStatement using the SQL syntax created in the previous step.

```
CallableStatement cstmt
= conn.prepareCall(sql);
```

3. Set any IN parameters that need to be passed to the stored procedure. In your case, you will pass a `person_id` to the stored procedure and you need to set that `person_id` as an IN parameter. Register the OUT parameter as `oracle.jdbc.OracleTypes.CURSOR` type.

```
cstmt.setInt(1, 101);
cstmt.registerOutParameter(2,
oracle.jdbc.OracleTypes.CURSOR);
```

4. Call the `execute()` method of the CallableStatement object.

```
cstmt.execute();
```

5. Get the ResultSet object, which is passed back in the second OUT parameter using the `getObject()` method and cast it as ResultSet.

```
ResultSet rs
= (ResultSet)cstmt.getObject(2);
```

6. Process the ResultSet object as usual by looping through its rows and using its `getXxx()` methods to read the column values.

[Listing 6-17](#) contains the complete code that executes the

`get_person_details` stored procedure in an Oracle database and processes the result set produced by the stored procedure. Make sure that you have the `JDBCUtil.getConnection()` method (see [Listing 6-1](#)) that returns a connection to an Oracle database. You must also compile the necessary package and procedure in the Oracle database as listed in this section for Oracle before you can run the program in [Listing 6-17](#). Note that you will need to uncomment the following statement that appears inside the `printPersonDetails()` method:

```
//cstmt.registerOutParameter(2,
oracle.jdbc.OracleTypes.CURSOR);
```

I have commented it so the entire class will compile. You will need to add the Oracle JDBC driver JAR file in CLASSPATH to compile the class, after uncommenting this statement.

**[Listing 6-17](#).** Processing a ResultSet from a Stored Procedure in Oracle Database

```
// Oracle.StoredProcedureResultSetTest.java
package com.jdojo.jdbc;

import java.sql.CallableStatement;
import java.sql.Connection;
import java.sql.ResultSet;
import java.sql.SQLException;

public class Oracle.StoredProcedureResultSetTest {
 public static void main(String[] args) {
 Connection conn = null;
 try {
 conn = JDBCUtil.getConnection();

 // Print details for person_id 101
 printPersonDetails(conn, 101);

 JDBCUtil.commit(conn);
 }
 catch (SQLException e) {
 System.out.println(e.getMessage());
 JDBCUtil.rollback(conn);
 }
 }
}
```

```

 }
 finally {
 JDBCUtil.closeConnection(conn);
 }
}

public static void
printPersonDetails(Connection conn,
 int personId) throws SQLException
{
 String sql = "{ call
get_person_details(?, ?) }";
 CallableStatement cstmt = null;
 try {
 cstmt = conn.prepareCall(sql);

 // Set the IN parameters
 cstmt.setInt(1, personId);

 /* Uncomment the following
statement after you have
the Oracle JDBC driver in
CLASSPATH.

Register the second parameter as
an OUT parameter
which will return the REF CURSOR
(the ResultSet) */
 //cstmt.registerOutParameter(2,
 //
oracle.jdbc.OracleTypes.CURSOR);

 // Execute the stored procedure
 cstmt.execute();

 // Get the result set from the OUT
parameter
 ResultSet rs = (ResultSet)
cstmt.getObject(2);
 }
}

```

```
 // Process the result set
 QueryPersonTest.printResultSet(rs);
 }
 finally {
 JDBCUtil.closeStatement(cstmt);
 }
}
```

Many databases support the REF\_CURSOR type. Java 8 has added direct support for REF\_CURSOR data type in the JDBC API by adding the `JDBCType.REF_CURSOR` enum constant that represents REF\_CURSOR data type in Java. Using this JDBC type, you will be able to work with the REF\_CURSOR type without using proprietary JDBC classes in your Java program. For example, you will be able to register the OUT parameter of the REF\_CURSOR database type in the `printPersonDetails()` method as follows:

```
cstmt.registerOutParameter(2, JDBCType.REF_CURSOR);
```

---

**Tip** At the time of this writing, the `JDBCType.REF_CURSOR` type has not been implemented in the Oracle JDBC driver. If you use this type to register a REF\_CURSOR database type, you will get a runtime error with an error message that this data type has not been implemented yet. Use the `supportsRefCursors()` method of the `DatabaseMetaData` interface, which was added in Java 8, to know if the database supports REF\_CURSOR.

---

## ResultSetMetaData

A `ResultSet` object contains the rows of data returned by executing a query and detailed information about the columns. The information that it contains about the columns in the result set is called the *result set metadata*. An object of the `ResultSetMetaData` interface represents the result set metadata. You can get a `ResultSetMetaData` object by calling the `getMetaData()` method of the `ResultSet` interface.

```
ResultSet rs = get result set object;
ResultSetMetaData rsmd = rs.getMetaData();
```

A `ResultSetMetaData` contains a lot of information about all columns in a result set. All of the methods, except `getColumnCount()`, in the `ResultSetMetaData` interface accept a column index in the result set as an argument. It contains the table name, name, label, database data type, class name in Java, nullability, precision, etc. of a column. It also contains the column count in the result set. Its `getTableName()` method returns the table name of a

column; the `getColumnName()` method returns the column's name; the `getColumnLabel()` method returns the column's label; the `getColumnTypeName()` method returns the column type in database; and the `getColumnClassName()` method returns Java class used to represent the data for the column. Its `getColumnCount()` method returns the number of columns in the result set.

The column label is a nice printable text that is used in a query after the column name. The following query uses "Person ID" as the column label for the `person_id` column. The `first_name` column does not have a specified label.

```
select person_id as "Person ID", first_name from person
```

The `getColumnLabel(1)` method call will return "Person ID", whereas `getColumnName(1)` will return `person_id` if the above query is used for a result set. If the column label is not specified in a query, the `getColumnLabel()` method returns the column name.

[Listing 6-18](#) demonstrates how to use a `ResultSetMetaData` object to know more about a result set. The output is shown for Java DB. You may get a different output when you use a different JDBC driver because database-column-type-to-JDBC-column-type mapping depends on the JDBC driver.

**[Listing 6-18.](#)** Using a `ResultSetMetaData` Object to Get Information About a `ResultSet`

```
// ResultSetMetaDataTest.java
package com.jdojo.jdbc;

import java.sql.Connection;
import java.sql.ResultSet;
import java.sql.ResultSetMetaData;
import java.sql.SQLException;
import java.sql.Statement;

public class ResultSetMetaDataTest {
 public static void main(String[] args) {
 Connection conn = null;
```

```

 try {
 conn = JDBCUtil.getConnection();
 String SQL = "select person_id as
\"Person ID\", " +
 "first_name as \"First
Name\", " +
 "gender as Gender, " +
 "dob as \"Birth Date\",
" +
 "income as Income " +
 "from person";

 // Print the result set metadata
 printMetaData(conn, SQL);

 JDBCUtil.commit(conn);
 }
 catch (SQLException e) {
 System.out.println(e.getMessage());
 JDBCUtil.rollback(conn);
 }
 finally {
 JDBCUtil.closeConnection(conn);
 }
 }

 public static void printMetaData(Connection
conn, String SQL)
 throws SQLException {
 Statement stmt = conn.createStatement();
 try {
 ResultSet rs
= stmt.executeQuery(SQL);
 ResultSetMetaData rsmd
= rs.getMetaData();
 int columnCount
= rsmd.getColumnCount();
 System.out.println("Column Count:"
+ columnCount);
 }
 }
}

```

```

 for (int i = 1; i <= columnCount;
i++) {
 System.out.println("Index:"
+ i +
 ", Name:"
+ rsmd.getColumnName(i) +
 ", Label:"
+ rsmd.getColumnLabel(i) +
 ", Type Name:"
+ rsmd.getColumnTypeName(i) +
 ", Class Name:"
+ rsmd.getColumnClassName(i));
 }
 }
 }
}

```

---

```

Index:1, Name:Person ID, Label:Person ID, Type
Name:INTEGER, Class Name:java.lang.Integer
Index:2, Name:First Name, Label:First Name, Type
Name:VARCHAR, Class Name:java.lang.String
Index:3, Name:GENDER, Label:GENDER, Type Name:CHAR,
Class Name:java.lang.String
Index:4, Name:Birth Date, Label:Birth Date, Type
Name:DATE, Class Name:java.sql.Date
Index:5, Name:INCOME, Label:INCOME, Type Name:DOUBLE,
Class Name:java.lang.Double

```

---

If you have to write generic code to process any or an unknown result set, you will find a `ResultSetMetaData` object indispensable. For example, suppose you want to develop a Swing application that will let the user enter in a query and you will display the query data in a `JTable`. To construct the `JTable`, you must know the number of columns in the result set. You can use the `getColumnCount()` method of a `ResultSetMetaData` object to

know the number of columns in a result set. You can use many other methods available in this object to construct an appropriate `JTable`.

## Using RowSets

An instance of the `RowSet` interface is a wrapper for a result set. The `RowSet` interface inherits from the `ResultSet` interface. In simple terms, a `RowSet` is a Java object that contains a set of rows from a tabular data source. The tabular data source could be a database, a flat file, a spreadsheet, etc. The `RowSet` interface is in the `javax.sql` package. The following are the advantages of the `RowSet` over the `ResultSet`:

- A `RowSet` makes JDBC programming simpler. When you use a `ResultSet` object, you must deal with the `Connection` and `Statement` objects at the same time. A `RowSet` hides the complexities of using the `Connection` and `Statement` objects from the developers. All you have to work with is only one object, which is a `RowSet` object.
- A `ResultSet` is not `Serializable` and therefore, it cannot be sent over the network or saved to the disk for later use. A `RowSet` is `Serializable`. It can be sent over the network or saved to a disk for later use.
- A `ResultSet` is always connected to a data source. A `RowSet` object does not need to be connected to its data source all the time. It can connect to the database when needed such as to retrieve/update data in the data source.
- A `RowSet` is by default scrollable and updatable.
- The two properties of a `RowSet`, serialization and connectionlessness, makes it very useful in a thin client environment such as a mobile device or a web application. A thin client does not need to have a JDBC driver. It may get the data in a disconnected `RowSet` from a middle tier. It may modify the data and send the modified `RowSet` to the middle tier, which can connect to the data source and update

the data. You can use this technique in an applet or a web page. You can have a servlet that can connect to a database, retrieve data in a disconnected RowSet, and pass it to an applet. The applet can modify the data and send the modified RowSet to the servlet, which can connect to the database to update the data. This way, an applet does not need to use a JDBC driver or anything related to database connectivity at all. There is also a RowSet type available for web usage that works with XML data.

- A ResultSet uses a database as its data source. You are not restricted to using only a database as a data source with a RowSet. You can implement a RowSet to use any tabular data source.
- A RowSet follows the JavaBeans model for properties setting and events notifications, which makes it possible to develop a RowSet using a visual tool that supports the JavaBeans development.
- A RowSet also supports filtering of data after the data has been retrieved. Filtering of data is not possible in a ResultSet. You must use a WHERE clause in a query to filter data in the database itself if you use a ResultSet.
- A RowSet makes it possible to join two or more data sets based on their column's values after they have been retrieved from their data sources. One data set can be retrieved from a database and another from a flat file. This is simply not possible when you use a ResultSet. When you use a ResultSet, joining multiple data sets is possible using SQL joins in the query that fills the ResultSet.

You also need to be aware of a few disadvantages of using a RowSet.


- A specific RowSet implementation may cache data in memory. You need to be careful when using such type of RowSets. You should not fetch large volumes of data using these RowSets. Otherwise, it may slow down the application.

- With cached data in a RowSet, there are more possibilities of data inconsistency between the data in the RowSet and data in the data source, when changes are applied to the data source.

The following interfaces in the `javax.sql.rowset` package define five types of rowsets:

- `JdbcRowSet`
- `CachedRowSet`
- `WebRowSet`
- `FilteredRowSet`
- `JoinRowSet`

Each type of rowset has features that are suitable for specific needs. All these rowset interfaces inherit, directly or indirectly, from the `RowSet` interface. The `RowSet` interface is inherited from the `ResultSet` interface. Therefore, all methods in the `ResultSet` interface are also available in all types of rows. [Figure 6-7](#) depicts a class diagram for rowset interfaces.

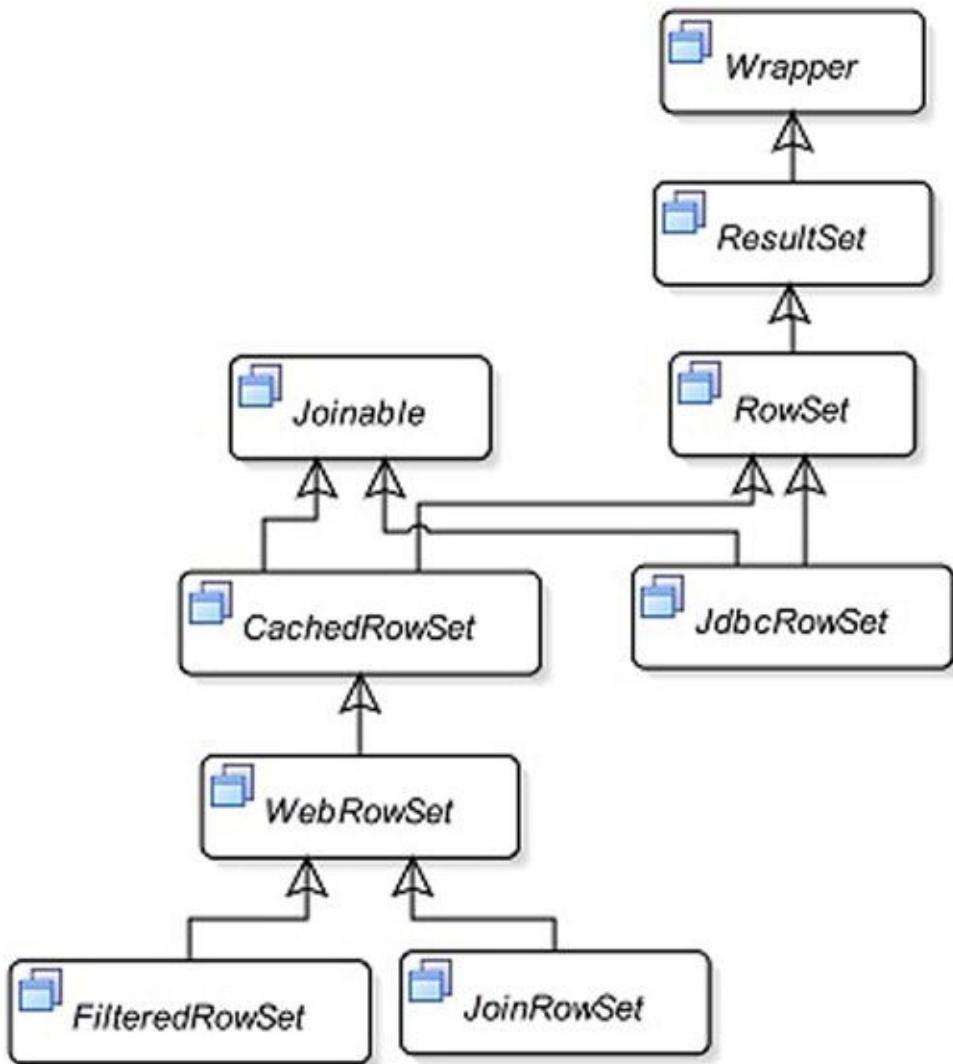

**Figure 6-7.** A class diagram for the interfaces defining rowsets

Who provides the implementation classes for the rowsets interfaces? Typically, database vendors are supposed to provide implementation classes for rowsets. They may provide them as part of their JDBC driver or as a separate bundle. Third parties can also provide rowset implementation classes. As a developer, you can also provide rowset implementations to suit specific needs.

## Creating a RowSet

An instance of the `RowSetFactory` interface lets you create different types of `RowSet` objects without caring about the rowset implementation classes. To get a `RowSetFactory`, you need to use the `newFactory()` static method of the

RowSetProvider class. The RowSetFactory interface has five methods to create five types of rowsets. Those methods are named as `createXxxRowSet()`, where Xxx can be Cached, Filtered, Jdbc, Join, and Web. For example, you will use the `createJdbcRowSet()` method of a RowSetFactory to create a JdbcRowSet. The following snippet of code shows how to create a JdbcRowSet:

```
import java.sql.SQLException;
import javax.sql.rowset.JdbcRowSet;
import javax.sql.rowset.RowSetFactory;
import javax.sql.rowset.RowSetProvider;
...

JdbcRowSet jdbcRs = null;
try {
 // Get the RowSetFactory implementation
 RowSetFactory rsFactory
= RowSetProvider.newFactory();

 // Create a JdbcRowSet object
 jdbcRs = rsFactory.createJdbcRowSet();

 // Work with jdbcRs here
}
catch (SQLException e) {
 e.printStackTrace();
}
finally {
 if (jdbcRs != null) {
 try {
 // Close the RowSet
 jdbcRs.close();
 }
 catch (SQLException e) {
 e.printStackTrace();
 }
 }
}
```

The `newFactory()` method of the `RowSetProvider` class searches for the implementation class for the `RowSetFactory` interface as follows:

- It looks for the value of the `javax.sql.rowset.RowSetFactory` system property. You can specify this property value on the command line. The following command sets this property value to the `com.jdojo.MyRowSetFactoryImpl` class when running the `com.jdojo.jdbc.Test` class:

```
java -Djavax.sql.rowset.RowSetFactory=com.jdojo.MyRowSetFactoryImpl com.jdojo.jdbc.Test
```

- The service provider API looks for a class name in all available JAR files to the runtime under `META-INF/services/javax.sql.rowset.RowSetFactory`.
- It looks for the platform's default implementation for the `RowSetFactory` interface.

The `RowSetProvider` class has another static method called `newFactory(String factoryClassName, ClassLoader cl)` that lets you specify the class name of the `RowSetFactory` implementation to use. This method is useful when multiple `RowSetFactory` providers are available at runtime and you want to use a specific one. Suppose you have created a class `com.jdojo.jdbc.MyRowSetFactory` that implements the `RowSetFactory` interface. The following snippet of code shows how to use this version of the `newFactory()` method to use your own implementation of the `RowSetFactory` class:

```
String factoryClassName
= "com.jdojo.jdbc.MyRowSetFactory";

// Use null as the second argument to use the current
// Thread's context classLoader
RowSetFactory factory
= RowSetProvider.newFactory(factoryClassName, null);
```

```
// Create a JdbcRowSet
JdbcRowSet jdbcRs = factory.createJdbcRowSet();
```

## Setting RowSet Connection Properties

A RowSet is a JavaBeans component. You can set its properties at design time using a visual development tool. You can also set its properties at runtime. Typically, a RowSet will need to connect to a data source to retrieve and update data. You can set the database connection properties for a RowSet in terms of a JDBC URL or a data source name. When you use a JDBC URL, the RowSet will use a JDBC driver to connect to the database registered with the DriverManager class. You can set the JDBC connection properties for a RowSet object as follows:

```
// Register the JDBC driver with the DriverManager
here

// Create a RowSet
RowSet rs = create a RowSet;

// Set the connection properties for the RowSet
rs.setUrl("jdbc:derby:beginningJavaDB");
rs.setUsername("root");
rs.setPassword("chanda");
```

You do not need to establish a connection to the database. The RowSet will take care of establishing connection when it is needed.

Alternatively, you can set a data source name for the RowSet object. It will look up the data source name using a JNDI service to get a DataSource object for connecting to the database.

```
RowSet rs = create a RowSet;
rs.setDataSourceName("jdbc/myTestDB");
```

You need to set either a data source name or a JDBC URL. If you set both, the most recently set non-null value will be used to connect to the database.

Not all RowSets connect to a database. For example, if you use a RowSet to send data over the network, you do not need to set its connection properties.

However, if a RowSet object needs to interact with a database, you must set these properties before you call any methods of that RowSet needing a database connection.

## Setting a Command for a RowSet

You learned in the previous section that you do not need to worry about a Connection object to use a RowSet. The benefits of using a RowSet do not stop there. When you work with a RowSet, you do not need to worry about Statement, PreparedStatement, and CallableStatement objects either. However, you must specify a command that will generate the result set for the RowSet object. The command will be in a string in the form of a SQL SELECT statement or a stored procedure call. You can use a question mark as a placeholder for any parameter that you would like to pass to your command at runtime. To set a parameter value at runtime, you need to use one of setXxx(int paramInt, Xxx paramValue) methods of the RowSet interface. Working with parameters in a command for a RowSet is the same as working with parameters for a PreparedStatement. The following snippet of code contains some examples of setting a command for a RowSet object:

```
RowSet rs = create a RowSet;

/* Example 1 */
// Command to select all rows from the person table
String sqlCommand = "select person_id, first_name,
last_name from person";

// Set the command to the RowSet object
rs.setCommand(sqlCommand);

/* Example 2 */
// Command to select rows from the person table with
two parameters that
// will be the range of the income
String sqlCommand = "select person_id, first_name,
last_name, income " +
 "from person " +
```

```

 "where income between ? and ?;

// Set the command to the RowSet object
rs.setCommand(sqlCommand);

// Set the range of income between 20000.0 and 30000.0
rs.setDouble(1, 20000.0);
rs.setDouble(2, 30000.0);

/* Example 3 */
// Command to execute a stored procedure that accepts
two parameters that will //be the
// range of the income. The getPersons() stored
procedure produces a result set
String sqlCommand = "{call getPersons(?, ?)}";

// Set the command to the RowSet object
rs.setCommand(sqlCommand);

// Set the range of income between 20000.0 and 30000.0
rs.setDouble(1, 20000.0);
rs.setDouble(2, 30000.0);

```

## Populating a RowSet with Data

A RowSet may be populated with data in many ways:

- By executing a command such as a SQL SELECT or a stored procedure
- By supplying it with a ResultSet in which it will read all its data from the supplied ResultSet
- By reading XML data into it
- By using any other custom methods

If you want to populate a RowSet with data by executing its command, you need to call its `execute()` method as shown:

```
// Execute its command to populate the RowSet
```

```
rs.execute();
```

After the `execute()` method is executed, the RowSet has the data in it and you need to scroll to a row to read/update its column's value. Other methods of populating a RowSet depend on the type of the RowSet. I will discuss an example of each type shortly in the section that describes the specific types of RowSets.

## Scrolling Through Rows of a RowSet

In simple terms, a RowSet is a wrapper for a ResultSet. It inherits all cursor movement methods from the ResultSet interface. By default, all RowSet objects are bidirectional scrollable and updateable. However, check the implementation documentation for your RowSet to see if it imposes any restrictions on scrollability or updatability. The following snippet of code shows a typical while-loop that is used to scroll through all rows and read some column values from rows. It is the same as what you have been using to scroll through a ResultSet object.

```
RowSet rs = create a RowSet;
...
while(rs.next()) {
 // Read values for person_id and first_name
 // from the current row
 int personID = rs.getInt("person_id");
 String firstName = rs.getString("first_name");

 // Perform other processing here
}
```

## Updating Data in a RowSet

Updating data in a RowSet is similar to updating data in a ResultSet. To update a column's value, you need to move the cursor to a row, use one of the `updateXXX()` methods to set the new value for a column, and call the `updateRow()` method of the RowSet to make the changes permanent in the RowSet.

To insert a new row, you need to move the cursor to the insert row by calling the `moveToInsertRow()` method of the `RowSet`. You need to set values for columns in the insert row using one of `updateXxx()` methods. Finally, you call the `insertRow()` method of the `RowSet`.

To delete a row, you need to move the cursor to the row you want to delete and call the `deleteRow()` method of the `RowSet`.

How and when the changes made to a `RowSet` object are propagated to the database depends on the type of the `RowSet`. I will discuss updating different types of `RowSet` in the next few sections.

---

**Tip** You can make a `RowSet` read-only by calling its `setReadOnly(true)` method.

---

## The RowSetUtil Class

You need to use repetitive code in examples in using rowsets such as to supply database connection properties, to get a `RowSetFactory` instance, and to print rows of a `RowSet`. Listing 6-19 contains the complete code for a `RowSetUtil` class that you will use in this section. Its `setConnectionParameters()` method loads a JDBC driver and sets its connection parameters. Its `getRowSetFactory()` method returns a `RowSetFactory` instance. Its `printPersonRecord()` method prints records from a `RowSet`, assuming that the `RowSet` contains at least `person_id`, `first_name`, and `last_name` columns from the `person` table.

### ***Listing 6-19.*** A Utility Class to Help Working With a RowSet

```
// RowSetUtil.java
package com.jdojo.jdbc;

import java.sql.Driver;
import java.sql.DriverManager;
import java.sql.SQLException;
import javax.sql.RowSet;
import javax.sql.rowset.RowSetFactory;
```

```
import javax.sql.rowset.RowSetProvider;

public class RowSetUtil {
 private static boolean driverLoaded = false;

 public static void
 setConnectionParameters(RowSet rs) throws SQLException
 {
 // Register the JDBC driver only once for
 // your database
 if (!driverLoaded) {
 // Change the JDBC driver class
 // for your database
 Driver derbyEmbeddedDriver =
 new
 org.apache.derby.jdbc.EmbeddedDriver();
 DriverManager.registerDriver(derbyE

 driverLoaded = true;
 }

 // Set the rowset database connection
 properties
 String dbURL
 = "jdbc:derby:beginningJavaDB;create=true;";
 String userId = "root";
 String password = "chanda";
 rs.setUrl(dbURL);
 rs.setUsername(userId);
 rs.setPassword(password);
 }

 public static RowSetFactory getRowSetFactory()
 {
 try {
 RowSetFactory factory
 = RowSetProvider.newFactory();
 return factory;
 }
 catch (SQLException e) {
```

```

 throw new RuntimeException(e);
 }
}

// Print person id and name for each person
record
public static void printPersonRecord(ResultSet rs)
throws SQLException {
 while (rs.next()) {
 int personId
= rs.getInt("person_id");
 String firstName
= rs.getString("first_name");
 String lastName
= rs.getString("last_name");
 System.out.println("Row #"
+ rs.getRow() + ":" +
 " Person ID:"
+ personId +
 ", First Name:"
+ firstName +
 ", Last Name:"
+ lastName);
 }

 System.out.println();
}
}

```

## JdbcRowSet

A JdbcRowSet is also called a *connected rowset* because it always maintains a database connection. You can think of a JdbcRowSet as a thin wrapper for a ResultSet. As a ResultSet always maintains a database connection, so does a JdbcRowSet. It adds some methods that let you configure the connection behaviors. You can use its `setAutoCommit()` method to enable or disable the auto-commit mode for the connection. You can use its `commit()` and `rollback()` methods to commit or rollback changes made to its data.

A JDBC driver or underlying database may not support a bidirectional scrollable and updatable result set. In such cases, a `JdbcRowSet` implementation may provide such features. [Listing 6-20](#) uses a `JdbcRowSet` to read records for all `person_id` in a specified range from the `person` table. Note that the code attempts to print the number of rows retrieved by using the `last()` method of the `RowSet`. At the end, it uses the `printPersonRecord()` method of the `RowSetUtil` class to print the records in the rowset.

**[Listing 6-20.](#)** Using a `JdbcRowSet` to Read Records from a Table

```
// JdbcRowSetTest.java
package com.jdojo.jdbc;

import java.sql.SQLException;
import javax.sql.rowset.JdbcRowSet;
import javax.sql.rowset.RowSetFactory;

public class JdbcRowSetTest {
 public static void main(String[] args) {
 RowSetFactory factory
= RowSetUtil.getRowSetFactory();

 // Use a try-with-resources block
 try (JdbcRowSet jdbcRs
= factory.createJdbcRowSet()) {
 // Set the connection parameters
 RowSetUtil.setConnectionParameters(
 // Set the command and input
 parameters
 String sqlCommand = "select
person_id, first_name, " +
 "last_name from
person " +
 "where person_id
between ? and ?";
 jdbcRs.setCommand(sqlCommand);
```

```

 jdbcRs.setInt(1, 101);
 jdbcRs.setInt(2, 301);

 // Retrieve the data
 jdbcRs.execute();

 // Scroll to the last row to get
the row count It may throw an
 // exception if the underlying
JdbcRowSet implementation
 // does not support a bi-
directional scrolling result set.
 try {
 jdbcRs.last();
 System.out.println("Row
Count: " + jdbcRs.getRow());
 // Position the cursor
before the first row
 jdbcRs.beforeFirst();
 }
 catch (SQLException e) {
 System.out.println("JdbcRowSe
implementation" +
 " supports forward-
only scrolling");
 }

 // Print the records in the rowset
RowSetUtil.printPersonRecord(jdbcRs
 }
 catch (SQLException e) {
 e.printStackTrace();
 }
}
}

```

Updating data using a JdbcRowSet is similar to updating data using a ResultSet. Make sure that you set the auto-commit mode for the rowset appropriately. In case of a JdbcRowSet, all methods will be used on a

JdbcRowSet object instead of a ResultSet object.

**Listing 6-21** contains the complete code that retrieves a person record and updates its income to 65000.00. Note that you must call the updateRow() method of the JdbcRowSet after updating the column's value and before you scroll to another row. Otherwise, your changes will be lost as it is lost in the case of updating data in a ResultSet. In case of JdbcRowSet, you do not have a direct access to the Connection object. You need to use JdbcRowSet object's commit() and rollback() methods to commit and rollback changes to the database.

### **Listing 6-21.** Updating Data in a JdbcRowSet

```
// JdbcRowSetUpdateTest.java
package com.jdojo.jdbc;

import java.sql.SQLException;
import javax.sql.rowset.JdbcRowSet;
import javax.sql.rowset.RowSetFactory;

public class JdbcRowSetUpdateTest {
 public static void main(String[] args) {
 RowSetFactory factory
= RowSetUtil.getRowSetFactory();

 // Use a try-with-resources block
 try (JdbcRowSet jdbcRs
= factory.createJdbcRowSet()) {
 // Set the connection parameters
 RowSetUtil.setConnectionParameters(
 // Set the auto-commit mode to
false
 jdbcRs.setAutoCommit(false);

 // Set the command and input
parameters
 String sqlCommand = "select
person_id, first_name, " +
 "last_name, income
```

```

from person " +
 "where person_id
= ?";
 jdbcRs.setCommand(sqlCommand);
 jdbcRs.setInt(1, 101);

 // Retrieve the data
 jdbcRs.execute();

 // If a row is retrieved, update
the first row's income
 // column to 65000.00
 if (jdbcRs.next()) {
 int personId
= jdbcRs.getInt("person_id");
 jdbcRs.updateDouble("income",
65000.00);
 jdbcRs.updateRow();

 // Commit the changes
 jdbcRs.commit();

 System.out.println("Income
has been set to " +
 "65000.00 for
person_id=" + personId);
 }
 else {
 System.out.println("No
person record was found.");
 }
 }
 catch (SQLException e) {
 e.printStackTrace();
 }
 }
}

```

## CachedRowSet

A CachedRowSet is also called a *disconnected rowset* because it is disconnected from a database when it does not need a database connection. It keeps the database connection open only for the duration it needs to interact with the database. Once it is done with the connection, it disconnects. For example, it connects to a database when it needs to retrieve or update data.

It retrieves all data generated by the command and caches the data in memory. Care should be taken not to retrieve a large volume of data in a CachedRowSet. Otherwise, it may degrade the performance of the application. It provides a new feature called *paging*, which lets you deal with large volume of data in chunks. You will see an example of paging in this section.

A CachedRowSet is always serializable, scrollable, and updatable. You can save it to a disk or send it over the network. Not all CachedRowSet will need a connection to a data source. For example, you can retrieve data in a CachedRowSet and send its copy to another application, say an applet running in a web browser. In this case, the applet can read/update the data in the CachedRowSet without needing a database connection. When the applet is done working with the CachedRowSet, it can send the updated rowset to the server. The CachedRowSet does not need to have a database connection while it is being used in an applet. You can use one of the following four methods to populate data in a CachedRowSet object:

- `void execute() throws SQLException`
- `void execute(Connection conn) throws SQLException`
- `void populate(ResultSet data) throws SQLException`
- `void populate(ResultSet rs, int startRow) throws SQLException`

If you have set the database connection properties for a CachedRowSet, you can use the `execute()` method. It will connect to the database using the connection properties, which were already set, and execute the command for the rowset to populate it with the data. Another version of the `execute()` method accepts a `Connection`, which will be used to populate the CachedRowSet with the data. Use the `populate()` method to populate a CachedRowSet

with data from a `ResultSet`. Another version of the `populate()` method accepts a starting row number from where it reads the rows from the `ResultSet` into the `CachedRowSet`.

You need to be aware of some restrictions when using the `populate()` method of the `CachedRowSet`. This method uses a `ResultSet` object, which supplies the data. Before you pass the `ResultSet` to this method, you might move the cursor to a specific row. For example, suppose the cursor is on the tenth row in the `ResultSet` when you pass it to the `populate()` method. What would happen when you call the first version the `populate()` method? Would it try to read all rows in the `ResultSet` object or would it read the data from the eleventh row? What would happen when you call the second version of the `populate()` method starting at row 5 when the current row is 10? Java documentation for these methods in the `CachedRowSet` interface does not provide any information for these situations. It is up to the implementation class to decide the details. However, if you just retrieve the `ResultSet` object and pass it to either versions of the `populate()` method, it will behave as expected.

You can obtain the number of rows in a `CachedRowSet` using its `size()` method. Note that for a `JdbcRowSet`, you need to move the cursor to the last row and call its `getRow()` method to get the number of rows in it. Since a `CachedRowSet` caches all its rows in memory, it can provide you a count of all rows any time. Note that the `size()` method is not available for a `JdbcRowSet`.

```
// Get the row count in a CachedRowSet
int rowCount = myCachedRowSet.size();
```

[Listing 6-22](#) demonstrates how to use a `CachedRowSet` to retrieve rows from a database. It is similar to using a `JdbcRowSet` except that you are able to use its `size()` method to get the number of rows retrieved. A `CachedRowSet` is always bidirectional scrollable.

### [Listing 6-22](#). Retrieving Data Using a `CachedRowSet`

```
// CachedRowSetTest.java
package com.jdojo.jdbc;
```

```

import java.sql.SQLException;
import javax.sql.rowset.CachedRowSet;
import javax.sql.rowset.RowSetFactory;

public class CachedRowSetTest {
 public static void main(String[] args) {
 RowSetFactory factory
= RowSetUtil.getRowSetFactory();

 // Use a try-with-resources block
 try (CachedRowSet cachedRs
= factory.createCachedRowSet()) {
 // Set the connection parameters
 RowSetUtil.setConnectionParameters(
 String sqlCommand = "select
person_id, first_name, last_name " +
 "from person " +
 "where person_id
between 101 and 501";

 cachedRs.setCommand(sqlCommand);
 cachedRs.execute();

 // Print the records in cached
rowset
 System.out.println("Row Count: "
+ cachedRs.size());
 RowSetUtil.printPersonRecord(cached
 }
 catch (SQLException e) {
 e.printStackTrace();
 }
 }
}

```

A `CachedRowSet` provides an additional feature called *paging* to let you retrieve rows generated by a command in chunks. The chunk of rows that is retrieved at one time is called a *page*. You can think of a page as a set of rows, where you decide the number of rows in the set. The maximum number of rows

in a page is called the *page size*. The CachedRowSet lets you set the page size by calling its `setPageSize(int size)` method. Suppose a command for a CachedRowSet generates 500 rows. By calling its `setPageSize(90)`, it will retrieve a maximum of 90 rows at a time. When you call its `execute()` method, it will retrieve the first 90 rows. To retrieve the next 90 rows, you need to call its `nextPage()` method. When it has retrieved five pages (450 rows), calling the `nextPage()` will retrieve the remaining 50 rows. It also provides a `previousPage()` method to retrieve the previous page. You can use the `nextPage()` and `previousPage()` methods of a CachedRowSet to retrieve and process a large result set in chunks. Both methods return `true` if there are more pages to retrieve. Otherwise, they return `false`. Typically, you use a do-while loop and a while-loop when you use the paging feature. The outer do-while loop will scroll through pages and the inner while-loop will scroll through the rows in the current page. The following snippet of code shows the typical processing logic for a CachedRowSet using paging:

```
CachedRowSet cachedRs = create and set properties for
a cached rowset here;

// Set the page size to 90
cachedRs.setPagesize(90);

// Retrieves the first page
cachedRs.execute();

do {
 // Process each row in the page
 while(cachedRs.next()) {
 // Process a row here...
 }

 // Retrieve the next page of rows
}
while (cachedRs.nextPage());
```

[Listing 6-23](#) contains the complete code for demonstrating the paging feature of a CachedRowSet. It retrieves all records from the `person` table a page at a time using a page size of 2. Typically, you do not retrieve all rows from a table in your program. The `person` table has only a few rows. I have done it only for

demonstration purpose to keep the code simpler and smaller.

***Listing 6-23.*** Using Paging Feature of a CachedRowSet

```
// CachedRowSetPagingTest.java
package com.jdojo.jdbc;

import java.sql.SQLException;
import javax.sql.rowset.CachedRowSet;
import javax.sql.rowset.RowSetFactory;

public class CachedRowSetPagingTest {
 public static void main(String[] args) {
 RowSetFactory factory
= RowSetUtil.getRowSetFactory();

 // Use a try-with-resources block
 try (CachedRowSet cachedRs
= factory.createCachedRowSet()) {
 // Set the connection parameters
 RowSetUtil.setConnectionParameters(
 // Set the command and teh page
 size
 String sqlCommand = "select
person_id, first_name, last_name " +
 "from person";
 cachedRs.setCommand(sqlCommand);
 cachedRs.setPageSize(2); // page
size is 2

 // Execute the command
 cachedRs.execute();

 int pageCounter = 1;

 // Retrieve and print person
records one page at a time
 do {
 System.out.println("Page #"

```

```
+ pageCounter +
+ cachedRs.size() + ")");

 // Print the record in the
current page
RowSetUtil.printPersonRecord()

 // Increment the page count
by 1
pageCounter++;
}
while (cachedRs.nextPage());
}
catch (SQLException e) {
 e.printStackTrace();
}
}
}
}
```

You can update the data in a CachedRowSet and save the changes back to the database. The process of saving changes to the database for a CachedRowSet is different from that of a JdbcRowSet. There are two main reasons to keep the save process a little different for a CachedRowSet. First, it is disconnected and you do not want to connect to the database often. Second, the updated data may have conflicts with the data stored in the database.

The process of inserting, updating, and deleting rows in a `CachedRowSet` is the same as in a `JdbcRowSet`. After changing the values for the current row, you need to call the `updateRow()` method. Unlike a `JdbcRowSet`, a `CachedRowSet` does not send the changes to the database when you call the `updateRow()` method. You use the `insertRow()` and `deleteRow()` methods the same way as you do with a `ResultSet` or a `JdbcRowSet`. These methods do not send changes to the database when used with a `CachedRowSet`.

After you make changes to a `CachedRowSet`, you can send changes to the database by calling its `acceptChanges()` method that may commit the changes if you have set the `commit-on-accept-change` value to true. You need to refer to the implementation details of the `CachedRowSet` on how

it lets you set the commit-on-accept-change value. If it is set to `false`, you need to use the `commit()` or `rollback()` method of the `CachedRowSet` interface to commit or rollback changes.

A `CachedRowSet` has to deal with conflicts that may exist between the data in it and the data in the database. For example, you might have retrieved a row from the database, changed the data, and kept the changes in the `CachedRowSet` for a long time. When you are ready to save your changes, another user might have changed the values for the same rows before you. A `CachedRowSet` uses a synchronization provider object to synchronize the changes with the database. It uses another object, a synchronization resolver, to resolve any conflicts that it detects during the synchronization process. When conflicts are detected during the `acceptChanges()` method call, it throws a `SyncProviderException`. You can get the synchronization resolver object that is an instance of the `SyncResolver` interface, using the `getSyncResolver()` method of the `SyncProviderException` object. A `SyncResolver` object lets you navigate through all conflicts and change the values in the rows with conflicts to new resolved values. You need to use the `setResolvedValue()` method of a `SyncResolver` object to set the resolved value when a conflict is detected.

[Listing 6-24](#) demonstrates how to update a `CachedRowSet`. It does not set a resolved value for a data element when it detects a conflict. Rather, it just prints the details about the conflict.

#### ***Listing 6-24.*** Updating and Detecting Conflicts in a `CachedRowSet`

```
// CachedRowSetUpdateTest.java
package com.jdojo.jdbc;

import java.sql.SQLException;
import javax.sql.rowset.CachedRowSet;
import javax.sql.rowset.RowSetFactory;
import javax.sql.rowset.spi.SyncProviderException;
import javax.sql.rowset.spi.SyncResolver;
import static
javax.sql.rowset.spi.SyncResolver.DELETE_ROW_CONFLICT;
import static
javax.sql.rowset.spi.SyncResolver.INSERT_ROW_CONFLICT;
```

```
import static
javax.sql.rowset.spi.SyncResolver.UPDATE_ROW_CONFLICT;

public class CachedRowSetUpdateTest {
 public static void main(String[] args) throws
SQLException {
 RowSetFactory factory
= RowSetUtil.getRowSetFactory();
 CachedRowSet cachedRs
= factory.createCachedRowSet();

 try {
 // Set the connection parameters
for the CachedRowSet
 RowSetUtil.setConnectionParameters(
 String sqlCommand = "select
person_id, first_name, last_name,
 + "gender, dob, income "
 + "from person "
 + "where person_id between
101 and 301";

 cachedRs.setKeyColumns(new int[]
{1});

 cachedRs.setCommand(sqlCommand);
 cachedRs.execute();

 // Print the records in the cached
rowset
 System.out.println("Before
Update");
 System.out.println("Row Count: "
+ cachedRs.size());
 RowSetUtil.printPersonRecord(cached

 // Update income to 23000.00 for
the first row
 if (cachedRs.size() > 0) {
```

```

 updateRow(cachedRs, 1,
23000.00);
 }

 // Insert a new row
 insert newRow(cachedRs);

 // Send changes to the database
 cachedRs.acceptChanges();

 System.out.println("After
Update");
 System.out.println("Row Count: "
+ cachedRs.size());
 cachedRs.beforeFirst();
 RowSetUtil.printPersonRecord(cached
)
 catch (SyncProviderException spe) {
 // When acceptChanges() detects
some conflicts
 SyncResolver resolver
= spe.getSyncResolver();

 // Print the details about the
conflicts
 printConflicts(resolver,
cachedRs);
 }
 catch (SQLException e) {
 e.printStackTrace();
}
 finally {
 if (cachedRs != null) {
 try {
 cachedRs.close();
}
 catch (SQLException e) {
 e.printStackTrace();
}
 }
 }
 }
 }
}
```

```
 }

 public static void insert newRow(CachedRowSet
cachedRs) throws SQLException {
 // Move cursor to the insert-row
 cachedRs.moveToInsertRow();

 // Set the values for columns in the new
row
 cachedRs.updateInt("person_id", 751);
 cachedRs.updateString("first_name",
" Mason");
 cachedRs.updateString("last_name",
" Baker");
 cachedRs.updateString("gender", "M");
 cachedRs.updateDate("dob",
java.sql.Date.valueOf("2006-01-02"));
 cachedRs.updateDouble("income", 0.00);

 // Insert the new row in the rowset. It
is not sent to the
 // database, until the acceptChanges()
method is called
 cachedRs.insertRow();

 // Must move back to the current row
 cachedRs.moveToCurrentRow();
 }

 public static void updateRow(CachedRowSet
cachedRs, int row, double newIncome)
 throws SQLException {
 // Set the values for columns in the new
row
 cachedRs.absolute(row);
 cachedRs.updateDouble("income",
newIncome);
 cachedRs.updateRow();
 }
}
```

```
 public static void printConflicts(SyncResolver
resolver, CachedRowSet cachedRs) {
 try {
 while (resolver.nextConflict()) {
 int status
= resolver.getStatus();
 String operation = "None";
 if (status ==
INSERT_ROW_CONFLICT) {
 operation = "insert";
 }
 else if (status ==
UPDATE_ROW_CONFLICT) {
 operation = "update";
 }
 else if (status ==
DELETE_ROW_CONFLICT) {
 operation = "delete";
 }
 // Get person_id from the
database
 Object oldPersonId
 =
resolver.getConflictValue("person_id");
 // Get person ID from the
cached rowset
 int row = resolver.getRow();
 cachedRs.absolute(row);
 Object newPersonId
= cachedRs.getObject("person_id");
 // Use setResolvedValue()
method to set resolved value
 // for a column
 //
resolver.setResolvedValue(columnName,resolvedValue);
 System.out.println("Conflict
```

```
detected in row #"
+ row
+ " during "
+ operation + " operation."
+ " person_id in
database is " + oldPersonId
+ " and person_id in
rowset is " + newPersonId);
}
}
catch (SQLException e) {
 e.printStackTrace();
}
}
```

# WebRowSet

The WebRowSet interface inherits from the CachedRowSet interface. It adds two more features to the CachedRowSet: reading data and metadata from an XML document, and exporting data and metadata to an XML document. The two methods that it adds to provide XML support are `readXML()` and `writeXML()`. Both of them are overloaded. They accept either a stream-based or a character-based source/sink. Use the `readXML()` method to read XML data, properties, and metadata from a source (a `java.io.InputStream` or a `java.io.Reader`) into a WebRowSet, and use the `writeXML()` method to write the data, properties, and metadata from a WebRowSet object to a destination, which could be a `java.io.OutputStream` or a `java.io.Writer`. The following snippet of code shows how to export the contents and properties of a WebRowSet to a string:

```
WebRowSet webRs = get a web rowset with data...;

// Create a StringWriter object to hold the exported
XML
StringWriter sw = new StringWriter();

// Write the XML representation of webRs into sw
```

```
webRs.writeXml(sw);

// Get the String object from sw
String webRsXML = sw.toString();
```

At this point, the `webRsXML` contains the XML representation of the `webRs` object. You can pass it to another module of your application, where you would be able to recreate the `WebRowSet` with the same data, properties, and metadata. The following snippet of code shows how to import an XML document into a `WebRowSet`:

```
// Create a StringReader object from an XML string
StringReader sr = new StringReader(webRsXML);

// Create an empty WebRowSet object
RowSetFactory factory = RowSetUtil.getRowSetFactory();
WebRowSet newWebRs = factory.createWebRowSet();

// Import (or read) the XML contents into the new,
empty WebRowSet
newWebRs.readXml(sr);
```

At this point, `webRs` and `newWebRs` are in the same state. A `WebRowSet` makes it easy to export its contents as XML and import an XML document into it. You can use these processes to get an XML document and to send it to another application, say an applet, which does not need to have JDBC connectivity to a database. When the applet is done making changes to the `WebRowSet`, it can export it as an XML document and pass it to another application that has a JDBC connectivity to synchronize the changes with the database.

The exported XML from a `WebRowSet` contains three sets of information: properties, metadata, and data. The properties refer to the properties that are set for the rowset. The metadata contains information about columns in the rowset such as the column count, column name, column data type, etc. The data section in the XML contains the original and changed data from the rowset.

[Listing 6-25](#) demonstrates how to export a `WebRowSet` object as XML. You will find three elements in the output for this listing: `<properties>`, `<metadata>`, and `<data>`. The program changes the last name of the first row that was retrieved in the rowset. You may observe that the rowset keeps track of the changes that are made in its data, as shown by the presence of a

<updateRow> element for the first row. You may get a different output when you run this program. The output depends on the data you have in the person table.

***Listing 6-25.*** Exporting State of a WebRowSet as an XML Document

```
// WebRowSetXMLTest.java
package com.jdojo.jdbc;

import java.io.StringWriter;
import java.sql.SQLException;
import javax.sql.rowset.RowSetFactory;
import javax.sql.rowset.WebRowSet;

public class WebRowSetXMLTest {
 public static void main(String[] args) {
 RowSetFactory factory
= RowSetUtil.getRowSetFactory();

 // Use a try-with-resources block
 try (WebRowSet webRs
= factory.createWebRowSet()) {
 // Set the connection parameters
 for the WebRowSet
 RowSetUtil.setConnectionParameters()

 String sqlCommand = "select
person_id, first_name, last_name " +
 "from person " +
 "where person_id
between ? and ?";

 webRs.setCommand(sqlCommand);
 webRs.setInt(1, 101);
 webRs.setInt(2, 102);
 webRs.execute();

 // Change the last name for the
first record
 if (webRs.first()) {
```

```

 webRs.updateString("last_name",
 "Who knows?") ;
 }

 // Get the XML representation of
of the WebRowSet
 StringWriter sw = new
StringWriter();
 webRs.writeXml(sw);
 String webRsXML = sw.toString();

 // Print the exported XML from the
WebRowSet
 System.out.println(webRsXML);
}
catch (SQLException e) {
 e.printStackTrace();
}
}
}
}

```

---

```

<?xml version="1.0"?>
<webRowSet xmlns="http://java.sun.com/xml/ns/jdbc"
xmlns:xsi="http://www.w3.org/2001/
 XMLSchema-instance"
xsi:schemaLocation="http://java.sun.com/xml/ns/jdbc
http://java.sun.com/xml/ns/jdbc/webrowset.xsd">
 <properties>
 <command>select person_id, first_name, last_name
from person where person_id between ? and
?</command>
 <concurrency>1008</concurrency>
 <datasource><null/></datasource>
 <escape-processing>true</escape-processing>
 <fetch-direction>1000</fetch-direction>
 <fetch-size>0</fetch-size>
 <isolation-level>2</isolation-level>
 <key-columns>

```

```
</key-columns>
<map>
</map>
<max-field-size>0</max-field-size>
<max-rows>0</max-rows>
<query-timeout>0</query-timeout>
<read-only>true</read-only>
<rowset-
type>ResultSet.TYPE_SCROLL_INSENSITIVE</rowset-type>
<show-deleted>false</show-deleted>
<table-name>person</table-name>
<url>jdbc:derby:beginningJavaDB;create=true;</url>
<sync-provider>
 <sync-provider-
name>com.sun.rowset.providers.RIOptimisticProvider</sy-
provider-name>
 <sync-provider-vendor>Oracle Corporation</sync-
provider-vendor>
 <sync-provider-version>1.0</sync-provider-
version>
 <sync-provider-grade>2</sync-provider-grade>
 <data-source-lock>1</data-source-lock>
 </sync-provider>
 </properties>
<metadata>
 <column-count>3</column-count>
 <column-definition>
 <column-index>1</column-index>
 <auto-increment>false</auto-increment>
 <case-sensitive>false</case-sensitive>
 <currency>false</currency>
 <nullable>0</nullable>
 <signed>true</signed>
 <searchable>true</searchable>
 <column-display-size>11</column-display-size>
 <column-label>PERSON_ID</column-label>
 <column-name>PERSON_ID</column-name>
 <schema-name>ROOT</schema-name>
 <column-precision>10</column-precision>
```

```
<column-scale>0</column-scale>
<table-name>PERSON</table-name>
<catalog-name></catalog-name>
<column-type>4</column-type>
<column-type-name>INTEGER</column-type-name>
</column-definition>
<column-definition>
 <column-index>2</column-index>
 <auto-increment>false</auto-increment>
 <case-sensitive>true</case-sensitive>
 <currency>false</currency>
 <nullable>0</nullable>
 <signed>false</signed>
 <searchable>true</searchable>
 <column-display-size>20</column-display-size>
 <column-label>FIRST_NAME</column-label>
 <column-name>FIRST_NAME</column-name>
 <schema-name>ROOT</schema-name>
 <column-precision>20</column-precision>
 <column-scale>0</column-scale>
 <table-name>PERSON</table-name>
 <catalog-name></catalog-name>
 <column-type>12</column-type>
 <column-type-name>VARCHAR</column-type-name>
</column-definition>
<column-definition>
 <column-index>3</column-index>
 <auto-increment>false</auto-increment>
 <case-sensitive>true</case-sensitive>
 <currency>false</currency>
 <nullable>0</nullable>
 <signed>false</signed>
 <searchable>true</searchable>
 <column-display-size>20</column-display-size>
 <column-label>LAST_NAME</column-label>
 <column-name>LAST_NAME</column-name>
 <schema-name>ROOT</schema-name>
 <column-precision>20</column-precision>
 <column-scale>0</column-scale>
```

```

<table-name>PERSON</table-name>
<catalog-name></catalog-name>
<column-type>12</column-type>
<column-type-name>VARCHAR</column-type-name>
</column-definition>
</metadata>
<data>
 <currentRow>
 <columnValue>101</columnValue>
 <columnValue>John</columnValue>
 <columnValue>Jacobs</columnValue>
 <updateRow>Who knows?</updateRow>
 </currentRow>
 <currentRow>
 <columnValue>102</columnValue>
 <columnValue>Donna</columnValue>
 <columnValue>Duncan</columnValue>
 </currentRow>
</data>
</webRowSet>

```

---

Who decides the format of the XML that a WebRowSet implementation should understand? If all implementations of the WebRowSet use different XML formats, the XML exported from a WebRowSet using one implementation cannot be imported into a WebRowSet object that uses another implementation. To avoid this kind of portability issues, Oracle provides an XML schema for the format of the standard WebRowSet XML. The schema is available at <http://java.sun.com/xml/ns/jdbc/webrowset.xsd>. A standard WebRowSet implementation should use this schema to export and import a WebRowSet implementation to ensure portability with other implementations.

## FilteredRowSet

The FilteredRowSet interface inherits from the WebRowSet interface. It provides filtering capability to a rowset at the client side. You can apply a filter

to the rowset by using a where clause in its SQL command, which is executed in a database. A `FilteredRowSet` lets you filter the rows of a rowset after it has retrieved the data from a database. You can think of a `FilteredRowSet` as a rowset that lets you view its rows based on a set of criteria, which is called a *filter*. Setting a filter to a rowset does not delete the rows from the rowset. Rather, it lets you access only those rows that meet the filter criteria. The filter also applies to inserting, updating, and deleting the rows in the rowset. You can only read, insert, update, and delete rows that meet the filter criteria. You can reset the filter any time you want to view all rows of a rowset. A filter is an object of a class that implements the `javax.sql.rowset.Predicate` interface. The following is the declaration of the `Predicate` interface:

```
public interface Predicate {
 boolean evaluate(RowSet rs);
 boolean evaluate(Object value, int colIndex)
throws SQLException;
 boolean evaluate(Object value, String colName)
throws SQLException;
}
```

If the `evaluate()` method returns `true` for a row, it is visible. Otherwise, it is filtered out and you cannot access it. All of the three versions of the `evaluate()` methods are called internally. The reference implementation for the rowset by Oracle does not supply an implementation for the `Predicate` interface. I will discuss an implementation of the `Predicate` interface in this section.

The `FilteredRowSet` interface adds two methods, one to set a filter and one to get the filter:

- `Predicate getFilter()`
- `void setFilter(Predicate filter) throws SQLException`

The `setFilter()` method sets a filter to the rowset. Setting `null` as a filter resets (or removes) the filter from a `FilteredRowSet` and makes all rows accessible. You can set a filter to a `FilteredRowSet` as follows:

```
// Create a FilteredRowSet
```

```

FilteredRowSet filteredRs = create a filtered row set;

// Set properties and retrieve data in the rowset

// Create a Filter
Predicate filter = create a filter object;

// Set the filter
filteredRs.setFilter(filter);

// Work with the filtered rowset here

// Remove the filter
filteredRs.setFilter(null);

```

[Listing 6-26](#) contains the code that implements a range filter. It is based on a range of a numeric column.

### ***Listing 6-26.*** An Implementation of the Predicate Interface

```

// RangeFilter.java
package com.jdojo.jdbc;

import java.sql.SQLException;
import javax.sql.RowSet;
import javax.sql.rowset.Predicate;

public class RangeFilter implements Predicate {
 private final int columnIndex;
 private final String columnName;
 private final double min;
 private final double max;

 public RangeFilter(int columnIndex, String
columnName,
 double min, double max) {
 this.columnIndex = columnIndex;
 this.columnName = columnName;
 this.min = min;
 this.max = max;
 }
}

```

```

@Override
public boolean evaluate(RowSet rs) {
 // Make sure we have a good row number to
evaluate
 try {
 if (rs.getRow() <= 0) {
 return false;
 }
 }
 catch (SQLException e) {
 e.printStackTrace();
 }

 boolean showRow = false;
 Object value = null;

 try {
 value = rs.getObject(columnName);
 if (value instanceof Number) {
 double num = ((Number)
value).doubleValue();
 showRow = (num >= min && num
<= max);
 }
 }
 catch (SQLException e) {
 showRow = false;
 e.printStackTrace();
 throw new RuntimeException(e);
 }
 return showRow;
}

@Override
public boolean evaluate(Object value, int
columnIndex) {
 boolean showRow = false;
 if (columnIndex == this.columnIndex
 && value instanceof Number) {

```

```

 double num = ((Number)
value).doubleValue();
 showRow = (num >= min && num <=
max);
 }
 return showRow;
}

@Override
public boolean evaluate(Object value, String
columnName) {
 boolean showRow = false;
 if
(this.columnName.equalsIgnoreCase(columnName)
 && value instanceof Number) {
 double num
= ((Number)value).doubleValue();
 showRow = (num >= min && num <=
max);
 }
 return showRow;
}
}

```

Suppose `person_id` is the first column in your rowset and you want to see only rows that have `person_id` between 101 and 501. You can set a filter for the rowset using an object of the `RangeFilter` class as follows:

```

FilteredRowSet filteredRs = get a filtered row set...;
Predicate filter = new RangeFilter(1, "person_id",
101, 501);
filteredRs.setFilter(filter);

```

The `RangeFilter` class is a simple implementation of the `Predicate` interface. You need to have a little more sophisticated implementation that can be used in a production environment. For example, you may allow a filter criteria based on multiple columns.

[Listing 6-27](#) demonstrates how to use a `FilteredRowSet`. The output of this program will depend on the data in the `person` table. A

FilteredRowSet is not an alternative to using a filter in a SQL SELECT (using a WHERE clause). You should not retrieve a large number of rows in a FilteredRowSet and set a filter. It may degrade your application performance. You should use it when you get a disconnected (or cached) rowset in your program and you do not have control over its retrieval process. It is also useful if your FilteredRowSet is not representing rows from a database table such as if you are retrieving data from a flat file.

### ***Listing 6-27.*** Using a FilteredRowSet

```
// FilteredRowSetTest.java
package com.jdojo.jdbc;

import java.sql.SQLException;
import javax.sql.rowset.Predicate;
import javax.sql.rowset.FilteredRowSet;
import javax.sql.rowset.RowSetFactory;

public class FilteredRowSetTest {
 public static void main(String[] args) {
 RowSetFactory factory
= RowSetUtil.getRowSetFactory();

 // Use a try-with-resources block
 try (FilteredRowSet filteredRs
 = factory.createFilteredRowSet())
{
 // Set the connection parameters
 RowSetUtil.setConnectionParameters(
 // Prepare, set, and execute the
 command
 String sqlCommand= "select
person_id, first_name, last_name " +
 "from person";
 filteredRs.setCommand(sqlCommand);
 filteredRs.execute();

 // Print the retrieved records
 }
 }
}
```

```
System.out.println("Before Filter
- Row count: " +
 filteredRs.size());
RowSetUtil.printPersonRecord(filteredRs);

// Set a filter
Predicate filter = new
RangeFilter(1, "person_id", 101, 102);
filteredRs.setFilter(filter);

// Print the retrieved records
System.out.println("After Filter
- Row count: " +
 filteredRs.size());
filteredRs.beforeFirst();
RowSetUtil.printPersonRecord(filteredRs);
}

catch (SQLException e) {
 e.printStackTrace();
}
}
```

## JoinRowSet

The `JoinRowSet` interface inherits from the `WebRowSet` interface. It provides the ability to combine (or join) two or more disconnected rowsets into one rowset. Rows from two or more tables are joined in a query using a SQL JOIN. A `JoinRowSet` lets you have a SQL JOIN between two or more rowsets without using a SQL JOIN in a query.

Using a `JoinRowSet` is easy. You retrieve data in multiple rowsets: `CachedRowSet`, `WebRowSet`, or `FilteredRowSet`. Create an empty `JoinRowSet` and add all rowsets to it by calling its `addRowSet()` method. The first rowset that is added to the `JoinRowSet` becomes the reference rowset for establishing the joins when more rowsets are added. You can specify the `JOIN` columns in a rowset individually or when you add a rowset to a `JoinRowSet`.

There are five standard types of SQL JOIN:

- INNER\_JOIN
- LEFT\_OUTER\_JOIN
- RIGHT\_OUTER\_JOIN
- FULL\_JOIN
- CROSS\_JOIN

A JoinRowSet lets you establish all of the above-mentioned SQL JOINS between rowsets. Except for CROSS\_JOIN, which gives you a Cartesian product of rows in the rowsets, all other joins are based on matching columns in the joined rowsets. There are two ways to specify matching columns:

- If a rowset that is participating in the JOIN implements the Joinable interface, you can use one of its setMatchColumn () methods to specify the JOIN columns. The Joinable interface defines multiple versions of the setMatchColumn () method and other methods to work with JOIN columns.
- You can set the JOIN columns when you add a rowset to a JoinRowSet using one of its addRowSet () methods.

An implementation of the JoinRowSet interface may not support all five types of JOINS. You can use the following five methods of the JoinRowSet interface to check if an implementation supports a specific SQL JOIN type:

- boolean supportsInnerJoin()
- boolean supportsLeftOuterJoin()
- boolean supportsRightOuterJoin()
- boolean supportsFullJoin()
- boolean supportsCrossJoin()

You can specify a JOIN type in a JoinRowSet using its

`setJoinType()` method, which accepts one of the five JOIN constants: `INNER_JOIN`, `LEFT_OUTER_JOIN`, `RIGHT_OUTER_JOIN`, `FULL_JOIN`, and `CROSS_JOIN`. By default, it uses `INNER_JOIN`, which is based on equality of matching columns.

You must have at least two rowsets to work with a `JoinRowSet`. It does not make sense to have a `JoinRowSet` to hold rows from only one rowset. Its name, “Join,” itself implies that it represents a JOIN between at least two rowsets. The names or indexes of the columns in the joined rowsets do not have to be the same. The data types of the join columns need not be the same. However, data types of the join columns must be such that their values can be compared.

You have only been working with the `person` table in the previous examples. You can still work with only one table to form a SQL JOIN based on `person_id` column. Your first rowset will select `person_id` and `first_name` from the `person` table. The second rowset will select `person_id` and `last_name` from the `person` table. You will join the two rowsets based on `person_id` using `INNER_JOIN`, which is the default for a `JoinRowSet`. Listing 6-28 shows how to achieve this using a `JoinRowSet`.

#### ***[Listing 6-28.](#)*** Establishing SQL JOINS Using a `JoinRowSet`

```
// JoinRowSetTest.java
package com.jdojo.jdbc;

import java.sql.SQLException;
import javax.sql.rowset.CachedRowSet;
import javax.sql.rowset.JoinRowSet;
import javax.sql.rowset.RowSetFactory;

public class JoinRowSetTest {
 public static void main(String[] args) {
 RowSetFactory factory
= RowSetUtil.getRowSetFactory();

 // Use a try-with-resources block
 try (CachedRowSet cachedRs1
= factory.createCachedRowSet();
 CachedRowSet cachedRs2
```

```

= factory.createCachedRowSet();
 JoinRowSet joinRs
= factory.createJoinRowSet()) {
 // Set the connection parameters
 RowSetUtil.setConnectionParameters(
 RowSetUtil.setConnectionParameters(
 String sqlCommand1 = "select
person_id, first_name " +
 "from person " +
 "where person_id
in (101, 102)";

 String sqlCommand2 = "select
person_id, last_name " +
 "from person " +
 "where person_id
in (101, 102, 103)";

 cachedRs1.setCommand(sqlCommand1);
 cachedRs2.setCommand(sqlCommand2);

 cachedRs1.execute();
 cachedRs2.execute();

 // Create a JoinRowSet for
cachedRs1 and cachedRs2
 // joining them based on the
person_id column
 joinRs.addRowSet(cachedRs1,
"person_id");
 joinRs.addRowSet(cachedRs2,
"person_id");

 System.out.println("Row Count:
" + joinRs.size());
 RowSetUtil.printPersonRecord(joinRs
)
 catch (SQLException e) {
 e.printStackTrace();
}

```

```
 }
}
}
```

You can add only a non-empty rowset to a `JoinRowSet`. Adding an empty rowset to a `JoinRowSet` throws a `SQLException`. The `JoinRowSet` can implement the SQL `JOIN` based on multiple columns. There is no limit on the number of rowsets added to a `JoinRowSet`. However, care should be taken not to add too many rowsets with a large number of rows to a `JoinRowSet`. This may slow down the application because of the processing needed to perform the `JOIN` operation on large number of rows.

The `toCachedRowSet()` method of the `JoinRowSet` returns a `CachedRowSet` that represents the rows based on the `JOIN` established in it. The returned `CachedRowSet` does not contain any changes made to the data through the `JoinRowSet`. You can make modifications to the data in a `JoinRowSet` and apply the changes back to the database, as you would do with a `CachedRowSet`. Make sure that you set the required properties for the `JoinRowSet` before you call the `acceptChanges()` method. For example, you will need to set its database connection properties, its command, etc., so it will have the required pieces of information to apply the changes to the database.

## Working with a Large Object (LOB)

The JDBC API has support for working with large objects stored in a database. The type of a large object could be one of the following.

- Binary Large Object (Blob)
- Character Large Object (Clob)
- National Character Large Object (NClob)

The data for LOB columns is usually not stored in a database table itself. The database stores the data for a LOB at some other location. It stores a reference (or pointer) to the data location in the table. The reference for a LOB stored in the table is also called a *locator*. Whether a LOB column's data is stored with the table or at other location is determined by the DBMS based on some criteria. For

example, a DBMS may decide that if the size of a LOB is smaller than 10k, it will store it in the table and if it grows bigger, it will be stored at some other location and the table will store a locator instead. When you retrieve the data for a column of a LOB type, usually a JDBC driver retrieves only the locator for the LOB. When you need the actual data, you need to perform some more operations on the locator to fetch the data. Usually a locator for a LOB has more information about the data than just being a pointer to the actual data, such as it knows the length of the data.

A Blob is used to store binary data. A Clob is used to store character data. An NClob is used to store Unicode character data. Consult your DBMS documentation about the data type name that it uses for Blob, Clob, and NClob types of LOBs. Oracle DBMS has the same names as Blob, Clob, and NClob, as data types that you can use to define columns in a table. The JDBC API lets you work with Blob, Clob, and NClob using the `java.sql.Blob`, `java.sql.Clob`, and `java.sql.NClob` interfaces, respectively.

You will work through an example of using Blob and Clob data types. The example will use a Java DB database. Java DB supports Blob and NClob types for LOBs through its Blob and Clob database data types, respectively.

Let's create a table named `person_detail`, which is used to store a person's picture as Blob and his text-only resume in a Clob column. The following is the script to create the table in Java DB:

```
create table person_detail (
 person_detail_id integer not null,
 person_id integer not null,
 picture blob,
 resume clob,
 primary key (person_detail_id),
 foreign key (person_id) references
person(person_id)
);
```

You can run the program in [Listing 6-29](#) to create the `person_detail` table in a Java DB database, assuming that the `JDBCUtil.getConnection()` method is configured to return a Connection to a Java DB database. If you are using a DBMS other than Java DB, please change the CREATE TABLE script of the program in [Listing 6-29](#) to match the syntax of your database.

***Listing 6-29.*** Create the person\_detail Table in Java DB

```
// CreatePersonDetailTable.java
package com.jdojo.jdbc;

import java.sql.Connection;
import java.sql.SQLException;
import java.sql.Statement;

public class CreatePersonDetailTable {
 public static void main(String[] args) {
 Connection conn = null;
 try {
 conn = JDBCUtil.getConnection();

 // Create a SQL string
 String SQL = "create table
person_detail(" +
 "person_detail_id integer
not null, " +
 "person_id integer not null,
" +
 "picture blob, " +
 "resume clob, " +
 "primary key
(person_detail_id), " +
 "foreign key (person_id)
references person(person_id))";

 Statement stmt = null;
 try {
 stmt
= conn.createStatement();
 stmt.executeUpdate(SQL);
 }
 finally {
 JDBCUtil.closeStatement(stmt)
 }

 // Commit the transaction
 }
 }
}
```

```
 JDBCUtil.commit(conn);
 System.out.println("Person table
created successfully.");
 }
 catch (SQLException e) {
 System.out.println(e.getMessage());
 JDBCUtil.rollback(conn);
 }
 finally {
 JDBCUtil.closeConnection(conn);
 }
}
```

# Retrieving LOB Data

You can retrieve Blob, Clob and NClob column's data from a result set using the `getBlob()`, `getBlob()`, and `getNClob()` methods of the `ResultSet` interface, respectively. These methods return an object of the `java.sql.Blob`, `java.sql.Clob`, and `java.sql.NClob` interfaces, respectively. These interfaces include many methods that let you query the LOB object and manipulate the data they represent. The following snippet of code reads rows from the `person_detail` table for the `person_detail_id` equal to 1001:

```
Connection conn = JDBCUtil.getConnection();
String SQL = "select person_id, picture, resume " +
 "from person_detail " +
 "where person_detail_id = ?";

PreparedStatement pstmt = null;
pstmt = conn.prepareStatement(SQL);
pstmt.setInt(1, 1001);
ResultSet rs = pstmt.executeQuery();

while(rs.next()) {
 int personId = rs.getInt("person_id");
 Blob pictureBlob = rs.getBlob("picture");
 Clob resumeClob = rs.getBlob("resume");
}
```

After you get a Blob or Clob object from the `ResultSet`, you will need to read the data. Blob and Clob interfaces contain a `length()` method, which returns the number of bytes in a Blob object and the number of characters in a Clob object. The NClob interface inherits the Clob interface. The discussion for the Clob interface also applies to the NClob interface. If you want to read a Blob's data in a byte array and the Clob's data in a String object, here is how you do it. Note that the `length()` method of the Blob and Clob interfaces returns long.

```
// Read picture in a byte array
```

```
int pictureLength = (int)pictureBlob.length();
byte[] pictureData = pictureBlob.getBytes(1,
pictureLength);

// Read resume in a string
int resumeLength = (int)resumeClob.length();
String resume = resumeClob.getSubString(1,
resumeLength);
```

In the `getBytes(int start, int length)` method of the `Blob` interface, the first parameter is the starting position of the byte in the `Blob` object from where you want to start, and the second parameter is the number of bytes you want to read. The position of the first byte in a `Blob` object is 1, not 0. Similarly, the `getSubString(int start, int length)` method of the `Clob` interface accepts the starting position of the character in a `Clob` object and the number of characters to return. The position of the first character in a `Clob` object is 1, not 0.

---

**Tip** Be careful when using the starting position in any context in JDBC programs. In the JDBC API, things start at position 1, and in other parts of Java such as arrays, things start at position 0.

---

Most of the time, you will not read the `Blob`'s and `Clob`'s data in an array or a `String` object. They may contain big amounts of data. The `Blob` and `Clob` interfaces let you read their data in chunks using an `InputStream` and a `Reader`, respectively. Typically, you would read the data from `Blob` and `Clob` objects and store them in a file on a disk. Here is how you do it. The `Blob` interface contains a `getBinaryStream()` method, which returns an `InputStream`. You can use that `InputStream` to read data contained in the `Blob` object. Similarly, the `Clob` interface contains a `getCharacterStream()` method, which returns a `Reader`. You can use that `Reader` object to read characters contained in the `Clob` object.

```
// Read picture data and save it to a file
String pictureFilePath = "c:\\mypicture.bmp";
FileOutputStream fos = new
FileOutputStream(pictureFilePath);
```

```

InputStream in = pictureBlob.getBinaryStream();
int b = -1;

while((b = in.read()) != -1) {
 fos.write((byte)b);
}

fos.close();

// Read resume data and save it to a file
String resumeFilePath = "c:\\myresume.txt";
FileWriter fw = new FileWriter(resumeFilePath);
Reader reader = resumeClob.getCharacterStream();
int b = -1;
while((b = reader.read()) != -1) {
 fw.write((char)b);
}

fw.close();

```

## Creating a LOB Data

In the previous section, you learned how to read LOB data from the database into a Java program. In this section, you will learn how to create a LOB in a Java program and send the LOB data to the database to store it in a table's column. The `Connection` interface contains three methods to create a LOB:

- `Blob createBlob() throws SQLException`
- `Clob createClob() throws SQLException`
- `NClob createNClob() throws SQLException`

You can use one of the methods to create an empty LOB of a specific type. For example, to store a picture and resume in a database, you would create a `Blob` object and a `Clob` object as follows:

```

Connection conn = JDBCUtil.getConnection();
Blob pictureBlob = conn.createBlob();
Clob resumeClob = conn.createClob();

```

Once you get the Blob and Clob objects, there are two ways to write data to them. You can write data to a Blob object using its `setBytes()` method, which accepts the position in the Blob object where you want to write, and the data in a byte array. You can also write data to a Blob object using an OutputStream. You need to call its `setBinaryStream()` method, which accepts the starting position for writing the data and returns an OutputStream. You need to use that OutputStream to write data to the Blob. Here are the two method's signatures:

- `int setBytes(long pos, byte[] bytes)`  
throws SQLException
- `OutputStream setBinaryStream(long pos)`  
throws SQLException

The following snippet of code shows how to write data to a Blob. It reads data from a file, which stores a picture, and writes all bytes to a Blob object. The while-loop reads one byte at a time from the file to keep the code simple and readable. In real-world programs, you will read and write a bigger chunk of data at a time.

```
// Get the output stream of the Blob object to write
// the picture data to it.
int startPosition = 1; // start writing from beginning
OutputStream out
= pictureBlob.setBinaryStream(startPosition);

// Get ready to read from a file
String picturePath = "picture.jpg";
FileInputStream fis = new
FileInputStream(picturePath);

// Read from the file and write to the Blob object
int b = -1;
while ((b = fis.read()) != -1) {
 out.write(b);
}
fis.close();
out.close();
```

The `Clob` interface provides the following three methods to write data to a `Clob` object:

- `int setString(long pos, String str)`  
`throws SQLException`
- `int setString(long pos, String str, int offset, int len)` `throws SQLException`
- `Writer setCharacterStream(long pos)`  
`throws SQLException`

The `setString()` method lets you write a `String` to it at a specified position. The second version of the `setString()` method lets you specify the offset into the source string to start reading and the number of characters to be read from the source string. The `setCharacterStream()` method returns a `Writer`, which you can use to write data in Unicode characters to the `Clob`. The `Clob` interface also contains a `setAsciiStream()` method, which returns an `OutputStream` that you can use to write the ASCII-encoded characters.

The following snippet of code shows how to write data to a `Clob`. It reads data from a file, which stores a resume in a text format and writes all characters to a `Clob` object. The while-loop reads one character at a time from the file to keep the code simple and readable. In real-world programs, you will read and write a bigger chunk of characters at a time.

```
// Get the Character output stream of the Clob object
// to write the resume data to it.
int startPosition = 1; // start writing from beginning
Writer writer
= resumeClob.setCharacterStream(startPosition);

// Get ready to read from a file
String resumePath = "resume.txt";
FileReader fr = new FileReader(resumePath);

// Read from the file and write to the Clob object
int b = -1;
while ((b = fr.read()) != -1) {
```

```
 writer.write(b);
}
fr.close();
writer.close();
```

Finally, it is time to write the LOB's data to a database. You can use the `setBlob()` and `setClob()` methods of the `PreparedStatement` interface to set the `Blob` and `Clob` data as shown:

```
Connection conn = JDBCUtil.getConnection();
String SQL = "insert into person_detail " +
 "(person_detail_id, person_id, picture,
resume) " +
 "values " +
 "(?, ?, ?, ?);"

PreparedStatement pstmt = null;
pstmt = conn.prepareStatement(SQL);
pstmt.setInt(1, 1); // set person_detail_id
pstmt.setInt(2, 101); // Set person_id

Blob pictureBlob = conn.createBlob();

// Write data to pictureBlob object here

pstmt.setBlob(3, pictureBlob);

Clob resumeClob = conn.createClob();

// Write data to resumeClob object here

pstmt.setClob(4, resumeClob);

// Insert the record into the database
pstmt.executeUpdate();
```

The `ResultSet` interface also includes the `updateBlob()` and `updateClob()` methods, which you can use to update `Blob` and `Clob` objects through a `ResultSet` object. `Blob` and `Clob` objects may require a lot of resources. Once you are done with them, you need to free the resources held by them by calling their `free()` method.

---

**Tip** Another way to set a Blob object's data in a PreparedStatement is to use its `setBinaryStream()` and `setObject()` methods. Another way to set Clob object's data in a PreparedStatement is to use its `setAsciiStream()`, `setCharacterStream()`, or `setObject()` method.

---

[Listing 6-30](#) contains the complete code that shows how to insert a record in a table that contains Blob and Clob columns. It has been tested in Java DB. It reads the data of a picture from a file named `picture.jpg` and a resume from a file named `resume.txt`. Both files are assumed to be in the current directory. If the files do not exist, the program prints a message with their expected full path. Please change the file paths in the `main()` method if you want to use different files. The program inserts a record in the `person_detail` table and retrieves the same data and saves it to the local disk in the current directory. Running the program more than once will print an error message because it will try inserting a duplicate record in the `person_detail` table. Person details will be retrieved every time you run the program.

**[Listing 6-30.](#) Reading and Writing Blob and Clob Data Database Columns**

```
// LOBTest.java
package com.jdojo.jdbc;

import java.io.FileInputStream;
import java.io.FileNotFoundException;
import java.io.FileOutputStream;
import java.io.FileReader;
import java.io.FileWriter;
import java.io.IOException;
import java.io.InputStream;
import java.io.OutputStream;
import java.io.Reader;
import java.io.Writer;
import java.nio.file.Files;
import java.nio.file.Path;
```

```
import java.nio.file.Paths;
import java.sql.Blob;
import java.sql.Clob;
import java.sql.Connection;
import java.sql.PreparedStatement;
import java.sql.ResultSet;
import java.sql.SQLException;

public class LOBTest {
 public static void main(String[] args) {
 Connection conn = null;
 try {
 conn = JDBCUtil.getConnection();

 // Insert a record in the
person_detail table. Files
 // picture.jpg and resume.txt are
assumed to be in
 // the working directory
String inPicturePath
= "picture.jpg";
String inResumePath
= "resume.txt";

 // Make sure that the files exist
ensureFileExistence(inPicturePath);
ensureFileExistence(inResumePath);

 try {
 // Insert a person_detail
record
 insertPersonDetail(conn, 1,
101,
inPicturePath,
inResumePath);

 // Commit the transaction
JDBCUtil.commit(conn);

 System.out.println(

```

```

 "Inserted person
details successfully");
 }
 catch(SQLException e) {
 System.out.print("Inserting
person details failed: ");
 System.out.println(e.getMessage());
 JDBCUtil.rollback(conn);
 }

 // These files will be created in
the current directory
 String outPicturePath
= "out_picture.jpg";
 String outResumePath
= "out_resume.txt";

 try {
 // Read the person_detail
record
 retrievePersonDetails(conn,
1,
 outPicturePath,
outResumePath);

 // Commit the transaction
 JDBCUtil.commit(conn);

 System.out.println(
"Retrieved and saved person
details successfully.");
 }
 catch(SQLException e) {
 System.out.print("Retrieving
person details failed: ");
 System.out.println(e.getMessage());
 JDBCUtil.rollback(conn);
 }
 }
 catch (Exception e) {

```

```

 System.out.println(e.getMessage());
 JDBCUtil.rollback(conn);
 }
 finally {
 JDBCUtil.closeConnection(conn);
 }
}

public static void
insertPersonDetail(Connection conn,
 int personDetailId,
 int personId,
 String pictureFilePath,
 String resumeFilePath)
throws SQLException {

 String SQL = "insert into person_detail "
+
 "(person_detail_id, person_id,
picture, resume) " +
 "values " +
 "(?, ?, ?, ?)";

 PreparedStatement pstmt = null;
 try {
 pstmt
= conn.prepareStatement(SQL);
 pstmt.setInt(1, personDetailId);
 pstmt.setInt(2, personId);

 // Set the picture data
 if (pictureFilePath != null) {
 // We need to create a Blob
object first
 Blob pictureBlob
= conn.createBlob();
 readInPictureData(pictureBlo
pictureFilePath);
 pstmt.setBlob(3,
pictureBlob);
 }
}
```

```

 }

 // Set the resume data
 if (resumeFilePath != null) {
 // We need to create a Clob
object first
 Clob resumeClob
= conn.createClob();
 readInResumeData(resumeClob,
resumeFilePath);
 pstmt.setClob(4,
resumeClob);
 }

 pstmt.executeUpdate();
}
catch (IOException | SQLException e) {
 throw new SQLException(e);
}
finally {
 JDBCUtil.closeStatement(pstmt);
}
}

public static void
retrievePersonDetails(Connection conn,
 int personDetailId,
 String picturePath,
 String resumePath) throws SQLException {

String SQL = "select person_id, picture,
resume " +
 "from person_detail " +
 "where person_detail_id = ?";

PreparedStatement pstmt = null;
try {
 pstmt
= conn.prepareStatement(SQL);
 pstmt.setInt(1, personDetailId);
}

```

```

 ResultSet rs
= pstmt.executeQuery();

 while (rs.next()) {
 int personId
= rs.getInt("person_id");
 Blob pictureBlob
= rs.getBlob("picture");
 if (pictureBlob != null) {
 savePicture(pictureBlo]
picturePath);
 pictureBlob.free();
 }

 Clob resumeClob
= rs.getClob("resume");
 if (resumeClob != null) {
 saveResume(resumeClob,
resumePath);
 resumeClob.free();
 }
 }

 catch (IOException | SQLException e) {
 throw new SQLException(e);
 }
 finally {
 JDBCUtil.closeStatement(pstmt);
 }
 }

 public static void readInPictureData(Blob
pictureBlob,
 String pictureFilePath)
 throws FileNotFoundException,
IOException, SQLException {

 // Get the output stream of the Blob
object to write
 // the picture data to it.
 }
}

```

```
 int startPosition = 1; // start writing
from the beginning
 OutputStream out
= pictureBlob.setBinaryStream(startPosition);

 FileInputStream fis = new
FileInputStream(pictureFilePath);

 // Read from the file and write to the
Blob object
 int b = -1;
 while ((b = fis.read()) != -1) {
 out.write(b);
 }

 fis.close();
 out.close();
 }

public static void readInResumeData(Clob
resumeClob,
 String resumeFilePath)
 throws FileNotFoundException,
IOException, SQLException {

 // Get the character output stream of the
Clob object
 // to write the resume data to it.
 int startPosition = 1; // start writing
from the beginning
 Writer writer
= resumeClob.setCharacterStream(startPosition);
 FileReader fr = new
FileReader(resumeFilePath);

 // Read from the file and write to the
Clob object
 int b = -1;
 while ((b = fr.read()) != -1) {
 writer.write(b);
 }
 }
}
```

```
 }
 fr.close();
 writer.close();
 }

 public static void savePicture(Blob
pictureBlob, String filePath)
 throws SQLException, IOException {
 FileOutputStream fos = new
FileOutputStream(filePath);
 InputStream in
= pictureBlob.getBinaryStream();

 int b = -1;
 while ((b = in.read()) != -1) {
 fos.write((byte) b);
 }

 fos.close();
 }

 public static void saveResume(Clob resumeClob,
String filePath)
 throws SQLException, IOException {
 FileWriter fw = new FileWriter(filePath);
 Reader reader
= resumeClob.getCharacterStream();

 int b = -1;
 while ((b = reader.read()) != -1) {
 fw.write((char) b);
 }

 fw.close();
 }

 public static void ensureFileExistence(String
filePath) {
 Path path = Paths.get(filePath);
 if (!Files.exists(path)) {
```

```
 throw new RuntimeException("File "
+
path.toAbsolutePath() + "
does not exist");
 }
}
}
```

## Batch Updates

You saw examples of using the Statement, PreparedStatement, and CallableStatement interfaces that let you send one SQL command (or stored procedure call) at a time to the database. The JDBC API includes a batch update feature that lets you send multiple update commands to a database in a batch (in one bundle) for execution. A batch update greatly improves performance. The update commands that you can use in a batch update are SQL INSERT, UPDATE, DELETE, and stored procedures. A command in a batch should not produce a result set. Otherwise, the JDBC driver will throw a SQLException. A command should generate an update count that will indicate the number of rows affected in the database by the execution of that command.

If you are using a Statement to execute a batch of commands, you can have heterogeneous commands in the same batch. For example, one command could be a SQL INSERT statement and another could be a SQL UPDATE statement.

If you are using a PreparedStatement or CallableStatement to execute a batch of commands, you will execute one command with multiple set of input parameters. A CallableStatement used in a batch update must return an update count and it should not produce a result set. Otherwise, the JDBC driver will throw a SQLException.

---

**Tip** Batch update is an optional feature that may be provided by a JDBC driver. If a JDBC driver supports a batch update, the supportsBatchUpdates () method of the DatabaseMetaData object will return true. You can get the DatabaseMetaData object using the

`getMetaData()` method of a `Connection` object. You should turn off the auto-commit mode when executing batch updates, so you should be able to commit or rollback the entire batch. If the auto-commit mode is turned on, the commit behavior depends on the JDBC driver implementation when an error occurs executing one of the commands in the batch.

---

How do you execute multiple commands in a batch? It is a multi-step process.

1. Create a `Statement`, a `PreparedStatement`, or a `CallableStatement` by using an appropriate method of a `Connection` object. At this point, there is no difference between executing one command and using a batch of commands.
2. Use the `addBatch()` method to add a command to the batch. Each type of statement object maintains a list of batch commands internally. The `addBatch()` method adds the command to the internal list of batch commands. You need to call the `addBatch()` method once for each command in the batch that you want to bundle together for execution.
3. If you want to clear the list of batch commands without executing them, you can call the `clearBatch()` method of the `Statement` interface to do so.
4. Use the `executeBatch()` method to send the batch of commands to the database for execution in one go.

It is important to understand the behavior of the `executeBatch()` method of the `Statement` interface. It returns an array of `int` if all commands in the batch are executed successfully. The array contains as many elements as the number of commands in the batch. Each element in the array contains the update count that is returned from the command. The order of the element in the array is the same as the order of commands in the batch. Sometimes, a command in a batch may execute without an error, but the JDBC driver was not able to get the update count value. In such a case, a value of `Statement.SUCCESS_NO_INFO` is returned in the array.

---

**Tip** Java 8 has added an `executeLargeBatch()` method to the `Statement` interface that works the same as the `executeBatch` method, except that it returns a `long[]` instead of an `int[]`. Use this method when you expect the update counts of any commands in the batch to exceed `Integer.MAX_VALUE`.

---

A JDBC driver throws a `BatchUpdateException` if a command in the batch fails to execute successfully. It is up to the JDBC driver whether it continues to execute the subsequent commands in the batch upon failure or stops the batch execution upon the first failure. How do you know which command failed in a batch? When a `BatchUpdateException` is thrown, you can use its `getUpdateCounts()`, which returns an array of `int`. The update count array contains the update counts of the commands that were executed in the batch. If a JDBC driver executes all commands in a batch irrespective of a failure, the returned array will contain as many elements as the number of commands in the batch. If a command failed, its corresponding value in the array will be `Statement.EXECUTE_FAILED`. If the `getUpdateCounts()` method of `BatchUpdateException` object returns fewer number of elements than the number of commands in the batch, it means that the JDBC driver stopped processing any commands after the first failure.

The following snippet of code shows how to use a `Statement` object to execute a batch update:

```
Connection conn = JDBCUtil.getConnection();
Statement stmt = conn.createStatement();

// Add batch update commands
stmt.addBatch("insert into t1...");
stmt.addBatch("insert into t2...");
stmt.addBatch("update t3 set...");
stmt.addBatch("delete from t4...");

// Execute the batch updates
int[] updateCount = null;

try {
 updatedCount = stmt.executeBatch();
```

```

 System.out.println("Batch executed
successfully.");
 }
catch (BatchUpdateException e) {
 System.out.println("Batch failed.");
}

```

The following snippet of code shows how to use a `PreparedStatement` object to execute a batch update. The logic will be the same if you use a `CallableStatement`, except for the construction of the SQL in the string format. The `addBatch()` method in the `PreparedStatement` interface does not accept any parameter.

```

String sql = "delete from person where person_id = ?";

Connection conn = JDBCUtil.getConnection();
PreparedStatement pstmt = conn.prepareStatement(sql);

// Add two commands to the batch.
// Command #1: Set the input parameter and add it to
// the batch.
pstmt.setInt(201);
pstmt.addBatch();

// Command #2: Set the input parameter and add it to
// the batch.
pstmt.setInt(301);
pstmt.addBatch();

// Execute the batch update
int[] updateCount = null;

try {
 updateCount = pstmt.executeBatch();
 System.out.println("Batch executed
successfully.");
}
catch (BatchUpdateException e) {
 System.out.println("Batch failed.");
}

```

[Listing 6-31](#) contains the complete code to demonstrate how to use a batch update. It also shows how to handle the results of a batch update returned from the `executeUpdate()` method and from a `BatchUpdateException`. The `insertPersonStatement()` and `insertPersonPreparedStatement()` methods do the same work: the first one uses a `Statement` and the second one uses a `PreparedStatement`. In the `main()` method, the call to the `insertPersonPreparedStatement()` method is commented. You need to use one of these methods, but not both.

**[Listing 6-31.](#) Using the Batch Update Feature of the JDBC API**

```
// BatchUpdateTest.java
package com.jdojo.jdbc;

import java.sql.Connection;
import java.sql.SQLException;
import java.sql.Statement;
import java.sql.BatchUpdateException;
import java.sql.PreparedStatement;
import java.sql.Types;
import java.sql.Date;

public class BatchUpdateTest {
 public static void main(String[] args) {
 Connection conn = null;

 try {
 conn = JDBCUtil.getConnection();

 // Prepare the data
 int[] personIds = {801, 901};
 String[] firstNames = {"Matt",
"Greg"};
 String[] lastNames = {"Flower",
"Rice"};
 String[] genders = {"M", "M"};
 String[] dobString = {"d '1960-
04-01'"},
```

```

 " {d '1962-03-
01'}};

 double[] incomes = {56778.00,
89776.00};

 // Use batch update using the
Statement objects
 insertPersonStatement(conn,
personIds, firstNames,
lastNames, genders,
dobString, incomes);

 // Use batch update using the
PreparedStatement objects
/*
 java.sql.Date[] dobDate
= {Date.valueOf("1960-04-01"),
 Date.valueOf("1962-03-01") };

insertPersonPreparedStatement(conn, personIds,
firstNames, lastNames, genders,
dobDate, incomes);
*/
 // Commit the transaction
 JDBCUtil.commit(conn);
 }
 catch (SQLException e) {
 System.out.println(e.getMessage());
 JDBCUtil.rollback(conn);
 }
 finally {
 JDBCUtil.closeConnection(conn);
 }
}

public static void
insertPersonStatement(Connection conn,
int[] personId,
String[] firstName, String[] lastName,

```

```

String[] gender, String[] dob,
double[] income) throws SQLException {

 int[] updatedCount = null;
 Statement stmt = null;

 try {
 stmt = conn.createStatement();
 for (int i = 0; i <
personId.length; i++) {
 String SQL = "insert into
person " +
 "(person_id,
first_name, last_name," +
 " gender, dob, income)
" +
 "values " +
 "(" + personId[i] + ",",
" +
 "''' + firstName[i]
+ "''' + lastName[i]
+ "''' + gender[i] + """
+ ", " +
 dob[i] + ", " +
 income[i] + ")";
 // Add insert command to the
batch
 stmt.addBatch(SQL);
 }

 // Execute the batch
 updatedCount
= stmt.executeBatch();
 System.out.println("Batch executed
successfully.");
 printBatchResult(updatedCount);
 }
 }
}

```

```

 catch (BatchUpdateException e) {
 // Let us see how many commands
 were successful
 updatedCount
 = e.getUpdateCounts();

 System.out.println("Batch
failed.");
 int commandCount
 = personId.length;
 if (updatedCount.length ==
 commandCount) {
 System.out.println(
 "JDBC driver continues
to execute all"
 + " commands in
a batch after a failure.");
 }
 else {
 System.out.println(
 "JDBC driver stops
executing subsequent"
 + " commands in
a batch after a failure.");
 }

 // Re-throw the exception
 throw e;
 }
 finally {
 JDBCUtil.closeStatement(stmt);
 }
 }

 public static void
insertPersonPreparedStatement(
 Connection conn, int[] personId,
 String[] firstName, String[] lastName,
 String[] gender, java.sql.Date[] dob,

```

```
 double[] income) throws SQLException {

 int[] updatedCount = null;
 String SQL = "insert into person " +
 "(person_id, first_name,
last_name, gender, dob," +
 " income) " +
 " values " +
 "(?, ?, ?, ?, ?, ?, ?)";

 PreparedStatement pstmt = null;
 try {
 pstmt
= conn.prepareStatement(SQL);

 for (int i = 0; i <
personId.length; i++) {
 // Set input parameters
 pstmt.setInt(1,
personId[i]);
 pstmt.setString(2,
firstName[i]);
 pstmt.setString(3,
lastName[i]);
 pstmt.setString(4,
gender[i]);
 if (dob[i] == null) {
 pstmt.setNull(5,
Types.DATE);
 }
 else {
 pstmt.setDate(5,
dob[i]);
 }
 }
 pstmt.setDouble(6,
income[i]);
 // Add insert command with
current input parameters
```

```

 pstmt.addBatch();
 }

 // Execute the batch
 updatedCount
= pstmt.executeBatch();
 System.out.println("Batch executed
successfully.");
 printBatchResult(updatedCount);
 }
 catch (BatchUpdateException e) {
 // Let us see how many commands
were successful
 updatedCount
= e.getUpdateCounts();
 System.out.println("Batch
failed.");
 int commandCount
= personId.length;
 if (updatedCount.length ==
commandCount) {
 System.out.println(
 "JDBC driver continues
to execute all" +
 "commands in a batch
after a failure.");
 }
 else {
 System.out.println(
 "JDBC driver stops
executing subsequent" +
 "commands in a batch
after a failure.");
 }
 }

 // Re-throw the exception
 throw e;
 }
 finally {

```

```

 JDBCUtil.closeStatement(pstmt);
 }
}

public static void printBatchResult(int[]
updateCount) {
 System.out.println("Batch Results...");
 for (int i = 0; i < updateCount.length;
i++) {
 int value = updateCount[i];
 if (value >=0) {
 System.out.println("Command
#" + (i + 1)
 + ": Success. Update
Count=" + value);
 } else if (value
>=Statement.SUCCESS_NO_INFO) {
 System.out.println("Command
#" + (i + 1)
 + ": Success. Update
Count=Unknown");
 } else if (value
>=Statement.EXECUTE_FAILED) {
 System.out.println("Command
#" + (i + 1) + ": Failed");
 }
 }
}

```

## Savepoints in a Transaction

A database transaction consists of one or more changes as a unit of work. A savepoint in a transaction is like a marker that marks a point in a transaction so that, if needed, the transaction can be rolled back (or undone) up to that point. Let's take an example of inserting five records in the person table, like so:

```
Connection conn = JDBCUtil.getConnection();
Statement stmt = conn.createStatement();
stmt.execute("insert into person..."); // insert 1
stmt.execute("insert into person..."); // insert 2
stmt.execute("insert into person..."); // insert 3
stmt.execute("insert into person..."); // insert 4
stmt.execute("insert into person..."); // insert 5
```

At this point, you have only two choices: either you commit the transaction, which will insert all five records in the person table, or you roll back the transaction, so that none of the five records will be inserted. You can perform a commit or rollback as

```
conn.commit(); // Save all five records
```

or

```
conn.rollback(); // Do not save any of the five
records
```

A savepoint will let you set a marker in between any of the above two INSERT statements. An object of the Savepoint interface represents a savepoint in a transaction. To mark a savepoint in a transaction, you simply call the `setSavepoint()` method of the Connection. The `setSavepoint()` method is overloaded. One version accepts no argument and another accepts a string, which is the name of the savepoint. The `setSavepoint()` method returns a Savepoint object, which is your marker and you must keep it for future use. Let's rewrite the above logic using a savepoint after every INSERT statement.

```
Connection conn = JDBCUtil.getConnection();
Statement stmt = conn.createStatement();
stmt.execute("insert into person..."); // insert 1
Savepoint sp1 = conn.setSavepoint(); // savepoint 1
stmt.execute("insert into person..."); // insert 2
Savepoint sp2 = conn.setSavepoint(); // savepoint 2
```

```
stmt.execute("insert into person..."); //
insert 3
Savepoint sp3 = conn.setSavepoint(); //
savepoint 3
stmt.execute("insert into person..."); //
insert 4
Savepoint sp4 = conn.setSavepoint(); //
savepoint 4
stmt.execute("insert into person..."); //
insert 5
```

At this point, you have finer control on the transaction if you want to undo any of the above five inserts into the `person` table. Now you can use another version of the `rollback()` method of the `Connection` object, which accepts a `Savepoint` object. If you want to undo all changes that were made after `savepoint 4`, you can do so as follows:

```
// Rolls back insert 5 only
conn.rollback(sp4);
```

If you want to undo all changes that were made after `savepoint 2`, you can do so as follows:

```
// Rolls back inserts 3, 4, and 5
conn.rollback(sp2);
```

If you roll back up to save point 1, only the first insert will remain in the transaction. Can you change your mind after you have rolled back to a save point? Suppose, after you call `conn.rollback(sp2)`, you realize that you have made a mistake and you wanted to roll back insert 4, and 5 only, and not insert 3. The call to `conn.rollback(sp2)` will rollback three inserts: 3, 4, and 5. Do you have any choice to go back only up to `savepoint 3` after you have gone back to `save point 2`? No. You do not have any choice in such cases. Once you roll back up to a `savepoint` (say, `spx`), all `savepoints` that were created after the `savepoint spx` are released and you cannot refer to them again. If you refer to a released `savepoint`, the JDBC driver will throw a `SQLException`. The following snippet of code will throw a `SQLException`:

```
conn.rollback(sp2); // Will release sp3, and sp4
conn.rollback(sp3); // Will throw an exception. sp3 is
```

already released.

Note that when you roll back a transaction to a savepoint, that savepoint itself is not released. When you call `conn.rollback(sp2)`, savepoint `sp2` remains valid. You can add more savepoints afterwards and roll back up to savepoint `sp2` again.

You can also release a savepoint explicitly by calling `releaseSavepoint(Savepoint sp)` method of a `Connection` object. Releasing a savepoint also releases all subsequent savepoints that were created after this savepoint. For example, calling `conn.releaseSavepoint(sp2)` will release savepoints `sp2`, `sp3`, and `sp4`. All savepoints in a transaction are released when the transaction is committed or rolled back entirely. A JDBC driver will throw a `SQLException` if you use the savepoint that has been released by any of the above-described means. [Listing 6-32](#) shows how to use a savepoint in a transaction.

### ***[Listing 6-32](#)***. Using Savepoints in a Transaction

```
// SavePointTest.java
package com.jdojo.jdbc;

import java.sql.Connection;
import java.sql.SQLException;
import java.sql.PreparedStatement;
import java.sql.Savepoint;

public class SavePointTest {
 public static void main(String[] args) {
 Connection conn = null;
 try {
 // Connect to the database
 conn = JDBCUtil.getConnection();
 conn.setAutoCommit(false);

 // SQL Statement
 String SQL = "update person " +
 "set income = ? " +
 "where person_id = ?";
```

```

 PreparedStatement pstmt
= conn.prepareStatement(SQL);
 pstmt.setDouble(1, 20000);
 pstmt.setInt(2, 101);
 pstmt.execute();

 // Set a save point
 Savepoint sp1
= conn.setSavepoint();

 // Change the income to 25000 and
execute the SQL again
 pstmt.setDouble(1, 25000);
 pstmt.execute();

 // Set a save point
 Savepoint sp2
= conn.setSavepoint();

 // Perform some more database
changes here
 // Roll back the transaction to
the save point sp1,
 // so that income for person_id
101 will remain set
 // to 20000 and not the 25000
conn.rollback(sp1);

 // Commit the transaction
JDBCUtil.commit(conn);
}
catch (SQLException e) {
 System.out.println(e.getMessage());
 JDBCUtil.rollback(conn);
}
finally {
 JDBCUtil.closeConnection(conn);
}
}
}

```

---

**Tip** You can check if a JDBC driver supports savepoints by using the `supportsSavepoints()` method of the `DatabaseMetaData` object.

---

## Using a DataSource

You need a `Connection` to communicate with a database. So far, you have been obtaining a `Connection` using the `DriverManager` class. You need to register the database driver with the `DriverManager` and specify the details of the database connection properties. All these things have to be done in the Java code that resides with the main application logic. If anything related to the database connectivity changes, you must change your code that deals with establishing the database connection.

The JDBC API provides another way to obtain a `Connection` in a Java application. You can use the `javax.sql.DataSource` interface to get a connection to a database. In this alternative way of working with database connections, things are separated into two logical modules: connection management and connection consumption.

- One module is responsible for configuring and deploying the `DataSource` objects on a server that allows lookup using a Java Naming and Directory Interface (JNDI) service. The configuration involves setting the properties for the `DataSource` object, which it will use to establish a connection to the database such as server name, port number, network protocol, etc. The deployment involves storing the configured `DataSource` object on a JNDI server by giving it a logical name. The deployment is also known as binding, because a `DataSource` object is bound to a logical name. Usually, a system administrator performs this step. The logical name that is given to a `DataSource` object is announced to the developers who need to look up the `DataSource` object. Typically, you use a `DataSource` in an application server, which uses J2EE technology. The application server provides you with a GUI tool to configure and deploy `DataSource` objects.

- The Java application, which needs an instance of a `Connection` object, performs a lookup using the JNDI API using the logical name of a `DataSource`. The lookup operation returns an instance of the `DataSource` interface. You can get a `Connection` object from a `DataSource` object using its `getConnection()` method. The `getConnection()` method is overloaded. One version accepts no parameter and another version accepts `userId` and `password` as parameters. The `getConnection()` method works similar to the `getConnection()` method of the `DriverManager` class. A developer performs this step.

Usually, you configure and deploy a `DataSource` on a server, which is available using a JNDI service. The following is a sample snippet of code that you can use to configure and deploy a `DataSource` programmatically. It creates a `DataSource` provided by MySQL JDBC driver.

```
import com.mysql.jdbc.jdbc2.optional.MySQLDataSource;
import javax.naming.InitialContext;
import javax.naming.Context;

...
// Create a DataSource object
MySQLDataSource mds = new MySQLDataSource();
mds.setServerName("localhost");
mds.setPortNumber(3306);
mds.setUser("root");
mds.setPassword("chanda");

// Get the initial context
Context ctx = new InitialContext();

// Bind (or register) the DataSource object under
// a logical name "jdbc/mydb"
ctx.bind("jdbc.mydb", mds);
```

The Java application that needs a connection to a database will perform a lookup using the logical name of the `DataSource` that was given to it at the time of binding. Here is a typical snippet of Java code that you need to write

when you need a Connection object:

```
import javax.sql.DataSource;
import java.sql.Connection;
import javax.naming.InitialContext;
import javax.naming.Context;
...
// Get the initial context
Context ctx = new InitialContext();

// Perform a lookup for the DataSource using its
logical name "jdbc/mydb"
DataSource ds = (DataSource)ctx.lookup("jdbc/mydb");

// Get a Connection object from the DataSource object
Connection conn = ds.getConnection();

// Perform other database related tasks...

// Close the connection
conn.close()
```

The JDBC API provides two other types of data source interfaces:

`javax.sql.ConnectionPoolDataSource` and  
`javas.sql.XADataSource`. The `ConnectionPoolDataSource` interface contains a `getPooledConnection()` method, which returns an instance of the `PooledConnection` interface. The `XADataSource` interface contains a `getXAConnection()` method, which returns an instance of the `XAConnection` interface.

An implementation of the `ConnectionPoolDataSource` interface provides the connection pooling feature to improve the application's performance. The basic `DataSource` implementation connects when a `Connection` object is obtained from it and disconnects from the database when the `Connection` object is closed. A `ConnectionPoolDataSource` implementation maintains a pool of database connections. When a database connection is needed, it gives a connection from its pool. When a database connection is closed, it does not disconnect the `Connection` object from the database physically. Rather, it returns the connection object to the pool for reuse. Establishing a database connection is a time-consuming process. By using a

connection pool in an application using a `ConnectionPoolDataSource`, you improve your application's performance greatly. The connection pooling mechanism is also useful when the number of connections you can establish to a database is limited. In such cases, you can maintain a pool of limited number of connections and users will take turns using these connections.

The implementation of the `XADatasource` interface provides support for distributed transactions, which involve multiple databases. A transaction manager is used to manage a distributed transaction in conjunction with a `XADatasource` object. Typically, a `XADatasource` also supports connection pooling.

## Retrieving SQL Warnings

Sometimes, a DBMS issues a SQL warning instead of throwing an exception. A SQL warning indicates that the database interaction has been completed; however, everything was not right. The JDBC API lets you retrieve SQL warnings signaled by a DBMS using a `java.sql.SQLWarning` object. The `SQLWarning` class inherits from the `SQLException` class. A `SQLWarning` stores chains of SQL warnings. A SQL warning may be issued on a `Connection`, a `Statement` (including `PreparedStatement` and `CallableStatement`), or a `ResultSet`. You can retrieve the first warning object associated with any of these objects using their `getWarnings()` methods. If there are no warnings reported in an object, the method returns `null`. Once you call the `getWarnings()` method on these objects, their warnings are cleared. You can also clear their warnings by calling their `clearWarnings()` method. Note that these objects must be open to access warnings reported on them. Once you execute or re-execute a `Statement` object, its warnings are reset. The following snippet of code may be used to print warnings details reported on any object—`Connection`, `Statement` or `ResultSet`:

```
// Check for warnings.
// Here xxx is either a Connection, Statement or
ResultSet object
SQLWarning warning = xxx.getWarnings();
while(warning != null) {
```

```

int errorCode = warning.getErrorCode();
String sqlState = warning.getSQLState();
String warningMsg = warning.getMessage();

// Print the details
System.out.println("Warning: " + warningMsg +
 "SQL State: " + sqlState +
 "Error Code:" + errorCode);

// Get the next warning
warning = warning.getNextWarning();
}

```

## Enabling JDBC Trace

You can enable JDBC tracing that will log JDBC activities to a `PrintWriter` object. You can use the `setLogWriter(PrintWriter out)` static method of the `DriverManager` to set a log writer if you are using the `DriverManager` to connect to a database. If you are using a `DataSource`, you can use its `setLogWriter(PrintWriter out)` method to set a log writer. Setting `null` as a log writer disables the JDBC tracing. The following snippet of code sets a log writer to a `C:\jdbc.log` file on Windows:

```

// Sets the log writer to a file c:\jdbc.log
PrintWriter pw = new PrintWriter("C:\\\\jdbc.log");
DriverManager.setLogWriter(pw);

```

When you call the `setLogWriter()` method of the `DriverManager` class with the Java security enabled, Java checks for a `java.sql.SQLPermission`. You can grant this permission to an executing code in a security policy file. The following is an example of an entry in a security policy file that grants a permission to execute the `setLogWriter()` method on the `DriverManager`:

```

grant {
 permission java.sql.SQLPermission "setLog";
};

```

# Summary

The JDBC API provides a standard database-independent interface to interact with any tabular data source, including a relational database management system (RDBMS) such as Oracle, SQL Server, DB2, Java DB, MySQL, etc. JDBC drivers facilitate connection to a database in Java programs. The JRE does not include any JDBC drivers. JDBC drivers are supplied by the DBMS vendors. Classes and interfaces in the JDBC API are in the `java.sql` and `javax.sql` packages.

The `DriverManager` class facilitates registration of JDBC drivers to connect to different types of databases. When passed in database connection properties such as the server location, protocol, database names, user id, password, etc., the `DriverManager` uses the registered JDBC drivers to connect to the database and returns an object of the `Connection` interface that represents a connection to the database.

You can use the `getMetaData()` method for a `Connection` object to get a `DatabaseMetaData` object. A `DatabaseMetaData` object contains information about the database such as the features supported by the database, all tables in the database, etc.

The JDBC API provides mappings between SQL types and Java types. JDBC drivers perform the translation between the two types. This hides the differences in data type names and their internal representations in different databases. For example, you can use a `java.sql.Date` object to represent a SQL date value in your Java program irrespective of the DBMS you are using. The JDBC driver will take care of converting the value in the `java.sql.Date` to the DBMS-specific date value and vice versa.

A `Statement` is used to execute SQL statements in string forms from a Java program. The result set returned by a SQL statement is made available in the Java program as an object of the `ResultSet` interface.

A `PreparedStatement` is used to execute SQL statement with parameters. The SQL statement is pre-compiled to provide a faster execution on repeated use of the same SQL statement with different parameters. Using input parameters in the SQL statement as placeholders also prevents attacks from hackers that use SQL injections.

A `CallableStatement` is used to call a SQL stored procedure or a function in a database. Different DBMSs use different syntax to call stored

procedures and functions. The JDBC API provides a DBMS-independent syntax to call stored procedures and functions using a `CallableStatement`.

A `ResultSet` represents tabular data defined in terms of rows and columns. Typically, you get a `ResultSet` by executing a SQL statement that returns a result set from the database. A `ResultSet` may scroll only in the forward direction or in both forward and backward directions. All JDBC drivers will support at least a forward-only `ResultSet`. A `ResultSet` may also be used to update data in the database.

A `RowSet` is a wrapper for a `ResultSet`. A `RowSet` hides the complexities that are involved in working with a `ResultSet`. A `JdbcRowSet`, which is also known as a connected rowset, maintains a database connection all the time. A `CachedRowSet`, which is also called a disconnected rowset, uses a database connection only for the duration it is needed. A `WebRowSet` is a `CachedRowSet` that supports importing data from an XML document and exporting its data to an XML document. A `FilteredRowSet` is a `WebRowSet` that provides filtering capability at the client side. A `JoinRowSet` is a `WebRowSet` that provides the ability to combine (or join) two or more disconnected rowsets into one rowset.

The JDBC provides support for working with database large objects, typically called, `Blob`, `Clob`, and `NClob`.

For a better performance, you can send multiple SQL commands to the database in one shot using the batch update feature of the JDBC API. Batch updates are supported through the `Statement`, `PreparedStatement`, and `CallableStatement` interfaces. The `addBatch()` method of the `Statement` object is used to add a SQL command to the batch. The `executeBatch()` method sends all SQL commands in the batch to the database for execution.

A database transaction consists of one or more changes as a unit of work. A savepoint in a transaction is a marker that marks a point in a transaction so that, if needed, the transaction can be rolled back up to the marked point. An instance of the `Savepoint` interface represents a savepoint. You can create a savepoint in a transaction using the `setSavepoint()` method of the `Connection` object. You can specify a savepoint in the `rollback()` method of the `Connection` object to roll back the transaction to the specified savepoint.

A DBMS may issue SQL warnings instead of throwing an exception. An instance of the `SQLWarning` class represents a set of SQL warnings. SQL

warnings are nested in one `SQLWarning` object. Use the `getWarnings()` method of the `Connection`, `Statement`, or `ResultSet` objects to get SQL warnings associated with them. Use the `getNextWarning()` method of the `SQLWarning` class to retrieve the next SQL warning from the set.

You can enable JDBC tracing that will log JDBC activities to a `PrintWriter` object. You can use the `setLogWriter(PrintWriter out)` static method of the `DriverManager` to set a log writer.

# CHAPTER 7



## Java Remote Method Invocation

---

In this chapter, you will learn

- What Java Remote Method Invocation (RMI) is and the RMI architecture
- How to develop and package RMI server and client applications
- How to start the `rmiregistry`, RMI server, and client applications
- How to troubleshoot and debug RMI applications
- Dynamic class downloading in an RMI application
- Garbage collections of remote objects in RMI applications

## What Is Java Remote Method Invocation?

Java supports a variety of application architectures that determine how and where the application code is deployed and executed. In the simplest application architecture, all Java code resides on a single machine and one JVM manages all Java objects and the interaction among them. This is an example of a standalone application, where all that is needed is a machine that can launch a JVM. Java also supports a distributed application architecture in which the application's code and execution can be distributed among multiple machines.

In [Chapter 4](#), you saw Java applets where Java classes are deployed on a web

server. The applet classes are downloaded to the client machine by the web browser and executed inside a JVM that runs on the client machine. In the case of an applet, the Java code is still executed inside one JVM. In [Chapter 5](#), you learned network programming in Java that involves at least two JVMs running on different machines that execute the Java code for the client and server sockets. Typically, sockets are used to transfer data between two applications. In socket programming, it is possible for the client program to send a message to the server program. The server program creates a Java object, invokes a method on that object, and returns the result of the method invocation to the client program. Finally, the client program reads the result using sockets. In such cases, the client is able to invoke a method on a Java object that resides in a different JVM. This possibility opens up doors for new application architectures, called distributed programming, in which an application may utilize multiple machines, running multiple JVMs to process the business logic. Although it is possible to invoke a method on an object that resides in a different JVM (possibly on a different machine too) using socket programming, it is not easy to code. To achieve this, Java provides a separate mechanism called Java Remote Method Invocation (Java RMI).

Java RMI enables a Java application to invoke a method on a Java object in a remote JVM. I will use the term “remote object” to refer to a Java object that is created and managed by a JVM, other than the JVM that manages the Java code that calls methods on that “remote object.” Typically, a remote object also implies that it is managed by a JVM that runs on a machine other than the machine from which it is accessed. However, it is not a requirement for a Java object to be a remote object that it should exist in a JVM on a different machine. For learning purposes, you will use one machine to deploy the remote object in one JVM and launch another application in a different JVM to access the remote object. RMI lets you treat the remote object as if it is a local object. Internally, it uses sockets to handle access to the remote object and to invoke its methods.


An RMI application consists of two programs, a client and a server, that run in two different JVMs. The server program creates a number of Java objects and makes them accessible to the remote client programs to invoke methods on those objects. The client program needs to know the location of the remote objects on the server, so it can invoke methods on them. The server program creates a remote object and registers (or binds) its reference to an RMI registry. An RMI registry is a name service that is used to bind a remote object reference to a name, so a client can get the reference of the remote object using a name-based lookup in the registry. An RMI registry runs in a separate process from the server

program. It is supplied as a tool called `rmiregistry`. When you install a JDK/JRE on your machine, it is copied in the `bin` subdirectory under the JDK/JRE installation directory.

After the client program gets the remote reference of a remote object, it invokes methods using that reference as if it were a reference to a local object. RMI technology takes care of the details of invoking the methods on the remote reference in the server program running on a different JVM on a different machine. In an RMI application, Java code is written in terms of interfaces. The server program contains implementations for the interfaces. The client program uses interfaces along with the remote object references to invoke methods on the remote object that exists in the server's JVM. All Java library classes supporting Java RMI are in the `java.rmi` package and its subpackages.

## The RMI Architecture

[Figure 7-1](#) shows the RMI architecture in a simplified form. A rectangular box in the figure represents a component in an RMI application. An arrow line shows a message sent from one component to another in the direction of the arrow. The ovals showing numbers from 1 to 11 represent the sequence of steps that take place in a typical RMI application. I will discuss all steps in detail in this section.

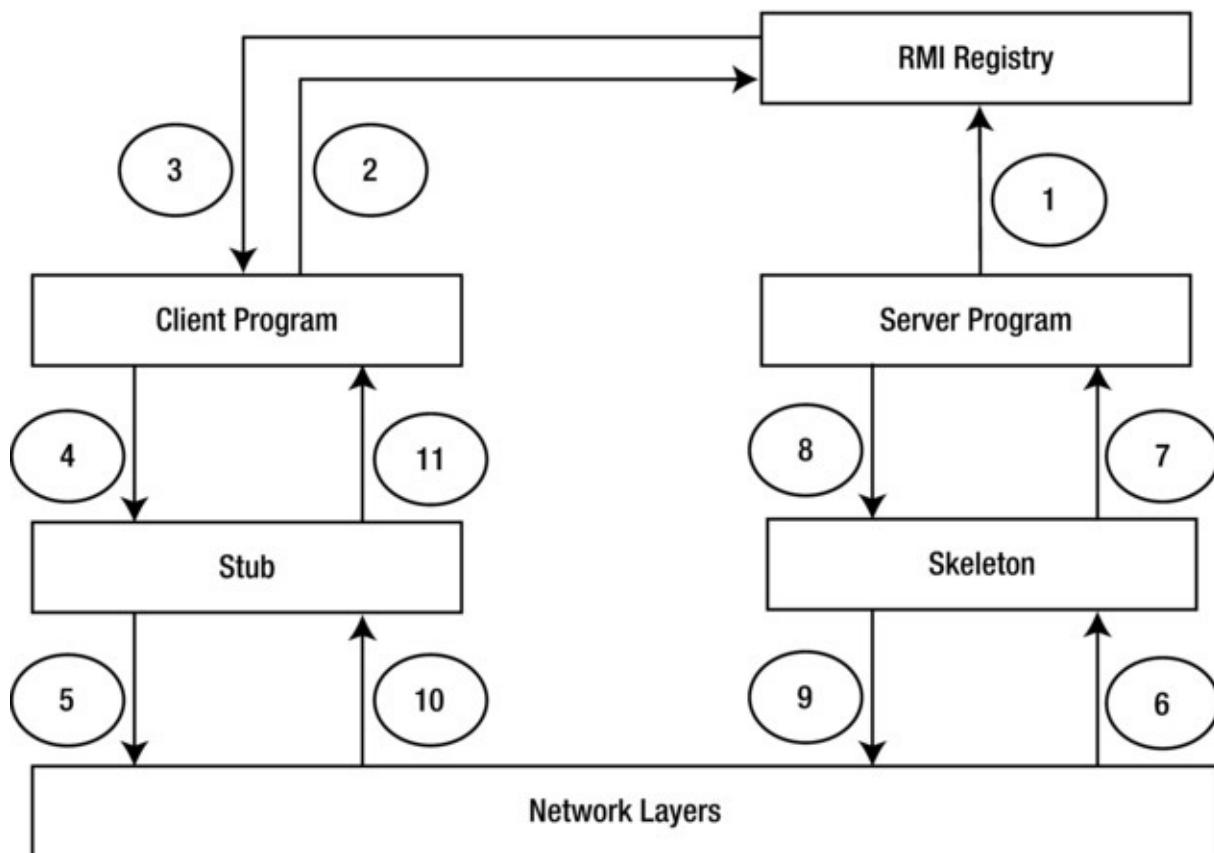

**Figure 7-1.** The RMI architecture

Let's assume that you have developed all Java classes and interfaces that are needed for an RMI application to run. In this section, you will walk through all the steps that are involved when you run an RMI application. You will develop the Java code that is needed for each step in the next few sections.

The first step involved in an RMI application is to create a Java object in the server. The object will be used as the remote object. There is an additional step that needs to be performed to make an ordinary Java object a remote object. The step is known as *exporting* the remote object. When an ordinary Java object is exported as a remote object, it becomes ready to receive/handle calls from remote clients. The export process produces a remote object reference (also called a stub). The remote reference knows the details about the exported object such as its location and methods that can be called remotely. This step is not labeled in [Figure 7-1](#). It happens inside the server program. When this step finishes, the remote object has been created in the server and is ready to receive a remote method invocation.

The next step is performed by the server to register (or bind) the remote reference with an RMI registry. The server chooses a unique name for each

remote reference it registers with an RMI registry. A remote client will need to use the same name to look up the remote reference in the RMI registry. This is labeled as #1 in [Figure 7-1](#). When this step finishes, the RMI registry has registered the remote object reference and a client interested in invoking a method on the remote object may ask for its reference from the RMI registry.

---

**Tip** For security reasons, an RMI registry and the server must run on the same machine so that a server can register the remote references with the RMI registry. If this restriction is not imposed, a hacker may register his own harmful Java objects to your RMI registry from his machine.

---

This step involves interaction between a client and an RMI registry. Typically, a client and an RMI registry run on two different machines. The client sends a lookup request to the RMI registry for a remote reference. The client uses a name to look up the remote reference in the RMI registry. The name is the same as the name that was used by the server to bind the remote reference in the RMI registry in step #1. The lookup step is labeled as #2 in [Figure 7-1](#). The RMI registry returns the remote reference (or stub) to the client labeled as step #3 in [Figure 7-1](#). If a remote reference is not bound in the RMI registry with the name used by the client in the lookup request, the RMI registry throws a `NotBoundException`. If this step finishes successfully, the client has received the remote reference (or stub) of the remote object running in the server.

In this step, the client invokes a method on the stub. It is shown as step #4 in [Figure 7-1](#). At this point, the stub connects to the server and transmits the information required to invoke the method on the remote object, such as the name of the method, the method's arguments, etc. The stub knows about the server location and the details about how to contact the remote object on the server. This step is labeled as step #5 in [Figure 7-1](#). Many different layers at the network level are involved in transmitting information emanating from stub to the server.

A skeleton is the server side counterpart of a stub on the client side. Its job is to receive the data sent by the stub. This is shown as step #6 in [Figure 7-1](#). After a skeleton receives the data, it reassembles it into a more meaningful format and invokes the method on the remote object, which is shown as step #7 in [Figure 7-1](#). Once the remote method call is over on the server, the skeleton receives the result of the method call (step #8) and transmits the information back to the stub

(step #9) through the network layers. The stub receives the result of the remote method invocation (step #10), reassembles the result, and passes the result to the client program (step #11).

The steps #4 through #11 may be repeated to call the same or different methods on the same remote object. If a client wants to call a method on a different remote object, it will have to first perform steps #2 and #3 before initiating a remote method call.

It is typical in an RMI application that a client contacts an RMI registry to get the stub of a remote object in the beginning. If the client needs the stub of another remote object running in the server, it may get it by calling a method on the stub that it already has. Note that a remote object's method can also return a stub to a remote client. This way, a remote client may perform a lookup in the RMI registry only once at startup. The Java code that you write for an RMI application is no different from that of a non-RMI application, except for looking up for a remote object reference in the RMI registry.

## Developing an RMI Application

This section will walk you through the steps to write the Java code to develop an RMI application. You will develop a remote utility RMI application that will let you perform three things: echo a message from the server, get the current date and time from the server, and add two integers. The following steps are involved in writing an RMI application:

- Writing a remote interface.
- Implementing the remote interface in a class. An object of this class serves as the remote object.
- Writing a server program. It creates an object of the class that implements the remote interface and registers it with the RMI registry.
- Writing a client program that accesses the remote object on the server.

### Writing the Remote Interface

A remote interface is like any other Java interface whose methods are meant to be called from a remote client running in a different JVM. It has four special requirements:

- It must extend the `Remote` interface. The `Remote` interface is a marker interface that does not declare any methods.
- All methods in a remote interface must throw a `RemoteException` or an exception, which is its superclass such as `IOException` or `Exception`. The `RemoteException` is a checked exception. A remote method can also throw any number of other application-specific exceptions.
- A remote method may accept the reference of a remote object as a parameter. It may also return the reference of a remote object as its return value. If a method in a remote interface accepts or returns a remote object reference, the parameter or return type must be declared of the type `Remote` rather than of the type of the class that implements the `Remote` interface.
- A remote interface may only use three data types in its method's parameters or return value. It could be a primitive type, a remote object, or a serializable non-remote object. A remote object is passed by reference, whereas a non-remote serializable object is passed by copy. An object is serializable if its class implements the `java.io.Serializable` interface.

You will name your remote interface `RemoteUtility`. [Listing 7-1](#) contains the code for the `RemoteUtility` remote interface. It contains three methods called `echo()`, `getServerTime()`, and `add()`, which provide your three intended functionalities.

#### ***[Listing 7-1](#).*** A `RemoteUtility` Interface

```
// RemoteUtility.java
package com.jdojo.rmi;
```

```

import java.rmi.Remote;
import java.rmi.RemoteException;
import java.time.ZonedDateTime;

public interface RemoteUtility extends Remote {
 // Echoes a string message back to the client
 String echo(String msg) throws RemoteException;

 // Returns the current date and time to the
 client
 ZonedDateTime getServerTime() throws
 RemoteException;

 // Adds two integers and returns the result to
 the client
 int add(int n1, int n2) throws RemoteException;
}

```

## Implementing the Remote Interface

This step involves creating a class that implements the remote interface. You will name the class `RemoteUtilityImpl`. It will implement the `RemoteUtility` remote interface and will provide implementations for three methods: `echo()`, `getServerTime()`, and `add()`. You can have any number of other methods in this class. The only thing you must do is provide implementations for all methods defined in the `RemoteUtility` remote interface. The remote client will be able to call only remote methods of this class. If you define methods in this class other than those defined in the remote interface, those methods are not available for remote method invocations. However, you can use the additional methods to implement the remote methods. [Listing 7-2](#) contains the code for the `RemoteUtilityImpl` class.

***Listing 7-2.*** An Implementation Class for the `RemoteUtility` Remote Interface

```

// RemoteUtilityImpl.java
package com.jdojo.rmi;

import java.time.ZonedDateTime;

```

```
public class RemoteUtilityImpl implements
RemoteUtility {
 public RemoteUtilityImpl() {
 }

 @Override
 public String echo(String msg) {
 return msg;
 }

 @Override
 public ZonedDateTime getServerTime() {
 return ZonedDateTime.now();
 }

 @Override
 public int add(int n1, int n2) {
 return n1 + n2;
 }
}
```

The remote object implementation class is very simple. It implements the `RemoteUtility` interface and provides implementations for three methods of the interface. Note that these methods in the `RemoteUtilityImpl` class do not declare that they throw a `RemoteException`. The requirement to declare that all remote methods throw a `RemoteException` is for the remote interface, not the class implementing the remote interface.

There are two ways to write your implementation class for a remote interface. One way is to inherit it from the `java.rmi.server.UnicastRemoteObject` class. Another way is to inherit it from no class or any class other than the `UnicastRemoteObject` class. Listing 7-2 took the latter approach. It did not inherit the `RemoteUtilityImpl` class from any class.

What difference does it make if the implementation class for a remote interface inherits from the `UnicastRemoteObject` class or some other class? The implementation class of a remote interface is used to create remote objects whose methods are invoked remotely. The object of this class must go through an export process, which makes it suitable for a remote method

invocation. The constructors for the `UnicastRemoteObject` class export the object automatically for you. So, if your implementation class inherits from the `UnicastRemoteObject` class, it will save you one step in the entire process later. Sometimes your implementation class must inherit from another class and that will force you not to inherit it from the `UnicastRemoteObject` class. One thing you need to note is that the constructors for the `UnicastRemoteObject` class throw a `RemoteException`. If you inherit the remote object implementation class from the `UnicastRemoteObject` class, the implementation class's constructor must throw a `RemoteException` in its declaration. [Listing 7-3](#) rewrites `RemoteUtilityImpl` class by inheriting it from the `UnicastRemoteObject` class. There are two new things in this implementation—it uses the `extends` clause in the class declaration and it uses a `throws` clause in the constructor declaration. Everything else remains the same. I will discuss the difference in using the implementation of the `RemoteUtilityImpl` class shown in [Listing 7-2](#) and [Listing 7-3](#) when you write the server program later in this chapter.

**[Listing 7-3](#).** Rewriting the `RemoteUtilityImpl` Class by Inheriting It from the `UnicastRemoteObject` Class

```
// RemoteUtilityImpl.java
package com.jdojo.rmi;

import java.rmi.RemoteException;
import java.rmi.server.UnicastRemoteObject;
import java.time.ZonedDateTime;

public class RemoteUtilityImpl extends
UnicastRemoteObject implements RemoteUtility {
 // Must throw RemoteException
 public RemoteUtilityImpl() throws
RemoteException {
}

@Override
public String echo(String msg) {
 return msg;
```

```
 }

 @Override
 public ZonedDateTime getServerTime() {
 return ZonedDateTime.now();
 }

 @Override
 public int add(int n1, int n2) {
 return n1 + n2;
 }
}
```

## Writing the RMI Server Program

The responsibility of a server program is to create the remote object and make it accessible to remote clients. A server program performs the following things:

- Installs the security manager.
- Creates and exports the remote object.
- Registers the remote object with the RMI registry application.

The subsequent sections discuss these steps in detail.

## Installing the Security Manager

You need to make sure that the server code is running under a security manager. An RMI program cannot download Java classes from remote locations if it is not running with a security manager. Without a security manager, it can only use local Java classes. In both RMI servers and RMI clients, programs may need to download class files from remote locations. You will look at examples of downloading Java classes from remote locations shortly. When you run a Java program under a security manager, you must also control access to the privileged resources through a Java policy file. The following snippet of code shows how to install a security manager if it is not already installed. You can use an object of the `java.lang.SecurityManager` class or

`java.rmi.RMISecurityManager` class to install a security manager.

```
SecurityManager secManager
= System.getSecurityManager();
if (secManager == null) {
 System.setSecurityManager(new
SecurityManager());
}
```

A security manager controls the access to privileged resources through a policy file. You will need to set appropriate permissions to access the resources used in a Java RMI application. For this example, you will give all permissions to all code. However, you should use a properly controlled policy file in a production environment. The entry that you need to make in the policy file to grant all permissions is as follows:

```
grant {
 permission java.security.AllPermission;
};
```

Typically, a Java policy file resides in the user's home directory on a computer and it is named `.java.policy`. Note that the file name starts with a dot.

## Creating and Exporting the Remote Object

The next step the RMI server program performs is to create an object of the class that implements the remote interface, which will serve as a remote object. In your case, you will create an object of the `RemoteUtilityImpl` class.

```
RemoteUtilityImpl remoteUtility = new
RemoteUtilityImpl();
```

You need to export a remote object so remote clients can invoke its remote methods. If your remote object class (`RemoteUtility` class in this case) inherits from the `UnicastRemoteObject` class, you do not need to export it. It is exported automatically when you create it. If your remote object's class does not inherit from the `UnicastRemoteObject` class, you need to export it explicitly using one of the `exportObject()` static methods of the

`UnicastRemoteObject` class. When you export a remote object, you can specify a port number where it can listen for a remote method invocation. By default, it listens at port 0, which is an anonymous port. The following statement exports a remote object:

```
int port = 0;
RemoteUtility remoteUtilityStub =
(RemoteUtility) UnicastRemoteObject.exportObject(remote
port);
```

The `exportObject()` method returns the reference of the exported remote object, which is also called a stub or a remote reference. You need to keep the reference of the stub, so you can register it with an RMI registry.

## Registering the Remote Object

The final step that the server program performs is to register (or bind) the remote object reference with an RMI registry using a name. An RMI registry is a separate application that provides a name service. To register a remote reference with an RMI registry, you must first locate it. An RMI registry runs on a machine at a specific port. By default, it runs on port 1099. Once you locate the registry, you need to call its `bind()` method to bind the remote reference. You can also use its `rebind()` method, which will replace an old binding if it already exists for the specified name. The name used is a `String`. You will use the name `MyRemoteUtility` as the name for your remote reference. It is better to follow a naming convention for binding a reference object in the RMI registry to avoid name collisions.

```
Registry registry
= LocateRegistry.getRegistry("localhost", 1099);
String name = "MyRemoteUtility";
registry.rebind(name, remoteUtilityStub);
```

That is all needed to write a server program. [Listing 7-4](#) contains the complete code for the RMI server. It assumes that the `RemoteUtilityImpl` class does not inherit from the `UnicastRemoteObject` class as listed in [Listing 7-2](#).

***Listing 7-4.*** An RMI Remote Server Program

```
// RemoteServer.java
package com.jdojo.rmi;

import java.rmi.RemoteException;
import java.rmi.registry.LocateRegistry;
import java.rmi.registry.Registry;
import java.rmi.server.UnicastRemoteObject;

public class RemoteServer {
 public static void main(String[] args) {
 SecurityManager secManager
= System.getSecurityManager();
 if (secManager == null) {
 System.setSecurityManager(new
SecurityManager());
 }

 try {
 RemoteUtilityImpl remoteUtility
= new RemoteUtilityImpl();

 // Export the object as a remote
object
 int port = 0; // an anonymous port
 RemoteUtility remoteUtilityStub
 = (RemoteUtility)
UnicastRemoteObject.exportObject(
 remoteUtility, port);

 // Locate the registry
 Registry registry
= LocateRegistry.getRegistry("localhost", 1099);

 // Bind the exported remote
reference in the registry
 String name = "MyRemoteUtility";
 registry.rebind(name,
remoteUtilityStub);
```

```

 System.out.println("Remote server
is ready...");
 }
 catch (RemoteException e) {
 e.printStackTrace();
 }
}
}

```

If you use the implementation of the `RemoteUtilityImpl` class as listed in [Listing 7-3](#), you will need to modify the code in [Listing 7-4](#). The code in the try-catch block will change to the code as follows. All other code will remain the same.

```

RemoteUtilityImpl remoteUtility = new
RemoteUtilityImpl();

// No need to export the object

// Locate the registry
Registry registry
= LocateRegistry.getRegistry("localhost", 1099);

// Bind the exported remote reference in the registry
String name = "MyRemoteUtility";
registry.rebind(name, remoteUtility);

System.out.println("Remote server is ready...");

```

You are not ready to start your server program yet. I will discuss how to start an RMI application in the sections to follow.

For security reasons, you can bind a remote reference to an RMI registry only from the RMI server program that is running on the same machine as the RMI registry. Otherwise, a hacker may be able to bind any arbitrary and potentially harmful remote references to your RMI registry. By default, the `getRegistry()` static method of the `LocateRegistry` class returns a stub for a registry that runs on the same machine at port 1099. You may just use the following code to locate a registry in the server program.

```
// Get a registry stub for a local machine at port
```

```
Registry registry = LocateRegistry.getRegistry();
```

Note that the call to the `LocateRegistry.getRegistry()` method does not try to connect to a registry application. It just returns a stub for the registry. It is the subsequent call on this stub, `bind()`, `rebind()` or any other method call that attempts to connect to the registry application.

## Writing the RMI Client Program

The RMI client program calls the methods on remote objects, which exist on the remote server. The first thing that a client program must do is to know the location of the remote object. It is the RMI server program that creates and knows the location of the remote object. It is the responsibility of the server program to publish the location details of the remote object so a client can locate it and use it. The server program publishes the remote object's location details by binding it with an RMI registry and gives it a name, which is `MyRemoteUtility` in your case. The client program contacts the RMI registry and performs a name-based lookup to get the remote reference. After getting the remote reference, the client program calls methods on the remote reference, which are executed in the server. Typically, the RMI client program performs the following:

- It makes sure that it is running under a security manager.

```
SecurityManager secManager
= System.getSecurityManager();
if (secManager == null) {
 System.setSecurityManager(new
SecurityManager());
```

It locates the registry where the remote reference has been bound by the server. You must know the machine name or IP address, and the port number at which the RMI registry is running. In a real-world RMI program, you would not be using `localhost` in the client program to locate the registry. Rather, an RMI registry will be running on a

separate machine. For your example, you will run all three programs—RMI registry, server, and client—on the same machine.

```
// Locate the registry
Registry registry
= LocateRegistry.getRegistry("localhost",
 1099);
```

- It performs the lookup in the registry using the `lookup()` method of the `Registry` interface. It passes the name of the bound remote reference to the `lookup()` method and gets back the remote reference (or stub). Note that the `lookup()` method must use the same name that was used to bind/rebind a remote reference by the server. The `lookup()` method returns a `Remote` object. You must cast it to the type of your remote interface. The following snippet of code casts the returned remote reference from the `lookup()` method to the `RemoteUtility` interface type:

```
String name = "MyRemoteUtility";
RemoteUtility remoteUtilStub
= (RemoteUtility) registry.lookup(name);
```

- It calls methods on the remote reference (or stub). The client program treats the `remoteUtilStub` reference as if it is a reference to a local object. Any method call made on it is sent to the server for execution. All remote methods throw a `RemoteException`. You must handle the `RemoteException` when you call any remote method.

```
// Call the echo() method
String reply
= remoteUtilStub.echo("Hello from the
 RMI client.");
```

[Listing 7-5](#) contains the complete code for your client program. Do not run this program yet. You will go through the step-by-step process in the next few sections to run your RMI application. You may notice that writing RMI code is

not complex. It is the plumbing of different components in RMI that is complex.

***Listing 7-5.*** An RMI Remote Client Program

```
// RemoteClient.java
package com.jdojo.rmi;

import java.rmi.NotBoundException;
import java.rmi.RemoteException;
import java.rmi.registry.LocateRegistry;
import java.rmi.registry.Registry;
import java.time.ZonedDateTime;

public class RemoteClient {
 public static void main(String[] args) {
 SecurityManager secManager
= System.getSecurityManager();
 if (secManager == null) {
 System.setSecurityManager(new
SecurityManager());
 }

 try {
 // Locate the registry
 Registry registry =
 LocateRegistry.getRegistry("1
1099);

 String name = "MyRemoteUtility";
 RemoteUtility remoteUtilStub =
 (RemoteUtility)
 registry.lookup(name);

 // Echo a message from the server
 String msg = "Hello";
 String reply
= remoteUtilStub.echo(msg);
 System.out.println("Echo Message:
" + msg +
 ", Echo reply: "
```

```

+ reply);

 // Get the server date and time
with the zone info
 ZonedDateTime serverTime
= remoteUtilStub.getServerTime();
 System.out.println("Server Time: "
+ serverTime);

 // Add two integers
int n1 = 101;
int n2 = 207;
int sum = remoteUtilStub.add(n1,
n2);
 System.out.println(n1 + " + " + n2
+ " = " + sum);
 }
 catch (RemoteException
| NotBoundException e) {
 e.printStackTrace();
 }
 }
 }
}

```

# Separating the Server and Client Code

It is important that you separate the code for the server and client programs in an RMI application. The server program needs to have the following three components:

- The remote interface
- The implementation class for the remote interface
- The server program

The client program needs to have the following two components.

- The remote interface
- The client program

The client program should not know about the implementation class that implements the remote interface. Having this class accessible to the client program defeats the purpose of developing an RMI application. You can have additional classes accessible to server and client programs, which are needed to run them.

For your example, you can separate the server and client class files, either in two directory structures, or in two JAR files. You will package the class files for the server and the client programs in `utilserver.jar` and `utilclient.jar`, respectively.

The files in the `utilserver.jar` file are

- `RemoteUtility.class`
- `RemoteUtilityImpl.class`
- `RemoteServer.class`

The files in the `utilclient.jar` file are

- `RemoteUtility.class`
- `RemoteClient.class`

## Generating Stub and Skeleton

RMI needs a stub class when a remote object is exported using the `UnicastRemoteObject` class. You can do one of the following two things:

- You can use the `UnicastRemoteObject` class to inherit your remote interface implementation class, which will export your remote object automatically.
- You can use the `exportObject()` method of the `UnicastRemoteObject` class to export the remote object explicitly.

In either case, when a remote object is exported, RMI needs a stub class. Prior to Java 5, you need to perform one extra step to generate the stub class for your remote interface implementation class. It is done by using an `rmic` command that is included in the `bin` subdirectory of your JDK installation folder. You run this command, passing the fully qualified name of the remote interface implementation class as shown:

```
rmic com.jdojo.rmi.RemoteUtilityImpl
```

You may need to set the `CLASSPATH` environment variable appropriately so that `rmic` will be able to find the class you specify as its argument. The above command will generate the following two class files in the same folder where the `RemoteUtilityImpl.class` file resides.

- `RemoteUtilityImpl_Stub.class`
- `RemoteUtilityImpl_Skel.class`

You need to include these two class files in the `utilserver.jar` file. Note that this step is needed only if you are using Java version prior to Java 5. You also need to perform this step if you have a client program that is running Java version prior to Java 5 and your server is running on Java 5 or later. If you are interested in looking at the Java source code that is generated for these two class files, you can use the `-keep` (or `-keepgenerated`) option with the `rmic` command, which will generate the Java source files for these classes. The following command will generate four files, two `.class` files and two `.java` files.

```
rmic -keep com.jdojo.chapter5.RemoteUtilityImpl
```

## Running the RMI Application

You need to start all programs involved in an RMI application in the following specific sequence:

- Run the RMI registry.
- Run the RMI server program.

- Run the RMI client program.

Please refer to the “Troubleshooting an RMI Application” section later in this chapter if you have any problem in running any of the programs.

Your server and client programs use security managers. You must have your java policy file properly configured before you can run the RMI application successfully. You can grant all security permissions to an RMI application for learning purposes. You can do so by creating a text file named `rmi.policy` (you can use any other file name you want) and entering the following content, which grants all permissions to all code:

```
grant {
 permission java.security.AllPermission;
};
```

When you run the RMI client or server program, you need to set the `rmi.policy` file as your Java security policy file using the `java.security.policy` JVM option. It is assumed that you have saved the `rmi.policy` file in the `C:\` folder on Windows.

```
java -Djava.security.policy=file:/c:/rmi.policy
<other-options>
```

This approach of setting a Java policy file is temporary. It should be only used for learning purposes. You will need to set a fine-grained security in a production environment.

## Running the RMI Registry

The RMI registry application is supplied with the JDK/JRE installation. It is copied in the `bin` subfolder of the respective installation main folder. On the Windows platform, it is the `rmiregistry.exe` executable file. You can run the RMI registry by starting the `rmiregistry` application using a command prompt. It accepts a port number on which it will run. By default, it runs on port 1099. The following command starts it at port 1099 using a command prompt on Windows:

```
C:\java8\bin> rmiregistry
```

The following command starts the RMI registry at port 8967:

```
C:\java8\bin> rmiregistry 8967
```

The `rmiregistry` application does not print any startup message on the prompt. Usually, it is started as a background process.

Most likely, the command is not going to work on your machine. Using this command, you will be able to start the `rmiregistry` successfully. However, you will get `ClassNotFoundException` when you run the RMI server application in the next section. The `rmiregistry` application needs access to some of the classes (the registered ones) used in the RMI server application. There are three ways to make the classes available to `rmiregistry`:

- Set the `CLASSPATH` appropriately.
- Set the `java.rmi.server.codebase` JVM property to the URL that contains the classes needed by the `rmiregistry`.
- Set the JVM property named `java.rmi.server.useCodebaseOnly` to `false`. From JDK 7u21 (also in JDK 6u45 and JDK 5u45), this property is set to true by default. Earlier it was set to `false` by default. If this property is set to `false`, the `rmiregistry` can download the needed class files from the server.

The following command adds the `serverutil.jar` file to the `CLASSPATH`, before starting the `rmiregistry`:

```
C:\java8\bin> SET CLASSPATH=C:\utilserver.jar
C:\java8\bin> rmiregistry
```

Instead of setting the `CLASSPATH` to make classes available to the `rmiregistry`, you can also set the `java.rmi.server.codebase` JVM property that is a space-separated list of URLs, as shown:

```
rmiregistry -J-
Djava.rmi.server.codebase=file:/C:/utilserver.jar
```

The following command resets the CLASSPATH and sets the `java.rmi.server.useCodebaseOnly` property for the JVM to `false` so the `rmiregistry` will download any class files needed from the RMI server. Your example will work using this command:

```
C:\java8\bin> SET CLASSPATH=
C:\java8\bin> rmiregistry -J-
Djava.rmi.server.useCodebaseOnly=false
```

## Running the RMI Server

The RMI registry must be running before you can run the RMI server. Recall that the server runs under a security manager that requires you to grant permissions to perform certain actions in a Java policy file. Make sure that you have entered the required grants in a policy file. You can use the following command to run the server program. The command text is entered in one line; it has been shown in multiple lines for clarity. Each part in the command text should be separated by a space, not a new line. In the command, you will need to change the path to the JAR and policy files that will reflect their paths on your machine.

```
java -cp C:\utilserver.jar
 -
Djava.rmi.server.codebase=file:/C:/utilserver.jar
 -Djava.security.policy=file:/c:/rmi.policy
 com.jdojo.rmi.RemoteServer
```

The `-cp` option sets the CLASSPATH to `utilserver.jar` file. If you do not want to use a JAR file to package server-related class files, you can use any other CLASSPATH settings, so that the server program may run. If you have already set the appropriate CLASSPATH, you can remove the `-cp` option and the CLASSPATH value from the command text.

You need to set a `java.rmi.server.codebase` property. This is used by an RMI registry and a client program if they need to download class files that they do not have. The value of this property is a URL, which can point to a local file system, a web server, a FTP server, or any other resource. The URL may point to a JAR file, as it does in this case, or it can point to a directory. If it points to a directory, the URL must end with a forward slash. The following

command uses a folder as its codebase. If an RMI registry and a client need any class files, they will attempt to download the class files from the URL file/C:/myrmi/classes/.

```
java -cp C:\utilserver.jar
 -Djava.rmi.server.codebase=file:/C:/myrmi/classes/
 com.jdojo.rmi.RemoteServer
```

You can also set a `java.rmi.server.codebase` property to point to a web server, where you can store your necessary class files as shown:

```
java -cp C:\utilserver.jar
 -
 Djava.rmi.server.codebase=http://www.jdojo.com/rmi/cla
 com.jdojo.rmi.RemoteServer
```

If you store class files at multiple locations, you can specify all locations separated by a space as follows:

```
java -cp C:\utilserver.jar
 -
 Djava.rmi.server.codebase="http://www.jdojo.com/rmi/cl
 ftp://www.jdojo.com/rmi/some/classes/c.jar"
 com.jdojo.rmi.RemoteServer
```

It specifies one location as a directory and another as a JAR file. One uses the `http` protocol and another `ftp`. The two values are separated by a space and they are on one line, not on two lines as shown. A `ClassNotFoundException` may occur when you run the server or client program, which is most likely caused by an incorrect setting for the `java.rmi.server.codebase` property, or by not setting this property at all.

## Running an RMI Client Program

After the RMI registry and server applications are started successfully, it is time to start the RMI client application. You can use the following command to run the client program:

```
java -cp C:\utilclient.jar
-Djava.rmi.server.codebase=file:/C:/utilclient.jar
-Djava.security.policy=file:/c:/rmi.policy
com.jdojo.rmi.RemoteClient
```

You do not have to include a `java.rmi.server.codebase` option when you run the above command. The client program can also be run with the following command. You should be able to see an output on the console when the client program runs successfully. You may get a different output when you run the program because it prints the current date and time with the zone information for the server machine running the server application.

```
java -cp C:\utilclient.jar
-Djava.security.policy=file:/c:/rmi.policy
com.jdojo.rmi.RemoteClient
```

---

```
Echo Message: Hello, Echo reply: Hello
Server Time: 2014-06-22T13:11:31.790-
05:00[America/Chicago]
101 + 207 = 308
```

---

## Troubleshooting an RMI Application

It is very likely that you will get many exceptions before you will be able to run the RMI application the very first time. This section will list a few exceptions that you may receive. It will also list some possible causes for those exceptions and some possible solutions. It is not possible to list all possible errors that you might get when you attempt to run an RMI application. You should be able to figure out most of the errors by looking at the stack prints of the exceptions.

### `java.rmi.StubNotFoundException`

You get a `StubNotFoundException` when you try to run a server program. The exception stack trace will be similar to the following:

```
java.rmi.StubNotFoundException: Stub class not found:
com.jdojo.rmi.RemoteUtilityImpl_Stub; nested exception
is:
java.lang.ClassNotFoundException:
com.jdojo.rmi.RemoteUtilityImpl_Stub
at sun.rmi.server.Util.createStub(Util.java:292) ...
```

This exception could occur because of many reasons. Here are some of the reasons you could look for and fix:

- You may be running the server program using a Java version prior to Java 5. You must create the stub and skeleton using the `rmic` command and make them accessible to the JVM when you run the server program. Please refer to the “Generating Stub and Skeleton” section for more details.
- You may get this error when you are exporting a remote object and not passing a port number:

```
RemoteUtility remoteUtilityStub =
(RemoteUtility) UnicastRemoteObject.exportObjec
```

If you do not pass a port number to the `exportObject()` method of the `UnicastRemoteObject` class to export a remote object, you must generate the stub and skeleton using the `rmic` command first. Please refer to the “Generating Stub and Skeleton” section for more details. Another way to resolve this is to pass a port number to the `exportObject()` method. The port number 0 (zero) means an anonymous port.

```
RemoteUtility remoteUtilityStub =
(RemoteUtility) UnicastRemoteObject.exportOk
```

## java.rmi.server.ExportException

You get an `ExportException` when you try to run the `rmiregistry` application or the server application. The exception stack trace will be similar to

the one shown if you get this exception when you attempt to run the rmiregistry application.

```
java.rmi.server.ExportException: Port already in use:
1099; nested exception is:
java.net.BindException: Address already in use:
JVM_Bind...
```

It states that the port number 1099 (may be a different number in your case) is already in use. Maybe you have already started the rmiregistry application at port 1099 (which is the default port number for an rmiregistry application) or some other application is using the port 1099. You can do one of the following two things to fix this problem:

- You can stop the application that is using the port 1099 and start the rmiregistry application at port 1009.
- You can start the rmiregistry application at a port other than 1099.

If you get an ExportException when you run the server program, it is caused by the failure of the export process of the remote object. There are many reasons for the export process to fail. The following exception stack trace (partial trace is shown) is caused by exporting the same remote object twice:

```
java.rmi.server.ExportException: object already
exported
at
sun.rmi.transport.ObjectTable.putTarget(ObjectTable.ja
at
sun.rmi.transport.Transport.exportObject(Transport.jav
```

Check your server program and make sure that you are exporting your remote object only once. It is a common mistake to inherit the remote object implementation class from the UnicastRemoteObject class and also use the exportObject() method of the UnicastRemoteObject class to export the remote object. When you inherit the remote object's implementation class from the UnicastRemoteObject class, the remote object, which you create, is exported automatically. If you try to export it again using the exportObject() method, you will get this exception. I have stressed this

point a few times when discussing the remote interface implementation class. When you are developing an RMI application, remember the saying, “To err is programmer, to punish Java.” Even a little mistake in the setup of an RMI program may cost you hours of your time to detect and fix.

## java.security.AccessControlException

You get this exception when your Java policy file does not have grant entries that are necessary to run the RMI application. The following is the partial stack trace of an exception, which is caused when you attempt to run the server program, and it attempts to bind a remote object to the RMI registry:

```
java.security.AccessControlException: access denied
(java.net.SocketPermission 127.0.0.1:1099
connect, resolve)...
```

Communications among registry, server, and client are performed using sockets. You must grant appropriate socket permission in the Java policy file for security, so that the three components of your RMI application may be able to communicate. Most of the security-related exceptions can be fixed by granting appropriate permissions in the Java policy file.

## java.lang.ClassNotFoundException

You get a `ClassNotFoundException` exception when a class file that is needed by Java runtime is not found. You must have received this exception many times by now. Most of the time, you receive this exception when the `CLASSPATH` is not appropriately set. In an RMI application, this exception may be the cause for another exception. The following stack trace shows that the `java.rmi.ServerException` exception was thrown, which has its cause in a `ClassNotFoundException` exception:

```
java.rmi.ServerException: RemoteException occurred in
server thread; nested exception is:
 java.rmi.UnmarshalException: error
unmarshalling arguments; nested exception is:
 java.lang.ClassNotFoundException:
```

```
com.jdojo.rmi.RemoteUtility
...
Caused by: java.lang.ClassNotFoundException:
com.jdojo.rmi.RemoteUtility
 at
java.net.URLClassLoader$1.run(URLClassLoader.java:220)
 at
java.net.URLClassLoader$1.run(URLClassLoader.java:209)
```

This type of exception is thrown when the `java.rmi.server.codebase` option is not set properly or not set at all when you run the server or the client application.

This exception was thrown when the server program was started without using the `java.rmi.server.codebase` option and the `rmiregistry` application was run without setting the `CLASSPATH`. When you try to bind/rebind a remote reference with an `rmiregistry` application, the server application sends the remote reference to the `rmiregistry` application. The `rmiregistry` application must load the class before it can represent the remote reference as a Java object in its JVM. At this time, the `rmiregistry` will try to download the required class files from the location that was specified at the server startup using the `java.rmi.server.codebase` property.

If you get this exception when you run the client program, make sure you have set the `java.rmi.server.codebase` property when you run the client program.

Please check the `CLASSPATH` and `java.rmi.server.codebase` property when you run the server and the client program to avoid this exception.

You get a `ClassNotFoundException` when you run the client program because the server was not able to find some class definitions that were required in unmarshalling the client call on the server side. The sample partial stack trace of the exception is shown:

```
java.rmi.ServerException: RemoteException occurred in
server thread; nested exception is:
java.rmi.UnmarshalException: error unmarshalling
arguments; nested exception is:
java.lang.ClassNotFoundException: com.jdojo.rmi.Square
 at
sun.rmi.server.UnicastServerRef.dispatch(UnicastServerRef.java:347)
```

```
at
sun.rmi.transport.Transport$1.run (Transport.java:159) .
```

A remote method defined in a remote interface may accept a parameter, which may be of an interface or a class type. The client may pass an object of a class that implements the interface or an object of a subclass of type defined in the remote interface's method signature. If the class definition does not exist on the server, the server will attempt to download the class using the `java.rmi.server.codebase` property that was set in the client application. You need to make sure the class for which you are getting this error (exception stack trace shows `com.jdojo.rmi.Square` as class name) is either in the `CLASSPATH` of the server JVM or set the `java.rmi.server.codebase` property when you run the remote client, so that this class can be downloaded by the sever.

## Debugging an RMI Application

You can turn on RMI logging for an RMI server application by setting the JVM property named `java.rmi.server.logCalls` to `true`. By default, it is set to `false`. The following command launches your `RemoteServer` application setting the `java.rmi.server.logCalls` property to `true`:

```
java -cp C:\utilserver.jar
 -Djava.rmi.server.logCalls=true
 -
 Djava.rmi.server.codebase="http://www.myurl.com/rmiclass"
 com.jdojo.rmi.RemoteServer
```

When the `java.rmi.server.logCalls` property for the server JVM is set to `true`, all incoming calls to the server and stack trace of any exceptions that are thrown during execution of an incoming call are logged to the standard error.

The RMI runtime also lets you log the incoming calls in a server application to a file, irrespective of the value set for the `java.rmi.server.logCalls` property for the server JVM. You can log all incoming call details to a file using the `setLog(OutputStream out)` static method of `java.rmi.server.RemoteServer` class. Typically, you set the file output

stream for logging in the beginning of the server program code such as the very first statement in the `main()` method of your `com.jdojo.rmi.RemoteServer` class. The following snippet of code enables the calls logging in a remote server application to a `C:\rmi.log` file. You can disable call logging by using `null` as the `OutputStream` in the `setLog()` method.

```
try {
 java.io.OutputStream os = new
java.io.FileOutputStream("C:\\rmi.log");
 java.rmi.server.RemoteServer.setLog(os);
}
catch (FileNotFoundException e) {
 System.err.println("Could not enable incoming
calls logging.");
 e.printStackTrace();
}
```

When a security manager is installed on the server, the running code, which enables logging to a file, must have a `java.util.logging.LoggingPermission` with permission target as “control”. The following grant entry in the Java policy file will grant this permission. You will also have to grant the “write” permission to the log file (`C:\rmi.log` in this example) in the Java policy file.

```
grant {
 permission java.io.FilePermission
"C:\\rmi.log", "write";
 permission java.util.logging.LoggingPermission
"control";
};
```

If you want to get debugging information about an RMI client application, set a non-standard `sun.rmi.client.logCalls` property to `true` when you launch the RMI client application. It will display the debugging information on the standard error. Since this property is not the part of a public specification, it may be removed in future releases. You need to refer to the RMI specification for more details on debugging options.

# Dynamic Class Downloading

The JVM loads the class definition before it can create an object of a class. It uses a class loader to load a class at runtime. A class loader is an instance of the `java.lang.ClassLoader` class. A class loader must locate the byte codes for a class before it can load its definition into the JVM. A Java class loader is capable of loading the byte codes of a class from any location such as a local file system, a network, etc. There could be multiple class loaders in one JVM and they could be system or custom defined.

The JVM creates a class loader at startup, which is called a *bootstrap* class loader. The bootstrap class loader is responsible for loading initial classes required for basic JVM functions. Class loaders are organized in a tree-like structure based on a parent-child relationship. The bootstrap class loader has no parent. All other class loaders have the bootstrap class loader as their direct or indirect parent. In a typical class loading process, when a class loader is asked to load the bytecode for a class, it asks its parent to load the class, which in turn asks its parent and so on, until the bootstrap class loader gets the request to load the class. If none of the parent class loaders are able to load the class, the class loader that received the initial request to load the class will attempt to load the class.

The RMI runtime uses a special RMI class loader that is responsible for loading the classes in an RMI application. When an object is being passed around in an RMI application from one JVM to another, the sending JVM has to serialize and marshal the object, and the receiving JVM has to deserialize and unmarshal it. The sending JVM adds the value of the property `java.rmi.server.codebase` to the object's serialized stream. When the object stream is received at other end, the receiving JVM must load the class definition of the object using a class loader before it can convert the object stream into a Java object. The JVM instructs the RMI class loader to load the class definition of the object, which it has received in a stream form. The class loader attempts to load the class definition from its JVM `CLASSPATH`. If the class definition is not found using the `CLASSPATH`, the class loader uses the value of the `java.rmi.server.codebase` property from the object's stream to load the class definition.

Note that the `java.rmi.server.codebase` property is set in one JVM and it is used to download the class definition in another JVM. This property can be set when you run the RMI server or client program. When one side (server or

client) transmits an object to another side, which does not have the bytecode to represent the class definition for the object being received, the sending side must have set the `java.rmi.server.codebase` property at the time of sending the object, so that the receiving end can download the class bytecode using this property. The value for the `java.rmi.server.codebase` property is a space-separated list of URLs.

Downloading code from an RMI server to the client may be fine from a security point of view. Sometimes it may not be considered safe to download code from a client to the server. By default, downloading the classes from remote JVMs is disabled. RMI lets you enable/disable this feature by using a `java.rmi.server.useCodebaseOnly` property. By default, it is set to `true`. If it is set to `true`, the JVM's class loader will load classes only from local `CLASSPATH` or locally set `java.rmi.server.codebase` property. That is, if it is set to `true`, the class loader will not read the value of `java.rmi.server.codebase` from the received object's stream to download the class definition. Rather, it will look for the class definition in its JVM `CLASSPATH` and use URLs that are set as the value of the `java.rmi.server.codebase` property for its own JVM. That is, when the `java.rmi.server.useCodebaseOnly` property is set to `true`, the RMI class loader ignores the value for the `codebase` that is sent from the sending JVM in an object's stream. The property name `useCodebaseOnly` seems to be a misnomer. It could have conveyed its meaning better had it been named `useLocallySetCodebaseOnly`. Here is how you can set this property when you run the RMI server:

```
java -cp C:\utilserver.jar
-
Djava.rmi.server.codebase="http://www.myurl.com/rmicla"
-Djava.rmi.server.useCodebaseOnly=true
com.jdojo.rmi.RemoteServer
```

---

**Tip** Starting in JDK 7u21 (also in JDK 6u45 and JDK 5u45), the default value for the `java.rmi.server.codebase` property is set to `true`. Its default value used to be `false`. It means, by default, the application is not allowed to download classes from other JVMs.

---

There are two implications of setting the `java.rmi.server.useCodebaseOnly` property to `true`:

- If the server needs a class as part of a remote call from a client, it will always look in its CLASSPATH or it will use the value of `java.rmi.server.codebase` that you set for the server program. In the above example, all classes in the server must be found in its CLASSPATH or at the URL <http://www.myurl.com/rmiclasses>.
- If a client needs to use a new class type in a remote method call, the new class type must be known to the server in advance because the server will never use the client's instruction (set by using `java.rmi.server.codebase` property at the client side) about the location from where to download the required new classes. This means that you must make the new classes that will be used by a remote client available in server's CLASSPATH or at the URLs specified as the `java.rmi.server.codebase` property for the server. This situation may arise when a remote method accepts an interface type and the client sends an object of a class that implements that interface. In this case, the server may not have the same definition of the new implementation of the interface as the client.

The above argument applies to running an RMI client application as well if you set the `java.rmi.server.useCodebaseOnly` property to `true` for the JVM running the RMI client application. If this property is set to `true` for the client application, you must make all required classes available to the client either by placing them in its CLASSPATH or placing them at URLs and setting the URLs as the value for the `java.rmi.server.codebase` property at the client side.

## Garbage Collection of Remote Objects

In an RMI application, remote objects are created in the JVM on the server. The RMI registry and remote clients keep references of the remote objects. Does a remote object ever get garbage collected? And, if it does get garbage collected, when does it happen and how does it happen? Garbage collection of a local object is easy. A local object is created and referenced in the same JVM. It is an easy task for a garbage collector to determine that a local object is no longer referenced in the JVM.

In an RMI application, you need a garbage collector that can keep track of the references of a remote object in remote JVMs. Suppose an RMI server creates a remote object of `RemoteUtilityImpl` class and five clients get its remote reference. An RMI registry is also a client that gets the remote reference as part of the bind/rebind process. When and how does the server garbage collect the lone object of the `RemoteUtilityImpl` class, which is being referenced by five clients?

The JVM on the server, which has the remote object, and the five JVMs at five different clients must interact, so the remote object in the server's JVM can be garbage collected when it is no longer used by any remote clients. Let's ignore the local references of the remote object in the server JVM for this discussion. The interaction between a remote client and an RMI server depend on many unreliable factors. For example, the network may go down and a remote client may not be able to communicate with the server. The second consideration is who initiates the interaction between the remote client and the server? Is it the server that keeps asking a remote client if it has a live remote reference? Is it the remote client who keeps telling the server that it still has a live remote reference? The responsibility of interaction between client and server is shared by both. The remote client needs to update the server about the aliveness of its remote references. If the server does not hear from any clients for a specific period of time, it takes a unilateral decision to make the remote object a candidate for a future garbage collection.

The RMI garbage collector is based on reference count. A reference count has an associated lease. A lease has a time period for which it is valid. When a remote client (including an RMI registry) gets a reference to a remote object, it sends a message to the RMI runtime on the server requesting a lease for that remote object reference. The server grants a lease for a specified time period to that client. The server increments the reference count for that remote object by one and sends back the lease to the client. By default, an RMI server grants a lease for 10 minutes for a remote object. Now, the following are some possibilities:

- The client may be done with the remote object reference within the time period for which it had acquired the lease from the server.
- The client may want to renew the lease for another extended time period.
- The client crashes. The server does not receive any message from the client, and the lease period for a remote reference that was acquired by the client expires.

Let's look at each possibility. A client sends messages to the server on three different occasions. It sends a message the very first time it receives a remote reference. It tells the server that it has a reference of the remote object. The second time, it sends a message to the server when it wants to renew the lease for a remote reference. The third time, it sends a message to the server when it is done with the remote reference. In fact, when a remote reference is garbage collected in a client application, it sends a message to the server that it is done with the remote object. Internally, there are only two types of messages that a remote client sends to a server: dirty and clean. The *dirty* message is sent to get a lease and the *clean* message is sent to remove/cancel the lease. These two messages are sent from a remote client to a server using the `dirty()` and `clean()` methods of the `java.rmi.dgc.DGC` interface. As a developer, you do not have any control over these messages (sending or receiving) except that you can customize the lease time period. The lease time period controls the frequency of these messages sent to the server.

When a client is done with a remote object reference, it sends a message to the server that it is done with it. The message is sent when the remote reference in the client's JVM is garbage collected. Therefore, it is important that you set the remote reference in the client program code to `null` as soon as you are done with it. Otherwise, the server will keep holding on to the remote object, even if it is no longer used by the remote client. You do not have any control on the timing of this message, which is sent from the remote client to the server. All you can do to expedite this message sending is to set the remote object reference in the client code to `null`, so the garbage collector will attempt to garbage collect it and send a clean message to the server.

The RMI runtime keeps track of the leases for remote references in a remote client JVM. When a lease is half-way through its expiration period, the remote client sends a lease renewal request to the server and gets the lease renewed.

When a lease for a remote client is renewed for a remote reference, the server keeps track of the lease expiration time and it will not garbage collect the remote object. It is important that you understand the importance of setting the lease period for a remote reference. If it is too small, a significant amount of network bandwidth will be used for renewing the lease frequently. If it is too large, the server will keep the remote object alive for a longer time in case a client is done with its remote reference and it does not inform the server to cancel the lease. I will discuss shortly how to set a lease period value in an RMI application.

If the server does not hear anything from a remote client about the lease of a remote reference that the client had acquired, after the expiration of the lease period, it simply cancels the lease and decrements the reference count for that remote object by one. This unilateral decision that is made by the server is important to handle the cases of ill-behaved remote clients (not telling the server that it is done with a remote reference) or any network/system hiccups that may prevent the remote client from communicating with the server.

When all clients are done with a remote reference of a remote object, its reference count in the server will go down to zero. A remote client is considered done with a remote reference when either its lease is expired or it has sent a clean message to the server. In this case, the RMI runtime will reference the remote object using a *weak reference*, so if there is no local reference to the remote object, it may be garbage collected.

By default, the lease period is set for 10 minutes. You can set the lease period using the `java.rmi.dgc.leaseValue` property when you start the RMI server. The value for the lease period is specified in milliseconds. The following command starts the server program with a lease period set to 5 minutes (300000 milliseconds). The command text is entered on one line with two parts separated by a space, not by a newline as shown; I have used a newline to separate the parts of the command for clarity.

```
java -cp C:/utilserver.jar
 -Djava.rmi.dgc.leaseValue=300000
 -Djava.rmi.server.codebase=file:/C:/utilserver.jar
 com.jdojo.rmi.RemoteServer
```

Except for setting the lease time period, everything is handled by the RMI runtime. The RMI runtime gives you one more piece of information about the garbage collection of a remote object. It can tell you when the reference count of the remote object has gone down to zero. It is important to get this notification if a remote object holds some resources that you would like to free when no remote

client is referencing it. It is easy to get this notification. All you have to do is to implement the `java.rmi.server.Unreferenced` interface in your remote object implementation class. Its declaration is as follows:

```
public interface Unreferenced {
 void unreferenced()
}
```

The `unreferenced()` method is called when the remote reference count for a remote object becomes zero. If you want to get a notification in your example for the `RemoteUtility` remote object, you need to modify the declaration of the `RemoteUtilityImpl` class, as shown in [Listing 7-6](#).

***Listing 7-6.*** A Modified Version of the `RemoteUtilityImpl` Class That Implements the `Unreferenced` Interface

```
// RemoteUtilityImpl.java
package com.jdojo.rmi;

import java.rmi.server.Unreferenced;
import java.time.ZonedDateTime;

public class RemoteUtilityImpl implements
RemoteUtility, Unreferenced {
 public RemoteUtilityImpl() {
 }

 @Override
 public String echo(String msg) {
 return msg;
 }

 @Override
 public ZonedDateTime getServerTime() {
 return ZonedDateTime.now();
 }

 @Override
 public int add(int n1, int n2) {
 return n1 + n2;
 }
```

```

 }

 @Override
 public void unreferenced() {
 System.out.println("RemoteUtility
unreferenced at: " +
 ZonedDateTime.now());
 }
}

```

You may notice that, this time, the `RemoteUtilityImpl` class implements the `Unreferenced` interface and provides implementation for the `unreferenced()` method, which prints a message on the standard output with the time when its reference count becomes zero. The `unreferenced()` method will be called by the RMI runtime. To test that the `unreferenced()` method is called, you can start the RMI registry application, and then start the RMI server application. The RMI registry will keep renewing the lease for the remote object. As long as an RMI registry is running, you will never see the `unreferenced()` method being called. You need to shut down the RMI registry application and wait for the remote object reference's lease to expire or to be cancelled by the RMI registry when you shut it down. After the RMI registry is shut down, you will see the message on the standard output for the server program that will be printed by the `unreferenced()` method.

An RMI registry should be used just as a bootstrap means to start the remote client. Later on, the remote client can receive a remote object's reference as a method call to another remote object. If a remote client receives a remote object reference by a remote method call on a remote object, that remote object's reference need not be registered with the RMI registry. In this case, after the last remote client is finished with the remote reference, the server will garbage collect the remote object instead of keeping it in memory when it is bound to an RMI registry.

## Summary

Java Remote Method Invocation (RMI) allows a program running in one JVM to invoke methods on Java objects running in another JVM. RMI provides an API to develop distributed applications using the Java programming language.

An RMI application involves three applications running in three JVMs: the rmiregistry application, a server application, and a client application. The rmiregistry application is shipped with the JDK. You are responsible for developing the server and client applications. The server application creates Java objects called remote objects and registers them with the rmiregistry for later name lookup by clients. The client application looks up the remote object in the rmiregistry using a logical name and gets back a reference of the remote object. The client application invokes methods on the remote object reference that is sent to the server application for execution of the method on the remote object. The results of the method execution is sent back from the server application to the client application.

An RMI application must follow a few rules to develop the classes and interfaces involved the remote communication. You need to create an interface (called remote interface) that must inherit from the Remote interface. All methods in the interface must include a throws clause that throws at least the RemoteException. The class for the remote object must implement the remote interface. The server application creates an object of the class implementing the remote interface, exports the object to give a status of a real remote object, and registers it with the rmiregistry. The client application needs only the remote interface.

If any of the three applications needs classes that are not locally available, they can download them dynamically at runtime. For a JVM to download classes dynamically, the java.rmi.server.useCodebaseOnly property must be set to false. By default, it is set to true, which disables dynamic downloading of the classes in a JVM. Along with a remote object reference, the JVM also receives the value of a property named java.rmi.server.codebase, which is the URLs from where the JVM may download (if permitted by its own java.rmi.server.useCodebaseOnly property setting) the classes needed to work with the remote object reference.

There are several components working together in an RMI application that make it hard to debug. You can log all calls to the RMI server by running it with the JVM property java.rmi.server.logCalls set to true. All calls to the server will be logged to a standard error. You can also log RMI server calls to a file.

RMI provides automatic garbage collection for remote objects running in the RMI server. The garbage collection of remote objects is based on reference

counts and leases. When the client application gets the reference of the remote object, it also obtains a lease for the remote object from the server application. The lease is valid for a period. The client application keeps renewing the lease periodically as long it keeps the remote object reference. The server application keeps track of the reference count and the leases for the remote objects. When the client application is done with the remote reference, it sends a message to the server application and the server application reduces the reference count for the remote object by 1. When the reference count of the remote object reduces to zero in the server application, the remote object is garbage collected.

# CHAPTER 8



## Java Native Interface

---

In this chapter, you will learn

- What the Java Native Interface (JNI) is
- How to write Java programs that uses native methods
- How to write C++ programs to implement native methods
- How to create a shared library on Windows and Linux for the native implementation of methods used in Java
- The data type mapping between Java types and JNI types
- How to work with Java strings and arrays in native code
- How to create Java objects, and access fields and methods of those objects in native code
- Exception handling in native code
- How to embed the JVM in native code
- How to handle thread synchronization using the JNI in native code

## What Is the Java Native Interface?

The Java Native Interface (JNI) is a programming interface that facilitates interaction between Java code and code written in native languages such as C, C++, FORTRAN, etc. The JNI supports calling C and C++ functions directly from Java. If you need to use native code written in any other language such as

FORTRAN, you can use a C/C++ wrapper function to call it from Java. Interaction can take place both ways. Java code can call native code and vice versa, as shown in [Figure 8-1](#).



[Figure 8-1.](#) The JNI architecture

Java calls native code using native methods. A native method in a Java context is a method that is declared in Java and implemented in a native language such as C/C++. The native method implementation is compiled into a *shared library*, which is loaded by the JVM. A shared library is called a dynamic link library (DLL) on Windows, and a shared object (SO) on UNIX. In Java code, you call a Java method and a native method the same way. A Java program is compiled into a platform-independent format called byte code. Native code is compiled into a platform-dependent format. Therefore, if a Java application uses native code, it is no longer portable to other platforms unless you develop the same shared library on all platforms. Sometimes you may access platform-specific features inside the native code, which is used from the Java application; in that case, you should be aware that your Java application cannot be run on other platforms.

Why would someone use the JNI when Java provides a rich set of features through its class libraries? It may be necessary to use the JNI to access native code in Java for the following reasons:

- If a Java application needs to implement some platform-specific features that are not possible to implement using the Java APIs.
- You may already have legacy code written in native languages and you want to reuse it in your Java application.
- You are developing a time-critical Java application where Java code does not perform as fast as expected. You can move the time-critical section of your Java code to native code.

You should consider using the JNI in a Java application as a last resort. You

must explore all possibilities of implementing the needed features using the Java APIs. Using the JNI also changes the skill set that is required to develop an application. Either the developers who are working on Java application are trained in the native language (C/C++) or new developers are brought into the team who know the native language. Using native code in a Java application makes the application less stable and prone to security risks because the native code is run outside the JVM.

I will use C++ to implement native methods in this chapter. You can use the C language instead. All code examples in C++ listed in this chapter can be moved to the C language with minor changes. I will specify the differences between C++ code and C code whenever you need to make changes in C++ code to convert it to C.

## System Requirements

You need a C or C++ compiler that can create a shared library. You also need a JDK installed on your computer to generate C/C++ header files. The native code referenced in this chapter has been developed using NetBeans 8.0 with Cygwin as the C++ compiler on the Windows platform. Java 8 was used to compile and run the Java code. However, using Cygwin as the C++ compiler is not a requirement to run any examples. You can use any other C/C++ compiler to create a shared library on your platform. Please visit <https://netbeans.org/kb/trails/cnd.html> for more details on how to configure NetBeans to use C++.

## Getting Started with the JNI

Developing a Java application that uses the JNI involves the following steps:

- Writing the Java program
- Compiling the Java program
- Creating a C/C++ header file
- Writing a C/C++ program

- Creating a shared library
- Running the Java program

Subsequent sections discuss each step in detail.

## Writing the Java Program

A Java program that uses the JNI differs from a Java-only program only in two aspects:

- Loading the shared library
- Declaring the native method

The shared library that contains the native method implementation must be loaded before Java can call the native method. A shared library is loaded using the `loadLibrary(String libraryNameWithoutExtension)` static method of the `java.lang.System` class as shown:

```
// Load a shared library named beginningjava
System.loadLibrary("beginningjava");
```

You can also load a shared library using the `loadLibrary()` method of the `java.lang.Runtime` class. Internally, the `loadLibrary()` method of the `System` class calls the `loadLibrary()` method of the `Runtime` class. The above code can be rewritten as follows:

```
// Load the shared library
Runtime.getRuntime().loadLibrary("beginningjava");
```

Note that you need to pass a shared library name without any platform-specific prefix and file extension to the `loadLibrary()` method. For example, if your shared library file name is `beginningjava.dll` on Windows or `beginningjava.so` on UNIX, you need to use `beginningjava` as the shared library name. The `loadLibrary()` method will append the file extension to find the shared library. This way, you do not need to change your Java code, which loads the shared library if you intend to run the same Java code on different platforms.

You can also load a shared library using the `load()` method of the `System` or `Runtime` class. The `load()` method accepts the absolute path of the shared library with the file extension. If a beginningjava.dll file on Windows platforms is in the `C:\myjni` directory, the call to the `load()` method will look as follows:

```
// Load the shared library
System.load("C:\\myjni\\beginningjava.dll");
```

Note that using the `load()` method forces you to use the absolute path and the file extension of the shared library, which makes your Java code non-portable to other platforms. You will use the `loadLibrary()` method of the `System` class to load shared library in your examples in this chapter. The `load()` and `loadLibrary()` methods throw a `java.lang.UnsatisfiedLinkError` if the specific library cannot be loaded.

How does the `loadLibrary()` method find the shared library file in the file system by just knowing the library name? You have two ways to let the JVM know about the location of your shared library:

- Include the directory that contains the shared library into the `PATH` environment variable on Windows and `LD_LIBRARY_PATH` environment variable on UNIX.
- Specify the directory (or directories, separated by semicolon) that contains the shared library using the `java.library.path` JVM property as a command line option. The following command assumes that the beginningjava shared library is placed in the `C:\myjni\lib` directory:

```
java -Djava.library.path=C:\\myjni\\lib
your-class-name-to-run
```

A native method that is used in Java does not have a body written in Java because its implementation exists in the native code. However, you need to declare the native method in Java before you can use it. It is declared using the `native` keyword. A native method declaration in Java code ends with a semicolon. The following snippet of code declares a native method named

`hello()`, which has no parameters and returns `void`.

```
public class Test {
 // Declare a native method called hello()
 public native void hello();
}
```

Calling a native method in Java code is the same as calling any other Java methods.

```
Test test = new Test();
test.hello();
```

You can declare a native method to have `public`, `private`, `protected`, or package-level scope. A `native` method can be declared `static` or non-`static`. You can have as many native methods in a Java class as you want.

You cannot declare a native method as `abstract`. This implies that an interface cannot have a `native` method because all methods declared in an interface are `abstract` if they are not declared `static` or `default`. An `abstract` method means that the method's implementation is missing and it will be implemented in Java, whereas `native` method means that the method's implementation is missing and it is implemented in native code. Declaring a method as `native` and `abstract` at the same time will be confusing as to where to look for the implementation of the method—in the Java code or in the native code. This is the reason why a method declaration cannot use the combination of the two modifiers `abstract` and `native`.

The `native` keyword must be used only to declare methods. You cannot declare a field as `native`. The following snippet of code declares two classes named `WillCompile` and `WontCompile`. Class `WillCompile` contains valid uses of the `native` keyword, whereas class `WontCompile` demonstrates the invalid uses of the `native` keyword.

```
public class WillCompile {
 public native void m1();
 private native void m2();
 protected native void m3();
 native void m4();

 public static native void m5();
```

```

 public native int m6(String str);

 // A non-native method (Java-only method)
 public int add(int a, int b) {
 return a + b;
 }

 }

// Sample of Illegal use of native keyword in a Java
class
public class WontCompile {
 // A field cannot be native
 private native String name;

 // A method cannot be abstract as well as
native
 public abstract native String getName();
}

```

Now you are ready to write Java code to call your first native method. You will name your native method `hello()`. It does not accept any parameters and does not return any value. You will implement it in C++ later and it will print a message, `Hello JNI`, on the standard output. [Listing 8-1](#) has the complete code for the `HelloJNI` class.

**[Listing 8-1](#).** A HelloJNI Class That Uses a Native Method Named `hello()`

```

// HelloJNI.java
package com.jdojo.jni;

public class HelloJNI {
 static {
 // Load the shared library using its name
only
 System.loadLibrary("beginningjava");
 }

 // Declare the native method
 public native void hello();
}

```

```

public static void main(String[] args) {
 // Create a HelloJNI object
 HelloJNI helloJNI = new HelloJNI();

 // Call the native method
 helloJNI.hello();
}
}

```

The HelloJNI class performs three things:

- It loads a beginningjava shared library (beginningjava.dll on Windows and beginningjava.so on UNIX-like OS) in the static initializer. Note that you do not need to have the beginningjava shared library when you write and compile the HelloJNI class. The shared library is required when you run the HelloJNI class.

```

static {
 System.loadLibrary("beginningjava ");
}

```

- It declares a native method named hello(), which will be implemented in C++ code later.

```
public native void hello();
```

The Java compiler will compile the HelloJNI class with the hello() native method declaration without having the native code that implements the method. The implementation of the method will be required when it is called at runtime.

- It creates an object of the HelloJNI class in the main() method and calls the hello() method on the object.

```
HelloJNI helloJNI = new HelloJNI();
helloJNI.hello();
```

The code for the `HelloJNI` class is simple. There is nothing extraordinary that you have to do inside the Java code to use a `native` method. You cannot run this class yet, because when you run it, it will look for a `beginningjava` shared library with the native code for the `hello()` method, which you have not written yet.

## Compiling the Java Program

Compiling a Java program that uses native methods is the same as compiling any other Java programs. There is no special setting that you need to apply when you compile the `HelloJNI` class. You can compile it using the `javac` command, like so:

```
javac HelloJNI.java
```

This command will generate a `HelloJNI.class` file, which will contain the class definition of the `HelloJNI` class, whose fully qualified name is `com.jdojo.jni.HelloJNI`. Make sure that you have the `HelloJNI.class` file available because it is necessary to perform the next step.

## Creating the C/C++ Header File

Before you start writing the code for a native method in C/C++, you need to generate a header file that will contain the declaration of your method in C/C++. You will use this header file when you write the implementation of your `hello()` `native` method. The method signature for the `hello()` method in Java and C/C++ differs significantly.

You do not need to worry about the details about how to write the signature of a method in C/C++, which will be used by the Java code. The JDK provides a tool called `javah` that generates all required header files for you. The `javah` tool is located in the `JDK_HOME\bin` folder, where `JDK_HOME` is the installation folder for the JDK. For example, if you have installed the JDK in the `C:\java8` directory on Windows, the `javah` tool is in `C:\java8\bin`. The tool accepts the fully qualified class name of a Java class and generates a header file with extension `.h` that contains the method signature for all `native`

methods declared in the specified class. The following command will generate a C/C++ header file for all native methods declarations in the HelloJNI class:

```
javah com.jdojo.jni.HelloJNI
```

The javah tool will look for the HelloJNI class in the CLASSPATH. If it is not in the CLASSPATH, you can specify CLASSPATH using a -classpath or -cp command line option as follows:

```
javah -cp C:\myclasses com.jdojo.jni.HelloJNI
```

This command will generate a header file named com\_jdojo\_jni\_HelloJNI.h in the current directory. By default, the generated file name is based on the fully qualified name of the class. A dot in the class name is replaced with an underscore and the file has an .h extension. You can also specify the header file name that the javah command will generate by using an -o option. You can look at other options supported by the javah command by executing a javah -help command. The contents of the com\_jdojo\_jni\_HelloJNI.h file are shown in [Listing 8-2](#).

### ***Listing 8-2.*** Contents of the com\_jdojo\_jni\_HelloJNI.h File

```
/* DO NOT EDIT THIS FILE - it is machine generated */
#include <jni.h>
/* Header for class com_jdojo_jni_HelloJNI */

#ifndef _Included_com_jdojo_jni_HelloJNI
#define _Included_com_jdojo_jni_HelloJNI
#ifdef __cplusplus
extern "C" {
#endif
/*
 * Class: com_jdojo_jni_HelloJNI
 * Method: hello
 * Signature: ()V
 */
JNIEXPORT void JNICALL
Java_com_jdojo_jni_HelloJNI_hello
(JNIEnv *, jobject);
```

```
#ifdef __cplusplus
}
#endif
#endif
```

You do not need to worry about the details in the header file. You only need the method signature that is generated for your native `hello()` method. The method signature `void hello()` in the Java code has been translated into the following method signature for the C/C++ code:

```
JNIEXPORT void JNICALL
Java_com_jdojo_jni_HelloJNI_hello (JNIEnv *, jobject);
```

`JNIEXPORT` and `JNICALL` are two macros. The keyword `void` denotes that the `native` method does not return any value. The `javah` command uses a rule to generate the name of the `native` method in the header file. In this case, the method name is `Java_com_jdojo_jni_HelloJNI_hello`. I will discuss the details of the naming rules used by the `javah` tool later. Although the method declaration of the `hello()` method in the Java code does not accept any parameters, the `native` method declaration in the header file accepts two parameters. Take it as a rule that all `native` method declarations in a native language will accept two additional parameters than the number of parameters declared in the Java code. The additional parameters are added as the first and second parameters for the method in the native language. The first parameter is a pointer to a `JNIEnv` type object, which is a table of function pointers to facilitate interaction between the native environment and Java environment. The second parameter is of type either `jobject` or `jclass`. If the `native` method is declared non-static in the Java code, the second parameter is of type `jobject`, which is a reference to the Java object on which the `native` method is called. It is similar to the `this` reference that is available inside every non-static method in Java. Since the `native` `hello()` method in Java has been declared non-static, the second parameter type is of type `jobject`. If the `native` method is declared as static in Java, the second parameter will be of type `jclass` and it will be the reference to the class object in the JVM on which the `native` method is called.

At the end of this step, you should have a header file named `com_jdojo_jni_HelloJNI.h` with the contents shown as in [Listing 8-2](#).

# Writing the C/C++ Program

[Listing 8-3](#) shows the C/C++ code that you need to write for the `hello()` native method. The next section describes the step-by-step process to set up a project and write the C++ code using the NetBeans IDE. The source code file for C++ is named `hellojni.cpp`. In this case, the code will be the same if you choose to use the C language instead. Note that `hello` is the name of your native method in Java code, whereas in C/C++ it is named `Java_com_jdojo_jni_HelloJNI_hello`.

**[Listing 8-3.](#)** A C/C++ Implementation for the `hello( )` Native Method

```
// hellojni.cpp
#include <stdio.h>
#include <jni.h>
#include "com_jdojo_jni_HelloJNI.h"

JNIEXPORT void JNICALL
Java_com_jdojo_jni_HelloJNI_hello(JNIEnv *env, jobject
obj) {
 printf("Hello JNI\n");
 return;
}
```

Here are the things that this program does. It uses three C/C++ compiler preprocessor `include` directives to include three header files: `stdio.h`, `jni.h`, and `com_jdojo_jni_HelloJNI.h`. It includes `stdio.h` to use the standard Input/Output functionalities, `jni.h` to use the JNI-related functionalities, and `com_jdojo_jni_HelloJNI.h` to include functionalities related to your `hello()` native method.

The `jni.h` file is copied to `JDK_HOME\include` directory when you install the JDK. For example, if you installed the JDK in `C:\java8`, the `jni.h` file will be in the `C:\java8\include` directory. There is a subdirectory that is created under the `JDK_HOME\include` directory. The subdirectory name is platform-dependent. It is named `win32` on Windows, `linux` on Linux, etc.. You need to use the following two directoroes as an `include-path` option when you compile the `hellojni.cpp` file:

- C:\java8\include
- C:\java8\include\win32

These include paths are for Windows. Please change them according to your platform.

You can place the com\_jdojo\_jni\_HelloJNI.h file in any directory on your machine. You will need to include the directory that contains this file in the include-path option when you compile the hellojni.cpp file.

The function signature is copied from the com\_jdojo\_jni\_HelloJNI.h header file. You have named the two parameters as env and obj. It does not matter what name you use for these parameters in your code.

```
JNIEXPORT void JNICALL
Java_com_jdojo_jni_HelloJNI_hello
(JNIEnv *env, jobject obj)
```

You have provided the implementation for the native method by adding two statements. The first statement uses the printf() function to print a message, Hello JNI, on the standard output, and the second one returns from the function, as shown:

```
printf("Hello JNI\n");
return;
```

## Creating a Shared Library

In this section, you will compile the hellojni.cpp file into a shared library named beginningjava. The shared library will be a file named beginningjava.dll on Windows and beginningjava.so on a UNIX-like OS. Your operating system may use a different file extension for a shared library. Many compilers are available that can be used to create a shared library from C/C++ code. This section explains how to create a shared library on

- Windows using a GNU C++ compiler named g++, known as a MinGW compiler (**Minimalist GNU for Windows**).
- On Fedora Linux using a GNU C++ compiler named g++ .

To create a shared library, you can use the C/C++ compiler on a command prompt or an IDE such as Microsoft Visual Studio on Windows or NetBeans on Windows and Linux. Note that NetBeans does not ship with a C/C++ compiler. You will need to download a compiler such as MinGW or Cygwin to use the NetBeans IDE to create a shared library.

## Creating a Shared Library on Windows

The following sections describe how to install the MinGW C++ compiler called g++ on Windows and how to use it via the command prompt to create the shared library named beginningjava.dll.

### Installing MinGW C/C++ Compiler

Follow these steps to install the MinGW compiler:

- Download the MinGW compiler from <http://sourceforge.net/projects/mingw> and install it on your machine.
- Assume that you have installed MinGW in the C:\MinGW directory. You need to install the following packages of MinGW: mingw-developer-toolkit, mingw32-base, mingw32-gcc-g++, and msys-base. If you have installed MinGW in another directory, please replace this directory path with your installation directory path in the following discussions in this section.
- Add the C:\MinGW\bin directory to the system PATH environment variable. If you do not set the system PATH environment variable, you will be able to work with MinGW by setting the PATH environment variable on the command prompt.
- Verify that the C:\MinGW\bin\g++.exe file exists on your machine. g++ is the C++ compiler and gcc is the C compiler used by MinGW. You will use C++ code in this chapter and the g++ compiler to compile the C++ code.

# Using the g++ Command

You need to use the g++ command to create a shared library. You will need two types of files to create the shared library:

- The C++ source file that contains the C++ code. In this case, you have named it `hellojni.cpp` as shown in [Listing 8-3](#).
- The `com_jdojo_jni_HelloJNI.h` header file shown in [Listing 8-2](#).
- The JNI-related header files that are located in `JDK_HOME\include` and `JDK_HOME\include\win32` directories where `JDK_HOME` is the directory in which you have installed the JDK.

You can pass several options to the g++ compiler. The following command shows the minimum options needed to create your shared library:

```
g++ -Wl,--kill-at -shared -I<include-dir> -o <output-file> <source-files>
```

Here,

- The `-Wl,<option>` is used to pass options to the linker. The `<option>` is a comma-separated list of linker options. In this command, you are passing the `--kill-at` option to the linker to strip the stdcall suffixes (@nn) from symbols before they are exported. If you do not specify this option, you will get a `java.lang.UnsatisfiedLinkError` when you run the Java program that uses the shared library.
- The `-shared` option indicates that you want to create a shared library.
- The `-I<include-dir>` option is used to pass the directory that contains the header files (.h files). You can repeat this option once for each directory.

- The `-o <output-file>` option specifies the output file name. In your case, you will use the output file named `beginningjava.dll`.
- The `<source-files>` is a space-separated list of C++ source files.

To simplify the command syntax to generate the shared library, I will assume that the following directories and files on your machine exist:

- `C:\dll\hellojni.cpp`
- `C:\dll\com_jdojo_jni_HelloJNI.h`
- `C:\java8\include`
- `C:\java8\include\win32`

The following command will generate the `beginningjava.dll` file in the `C:\dll` directory. Each part of the command is shown in a separate line for clarity; you will enter the entire command in one line.

```
C:> g++ -fPIC -shared
 -I C:/java8/include -I C:/java8/include/win32 -
 I C:/dll
 -o C:/dll/beginningjava.dll
 C:/dll/hellojni.cpp
```

Note the use of the forward slashes in file paths. With the `g++` command on Windows, you can use either a forward slash or a backslash as the path separator. Please change the path in the command to match the paths of these files and directories on your machine.

If you have not set the PATH environment variable to the `C:\MinGW\bin` directory, you may get the following error when you run the `g++` command:

```
'g++' is not recognized as an internal or external
command, operable program or batch file
```

 **Note** On Windows, if you want to use NetBeans IDE with MinGW, please refer to the following link for the setup instruction:

<https://netbeans.org/community/releases/80/cpp-setup-mingw.html>

[instructions.html](#).

---

## Creating a Shared Library on Linux

The following sections describe how to install the GNU C++ compiler called g++ on Fedora Linux and how to use it on a terminal to create the shared library named beginningjava.so.

### Installing MinGW C/C++ Compiler

Installing the g++ compiler on Linux is easy. Running the following command on a terminal in Linux will install the g++ compiler:

```
$ yum install gcc-c++
```

When you run the command, you may get the following message:

```
$ yum install gcc-c++
You need to be root to perform this command.
$
```

If you get this message, you need to log in as root to install the compiler. Use the su – command to login as root, enter the root password when prompted, and then run the yum command.

```
$ su –
Password: Enter Your Password Here
yum install gcc-c++
```

During the installation, the yum command will prompt you several times to confirm downloads of the compiler setup files. You need to answer yes when you get those prompts. If the g++ compiler is already installed on your machine, the yum command will print a message to that effect.

That's all it takes install the g++ compiler on Linux.

### Using the g++ Command

You need to use the g++ command to create a shared library. You will need two types of files to create the shared library:

- The C++ source file that contains the C++ code. In this case, you have named it `hellojni.cpp` as shown in [Listing 8-3](#).
- The `com_jdojo_jni_HelloJNI.h` header file shown in [Listing 8-2](#).
- The JNI-related header files that are located in `JDK_HOME/include` and `JDK_HOME/include/win32` directories where `JDK_HOME` is the directory in which you have installed the JDK.

You can pass several options to the g++ compiler. The following command shows the minimum options needed to create your shared library:

```
g++ -shared -I<include-dir> -o <output-file> <source-files>
```

Here,

- The `-shared` option indicates that you want to create a shared library.
- The `-I<include-dir>` option is used to pass the directory that contains the header files (.h files). You can repeat this option once for each directory.
- The `-o <output-file>` option specifies the output file name. In your case, you will use the output file name of `beginningjava.so`.
- The `<source-files>` is a space-separated list of C++ source files.

To simplify the command syntax to generate the shared library, I will assume that the following directories and files on your machine exist:

- `/home/ksharan/slib/hellojni.cpp`

- /home/ksharan/slib/com\_jdojo\_jni\_HelloJNI.h
- /home/ksharan/java8/include
- /home/ksharan/java8/include/linux

The following command will generate the beginningjava.so file in the /home/ksharan/slib directory. Each part of the command is shown in a separate line for clarity; you will enter the entire command in one line.

```
$ g++ -shared
-I/home/ksharan/java8/include -
I/home/ksharan/java8/include/linux -
I/home/ksharan/slib
-o /home/ksharan/slib/beginningjava.so
/home/ksharan/slib/hellojni.cpp
```

Please change the path in the command to match the paths of these files and directories on your machine.

 **Note** On Linux, if you want to use NetBeans IDE with the g++ compiler, please refer to the following link for the setup instruction:  
<https://netbeans.org/community/releases/80/cpp-setup-instructions.html>.

## Running the Java Program

Before proceeding to run the Java class, please make sure that you were able to create the shared library (the beginningjava.dll file on Windows and beginningjava.so file on a UNIX-like OS). If you were not able to create the shared library, you can use the shared libraries provided with the source code for this book. The shared libraries are located in a directory named cplusplus.

Now you are ready to run your HelloJNI Java class as shown in [Listing 8-1](#). Suppose you have placed the beginningjava shared library file in the C:\myjni\lib directory. Run the HelloJNI class using the following command:

```
C:\> java -Djava.library.path=C:\myjni\lib
com.jdojo.jni.HelloJNI
```

The `-Djava.library.path=C:\myjni\lib` option instructs the JVM to look for shared libraries in the `C:\myjni\lib` directory. If the above command runs successfully, it will print a message, `Hello JNI`, on the standard output. Alternatively, you can also add the directory that contains the shared library to the PATH environment variable and the Java runtime will find it. Windows will also find the shared library without setting the `java.library.path` option if the shared library is in the current directory. The following commands show how to set the PATH environment variable (on Windows) for the current session and run the class:

```
C:\> SET PATH=C:\myjni\lib;%PATH%
C:\> java com.jdojo.jni.HelloJNI
```

## Native Function Naming Rules

The `javah` command uses a naming rule, which is based on name mangling, to generate native method names in the C/C++ header file. The Java runtime uses the same rule to resolve the Java native method name to the native function name in a shared library. The name mangling rule is used so that the name generated for the native function is a valid C/C++ name without a name collision. You can think of name mangling as simply replacing invalid characters with characters that make up a valid function name. The native function name is generated based on the following parts, which are concatenated using an underscore:

- The method name starts with the word `Java`.
- The mangled fully qualified name of the package of the Java class that contains the native method's declaration. An underscore is used as a package/sub-package separator.
- The native method name in Java.
- For an overloaded native method, two underscores followed by the mangled method's signature

Java runtime uses two names for a native function—a short name and a long name. The short name does not use two underscores followed by the mangled method’s signature. The Java runtime searches the shared library for the short name first. If it does not find a function using the short name, it searches with the long name. The mangled name uses a conversion table shown in [Table 8-1](#).

**Table 8-1.** The Escape Sequence Used in the Name-Mangling Process

Original Character	Substituted Character
Any non-ASCII Unicode character	_0xxxx Note that alphabets used in _0xxxx are all lowercase such as _0abcd
_ (an underscore)	_1
; (a semi-colon)	_2
[ (a beginning square bracket)	_3

Characters such as a semicolon and beginning with a square bracket may occur as part of a method’s parameter signature that is used internally by Java. [Table 8-2](#) shows few examples of method declarations in .Java code and the method signature used internally by Java.

**Table 8-2.** Examples of Java Method’s Declaration and Internally Used Method Signatures

Method Declaration	Internally Used Method Signature
public static void javaPrintMsg(java.lang.String)	(Ljava/lang/String;)V
public void javaCallBack()	()V
public static void main(java.lang.String[])	([Ljava/lang/String;)V

If you declare a parameter of type `java.lang.String`, it is used internally as `Ljava/lang/String;`. To know about the signature of a method that is used internally by Java, you need to use the `javap` command with a `-s` option. The following command will print the method signatures for all methods in the `com.jdojo.jni.HelloJNI` class. You can use a `-private` option to print signatures of all methods including the private ones.

```
javap -s -private com.jdojo.jni.HelloJNI
```

If you are required to use a method signature of a Java method inside a JNI function in native code, you should run the `javap` command to get the signatures instead of entering them by hand. You can learn the rules used to make up the method signature that is used internally by Java. However, using the `javap` command makes it easy to get this information. Let's consider the declaration of some native methods in a class `Test` as shown in [Listing 8-4](#).

***Listing 8-4.*** A Test Class with Some Native Method Declarations

```
package com.jdojo.jni;

public class Test {
 private native void sayHello();
 private native void printMsg(String msg);
 private native int[] increment(int[] num, int
incrementValue);
 private native double myMethod(int i, String
s[], String ss);
 private native double myMethod(double i, String
s[], String ss);
 private native double myMethod(short i, String
s[], String ss);
}
```

If you compile the `Test` class and run the command

```
javah com.jdojo.jni.Test
```

you get a `com_jdojo_jni_Test.h` header file that has the contents shown in [Listing 8-5](#).

***Listing 8-5.*** The Header File Generated for the Class `com.jdojo.jni.Test`

```
/* DO NOT EDIT THIS FILE - it is machine generated */
#include <jni.h>
/* Header for class com_jdojo_jni_Test */
```

```
#ifndef _Included_com_jdojo_jni_Test
#define _Included_com_jdojo_jni_Test
#ifndef __cplusplus
extern "C" {
#endif
/*
 * Class: com_jdojo_jni_Test
 * Method: sayHello
 * Signature: ()V
 */
JNIEXPORT void JNICALL
Java_com_jdojo_jni_Test_sayHello
(JNIEnv *, jobject);

/*
 * Class: com_jdojo_jni_Test
 * Method: printMsg
 * Signature: (Ljava/lang/String;)V
 */
JNIEXPORT void JNICALL
Java_com_jdojo_jni_Test_printMsg
(JNIEnv *, jobject, jstring);

/*
 * Class: com_jdojo_jni_Test
 * Method: increment
 * Signature: ([II)[I
 */
JNIEXPORT jintArray JNICALL
Java_com_jdojo_jni_Test_increment
(JNIEnv *, jobject, jintArray, jint);

/*
 * Class: com_jdojo_jni_Test
 * Method: myMethod
 * Signature:
(I[Ljava/lang/String;Ljava/lang/String;)D
*/
JNIEXPORT jdouble JNICALL
```

```

Java_com_jdojo_jni_Test_myMethod_I_3Ljava_lang_String_
(JNIEnv *, jobject, jint, jobjectArray, jstring);

/*
 * Class: com_jdojo_jni_Test
 * Method: myMethod
 * Signature:
(D[Ljava/lang/String;Ljava/lang/String;)D
 */

JNIEXPORT jdouble JNICALL
Java_com_jdojo_jni_Test_myMethod_D_3Ljava_lang_String_
(JNIEnv *, jobject, jdouble, jobjectArray, jstring);

/*
 * Class: com_jdojo_jni_Test
 * Method: myMethod
 * Signature:
(S[Ljava/lang/String;Ljava/lang/String;)D
 */

JNIEXPORT jdouble JNICALL
Java_com_jdojo_jni_Test_myMethod_S_3Ljava_lang_String_
(JNIEnv *, jobject, jshort, jobjectArray, jstring);

#endif __cplusplus
}
#endif
#endif

```

You can look at the native function names that are generated for different native method's declarations. Do not worry about the data types used for the function's parameters. I will cover data type mapping between Java and native language in the next section.

## Data Type Mapping

The JNI defines mapping between data types used in Java and native functions. [Table 8-3](#) lists the mapping for primitive data types between Java and native C/C++ language. Note that all you have to do is to add a `j` in front of the name

of a primitive data type in Java and you get the equivalent data type name in C/C++. JNI also defines a data type named `jsize`, which is used to store the length, such as the length of an array or a string.

**Table 8-3.** The Mapping Between Java Primitive Data Types and JNI Native Data Types

Java Primitive Types	Native Primitive Type	Description
<code>boolean</code>	<code>jboolean</code>	Unsigned 8 bits
<code>byte</code>	<code>jbyte</code>	Signed 8 bits
<code>char</code>	<code>jchar</code>	Unsigned 16 bits
<code>double</code>	<code>jdouble</code>	64 bits
<code>float</code>	<code>jfloat</code>	32 bits
<code>int</code>	<code>jint</code>	Signed 32 bits
<code>long</code>	<code>jlong</code>	Signed 64 bits
<code>short</code>	<code>jshort</code>	Signed 16 bits
<code>void</code>	<code>void</code>	N/A

The JNI defines reference type equivalents for Java reference types. It is not possible to define a separate type in the JNI for all reference types that can be created in Java. All Java reference types can be mapped to the JNI reference type called `jobject`. You have some specialized JNI reference types that represent commonly used reference types in Java, such as `jstring` in JNI represents `java.lang.String` in Java. **Table 8-4** lists the reference type mapping between Java and the JNI.

**Table 8-4.** The Reference Type Mapping Between Java and JNI

Java Reference Type	JNI Type
Any Java object	<code>jobject</code>
<code>java.lang.String</code>	<code>jstring</code>
<code>java.lang.Class</code>	<code>jclass</code>
<code>java.lang.Throwable</code>	<code>jthrowable</code>

The JNI defines separate reference types to represent Java arrays. The type `jarray` is a generic array type that represents any Java array type. There is a

specialized array type for each type of array in Java. In JNI, an array type is named like `jxxxArray`, where `xxx` could be `object`, `boolean`, `byte`, `char`, `double`, `float`, `int`, `long`, and `short`. For example, `jintArray` in C/C++ represents an `int` array in Java. Note that all reference type arrays in Java are represented by `jobjectArray` type in C/C++.

While working with C/C++ code using the JNI, you will come across another type called `jvalue`. It is a union type defined in C/C++ as follows:

```
typedef union jvalue {
 jboolean z;
 jbyte b;
 jchar c;
 jshort s;
 jint i;
 jlong j;
 jfloat f;
 jdouble d;
 jobject l;
} jvalue
```

Note that the `jvalue` union type does not have an equivalent type in Java. Typically, the `jvalue` type is defined as a parameter type in built-in functions that are part of the JNI API.

## Using JNI Functions in C/C++

JNI functions let you access the JVM data structures and objects in native code. Sometimes they let you convert the data in a particular format that is passed between Java and the native environments. All native functions have their first parameter, which is always a pointer to `JNIEnv`, which in turn is a pointer to a table of all JNI function pointers.

There are always two versions of functions that you can call on type `JNIEnv`: one for C and one for C++. The C version of the function accepts a pointer to `JNIEnv` as the first parameter, and C++ will not have that first parameter. The two versions of the same methods, C and C++, are called differently. The following snippet of code shows the difference in calling a JNI

function in C and C++, assuming FuncXxx is the function name and env is a pointer to JNIEnv type:

```
// C style
(*env)->FuncXxx(env, list-of-arguments...);

// C++ style
env->FuncXxx(list-of-arguments...);
```

This chapter uses the C++ way of calling JNI functions. You can convert the code to C style easily by using the above snippet of code as a reference.

As a concrete example, the following are the function signatures for the GetStringUTFChars () JNI function that let you convert a Java string to a UTF-8 string format:

```
// C Version of the GetStringUTFChars() JNI function
const char * GetStringUTFChars(JNIEnv *env, jstring
string, jboolean *isCopy);

// C++ Version of the GetStringUTFChars() JNI function
const char * GetStringUTFChars(jstring string,
jboolean *isCopy);
```

If you want to call this function in C or C++, your code will look as follows:

```
// C Code
const char *utfMsg = (*env)->GetStringUTFChars(env,
msg, iscopy);

// C++ Code
const char *utfMsg = env->GetStringUTFChars(msg,
iscopy);
```

## Working with Strings

Strings are represented differently in Java and C/C++. In Java, a string is represented as a sequence of 16-bit Unicode characters, whereas in C/C++ a string is a pointer to a sequence of null-terminated characters. The `jstring` reference type in the native code represents an instance of the

`java.lang.String` class, which is a sequence of 16-bit Unicode characters. The JNI has functions to convert a Java string to a native string and vice versa. One set of string functions works with UTF-8 strings and the other set works with Unicode strings. When Java passes a string to the native code, you must convert the string in native code to native format (UTF-8 or Unicode) before using it. The same logic goes for returning a string from native code to Java. You must convert the native string to an instance of `jstring` before it can be returned to Java.

Let's start with an example in which you will pass a string from Java code to C/C++ code. The C/C++ code will convert the Java string to a native UTF-8 format and print it on the standard output using the `printf()` function. The native methods' declaration in Java would be as follows:

- `public native void printMsg(String msg);`
- `public native String getMsg();`

The `printMsg()` method accepts a Java string and its native function will print it on the standard output. The `getMsg()` method returns a native string to Java and Java will print it on the standard output. [Listing 8-6](#) contains the Java code that declares these two native methods. Note that the static initialize loads the shared library named `beginningjava` that you had created in the previous section. This time, you will need to include the C++ code for the new native method in the shared library.

#### ***[Listing 8-6](#).*** Passing Strings from Java to a Native Function and Vice Versa

```
// JNIStringTest.java
package com.jdojo.jni;

public class JNIStringTest {
 static {
 System.loadLibrary("beginningjava");
 }

 public native void printMsg(String msg);
 public native String getMsg();

 public static void main(String[] args) {
```

```

 JNIStringTest stringTest = new
JNIStringTest();

 String javaMsg = "Hello from Java to
JNI";
 stringTest.printMsg(javaMsg);

 String nativeMsg = stringTest.getMsg();
System.out.println(nativeMsg);
 }
}

```

The following are the native function declarations for `printMsg()` and `getMsg()` in C/C++:

- `JNIEXPORT void JNICALL Java_com_jdojo_jni_JNIStringTest_printMsg(JNIEnv *env, jobject obj, jstring msg);`
- `JNIEXPORT jstring JNICALL Java_com_jdojo_jni_JNIStringTest_getMsg(JNIEnv *env, jobject obj);`

Note that the first two parameters in the native functions are of type `JNIEnv` and `jobject`. The `printMsg()` function contains a third parameter of type `jstring` and its return type is `void`. The `getMsg()` function contains only two standard parameters and it returns a `jstring`.

To convert a `jstring` to a UTF-8 native string, you need to use the `GetStringUTFChars()` JNI function that you can access using a `JNIEnv` reference. The `GetStringUTFChars()` JNI function has two versions: one for C and one for C++.

The `GetStringUTFChars()` function converts a Java string (in a `jstring` in C/C++ code) to a UTF-8 format and returns a pointer to the converted UTF-8 string. If it fails, it returns `NULL`. The `GetStringUTFChars()` function may have to make a copy of the original Java string object in memory for converting it to UTF-8 format. The `isCopy` parameter to the functions, which is a pointer to a `boolean` variable, can be used to check if this function had to copy the original Java string. If `isCopy` is

not NULL, it is set to `JNI_TRUE` if a copy of the Java string was made. Otherwise, it is set to `JNI_FALSE`. Once you are done with the returned value of this function, you must call the `ReleaseStringUTFChars()` method to release the memory. The C and C++ style signatures of this method are as follows:

```
// C Style
void ReleaseStringUTFChars(JNIEnv *env, jstring
string, const char *utf);

// C++ Style
void ReleaseStringUTFChars(jstring string, const char
*utf);
```

[Listing 8-7](#) contains the implementations for the `printMsg()` and `getMsg()` native methods in C++. The code is in the `jnistringtest.cpp` file in the source code for this book. The code for `getMsg()` is simple. It uses the `NewStringUTF()` JNI function to get a Java string from the native string.

### ***Listing 8-7.*** Contents of the `jnistringtest.cpp` File

```
// jnistringtest.cpp
#include <stdio.h>
#include <jni.h>
#include "com_jdojo_jni_JNIStrintTest.h"

JNIEXPORT void JNICALL
Java_com_jdojo_jni_JNIStrintTest_printMsg
(JNIEnv *env, jobject obj, jstring msg) {
 const char *utfMsg;
 jboolean *iscopy = NULL;

 // Get the UTF string
 utfMsg = env->GetStringUTFChars(msg, iscopy);
 if (utfMsg == NULL) {
 printf("Could not convert Java string to UTF-8
string.\n");
 return;
 }
```

```

 // Print the message on the standard output
 printf("%s\n", utfMsg);

 // Release the memory
 env->ReleaseStringUTFChars(msg, utfMsg);
}

JNICALL Java_com_jdojo_jni_JNIStringTest_getMsg
(JNIEnv *env, jobject obj) {
 const char *utfMsg = "Hello from JNI to Java";
 jstring javaString = env->NewStringUTF(utfMsg);
 return javaString;
}

```

Run the `javah` command for the `JNIStringTest` class to create the `com_jdojo_jni_JNIStringTest.h` C++ header file.

```
javah com.jdojo.jni.JNIStringTest
```

To include the C++ contents of the `hellojni.cpp` and `jnistringtest.cpp` files in the same shared library named `beginningjava`, you need to pass both files as the source files to the `g++` command. The following is the command on Windows, assuming that you have placed the header files for both source files in the `C:\dll` directory.

```
C:> g++ -fPIC -shared
 -I C:/java8/include -I C:/java8/include/win32 -
 I C:/dll
 -o C:/dll/beginningjava.dll
C:/dll/hellojni.cpp C:/dll/jnistringtest.cpp
```

Please refer to the “Creating a Shared Library on Linux” section for creating the shared library with both C++ source files on Linux.

Now you are ready to run the `JNIStringTest` class as listed in [Listing 8-6](#). It will generate the following output:

```
Hello from JNI to Java
Hello from Java to JNI
```

You can use the `GetStringUTFLength(jstring string)` JNI function to get the length of a `jstring` in bytes to represent it in UTF-8 format. The JNI also has functions that let you work with Unicode native strings. The Unicode string functions are named UTF string functions without the word “UTF”. For example, to get the length of a `jstring` in terms of Unicode characters, you have a `GetStringLength()` function as opposed to the `GetStringUTFLength()` function. To construct a new Java String (a `jstring`) from Unicode characters, you have a `NewString()` JNI function as opposed to the `NewStringUTF()` JNI function, which creates a Java string from a UTF-8 native string. Sometimes you may need to convert a Java String in `jstring` to a native encoding and vice versa. You can use the `java.lang.String` class, which has a rich set of constructors and methods that let you convert string in one encoding to byte array and vice versa. I will cover how to access Java classes in the native code in a later section.

## Working with Arrays

The JNI lets you pass an array of primitive or reference types from Java to native code and vice versa. You cannot access or work with Java arrays directly in native code. You will need to use JNI functions to work with Java arrays in native code. The JNI provides a different set of functions for primitive and reference arrays. Some functions are common to both types. All array-related methods used in this section use the C++ version. Add `JNIEnv *env` as the first parameter to them to get the corresponding C version.

The `GetArrayLength()` method returns the length of an array of a primitive or reference type. Its declaration is

```
jsize GetArrayLength(jarray array)
```

You can use the `New<Xxx>Array()` method to create an array of a primitive type, where `<Xxx>` is one of the primitive types of `Boolean`, `Byte`, `Char`, `Double`, `Float`, `Int`, `Long`, or `Short`. You need to pass the length of the primitive type array as a parameter to this method. It returns `NULL` if an array could not be created. The following snippet of code creates an `int` array and a `double` array each of length 10:

```
jintArray iArray = env->NewIntArray(10);
jdoubleArray dArray = env->NewDoubleArray(10);
```

You can use `Get<Xxx>ArrayElements()` to get the contents of a primitive array, where `<Xxx>` is one of the primitive types of Boolean, Byte, Char, Double, Float, Int, Long, or Short. It is declared as follows:

```
<RRR> *Get<Xxx>ArrayElements(<AAA> array, jboolean
*isCopy)
```

Here, `<RRR>` is the JNI native data type such as `jint` or `jdouble`, and `<AAA>` is a JNI array type such as `jintArray`, `jdoubleArray`, etc. The `isCopy` parameter indicates if the returned array elements are copies of the original array. If `isCopy` is not `NULL`, it is set to `JNI_TRUE` if a copy of original array was made. It is set to `JNI_FALSE` if a copy of original array was not made. You can also make changes to the array elements in the native code that will be reflected to the original array. You need to release the elements, which you get using this method after you are done with them. You need to use the `Release<Xxx>ArrayElements()` method to release the array elements, which is declared as follows:

```
void Release<Xxx>ArrayElements(<AAA> array, <RRR>
*elems, jint mode)
```

The last parameter `mode` in the `Release<Xxx>ArrayElements()` function indicates how the buffer, which was used in native code for array elements, is released. Its value can be `0`, `JNI_COMMIT`, or `JNI_ABORT`. `0` means copy back the content and free the `elems` buffer; `JNI_COMMIT` means copy back the content, but do not free the `elems` buffer; and `JNI_ABORT` means free the buffer without copying back the possible changes. The following snippet of code accesses an `int` Java array in native code and prints all of its element values on the standard output:

```
jintArray num = get a Java array...;
const jsize count = env->GetArrayLength(num);
jboolean isCopy;
jint *intNum = env->GetIntArrayElements(num, &isCopy);

for (jsize i = 0; i < count; i++) {
```

```

 printf("%i\n", intNum[i]);
 }

// Release the intNum buffer without copying back any
changes made to the array elements
env->ReleaseIntArrayElements(num, intNum, JNI_ABORT);

```

Reference type Java arrays in the native code are treated differently. You can use the `NewObjectArray()` function to create a new reference type array. The method is declared as follows:

```
jobjectArray NewObjectArray(jsize length, jclass
elementClass, jobject initialElement)
```

Note that you need to use the array element's class type object to create a reference array. The last parameter is the initial element with which all elements of the array will be initialized.

Unlike primitive type arrays, you do not need to get array elements for reference type arrays to access them. You can access one element at a time using the `GetObjectArrayElement()` function. You can use the `SetObjectArrayElement()` function to set the value of an array element of a reference type. These methods are declared as follows:

- `jobject GetObjectArrayElement(jobjectArray array, jsize index)`
- `void SetObjectArrayElement(jobjectArray array, jsize index, jobject value)`

Let's look at examples of using arrays in a JNI application. [Listing 8-8](#) contains the Java code that declares three native methods using arrays.

#### ***[Listing 8-8.](#)*** An Example of Accessing and Manipulating Arrays in Native Code

```

// JNIArrayTest.java
package com.jdojo.jni;

import java.util.Arrays;

```

```
public class JNIArrayTest {
 static {
 System.loadLibrary("beginningjava");
 }

 // Three native method declarations
 public native int sum(int[] num);
 public native String concat(String[] str);
 public native int[] increment(int[] num, int incrementBy);

 public static void main(String[] args) {
 JNIArrayTest test = new JNIArrayTest();

 int[] num = {1, 2, 3, 4, 5};
 String[] str = {"One", "Two", "Three",
 "Four", "Five" } ;

 System.out.println("Original Number
Array: " + Arrays.toString(num));

 System.out.println("Original String
Array: " + Arrays.toString(str));
 int sum = 0;
 sum = test.sum(num);
 System.out.println("Sum: " + sum);

 String concatenatedStr
= test.concat(str);
 System.out.println("Concatenated String:
" + concatenatedStr);

 int increment = 5;
 int[] incrementedNum
= test.increment(num, increment);
 System.out.println("Increment By: "
+ increment);
 System.out.println("Incremented Number
Arrays: " +
```

```

 Arrays.toString(incrementedNum));
 }
}

```

The `sum()` native method accepts an `int` array and returns the sum of all its elements as `int`. Be careful not to pass big numbers in the `int` array when you call the `sum()` method. Otherwise, the result may overflow. The `concat()` native method accepts a `String` array. It concatenates all elements in the array and returns a `String` object. The `increment()` native method accepts an `int` array and an `int` number. It returns a new `int` array, which contains all elements of the original array that are incremented by the specified number. The `main()` method contains the code to test the three native methods.

Run the `javah` command for the `JNIArrayTest` class to create the `com_jdojo_jni_JNIArrayTest.h` C++ header file.

```
javah com.jdojo.jni.JNIArrayTest
```

**Listing 8-9** contains the C++ implementation of the three native methods in the `jniarraytest.cpp` file. The `concat()` method's implementation assumes that the length of all elements in `String` array will not exceed 500 bytes. Please refer to the previous section on how to include the C+= source file in the shared library.

**Listing 8-9.** Contents of the `jniarraytest.cpp` File with the C++ Implementation of the `sum()`, `concat()`, and `increment()` Native Methods

```

// jniarraytest.cpp
#include <jni.h>
#include <cstring>
#include "com_jdojo_jni_JNIArrayTest.h"

JNIEXPORT jint JNICALL
Java_com_jdojo_jni_JNIArrayTest_sum
(JNIEnv *env, jobject obj, jintArray num) {
 jint sum = 0;
 const jsize count = env->GetArrayLength(num);

 jboolean isCopy;
 jint *intNum = env->GetIntArrayElements(num,

```

```

 &isCopy);

 for (jsize i = 0; i < count; i++) {
 sum += intNum[i];
 }

 // Release the intNum buffer without copying back
 // any changes made to the array elements
 env->ReleaseIntArrayElements(num, intNum,
JNIA_BORT);

 return sum;
}

JNIEXPORT jstring JNICALL
Java_com_jdojo_jni_JNIArrayTest_concat
(JNIEnv *env, jobject obj, jobjectArray strArray) {
 const int MAX_LENGTH = 500;
 char dest[MAX_LENGTH];

 for (int i = 0; i < MAX_LENGTH; i++) {
 dest[i] = (char)NULL;
 }

 const jsize count = env->GetArrayLength(strArray);

 for (jsize i = 0; i < count; i++) {
 // Get the string object from the array
 jstring strElement =
 (jstring) env-
>GetObjectArrayElement(strArray, i);
 const char *tempStr = env-
>GetStringUTFChars(strElement, NULL);

 if (tempStr == NULL) {
 printf("Could not convert Java string to
UTF-8 string.\n");
 return NULL;
 }

 // Concatenate tempStr to dest

```

```

 strcat(dest, tempStr);

 // Release the memory used by tempStr
 env->ReleaseStringUTFChars(strElement,
tempStr);

 // Delete the local reference of jstring
 env->DeleteLocalRef(strElement);
 }

 jstring returnStr = env->NewStringUTF(dest);
 return returnStr;
}

JNIEXPORT jintArray JNICALL
Java_com_jdojo_jni_JNIArrayTest_increment
(JNIEnv *env, jobject obj, jintArray num, jint
incrementBy) {

 const jsize count = env->GetArrayLength(num);

 jboolean isCopy;
 jint *intNum = env->GetIntArrayElements(num,
&isCopy);

 jintArray modifiedNumArray = env-
>NewIntArray(count);
 jboolean isNewArrayCopy;
 jint *modifiedNumElements =
 env->GetIntArrayElements(modifiedNumArray,
&isNewArrayCopy);

 for (jint i = 0; i < count; i++) {
 modifiedNumElements[i] = intNum[i]
+ incrementBy;
 }

 if (isCopy == JNI_TRUE) {
 env -> ReleaseIntArrayElements(num, intNum,
JNI_COMMIT);
 }
}

```

```

 if (isNewArrayCopy == JNI_TRUE) {
 env ->
ReleaseIntArrayElements(modifiedNumArray,
 modifiedNumElements,
 JNI_COMMIT);
 }

 return modifiedNumArray;
}

```

Running the `JNIArraTest` class as shown in [Listing 8-8](#) will produce the following output:

```

Original Number Array: [1, 2, 3, 4, 5]
Original String Array: [One, Two, Three, Four, Five]
Sum: 15
Concatenated String: OneTwoThreeFourFive
Increment By: 5
Incremented Number Arrays: [6, 7, 8, 9, 10]

```

## Accessing Java Objects in Native Code

You can use Java objects in native code in different ways: You can

- Create Java objects in native code.
- Access Java objects and classes existing in the JVM from the native code.
- Access/modify fields of a Java object inside the native code.
- Invoke a Java instance and static methods of Java objects from the native code.

The following sections describe the steps needed to use Java objects in native code.

# Getting a Class Reference

An instance of the `jclass` type represents a class object in native code. If you invoke a native function, which is declared as `static` and `native` in a Java class, your native function always gets the reference of the class object as the second parameter. Sometimes you may have a reference of a Java object in the `jobject` type and you want to get its class object reference. You need to use the `GetObjectClass()` JNI function to get the reference of the class object of a Java object as shown:

```
jobject obj = get the reference to a Java object;
jclass cls = env->GetObjectClass(obj);
```

Use the `FindClass()` JNI function to get the reference of a class object using the class name. You need to use the fully qualified name of the class in the `FindClass()` method by replacing a dot in the package name with a forward slash. If you are trying to get the reference of a class object for an array, you need to use the array class signature. To get the reference of the class object for the `java.lang.String` class, you need to use `java/lang/String` as the class name. To get the class object reference for `int[]`, you need to use `[I` as the class name. To know the correct signature for the class of an array type, you can declare a field in a class of that array type and use the `javap` command with the `-s` and `-private` options. The following snippet of code demonstrates how to get the reference of the class object for some Java reference types:

```
jclass cls;

// Get the reference of the java.lang.String class
// object
cls = env->FindClass("java/lang/String");

// Get the reference of the int[] array class object
cls = env->FindClass("[I");

// Get the reference of the int[][] array class object
cls = env->FindClass("[[I");

// Get the reference of the String[] array class
```

```
object. Note a semi-colon in signature
cls = env->FindClass("[Ljava/lang/String;");
```

## Accessing Fields and Methods of a Java Object/Class

Before you can access the fields of a Java object/class in native code, you must get the field ID. You need to use the `GetFieldID()` JNI function to get the field ID of an instance field and the `GetStaticFieldID()` JNI function to get the field ID for a static field. The signatures of these two methods are as follows:

- `jfieldID GetFieldID(jclass cls, const char *name, const char *sig)`
- `jfieldID GetStaticFieldID(jclass cls, const char *name, const char *sig)`

The `cls` parameter is the reference of the class object, which defines the instance/static field. The `name` parameter is the name of the field. The `sig` parameter is the signature of the field. You need to use the `javap` command with the `-s` and `-private` options to get the signature of a field defined in a class.

You need to use a `Get<Xxx>Field()` JNI function to get the value of an instance field and a `GetStatic<Xxx>Field()` JNI function to get the value of a static field, where `<Xxx>` is the type of field whose value can be `Boolean`, `Byte`, `Char`, `Double`, `Float`, `Int`, `Long`, `Short`, or `Object`. The `Set<Xxx>Field()` and `SetStatic<Xxx>Field()` JNI functions let you set the value of instance and static fields, respectively. The declaration for these methods are as follows where `<RRR>` is a native data type, for example, if `<Xxx>` is `int`, `<RRR>` is `jint`:

- `<RRR> Get<Xxx>Field(jobject obj, jfieldID fieldID)`
- `<RRR> GetStatic<Xxx>Field(jclass clazz, jfieldID fieldID)`

- void Set<Xxx>Field(jobject obj, jfieldID fieldID, <RRR> value)
- void SetStatic<Xxx>Field(jclass clazz, jfieldID fieldID, <RRR> value)

Suppose `obj` is an instance of `jobject` (that is, a Java object reference) and `cls` is its class reference. There are two fields, `num` and `count`, of type `int` in the class represented by `cls`. The `num` field is an instance field and `count` field is a static field. The following snippet of code shows how to access these two fields in native code and increment their values by 1:

```
// Get the field ID of num and count fields
jfieldID numFieldId = env->GetFieldID(cls, "num",
"I");
jfieldID countFieldId = env->GetStaticFieldID(cls,
"count", "I");

// Get the field values
jint numValue = env->GetIntField(obj, numFieldId);
jint countValue = env->GetStaticIntField(cls,
countFieldId);

// Increment the values by 1 and set them back to the
fields
numValue = numValue + 1;
countValue = countValue + 1;
env->SetIntField(obj, numFieldId, numValue);
env->SetStaticIntField(cls, countFieldId, countValue);
```

The steps to use a method of Java object/class in native code are similar to using their fields. You need to get the method ID of a method before you can access the method. You can use `GetMethodID()` and `GetStaticMethodID()` JNI functions to get the method ID for an instance method and a static method, respectively. Their declarations are as follows:

- jmethodID GetMethodID(jclass clazz, const char \*name, const char \*sig)
- jmethodID GetStaticMethodID(jclass

```
clazz, const char *name, const char
*sig)
```

The name of the method is its simple name, and its signature can be obtained using the `javap` command with the `-s` and `-private` options. The following snippet of code shows how to get the method ID from a few methods of a Java class assuming that `cls` represents the class object reference:

```
jmethodID methodID

// Method is "void objectCallBack()
methodID = env->GetMethodID(cls, "objectCallBack", "()V");

// Method is "static void classCallBack()
methodID = env->GetStaticMethodID(cls,
"classCallBack", "()V");

// Method is "int getLength(String str)"
methodID = env->GetMethodID(cls, "getLength", "(Ljava/lang/String;)I");

// Method is "int[] increment(int[], int)"
methodID = env->GetMethodID(cls, "increment", "([II)[I");
```

Calling an instance or static method is easy. You need to use an object/class, the method ID, and method arguments, if any, to call a method. You can use any of the following methods to call an instance method of an object:

- <RRR> `Call<Xxx>Method(jobject obj, jmethodID methodID, arg1, arg2...)`
- <RRR> `Call<Xxx>MethodA(jobject obj, jmethodID methodID, const jvalue *args)`
- <RRR> `Call<Xxx>MethodV(jobject obj, jmethodID methodID, va_list args)`

Here, `<Xxx>` in the method name is the return type of the method and it

could be Boolean, Byte, Char, Double, Float, Int, Long, Short, Object, or Void. The <RRR> is the return type of the method and it could be jboolean, jbyte, jchar, jdouble, jfloat, jint, jlong, jshort, jobject, or void depending on the corresponding <Xxx> value. The difference between Call<Xxx>Method(), Call<Xxx>MethodA(), and Call<Xx>MethodV() is how you want to pass the arguments to the method. The Call<Xxx>Method() method lets you pass arguments to a method as a comma-separated list. The Call<Xxx>MethodA() method lets you pass arguments to a method as an array of jvalue type. The Call<Xxx>MethodV() method lets you pass arguments to a method as va\_list. The following snippet of code shows how to call an instance method assuming that obj is a reference of jobject type and the method ID is methodID:

```
// Method is "void m1()"
env->CallVoidMethod(obj, methodID);

// Method is "void m2(int a)"
env->CallVoidMethod(obj, methodID, 109);

// Method is "int m2(double a)"
jint value = env->CallIntMethod(obj, methodID,
109.23);
```

Calling a static method is similar to calling an instance method. You need to use a class object reference to call a static method. You need to use one of the following JNI functions to call a static method. Note that the JNI function names, which are used to call static methods, contain the word Static.

- <RRR> CallStatic<Xxx>Method(jclass cls, jmethodID methodID, arg1, arg2...)
- <RRR> CallStatic<Xxx>MethodA(jclass cls, jmethodID methodID, jvalue \*args)
- <RRR> CallStatic<Xxx>MethodV(jclass cls, jmethodID methodID, va\_list args)

The JNI lets you call an instance method on an object from any class in its

class hierarchy. When you use a `Call<Xxx>Method()` function, it uses the object's class to call the method. Consider the following class hierarchy:

```
// A.java
package com.jdojo.jni;

public class A {
 public int m1() {
 return 1;
 }
}

// B.java
package com.jdojo.jni;

public class B extends A {
 @Override
 public int m1() {
 return 3;
 }
}

// C.java
package com.jdojo.jni;

public class C extends B {
 @Override
 public int m1() {
 return 3;
 }
}
```

Classes B and C override the `m1()` method. If you use `CallIntMethod()` to call the `m1()` method of an object of class C, it will call `m1()` method in class C and it returns 3. The JNI lets you call the `m1()` method in class A or class B using an object of class C. To call a method on an object from its superclass, you need to use one of the following JNI methods:

- <RRR> `CallNonvirtual<Xxx>Method(jobject obj, jclass cls, jmethodID methodID,`

- <RRR> CallNonvirtual<Xxx>MethodA(jobject obj, jclass cls, jmethodID methodID, const jvalue \*args)
- <RRR> CallNonvirtual<Xxx>MethodV(jobject obj, jclass cls, jmethodID methodID, va\_list args)

You need to use the reference of the object and its class in these versions of the methods. The methodID must be obtained using the class from which the method needs to be called. For example, the following snippet of code calls the m1() method from class B on an object of class C. The code also creates an object of class C.

```
// Get the class references for B and C
jclass bCls = env->FindClass("com/jdojo/jni/B");
jclass cCls = env->FindClass("com/jdojo/jni/C");

// Get method ID for the constructor of class C
jmethodID cConstrctorID = env->GetMethodID(cCls, "<init>", "()V");

// Create an object of class C
jobject cObject = env->NewObject(cCls, cConstrctorID);

// Get the method ID for the m1() method in class B
jmethodID bMethodID = env->GetMethodID(bCls, "m1", "()I");

// Call the m1() method in class B using an object of
// class C
jint h = env->CallNonvirtualIntMethod(cObject, bCls,
bMethodID);

// will print 2, which is returned from m1() in class
B
printf("%i\n", h);
```

Let's look at a complete example of accessing fields and methods of a Java

object in native code. [Listing 8-10](#) contains the Java code in which a class named `JNIJavaObjectAccessTest` contains two fields named `num` and `count`. It also contains two methods named `objectCallBack()` and `classCallBack()`. You will access the fields and methods in native code. It has a native method called `callBack()`. The `callBack()` native method increments the `num` and `count` fields by 1 and calls the `objectCallBack()` and `classCallBack()` methods. Before you can run the `JNIJavaObjectAccessTest` class, you will need to generate the `com_jdojo_jni_JNIJavaObjectAccessTest.h` C++ header file and the shared library including the contents from the `jnihavaobjectaccesstest.cpp` file as shown in [Listing 8-11](#).

**[Listing 8-10.](#)** Accessing Fields and Methods of Java Objects/Classes from Native Code

```
// JNIJavaObjectAccessTest.java
package com.jdojo.jni;

public class JNIJavaObjectAccessTest {
 static {
 System.loadLibrary("beginningjava");
 }

 private int num = 10;
 private static int count = 1001;

 public void objectCallBack() {
 System.out.println("Inside
objectCallBack() method.");
 }

 public static void classCallBack() {
 System.out.println("Inside
classCallBack() method.");
 }

 public native void callBack();

 public int hashCode() {
```

```

 return -9999;
 }

 public static void main(String[] args) {
 JNIJavaObjectAccessTest test = new
 JNIJavaObjectAccessTest();

 System.out.println("Before calling native
method...");

 System.out.println("num = " + test.num);
 System.out.println("count = " + count);

 // Call native method
 test.callBack();

 System.out.println("After calling native
method...");

 System.out.println("num = " + test.num);
 System.out.println("count = " + count);
 }
}

```

---

```

Before calling native method...
num = 10
count = 1001
Inside objectCallBack() method.
Inside classCallBack() method.
After calling native method...
num = 11
count = 1002

```

---

***Listing 8-11.*** Contents of the the jnijavaobjectaccessstest.cpp File That Contains the C++ Implementation of the callBack( ) Native Methods Declared in JNIJavaObjectAccessTest Class

```

// jnijavaobjectaccessstest.cpp
#include <stdio.h>
#include <jni.h>

```

```
#include "com_jdojo_jni_JNIJavaObjectAccessTest.h"

JNIEXPORT void JNICALL
Java_com_jdojo_jni_JNIJavaObjectAccessTest_callBack
(JNIEnv *env, jobject obj) {
 jclass cls;

 // Get the class reference for the object
 cls = env->GetObjectClass(obj);
 if (cls == NULL) {
 return;
 }

 // Access the fields
 jfieldID numFieldId = env->GetFieldID(cls, "num",
"I");
 jfieldID countFieldId = env->GetStaticFieldID(cls,
"count", "I");

 jint numValue = env->GetIntField(obj, numFieldId);
 jint countValue = env->GetStaticIntField(cls,
countFieldId);

 numValue = numValue + 1;
 countValue = countValue + 1;

 env->SetIntField(obj, numFieldId, numValue);
 env->SetStaticIntField(cls, countFieldId,
countValue);

 // Call the instance method
 jmethodID instanceMethodID = env->GetMethodID(cls,
 "objectCallBack",
 "()V");
 if (instanceMethodID != 0) {
 env->CallVoidMethod(obj, instanceMethodID);
 }

 // Call the static method
 jmethodID staticMethodID = env-
```

```

>GetStaticMethodID(cls,
 "classCallBack",
 "()V");
if (staticMethodID != 0) {
 env->CallStaticVoidMethod(cls, staticMethodID);
}

return;
}

```

## Creating Java Objects

The JNI lets you create Java objects in native code without invoking any constructor or by invoking a specific constructor. You need to use the `AllocObject()` JNI function to allocate memory for a Java object without invoking any of its constructors. Note that all instance fields will have their default values according to their data types. Instance fields will not be initialized when you use `AllocObject()` JNI function and no instance initializer will be invoked either. Here is the snippet of code to allocate memory for an object of a class in Java:

```

jclass cls = get the class reference;
jobject obj = env->AllocObject(cls);
if (obj == NULL) {
 // The object could not be created. Handle the
 error condition.
}

```

You can create a Java object by invoking a specific constructor of a Java class using one of the following JNI functions. The functions differ only in how to pass the parameters for a constructor.

- `jobject NewObject(jclass clazz, jmethodID methodID, arg1, arg2...)`
- `jobject NewObjectA(jclass clazz, jmethodID methodID, const jvalue *args)`
- `jobject NewObjectV(jclass clazz,`

```
jmethodID methodID, va_list args)
```

The methodID parameter is the method ID of the constructor that you want to invoke. There is a special string that is used for a method name when you want to get the method ID for a constructor of a class. You need to use <init> or \$init\$ as the method name for a constructor. Consider the code for a class named IntWrapper as shown in [Listing 8-12](#).

**[Listing 8-12](#)**. A Sample Class to Demonstrate the Java Object Creation in Native Code

```
// IntWrapper.java
package com.jdojo.jni;

public class IntWrapper {
 private int value = -1;

 public IntWrapper() {
 }

 public IntWrapper(int value) {
 this.value = value;
 }

 public int getValue() {
 return value;
 }
}
```

You can get the reference of the IntWrapper class in native C++ code as shown:

```
jclass wrapperCls = env->FindClass("com/jdojo/jni/IntWrapper");
```

The following C++ code allocates memory for an IntWrapper object without invoking a constructor:

```
jobject wrapperObject = env->AllocObject(wrapperCls);
```

At this point, `wrapperObject` exists in memory and its instance field `value` still has the default value of 0. If you call the `getValue()` method on `wrapperObject` at this point, it will return 0 and not -1, as you might expect.

You need to use the `NewObject()` JNI function if you want to create an object of a Java class by invoking one of its constructors. The following snippet of code creates an object of the `IntWrapper` class by invoking its no-args constructor. The signature for a constructor depends on the number and type of parameters it accepts. For the no-args constructor, the signature is `()V`. If a constructor accepts an `int` parameter, its signature would be `(I)V`. You can get the signature of a constructor of a class by using the `javap` command with the `-s` option. Use the `-private` option with `javap` if you also want to include the private member's signatures.

```
// Get the method ID for the default constructor of
class IntWrapper
jmethodID mid = env->GetMethodID(wrapperCls, "<init>",
"()V");

// Create an object of class IntWrapper using the
default constructor
jobject wrapperObject = env->NewObject(wrapperCls,
mid);
```

At this point, if you call the `getValue()` method on `wrapperObject`, it will return -1, which is the initial value of the `value` instance field. When a constructor is called, all instance fields are initialized.

The following snippet of code calls the second version of the constructor of the `IntWrapper` class, which accepts an `int` parameter. It passes 999 as the value for the parameter for the constructor `IntWrapper(int value)`.

```
// Get the method ID for the constructor for class
IntWrapper
jmethodID wrapperConstrctorID = env-
>GetMethodID(wrapperCls, "<init>", "(I)V");

// Create an object of class IntWrapper passing 999 to
the constructor
jobject wrapperObject = env->NewObject(wrapperCls,
wrapperConstrctorID, 999);
```

At this point, if you call the `getValue()` method on `abcObject`, it will return 999, which is set in its constructor during its creation.

---

**Tip** The `AllocObject()` and `NewObject()` JNI functions can be used only to create objects of a non-array reference type. You need to use the `NewObjectArray()` JNI function to create an array of a specific type.

---

## Exception Handling

The JNI lets you handle exceptions in native code. Native code can detect and handle exceptions that are thrown in the JVM as a result of calling a JNI function. Native code can also throw an exception that can be propagated to Java code. The exception handling mechanism in the native code differs from that of the Java code. When an exception is thrown in Java code, the control is transferred immediately to the nearest `catch` block that can handle the exception. When an exception is thrown during native code execution, the native code keeps executing and the exception remains pending until the control returns to the Java code. Once an exception is pending, you should not execute any other JNI functions except the ones that free native resources. There are two ways to detect if an exception has occurred as a result of a JNI function call in the native code:

- By checking for the special return value from the function
- By checking if an exception has occurred after the function returns

Some JNI functions return a special value if an exception occurs. For example, if you call the `FindClass()` JNI function and the class is not found, any one of the four exceptions may be thrown: `ClassFormatError`, `ClassCircularityError`, `NoClassDefFoundError`, or `OutOfMemoryError`. The `FindClass()` JNI function returns `NULL` as a special value if any of the four exceptions is thrown. You should check for `NULL` as a return value just after a call to the `FindClass()` JNI function and write code to handle the exception. Typically, you return the control to the caller so that the caller can handle the exception as shown:

```

jclass cls = env->FindClass("abc/xyz/NonExistentClass");
if (cls == NULL) {
 /* Here, free up any resources you had held and
 * return. Exception is pending at this time.
 * It will be thrown when the control returns to the Java
 * code.
 */
 return;
}

```

In some cases, it is not possible to return a special value from a JNI function to indicate that an exception has occurred. Suppose you are accessing a Java array in native code and you have exceeded the array's boundary. In this case, an exception of type `ArrayIndexOutOfBoundsException` is thrown by the JVM. You may call a method of a Java object where an exception occurs. In such cases, you need to use either `ExceptionOccurred()` or `ExceptionCheck()` JNI function immediately after such JNI function call to check if an exception has occurred. These functions have the following signatures:

- `jthrowable ExceptionOccurred()`
- `jboolean ExceptionCheck()`

If an exception occurred during a function call, the `ExceptionOccurred()` function returns the reference of that exception object. Otherwise, it returns `NULL`. If an exception occurred during the function call, the `ExceptionCheck()` function returns `JNI_TRUE`. Otherwise, it returns `JNI_FALSE`. The following snippet of code demonstrates how to use these functions. You only need to use one of the two functions, not both at the same time.

```

// Using method ExceptionOccurred()

// Call a JNI function, which may throw an exception

jthrowable e = env->ExceptionOccurred();
if (e != NULL) {
 /* Free up any resources that you had held and
 */
}

```

```

return. Exception is pending at this
 time. It will be thrown when the control
returns to the Java code.
 */
 return;
}

// Using method ExceptionCheck()

// Call a JNI function, which may throw an exception

jboolean gotException = env->ExceptionCheck();

if (gotException) {
 /* Free up any resources that you had held and
return. Exception is pending at
 this time. It will be thrown when the control
returns to the Java code.
 */
 return;
}

```

Once you have detected an exception that has occurred in native code, you have three options:

- Clear the exception and handle it in native code.
- Return the control to Java code and let the Java code handle the exception.
- Clear the exception, handle it in native code, and throw a new exception from native code that Java code can handle.

The following sections explain the three ways of handling the exceptions.

## Handle the Exception in Native Code

You can clear the exception and handle the exceptional condition in the native code. Use the `ExceptionClear()` JNI function to clear a pending exception, as shown:

```
// Call a JNI function, which may throw an exception

jboolean gotException = env->ExceptionCheck();
if (gotException) {
 // Clear the exception
 env->ExceptionClear();

 // Write some code to take care of the
exceptional condition
}
```

Once you clear the exception, that exception is not pending anymore.

## Handling the Exception in Java Code

You can return the control to the caller by using a `return` statement and let the caller handle the exception as shown:

```
// Call a JNI function, which may throw an exception

jboolean gotException = env->ExceptionCheck();
if (gotException) {
 /* Free up any resources that you had held and
return. Exception is pending at this time. It will be
thrown when the control returns to the caller.
 */
 return;
}
```

## Throwing a New Exception from Native Code

You can handle the exception in the native code, clear the exception, and throw a new exception. Note that throwing an exception from the native code does not transfer the control back to the Java code. You must write code such as a `return` statement to transfer the control back to the Java code, so the exception you throw is handled in Java. You can throw an exception in the native code using either of the following two JNI functions. Both functions return zero on success and a negative integer on failure.

- jint Throw(jthrowable obj)
- jint ThrowNew(jclass clazz, const char \*message)

The Throw() function accepts a jthrowable object. The ThrowNew() function accepts the exception's class reference and a message. The following snippet of code shows how to throw a java.lang.Exception using the ThrowNew() function:

```
if (someErrorConditionIsTrue) {
 jclass cls = env->FindClass("java/lang/Exception");

 // Check for exception here (omitted)
 env->ThrowNew(cls, "your error message goes
here");
 return;
}
```

**Tip** If you want to print the stack trace of an exception in the native code, you can use the ExceptionDescribe() JNI function. It prints an exception stack trace on the standard error. If you want to raise a fatal error from the native code, you can use the FatalError(const char \*msg) JNI function. The FatalError() function does not return and the JVM will not recover from this error either. A native method declared in Java code can also use a throws clause the same way as a Java non-native method can. The following is a valid native method declaration inside a Java class:

```
public native int myMethod() throws Exception;
```

## Creating an Instance of the JVM

So far, you have seen Java applications using native code. Now you are ready to see the reverse. That is, a native application using Java code. Why would you use Java code from a native application? You may want to use Java code from a

native application for the following reasons:

- You may already have an application coded in Java and you want to use the existing code.
- Java provides a rich set of class libraries. You may want to take advantage of Java class libraries in your native application.

The part of the JNI API that lets you create and load a JVM in native code is known as the *Invocation API*. The JNI lets you embed a JVM inside a native application. That is, you can create a JVM from a native application and use Java classes as you use them in a Java application. It takes just a few lines of code to create a JVM in native code. All you need to do is to prepare the initial arguments that you want to pass to a JVM and call the `JNI_CreateJavaVM()` Invocation API function to create the JVM.

The initial argument that is passed to a JVM is a `JavaVMInitArgs` structure that is defined as follows:

```
typedef struct JavaVMInitArgs {
 jint version;
 jint nOptions;
 JavaVMOption *options;
 jboolean ignoreUnrecognized;
} JavaVMInitArgs;
```

The `version` field indicates the JNI version and it must be set to at least `JNI_VERSION_1_2`. The `nOptions` field is set to the number of options you want to pass to a JVM. The `options` field is an array of a `JavaVMOption` structure, which is defined as follows:

```
typedef struct JavaVMOption {
 char *optionString;
 void *extraInfo;
} JavaVMOption;
```

If `ignoreUnrecognized` is set to `JNI_TRUE`, the `JNI_CreateJavaVM()` function will ignore the unrecognized options. If it is set to `JNI_FALSE`, the `JNI_CreateJavaVM()` function will return `JNI_ERR` as soon as it encounters an unrecognized option.

The `optionString` field in the `JavaVMOption` structure is a string that is the value for the option to a JVM in the default platform encoding.

The `extraInfo` field is used for special kinds of JVM arguments. It represents a function hook for redirecting a JVM message, a JVM exit hook, or a JVM abort hook. The type of hook the `extraInfo` field represents depends on the value for the `optionString` field. If the `optionString` field has the value of `vfprintf`, `exit`, or `abort`, the `extraInfo` field represents a JVM message redirection hook, a JVM exit hook, or a JVM abort hook, respectively. Note that `vfprintf` hook redirects only the JVM message to the hook. It does not redirect the `System.out` and `System.err` messages to the hook. If you have set a `vsprintf` hook in native code and used one of the `print()`/`println()` methods of `System.out`/`System.err` in Java code, those messages would not be redirected to your `vfprintf` hook. You need to use the `setOut()` and `setErr()` methods of the `System` class to redirect `System.out` and `System.err` messages. The exit hook for a JVM is called upon a normal termination of the JVM such as by calling the `System.exit(int exitCode)` method in Java code. The abort hook for a JVM is called upon abnormal termination of the JVM. The following snippet of code shows how to populate the `extraInfo` field with a different VM hook. First, three functions are defined that will serve as the three types of hooks. Note that the functions must have the same signatures as shown in the following snippet of code:

```
jint JNICALL jvmMsgRedirection_hook(FILE *stream,
const char *format, va_list args) {
 // You can log the VM message here.
 // Let us just print the VM message on the
standard output.
 return vfprintf(stdout, format, args);
}

void JNICALL jvmExit_hook(jint code) {
 // You can do some cleanup work here

 printf("VM exited with exit code %i\n", code);
}

void JNICALL jvmAbort_hook() {
```

```

 printf("VM was aborted\n");
 }

JavaVMOption jvmOption[3];

// Add JVM hooks
options[0].optionString = "vfprintf";
options[0].extraInfo = jvmMsgRedirection_hook;

options[1].optionString = "exit";
options[1].extraInfo = jvmExit_hook;

options[2].optionString = "abort";
options[2].extraInfo = jvmAbort_hook;

```

The following snippet of code shows how to populate a JavaVMIInitArgs structure with initial arguments for the JVM. It sets only two arguments, `java.class.path` and `java.lib.path`. You can set more JVM arguments if you need to.

```

// Populate the JVM options in JavaVMOption structure
const jint MAX_OPTIONS = 2; // will pass two arguments
 // to the JVM

JavaVMOption options[MAX_OPTIONS];

// Our first argument is java.class.path (CLASSPATH
// for JVM)
options[0].optionString = "-Djava.class.path=.;c:\\\\myjni\\\\classes";

// Our second argument is java.library.path (PATH to
// find a shared library)
options[1].optionString = "-Djava.library.path=c:\\\\myjni\\\\libs";

// Populate JavaVMIInitArgs structure with options
// details
JavaVMIInitArgs vm_args;
vm_args.version = JNI_VERSION_1_2;
vm_args.nOptions = MAX_OPTIONS;

```

```
vm_args.options = options;
vm_args.ignoreUnrecognized = true;
```

Once you have the JVM arguments ready in a `JavaVMInitArgs` structure, you are just one JNI function call away from creating a JVM in your native code. The `JNI_CreateJavaVM()` JNI function accepts three arguments. The first argument is a pointer to a `JavaVM` structure that represent the JVM. The second argument is a pointer to a `JNIEnv` structure, which is the JNI interface. The third argument is the initial argument to the JVM. The following snippet of code shows how to create a JVM in native code. You need to check for any errors that the `JNI_CreateJavaVM()` function might return. It returns `JNI_ERR` if cannot create a JVM.

```
JNIEnv *env;
JavaVM *jvm;
long status;
status = JNI_CreateJavaVM(&jvm, (void**) &env,
&vm_args);

if (status == JNI_ERR) {
 printf("Could not create VM. Exiting
application...\n");
 return 1;
}
```

Once you get the `JNIEnv` structure, you can use it to find a class, create an object of that class, and execute any methods on that object. In fact, it lets you access the entire JVM using JNI.

After you are done with the JVM, you need to destroy it.

```
// Destroy JVM
jvm->DestroyJavaVM();
```

[Listing 8-13](#) contains the code for a `EmbeddedJVMJNI` class with a `printMsg()` static method to print a message on the standard output. Later, you will create a JVM in native code, and call the `printMsg()` method.

**[Listing 8-13.](#)** An `EmbeddedJVMJNI` Java Class

```
// EmbeddedJVMJNI.java
package com.jdojo.jni;

public class EmbeddedJVMJNI {
 public static void printMsg(String msg) {
 System.out.println(msg);
 }
}
```

The C++ console application listed in [Listing 8-14](#) creates a JVM and calls the `printMsg()` method of the `EmbeddedJVMJNI` class. The book's source code contains the C++ code in `createjvm.cpp` file. The program lets you specify the CLASSPATH as the command line argument. If you do not specify the CLASSPATH, it uses the current directory as the CLASSPATH.

***Listing 8-14.*** Contents of the `createjvm.cpp` File That Creates a JVM in a Native Application

```
// createjvm.cpp
#include <jni.h>
#include <iostream>
#include <string>

int main(int argc, char **argv) {
 std::string classpath("");
 if (argc < 2) {
 std::cout << "You did not pass the classpath."
 << " Using the current directory as the
classpath.\n";
 classpath = ".";
 } else {
 classpath = argv[1];
 }

 std::string classpathOption("-Djava.class.path=");
 classpathOption = classpathOption + classpath;
```

```

// Pass the classpath as an argument to the JVM
const jint MAX_OPTIONS = 1;
JavaVMOption options[MAX_OPTIONS];
options[0].optionString = (char *)
(classpathOption.c_str());;

// Prepare the JVM initial arguments
JavaVMInitArgs vm_args;
vm_args.version = JNI_VERSION_1_2;
vm_args.nOptions = MAX_OPTIONS;
vm_args.options = options;
vm_args.ignoreUnrecognized = true;

// Create the JVM
JavaVM *jvm;
JNIEnv *env;
long status = JNI_CreateJavaVM(&jvm, (void**)&env, &vm_args);
if (status == JNI_ERR) {
 std::cout << "Could not create VM. Exiting
application...\n";
 return 1;
}

const char *className
= "com/jdojo/jni/EmbeddedJVMJNI";
jclass cls = env->FindClass(className);
if (cls == NULL) {
 // Print exception stack trace and destroy the
JVM
 env->ExceptionDescribe();
 jvm->DestroyJavaVM();
 return 1;
}

if (cls != NULL) {
 jmethodID mid = env->GetStaticMethodID(cls,
"printMsg",
 "(Ljava/lang/String;)V");
 if (mid != NULL) {

```

```

 jstring m = env->NewStringUTF("Hello from
C++...\n");
 env->CallStaticVoidMethod(cls, mid, m);
 if (env->ExceptionCheck()) {
 env->ExceptionDescribe();
 env->ExceptionClear();
 }
 }
}

// Destroy JVM
jvm->DestroyJavaVM();
return 0;
}

```

You will need to compile the `createjvm.cpp` file into an executable. When you compile this program, you need to provide the path of the `jvm.lib` file, which is installed in the `JAVA_HOME\lib` directory on Windows. Assuming that you have installed the JDK in `C:\java8` on Windows, you can use the following command to create the `createjvm.exe` file on Windows:

```
C:> g++ -IC:/java8/include -IC:/java8/include/win32
 -o createjvm
 createjvm.cpp
 C:/java8/lib/jvm.lib
```

The command is entered on one line, but it is shown on multiple lines for readability. The first two lines in the command are the same as you were using to create the shared libraries before. The `-o` option is used to specify the executable output file name, which is `createjvm` in this case. The last option is the path of the library called `jvm.lib` that needs to be statically linked.

The following command will create a `createjvm` executable file on Linux, assuming that you have installed the JDK in the `/home/ksharan/java8` directory:

```
$ g++ -I/home/ksharan/java8/include -
I/home/ksharan/java8/include/linux
 -o createjvm
 createjvm.cpp
```

```
/home/ksharan/java8/jre/lib/i386/client/libjvm.so
```

On Windows, when you run the `createjvm.exe` application, it will look for the `jvm.dll` shared library, which is found in `JRE_HOME\bin\client` directory. You need to include the directory that contains the `jvm.dll` file in the `PATH` environment variable.

```
C:\> SET PATH=C:\java8\bin\client;%PATH%
C:\> createjvm C:\myclasses
Hello from C++...
```

When you run the `createjvm.exe` file, you may get the following error:

```
Exception in thread "main"
java.lang.NoClassDefFoundError:
com/jdojo/jni/EmbeddedJVMJNI
Caused by: java.lang.ClassNotFoundException:
com.jdojo.jni.EmbeddedJVMJNI
...
...
```

The error indicates that the `CLASSPATH` was not set properly and the JVM was not able to find the `EmbeddedJVMJNI` class. Using the above command, the class is searched in the `C:\myclasses` directory. To fix this error, either run the `createjvm` application with correct argument for the `CLASSPATH` or move the `com\jdojo\jni\EmbeddedJVMJNI.class` file into the `C:\myclasses` directory.

On Linux, you will need to set the `LD_LIBRARY_PATH`, so the `libjvm.so` file is located when the `createjvm` application is run. You can set this as follows:

```
$ export
LD_LIBRARY_PATH=/home/ksharan/java8/jre/lib/i386/client
```

Now you are ready to run the `createjvm` application as shown:

```
$./createjvm /home/ksharan/myclasses
Hello from C++...
```

The command will search for the

com/jdojo/jni/EmbeddedJVMJNI.class in the /home/ksharan/myclasses directory.

## Synchronization in Native Code

The JNI provides two functions called `MonitorEnter()` and `MonitorExit()` to synchronize access to native code in a multithreaded environment. These functions are used in tandem and their use is equivalent to using the `synchronized` keyword in Java code. These functions are declared as follows:

- `jint MonitorEnter(jobject obj)`
- `jint MonitorExit(jobject obj)`

Both functions return 0 (`JNI_OK` is defined as 0 in the `jni.h` header file) on success and a negative number on failure. You must check their return values to handle the code synchronization properly. Here is the sample Java code that uses synchronization:

```
Object someObject = get the reference of a java
object;

// Other logic goes here

synchronized(someObject) {
 // Synchronized code goes here
}
```

The equivalent native code is as follows:

```
jobject someObject = get the reference of a java
object;

// Other logic goes here

jint enterStatus = env->MonitorEnter(someObject);
if (enterStatus != JNI_OK) {
 // Handle the error condition here
```

```

}

// Synchronized code goes here

jint exitStatus = env->MonitorExit(someObject);
if (exitStatus != JNI_OK) {
 // Handle the error condition here
}

```

There are no equivalent JNI functions for Java `wait()` and `notify()` to aid in thread synchronization. However, you can always invoke these two Java methods from native code.

## Summary

The Java Native Interface (JNI) is a programming interface that facilitates interaction between Java programs and programs written in native languages such as C, C++, FORTRAN, etc. The JNI makes it possible to use a method in Java code and to implement that method in a native language such as C or C++. The JNI also makes it possible to embed the JVM in a native application that can access the Java class libraries.

The method used in Java but implemented in a native language is called a native method, and it is declared using the keyword `native`. The native method in Java does not have a body. Its body is represented by a semicolon. The implementation of the native method is written in a native language and compiled into a shared library. The shared library is made available to the Java runtime using the `java.library.path` JVM option or they are located in the `PATH` environment variable.

The `javah` command is used to generate the required header file for the native language. It takes the fully qualified class name of the class containing the native method as an argument.

The JNI defines mapping between data types used in Java and native code. For example, `jboolean`, `jchar`, `jint`, etc. are the native equivalent of the `boolean`, `char`, `int`, etc. primitive data types in Java. The `jclass`, `jobject`, and `jstring` types in native code are mapped to the `Class`, `Object`, and `String` classes in Java.

The JNI provides functions to facilitate the conversion between the Java and

native representation of strings. It also provides special functions to access the length of Java arrays and array elements.

The JNI also lets you create Java objects inside the native code. You can also access the fields and methods of the Java objects inside the native code.

The `Throwable` type in Java is mapped to the type `jthrowable` in native code. The JNI lets you handle exceptions in native code. Native code can detect and handle exceptions that are thrown in the JVM as a result of calling a JNI function. Native code can also throw an exception that can be propagated to Java code. When an exception is thrown during native code execution, the native code keeps executing and the exception remains pending until the control returns to the Java code.

The JNI lets you embed the JVM in a native application giving full access to the rich Java class library to them. The part of the JNI API that lets you create and load a JVM in native code is known as the Invocation API. The JVM is created in native code using the `JNI_CreateJavaVM()` method provided by the Invocation API.

In a multithreaded environment, it is possible to synchronize access to a critical section in native code by using the two JNI functions called `MonitorEnter()` and `MonitorExit()`. These functions are used in tandem and their use is equivalent to using the `synchronized` keyword in Java code.

# CHAPTER 9



## Introduction to JavaFX

---

In this chapter, you will learn

- What JavaFX is
- How to write simple JavaFX programs
- Properties, bindings, and observable collections in JavaFX
- Event handling
- Using layout panes, controls, 2D shapes, and drawing on a canvas
- Applying effects, transformations, and animations
- Using FXML to build UIs in JavaFX applications
- Printing nodes in JavaFX

JavaFX is a vast topic and it deserves a book by itself. This is an introductory chapter to show you the features offered by JavaFX. None of these topics are covered comprehensively.

## What Is JavaFX?

JavaFX is an open source Java-based GUI framework for developing rich client applications. It is comparable to other frameworks on the market such as Adobe Flex and Microsoft Silverlight. JavaFX is also seen as the successor of Swing in the arena of GUI development technology in the Java platform. The JavaFX library is available as a public Java API. JavaFX contains several features that


make it a preferred choice for developing rich client applications:

- JavaFX is written in Java, enabling you to take advantage of all Java features such as multithreading, generics, lambda expressions, etc. You can use any Java editor of your choice, such as NetBeans, to author, compile, run, debug, and package your JavaFX application.
- JavaFX supports data binding through its libraries.
- JavaFX code can be written using any JVM-supported scripting languages such as Visage, Groovy, Scala, Nashorn, etc.
- JavaFX offers two ways to build a UI: using Java code and using FXML. FXML is an XML-based scriptable markup language to define a UI declaratively. Oracle provides a tool called Scene Builder that is a visual editor for building FXML.
- JavaFX provides a rich set of multimedia support such as playing back audios and videos. It takes advantage of available codecs on the platform.
- JavaFX lets you embed web content in applications.
- JavaFX provides out-of-the-box support for applying effects and animations, which are important for developing gaming applications. In JavaFX, you can achieve sophisticated animations by writing just a few lines of code.

The JavaFX platform consists of the following components to take advantage of the Java native libraries and the available hardware and software on the platform. The arrangement of those components is shown in [Figure 9-1](#).

- JavaFX Public API
- Quantum Toolkit
- Prism
- Glass Windowing Toolkit
- Media Engine

- Web Engine

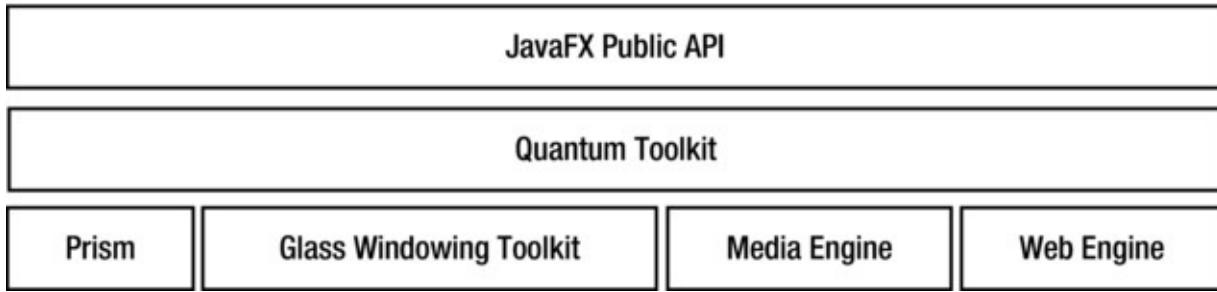

**Figure 9-1.** Components making up the JavaFX platform

The GUI in JavaFX is constructed as a *scene graph*. A scene graph is a collection of visual elements called nodes that are arranged in a tree-like hierarchy. A scene graph is built using the public JavaFX API. Nodes in a scene graph can handle user inputs and gestures. They can have effects, transformations, and states. Types of nodes in a scene graph include simple user interface (UI) controls such as buttons, text fields, 2D and 3D shapes, images, media (audios and videos), web content, charts, etc.

*Prism* is a hardware accelerated graphics pipeline used for rendering the scene graph. If hardware-accelerated rendering is not available on the platform, Java 2D is used as the fallback rendering mechanism. For example, before using Java 2D for rendering, JavaFX will try using DirectX on Windows and OpenGL on Mac, Linux, and embedded platforms.

The *Glass Windowing Toolkit* provides graphics and windowing services such as windows and the timer using the native operating system. The toolkit is also responsible for managing event queues. In JavaFX, event queues are managed by a single, operating system level thread called *JavaFX Application Thread*. All user input events are dispatched on the JavaFX Application Thread. JavaFX requires that a live scene graph must be modified only on the JavaFX Application Thread.

Prism uses a separate thread, other than the JavaFX Application Thread, for the rendering purpose. It accelerates the rendering process by rendering a frame while the next frame is being processed. When a scene graph is modified, for example, by entering text in a text field, Prism needs to re-render the scene graph. Synchronizing the scene graph with Prism is accomplished using an event called a *pulse* event. A pulse event is queued on the JavaFX Application Thread when the scene graph is modified and it needs to be re-rendered. A pulse event is an indication that the scene graph is not in sync with the rendering layer in Prism and the latest frame at the Prism level should be rendered. Pulse events are

throttled at 60 frames per second maximum.

The media engine is responsible for providing media support in JavaFX, for example, playing back audios and videos. It takes advantage of the available codecs on the platform. The media engine uses a separate thread to process media frames and the JavaFX Application Thread to synchronize the frames with the scene graph. The media engine is based on *GStreamer*, which is an open source multimedia framework.

The web engine is responsible for processing web content (HTML) embedded in the scene graph. Prism is responsible for rendering the web content. The web engine is based on *Webkit*, which is an open source web browser engine. It supports HTML5, Cascading Style Sheets (CSS), JavaScript, and Document Object Model (DOM).

The *Quantum* toolkit is an abstraction over the low-level components such as Prism, Glass, Media Engine, and Web Engine. It also facilitates coordination between low-level components.

## The History of JavaFX

JavaFX was originally developed by Chris Oliver at Seebeyond and it was called F3 (**F**orm **F**ollows **F**unction). F3 was a Java scripting language for easily developing GUI applications. It offered declarative syntax, static typing, type inference, data binding, animation, 2D graphics, Swing components, etc. Seebeyond was bought by Sun Microsystems, and F3 was named as JavaFX in 2007. Oracle acquired Sun Microsystem in 2010. Oracle open sourced JavaFX in 2013.

The first version of JavaFX was released in the fourth quarter of 2008. The current release for JavaFX is version 8.0. The version number of JavaFX jumped from 2.2 to 8.0. From Java 8, the version numbers of Java SE and JavaFX will be the same. In future, the major versions of Java SE and JavaFX will be released at the same time and their versions will be kept in sync. For example, JavaFX 9 will be released with Java SE 9, JavaFX 10 will be released with Java SE 10, and so on.

[Table 9-1](#) contains the list of releases of JavaFX. Starting with the release of Java SE 8, JavaFX is part of the Java SE runtime library and you do not need to perform any additional setup to compile and run your JavaFX programs.

**Table 9-1.** JavaFX Releases

<b>Release Date</b>	<b>Version</b>	<b>Comments</b>
Q4, 2008	JavaFX 1.0	It was the initial release of JavaFX. It used a declaration language called <i>JavaFX Script</i> to write the JavaFX code.
Q1, 2009	JavaFX 1.1	Support for JavaFX Mobile was introduced.
Q2, 2009	JavaFX 1.2	
Q2, 2010	JavaFX 1.3	
Q3, 2010	JavaFX 1.3.1	
Q4, 2011	JavaFX 2.0	Support for JavaFX script and JavaFX Mobile was dropped. It used the Java programming language to write the JavaFX code.
Q2, 2012	JavaFX 2.1	Support for Mac OS for desktop only was introduced.
Q3, 2012	JavaFX 2.2	
Q1, 2014	JavaFX 8.0	JavaFX version jumped from 2.2 to 8.0. JavaFX and Java SE versions will match from Java 8.

# System Requirements

To use the examples in this chapter, you need to have JDK8 installed. It is not necessary to have the NetBeans IDE to compile and run the programs in this book. However, the NetBeans IDE has special features for creating, running, and packaging JavaFX applications that makes developing JavaFX applications using NetBeans easier. You can use any other IDE such as Eclipse, JDeveloper, IntelliJ IDEA, etc. or just use the command prompt to compile and run JavaFX programs.

# The JavaFX Runtime Library

All JavaFX classes are packaged in a JAR file named `jfxrt.jar` that is located in the `JRE_HOME\lib\ext` directory where `JRE_HOME` is the installation directory for the JRE.

If you compile and run JavaFX programs on the command line, you do not need to worry about setting the JavaFX runtime JAR file in the CLASSPATH. Java 8 compiler (the `javac` command) and launcher (the `java` command) automatically include the JavaFX runtime JAR file in the CLASSPATH.

The NetBeans IDE automatically includes the JavaFX runtime JAR file in the CLASSPATH when you create a Java or JavaFX project. If you are using an IDE other than NetBeans, you may need to include `jfxrt.jar` in the IDE CLASSPATH to compile and run a JavaFX application from inside the IDE.

## JavaFX Source Code

Experienced developers sometimes prefer to look at the source code of the JavaFX library to learn how things are implemented behind the scenes. Oracle provides the JavaFX source code. The Java 8 installation copies the source in the JDK home directory. The file name is `javafx-src.zip`. Unzip the file in a directory and use your favorite Java editor to open the source code.

## Your First JavaFX Application

Your first JavaFX application will display the text `Hello JavaFX` in a window. You will take an incremental step-by-step approach to developing your first JavaFX application by adding as few lines of code as possible and learning what the code does and why it is needed.

### Creating the HelloJavaFX Class

A JavaFX application is a class that must inherit from the `Application` class. The `Application` class is in the `javafx.application` package. You will name your class `HelloFXApp` and it will be stored in the `com.jdojo.jfx` package.

```
// HelloFXApp.java
package com.jdojo.jfx;
```

```
import javafx.application.Application;

public class HelloFXApp extends Application {
 // Application logic goes here
}
```

The program includes a package declaration, an import statement, and the class declaration. There is nothing like JavaFX in the code. It looks like any other Java code. However, you have fulfilled one requirement of the JavaFX application by inheriting the `HelloFXApp` class from the `Application` class. The `HelloFXApp` class will not compile at this point.

## Overriding the start() Method

If you try compiling the `HelloFXApp` class, it will result in the following compile-time error:

```
HelloFXApp is not abstract and does not override
abstract method start(Stage) in Application
```

The error is stating that the `Application` class contains an abstract `start(Stage stage)` method, which has not been overridden in the `HelloFXApp` class. As a Java developer, you know what to do next: you either declare the `HelloJavaFX` class as abstract or provide an implementation for the `start()` method. You need to provide an implementation for the `start()` method in this class. The `start()` method in the `Application` class is declared as follows:

- `public abstract void start(Stage stage)  
throws java.lang.Exception`

The following is the revised code for your application:

```
// HelloFXApp.java
package com.jdojo.jfx;

import javafx.application.Application;
import javafx.stage.Stage;
```

```
public class HelloFXApp extends Application {
 @Override
 public void start(Stage stage) {
 // The logic for starting the application goes here
 }
}
```

In the revised code, you have incorporated two things:

- You have added one more `import` statement to import the `Stage` class from the `javafx.stage` package.
- You implemented the `start()` method. The `throws` clause for the method is dropped, which is fine by the rules for overriding methods in Java.

The `start()` method is the entry point for a JavaFX application. It is called by the JavaFX application launcher. Notice that the `start()` method is passed an instance of the `Stage` class, which is known as the *primary stage* of the application. You can create more stages as necessary in your application. However, the primary stage is always created by the JavaFX runtime for you.

---

**Tip** Every JavaFX application class must inherit from the `Application` class and provide the implementation for the `start(String stage)` method.

---

## Showing the Stage

Similar to a stage in the real world, a JavaFX stage is used to display a scene. A scene has visuals—such as text, shapes, images, controls, animations, effects, etc.—with which the user may interact, as is the case with all GUI-based applications.

In JavaFX, the primary stage is a container for a scene. The stage look-and-feel is different depending on the environment your application is run in. You do not need to take any action based on the environment because the JavaFX runtime takes care of all the details for you. For example, if the application runs as a desktop application, the primary stage will be a window with a title bar and an area to display the scene; if the application is run in a web browser as an

applet, the primary stage will be an embedded area in the browser window.

The primary stage created by the application launcher does not have a scene. You will create a scene for your stage in the next section.

You must show the stage to see the visuals contained in its scene. Use the `show()` method to show the stage. Optionally, you can set a title for the stage using the `setTitle()` method. The revised code for the `HelloFXApp` class is as follows:

```
// HelloFXApp.java
package com.jdojo.jfx;

import javafx.application.Application;
import javafx.stage.Stage;

public class HelloFXApp extends Application {
 @Override
 public void start(Stage stage) {
 // Set a title for the stage
 stage.setTitle("Hello JavaFX Application");

 // Show the stage
 stage.show();
 }
}
```

## Launching the Application

You are ready to run your first JavaFX application. You can use one of the following two options to run a JavaFX application:

- It is not necessary to have a `main()` method in the class to start a JavaFX application. When you run a Java class that inherits from the `Application` class, the `java` command launches the JavaFX application if the class being run does not contain the `main()` method.
- Include a `main()` method in the JavaFX application class. Inside the `main()` method, call the `launch()` static method of the `Application` class to launch the JavaFX

application. The `launch()` method takes a `String` array as an argument, which is the parameters passed to the JavaFX application.

If you are using the first option, you do not need to write any additional code for the `HelloJavaFX` class. If you are using the second option, the revised code for the `HelloFXApp` class with the `main()` method will be as shown in [Listing 9-1](#).

### ***Listing 9-1.*** A JavaFX Application Without a Scene

```
// HelloFXApp.java
package com.jdojo.jfx;

import javafx.application.Application;
import javafx.stage.Stage;

public class HelloFXApp extends Application {
 public static void main(String[] args) {
 // Launch the JavaFX application
 Application.launch(args);
 }

 @Override
 public void start(Stage stage) {
 stage.setTitle("Hello JavaFX
Application");
 stage.show();
 }
}
```

The `main()` method calls the `launch()` method, which will do some setup work and call the `start()` method of the `HelloFXApp` class. Your `start()` method sets the title for the primary stage and shows the stage.


Compile the `HelloFXApp` class using the following command:

```
javac com/jdojo/intro/HelloFXApp.java
```

Run the `HelloFXApp` class using the following command:

```
java com.jdojo.jfx.HelloFXApp
```

A window with a title bar as shown in [Figure 9-2](#) is displayed.

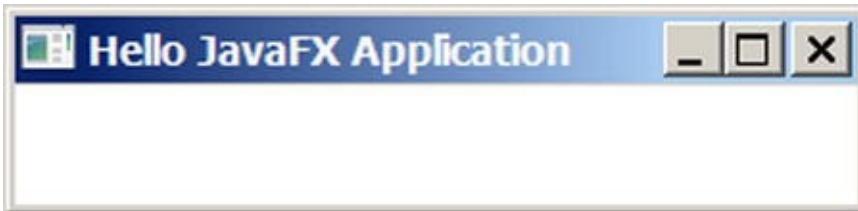

[Figure 9-2](#). A JavaFX stage without a scene

The main area of the window is empty. This is the content area in which the stage will show its scene. Because you do not have a scene for your stage yet, you see an empty area. The title bar shows the title that you have set in the `start()` method.

You can close the application using the Close menu option in the window title bar. Use Alt + F4 to close the window on Windows. You can use any other option to close the window as provided by your platform.

---

**Tip** The `launch()` method of the `Application` class does not return until all windows are closed or the application exits using the `Platform.exit()` method. The `Platform` class is in the `javafx.application` package.

---

You have not seen anything exciting in JavaFX yet. You need to wait for that until you create a scene in the next section.

## Adding the `main()` Method

As described in the previous section, the Java 8 launcher (the `java` command) does not require a `main()` method to launch a JavaFX application. If the class that you want to run inherits from the `Application` class, the `java` command launches the JavaFX application by automatically calling the `Application.launch()` method for you.

If you are using NetBeans IDE to create the JavaFX project, you do not need to have a `main()` method to launch your JavaFX application if you run the application by running the JavaFX project. However, the NetBeans IDE requires

you to have a `main()` method when you run the JavaFX application class as a file, for example, by selecting the `HelloFXApp` file, right-clicking it, and selecting the `Run File` option from the menu.

Some IDEs still require the `main()` method to launch a JavaFX application. All examples in this chapter will include the `main()` method that will launch the JavaFX applications.

## Adding a Scene to the Stage

An instance of the `Scene` class, which is in the `javafx.scene` package, represents a scene. A stage contains one scene. A scene contains visual contents.

The contents of the scene are arranged in a tree-like hierarchy. At the top of the hierarchy is the *root* node. The root node may contain child nodes, which in turn may contain their child nodes, and so on. You must have a root node to create a scene. You will use a `VBox` as the root node. `VBox` stands for vertical box, which arranges its children vertically.

```
VBox root = new VBox();
```

---

**Tip** Any node that inherits from the `javafx.scene.Parent` class can be used as the root node for a scene. Several nodes, known as layout panes or containers, for example, `VBox`, `HBox`, `Pane`, `FlowPane`, `GridPane`, `TilePane`, etc., can be used as a root node. `Group` is a special container that groups its children together.

---

A node that can have children provides a `getChildren()` method that returns an `ObservableList` of its children. To add a child node to a node, simply add the child node to the `ObservableList`. The following snippet of code adds a `Text` node to a `VBox`:

```
// Create a VBox node
VBox root = new VBox();

// Create a Text node
Text msg = new Text("Hello JavaFX");
```

```
// Add the Text node to the VBox as a child node
root.getChildren().add(msg);
```

The Scene class contains several constructors. You will use the one that lets you specify the root node and the size of the scene. The following statement creates a scene with the VBox as the root node, 300px width, and 50px height:

```
// Create a scene
Scene scene = new Scene(root, 300, 50);
```

You need to set the scene to the stage by calling the `setScene()` method of the Stage class.

```
// Set the scene to the stage
stage.setScene(scene);
```

That's it. You have completed your first JavaFX program with a scene. [Listing 9-2](#) contains the complete program. The program displays a window as shown in [Figure 9-3](#).

***Listing 9-2.*** A JavaFX Application with a Scene Having a Text Node

```
// HelloFXApp.java
package com.jdojo.jfx;

import javafx.application.Application;
import javafx.scene.Scene;
import javafx.scene.layout.VBox;
import javafx.scene.text.Text;
import javafx.stage.Stage;

public class HelloFXApp extends Application {
 public static void main(String[] args) {
 Application.launch(args);
 }


 @Override
 public void start(Stage stage) {
 Text msg = new Text("Hello JavaFX");
 VBox root = new VBox();
```

```

 root.getChildren().add(msg);

 Scene scene = new Scene(root, 300, 50);
 stage.setScene(scene);
 stage.setTitle("Hello JavaFX
Application");
 stage.show();
 }
}

```

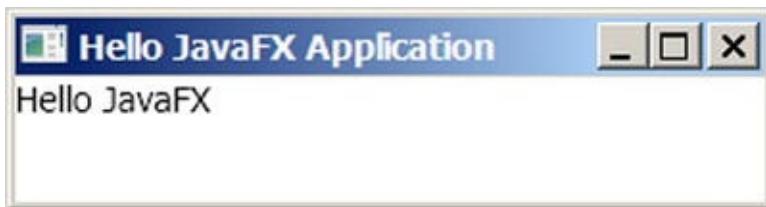

*Figure 9-3.* A JavaFX application with scene having a Text node

## Improving the HelloFX Application

JavaFX is capable of doing much more than you have seen so far. Let's enhance the first program and add some more user interface elements such as buttons and text fields. This time, the user will be able to interact with the application. Use an instance of the `Button` class to create a button as shown:

```
// Create a button with "Exit" text
Button exitBtn = new Button("Exit");
```

When a button is clicked, an `ActionEvent` is fired. You can add an `ActionEvent` handler to handle the event. Use the `setOnAction()` method to set an `ActionEvent` handler for the button. The following statement sets an `ActionEvent` handler for the button. The handler terminates the application. You can use a lambda expression or an anonymous class to set the `ActionEvent` handler. The following snippet of code shows both approaches:

```
// Using a lambda expression
exitBtn.setOnAction(e -> Platform.exit());

// Using an anonymous class
```

```

import javafx.event.ActionEvent;
import javafx.event.EventHandler;
...
exitBtn.setOnAction(new EventHandler<ActionEvent>() {
 @Override
 public void handle(ActionEvent e) {
 Platform.exit();
 }
}) ;

```

The program in [Listing 9-3](#) shows how to add more nodes to the scene. The program uses the `setStyle()` method of the `Label` class to set the fill color of the `Label` to blue. I will discuss using CSS in JavaFX briefly later.

### ***Listing 9-3.*** Interacting with Users in a JavaFX Application

```

// ImprovedHelloFXApp.java
package com.jdojo.jfx;

import javafx.application.Application;
import javafx.application.Platform;
import javafx.scene.Scene;
import javafx.scene.control.Button;
import javafx.scene.control.Label;
import javafx.scene.control.TextField;
import javafx.scene.layout.VBox;
import javafx.stage.Stage;

public class ImprovedHelloFXApp extends Application {
 public static void main(String[] args) {
 Application.launch(args);
 }

 @Override
 public void start(Stage stage) {
 Label nameLbl = new Label("Enter your
name:");
 TextField nameFld = new TextField();

```

```
Label msg = new Label();
msg.setStyle("-fx-text-fill: blue;");

// Create buttons
Button sayHelloBtn = new Button("Say
Hello");
Button exitBtn = new Button("Exit");

// Add the event handler for the Say Hello
button
sayHelloBtn.setOnAction(e -> {
 String name = nameFld.getText();
 if (name.trim().length() > 0) {
 msg.setText("Hello " + name);
 }
 else {
 msg.setText("Hello there");
 }
});

// Add the event handler for the Exit
button
exitBtn.setOnAction(e -> Platform.exit());

// Create the root node
VBox root = new VBox();


// Set the vertical spacing between
children to 5px
root.setSpacing(5);

// Add children to the root node
root.getChildren().addAll(nameLbl,
nameFld, msg, sayHelloBtn, exitBtn);

Scene scene = new Scene(root, 350, 150);
stage.setScene(scene);
stage.setTitle("Improved Hello JavaFX
Application");
stage.show();
```

```
 }
}
```

The improved HelloFX program displays a window as shown in [Figure 9-4](#). The window contains two labels, a text field, and two buttons. A `VBox` is used as the root node for the scene. Enter a name in the text field and click the `Say Hello` button to see a hello message. Clicking the `Say Hello` button without entering a name displays the message `Hello` there. The application displays a message in a `Label` control. Click the `Exit` button to exit the application.

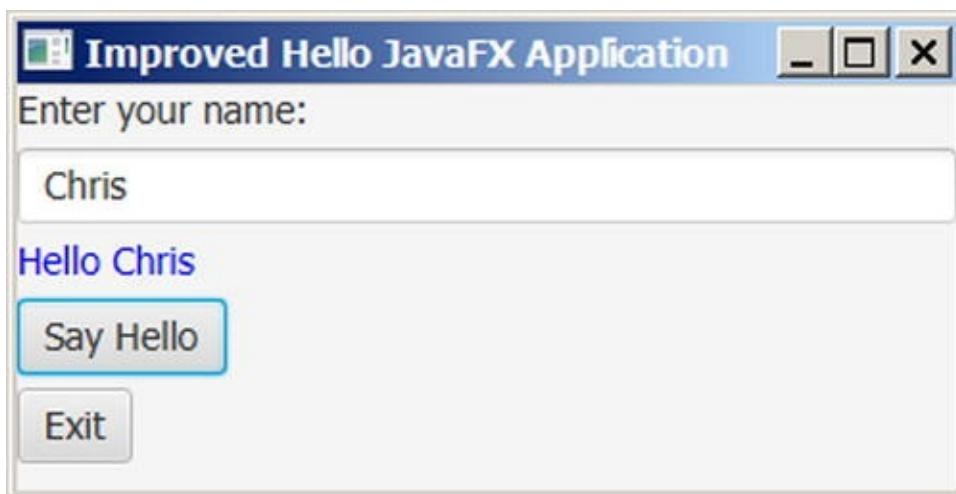

[Figure 9-4](#). A JavaFX Application with two labels, a text field, and two buttons

## The Life Cycle of a JavaFX Application

JavaFX runtime creates several threads that are used to perform different tasks at different stages in the application. In this section, you are interested in only those threads that are used to call methods of the `Application` class during its life cycle. The JavaFX runtime creates, among other threads, two threads named

- JavaFX-Launcher
- JavaFX Application Thread

The `launch()` method of the `Application` class creates these threads.

During the lifetime of a JavaFX application, the JavaFX runtime calls the following methods of the JavaFX application class in order:

- The no-args constructor
- The `init()` method
- The `start()` method
- The `stop()` method

The JavaFX runtime creates the instance of the specified application class on the JavaFX Application Thread.

The JavaFX-Launcher thread calls the `init()` method of the application class. The `init()` method implementation in the `Application` class is empty. You can override this method in your application class. It is not allowed to create a `Stage` or a `Scene` on the JavaFX-Launcher thread. They must be created on the JavaFX Application Thread. Therefore, you cannot create a `Stage` or a `Scene` inside the `init()` method. Attempting to do so throws a runtime exception. It is fine to create UI controls, for example, buttons, shapes, etc. in the `init()` method.

The JavaFX Application Thread calls the `start(Stage stage)` method of the application class. Note that the `start()` method in the `Application` class is declared `abstract`, and you must override this method in your application class.

At this point, the `launch()` method waits for the JavaFX application to finish.

When the application finishes, the JavaFX Application Thread calls the `stop()` method of the application class. The default implementation of the `stop()` method is empty in the `Application` class. You will have to override this method in your application class to perform your logic when your application stops.

The program in [Listing 9-4](#) illustrates the life cycle of a JavaFX application. It displays a stage an `Exit` button. You will see the first three lines of the output when the stage is shown. You will need to close the stage by clicking the `Exit` button to see the last line of the output.

**[Listing 9-4](#).** The Life Cycle of a JavaFX Application

```
// FXLifeCycleApp.java
package com.jdojo.jfx;

import javafx.application.Application;
import javafx.application.Platform;
import javafx.scene.Group;
import javafx.scene.Scene;
import javafx.scene.control.Button;
import javafx.stage.Stage;

public class FXLifeCycleApp extends Application {
 public FXLifeCycleApp() {
 String name
= Thread.currentThread().getName();
 System.out.println("FXLifeCycleApp()
constructor: " + name);
 }

 public static void main(String[] args) {
 Application.launch(args);
 }

 @Override
 public void init() {
 String name
= Thread.currentThread().getName();
 System.out.println("init() method: "
+ name);
 }

 @Override
 public void start(Stage stage) {
 String name
= Thread.currentThread().getName();
 System.out.println("start() method: "
+ name);

 // Add an Exit button to the scene
 Button exitBtn = new Button("Exit");
 exitBtn.setOnAction(e -> Platform.exit());
 }
}
```

```

 Scene scene = new Scene(new
Group(exitBtn), 300, 100);
 stage.setScene(scene);
 stage.setTitle("JavaFX Application Life
Cycle");
 stage.show();
 }

 @Override
 public void stop() {
 String name
= Thread.currentThread().getName();
 System.out.println("stop() method: "
+ name);
 }
}

```

---

FXLifeCycleApp() constructor: JavaFX Application Thread  
init() method: JavaFX-Launcher  
start() method: JavaFX Application Thread  
stop() method: JavaFX Application Thread

---

## Terminating a JavaFX Application

A JavaFX application may be terminated explicitly or implicitly. You can terminate a JavaFX application explicitly by calling the `Platform.exit()` method. When this method is called, after or from within the `start()` method, the `stop()` method of the `Application` class is called, and then the JavaFX Application Thread is terminated. At this point, if there are only daemon threads running, the JVM will exit. If this method is called from the constructor or the `init()` method of the `Application` class, the `stop()` method may not be called.

---

 **Tip** A JavaFX application may be run in web browsers. Calling `Platform.exit()` method in web environments may not have any effect.

---

A JavaFX application may be terminated implicitly when the last window is closed. This behavior can be turned on or turned off using the static `setImplicitExit(boolean implicitExit)` method of the `Platform` class. Passing true to this method turns this behavior on. Passing false to this method turns this behavior off. By default, this behavior is turned on. This is the reason that in most of the examples so far, your applications were terminated when you closed the windows. When this behavior is turned on, the `stop()` method of the `Application` class is called before terminating the JavaFX Application Thread. Terminating the JavaFX Application Thread does not always terminate the JVM. The JVM terminates if all running non-daemon threads terminate. If the implicit terminating behavior of the JavaFX application is turned off, you must call the `exit()` method of the `Platform` class to terminate the application.

## What Are Properties and Bindings?

A property is a publicly accessible attribute of a class that affects its state, behavior, or both. Even though a property is publicly accessible, its use (read/write) invokes methods that hide the actual implementation to access the data. Properties are observable, so interested parties are notified when its value changes. A property can be read-only, write-only, or read-write. A read-only property has a getter, but no setter. A write-only property has a setter, but no getter. A read-write property has a getter and a setter.

Unlike other programming languages such as C#, properties in Java are not supported at the language level. Java support for properties comes through the JavaBeans API and design patterns. For more details on properties in Java, please refer to the JavaBeans specification, which can be downloaded from [www.oracle.com/technetwork/java/javase/documentation/s136004.html](http://www.oracle.com/technetwork/java/javase/documentation/s136004.html).

In programming, the term *binding* is used in many contexts. Here, I want to define it in the context of *data binding*. Data binding defines a relationship between data elements (usually variables) in a program to keep them

synchronized. In a GUI application, data binding is frequently used to synchronize the elements in the data model with the corresponding UI elements. Consider the following statement, assuming that x, y, and z are numeric variables:

```
x = y + z;
```

The statement defines a binding between x, y, and z. When the statement is executed, the value of x is synchronized with the sum of the values of y and z. A binding also has a time factor. In the above statement, the value of x is bound to the sum of y and z, and is valid at the time the statement is executed. The value of x may not be equal the sum of y and z before and after the statement is executed. Sometimes it is desired for a binding to hold over a period. Consider the following statement that defines a binding using `listPrice`, `discounts`, and `taxes`:

```
soldPrice = listPrice - discounts + taxes;
```

For this case, you would like to keep the binding valid forever, so the sold price is computed correctly whenever `listPrice`, `discounts`, or `taxes` change. In this binding, `listPrice`, `discounts`, and `taxes` are known as *dependencies*, and it is said that `soldPrice` is bound to `listPrice`, `discounts`, and `taxes`.

For a binding to work correctly, it is necessary that it is notified whenever its dependencies change. Programming languages that support binding provide a mechanism to register listeners with the dependencies. When dependencies become invalid or when they change, all listeners are notified. A binding may synchronize itself with its dependencies when it receives such notifications.

A binding may be an *eager binding* or a *lazy binding*. In an eager binding, the bound variable is recomputed immediately when the dependencies change. In a lazy binding, the bound variable is not recomputed when its dependencies change; it is recomputed when its value is read next time. A lazy binding performs better as compared to an eager binding.

A binding may be *unidirectional* or *bidirectional*. A unidirectional binding works only in one direction: changes in the dependencies are propagated to the bound variable. A bidirectional binding works in both directions in which the bound variable and the dependency keep their values synchronized with each other. Typically, a bidirectional binding is defined only between two variables. For example, a bidirectional binding, `x = y` and `y = x`, declares that the

values of `x` and `y` are always the same.

Mathematically, it is not possible to define a bidirectional binding between multiple variables uniquely. In the above example, the sold price binding is a unidirectional binding. If you want to make it a bidirectional binding, it is not uniquely possible to compute the values of the list price, discounts, and taxes when the sold price is changed. There are an infinite number of possibilities in the other direction.

Applications with GUIs provide users with UI widgets such as text fields, check boxes, buttons, etc., to manipulate data. The data displayed in UI widgets has to be synchronized with the underlying data model and vice versa. In this case, a bidirectional binding is needed to keep the UI and the data model synchronized.

## Properties and Bindings in JavaFX

JavaFX supports properties, events, and binding through *Properties and Binding* APIs. Support for properties in JavaFX is a huge leap forward from the JavaBeans properties. All properties in JavaFX are observable. They can be observed for invalidation and value changes. You can have read-write or read-only properties. All read-write properties support binding. A property in JavaFX can represent a value or a collection of values.

In JavaFX, properties are objects. There is a property class hierarchy for each type of property. For example, the `IntegerProperty`, `DoubleProperty`, and `StringProperty` classes represent properties of `int`, `double`, and `String` types, respectively. These classes are abstract. There are two types of implementation classes for them: one to represent a read-write property and one to represent a wrapper for a read-only property. For example, the `SimpleDoubleProperty` and `ReadOnlyDoubleWrapper` classes are concrete classes whose objects are used as read-write and read-only properties of type `double`, respectively. The following is an example of how to create an `IntegerProperty` with an initial value of 100:

```
IntegerProperty counter = new
SimpleIntegerProperty(100);
```

Property classes provide two pairs of getter and setter methods:

- The `get()` and `set()` methods
- The `getValue()` and `setValue()` methods

The `get()` and `set()` methods get and set the value of the property, respectively. For primitive type properties, they work with primitive type values. For example, for `IntegerProperty`, the return type of the `get()` method and the parameter type of the `set()` method are `int`. The `getValue()` and `setValue()` methods work with object type; for example, their return type and parameter type are `Integer` for `IntegerProperty`.

For reference type properties, such as `StringProperty` and `ObjectProperty<T>`, both pairs of getter and setter work with object type. That is, both `get()` and `getValue()` methods of `StringProperty` return a `String`, and `set()` and `setValue()` methods take a `String` parameter. With auto-boxing for primitive types, it does not matter which version of getter and setter is used. The `getValue()` and `setValue()` methods exist to help you write generic code in terms of object types.

The following snippet of code uses an `IntegerProperty`, and its `get()` and `set()` methods. The `counter` property is a read-write property because it is an object of the `SimpleIntegerProperty` class.

```
IntegerProperty counter = new
SimpleIntegerProperty(1);
int counterValue = counter.get();
System.out.println("Counter:" + counterValue);

counter.set(2);
counterValue = counter.get();
System.out.println("Counter:" + counterValue);
```

---

Counter:1  
Counter:2

---

Working with read-only properties is a bit tricky. A `ReadOnlyXxxWrapper` class wraps two properties of `Xxx` type: one read-only and one read-write. Both properties are synchronized. Its `getReadOnlyProperty()` method returns a `ReadOnlyXxxProperty`

object. The following snippet of code shows how to create a read-only Integer property:

```
// Create a read-only wrapper property
ReadOnlyIntegerWrapper idWrapper = new
ReadOnlyIntegerWrapper(100);

// Get the read-only version of the read-only wrapper
// property object
ReadOnlyIntegerProperty id
= idWrapper.getReadOnlyProperty();

System.out.println("idWrapper:" + idWrapper.get());
System.out.println("id:" + id.get());

// Change the value
idWrapper.set(101);

System.out.println("idWrapper:" + idWrapper.get());
System.out.println("id:" + id.get());
```

---

```
idWrapper:100
id:100
idWrapper:101
id:101
```

---

The `idWrapper` property is read-write, whereas the `id` property is read-only. When the value in `idWrapper` is changed, the value in `id` is changed automatically. To define a read-only property in a class, you declare the `idWrapper` as a private instance variable. If its value is needed outside the class, you return the `id`, so the outside world can read the value but cannot change it.

---

**Tip** Typically, a wrapper property is used as a private instance variable of a class. The class can change the property internally. One of its methods returns the read-only property object of the wrapper class, so the same property is read-only for the outside world.

---

You can use seven types of properties that represent a single value. The base classes for those properties are named as XxxProperty, read-only base classes are named as ReadOnlyXxxProperty, and wrapper classes are named as ReadOnlyXxxWrapper. The values for Xxx for each type are listed in [Table 9-2](#).

**Table 9-2.** *Property Classes That Wrap a Single Value*

Type	Xxx Value
int	Integer
long	Long
float	Float
double	Double
boolean	Boolean
String	String
Object	Object

A property object wraps three pieces of information:

- The reference of the bean that contains it
- A name
- A value

When you create a property object, you can supply all or none of the above three pieces of information. Concrete property classes, named like SimpleXxxProperty and ReadOnlyXxxWrapper, provide four constructors that let you supply combinations of the three pieces of information. The following are the constructors for the SimpleIntegerProperty class:

- SimpleIntegerProperty()
- SimpleIntegerProperty(int initialValue)
- SimpleIntegerProperty(Object bean, String name)
- SimpleIntegerProperty(Object bean,

```
String name, int initialValue)
```

The default value for the initial value depends on the type of the property. It is zero for numeric types, `false` for boolean type, and `null` for reference types.

A property object may be part of a bean or it may be a standalone object. The specified bean is the reference to the bean object that contains the property. For a standalone property object, it can be `null`. Its default value is `null`.

The name of the property is its name. If not supplied, it defaults to an empty string.

The following snippet of code creates a property object as part of a bean and sets all three values. The first argument to the constructor of the `SimpleStringProperty` class is `this`, which is the reference of the `Person` bean; the second argument, `"name"`, is the name of the property; and the third argument, `"Li"`, is the value of the property.

```
public class Person {
 private StringProperty name = new
SimpleStringProperty(this, "name", "Li");

 // More code for the Person goes here
}
```

Every property class contains the `getBean()` and `getName()` methods that return the bean reference and the property name, respectively.

## Using Properties in JavaFX Beans

In the previous section, you saw the use of JavaFX properties as standalone objects. In this section, you will use them in classes to define properties. Let's create a `Book` class with three properties (`ISBN`, `title`, and `price`) that will be modeled using JavaFX properties classes.

In JavaFX, you do not declare the property of a class as one of the primitive types. Rather, you use one of the JavaFX property classes. The `title` property of the `Book` class will be declared as follows. It is declared `private` as usual.

```
public class Book {
 private StringProperty title =
```

```
 new SimpleStringProperty(this, "title",
"Unknown");
}
```

You declare a `public` getter for the property, which is named, by convention, as `XxxProperty`, where `Xxx` is the name of the property. The getter returns the reference of the property. For your `title` property, the getter will be named `titleProperty` as shown:

```
public class Book {
 private StringProperty title =
 new SimpleStringProperty(this, "title",
"Unknown");

 public final StringProperty titleProperty() {
 return title;
 }
}
```

The declaration of the `Book` class is fine to work with the `title` property as shown in the following snippet of code that sets and gets the title of a book:

```
Book beginningJava8 = new Book();
beginningJava8.titleProperty().set("Beginning Java
8");
String title = beginningJava8.titleProperty().get();
```

According to the JavaFX design patterns (not for any technical requirements), a JavaFX property has a getter and a setter that are similar to the getters and setters in JavaBeans. The return type of the getter and the parameter type of the setter are the same as the type of the property value. The `getTitle()` and `setTitle()` methods for the `title` property are declared as follows:

```
public class Book {
 private StringProperty title =
 new SimpleStringProperty(this, "title",
"Unknown");

 public final StringProperty titleProperty() {
```

```
 return title;
 }

 public final String getTitle() {
 return title.get();
 }

 public final void setTitle(String title) {
 this.title.set(title);
 }
}
```

Note that the `getTitle()` and `setTitle()` methods use the `title` property object internally to get and set the title value.

---

**Tip** In JavaFX, by convention, getters and setters for a property of a class are declared as `final`. Additional getters and setters, using JavaBeans naming convention, are added to make the class interoperable with the older tools and frameworks that use the old JavaBeans naming conventions to identify properties of a class.

---

The following snippet of code shows the declaration of a read-only ISBN property for the `Book` class:

```
public class Book {
 private ReadOnlyStringWrapper ISBN =
 new
 ReadOnlyStringWrapper(this, "ISBN", "Unknown");

 public final String getISBN() {
 return ISBN.get();
 }

 public final ReadOnlyStringProperty
ISBNProperty() {
 return ISBN.getReadOnlyProperty();
 }

 // More code for the Book class goes here
}
```

```
}
```

Note the following points about the declaration of the read-only ISBN property:

- It uses the `ReadOnlyStringWrapper` class instead of the `SimpleStringProperty` class.
- There is no setter for the property value. You may declare one; however, it must be private.
- The getter for the property value works the same as for a read-write property.
- The `ISBNProperty()` method uses `ReadOnlyStringProperty` as the return type, and not `ReadOnlyStringWrapper`. It obtains a read-only version of the property object from the wrapper object and returns the same.

For the users of the `Book` class, its `ISBN` property is read-only. However, it can be changed internally and the change will be reflected in the read-only version of the property object automatically. [Listing 9-5](#) shows the complete code for the `Book` class.

**[Listing 9-5.](#)** A Book Class with a Read-Only and Two Read-Write Properties

```
// Book.java
package com.jdojo.jfx;

import javafx.beans.property.DoubleProperty;
import javafx.beans.property.ReadOnlyStringProperty;
import javafx.beans.property.ReadOnlyStringWrapper;
import javafx.beans.property.SimpleDoubleProperty;
import javafx.beans.property.SimpleStringProperty;
import javafx.beans.property.StringProperty;

public class Book {
 private StringProperty title =
 new SimpleStringProperty(this, "title",
```

```
"Unknown");
 private DoubleProperty price =
 new SimpleDoubleProperty(this, "price",
0.0);
 private ReadOnlyStringWrapper ISBN =
 new ReadOnlyStringWrapper(this, "ISBN",
"Unknown");

 public Book() {
 }

 public Book(String title, double price, String
ISBN) {
 this.title.set(title);
 this.price.set(price);
 this.ISBN.set(ISBN);
 }

 public final String getTitle() {
 return title.get();
 }

 public final void setTitle(String title) {
 this.title.set(title);
 }

 public final StringProperty titleProperty() {
 return title;
 }

 public final double getPrice() {
 return price.get();
 }

 public final void setPrice(double price) {
 this.price.set(price);
 }

 public final DoubleProperty priceProperty() {
 return price;
```

```

 }

 public final String getISBN() {
 return ISBN.get();
 }

 public final ReadOnlyStringProperty
ISBNProperty() {
 return ISBN.getReadOnlyProperty();
 }
}

```

**Listing 9-6** tests the properties of the Book class. It creates a Book object, prints the details, changes some properties, and prints the details again. Note the use of the ReadOnlyProperty parameter type for the printDetails() method. All property classes implement, directly or indirectly, the ReadOnlyProperty interface.

The `toString()` methods of the property implementation classes return a well-formatted string that contains all relevant pieces of information for a property. I did not use the `toString()` method of the property objects because I wanted to show you the use of different methods of the JavaFX properties.

### **Listing 9-6.** A BookPropertyTest Class to Test Properties of the Book Class

```

// BookPropertyTest.java
package com.jdojo.jfx;

import javafx.beans.property.ReadOnlyProperty;

public class BookPropertyTest {
 public static void main(String[] args) {
 Book book = new Book("Beginning Java 8",
49.99, "1430266619");

 System.out.println("After creating the
Book object...");

 // Print Property details
 printDetails(book.titleProperty());
 printDetails(book.priceProperty());
 }
}

```

```

 printDetails(book.ISBNProperty()));

 // Change the book's properties
 book.setTitle("Harnessing JavaFX 8.0");
 book.setPrice(9.49);

 System.out.println("\nAfter changing the
Book properties...");

 // Print Property details
 printDetails(book.titleProperty());
 printDetails(book.priceProperty());
 printDetails(book.ISBNProperty());
 }

 public static void
printDetails(ReadOnlyProperty<?> p) {
 String name = p.getName();
 Object value = p.getValue();
 Object bean = p.getBean();
 String beanClassName =
 (bean == null) ? "null"
 : bean.getClass().getSimpleName();
 String propClassName
 = p.getClass().getSimpleName();

 System.out.print(propClassName);
 System.out.print("[Name:" + name);
 System.out.print(", Bean Class:"
+ beanClassName);
 System.out.println(", Value:" + value
+ "]");
}
}

```

---

After creating the Book object...

SimpleStringProperty[Name:title, Bean Class:Book,  
Value:Beginning Java 8]

SimpleDoubleProperty[Name:price, Bean Class:Book,

```
Value:49.99]
ReadOnlyPropertyImpl[Name:ISBN, Bean Class:Book,
Value:1430266619]
After changing the Book properties...

SimpleStringProperty[Name:title, Bean Class:Book,
Value:Harnessing JavaFX 8.0]
SimpleDoubleProperty[Name:price, Bean Class:Book,
Value:9.49]
ReadOnlyPropertyImpl[Name:ISBN, Bean Class:Book,
Value:1430266619]
```

---

## Handling Property Invalidation Events

A property generates an invalidation event when the status of its value changes from valid to invalid for the first time. Properties in JavaFX use lazy evaluation. When an already invalid property becomes invalid again because of the status of its value changed again, an invalidation event is not generated. An invalid property becomes valid when it is recomputed, such as by calling the `get()` or `getValue()` method of the property.

[Listing 9-7](#) is the program to demonstrate when invalidation events are generated for properties. The program includes enough comments to help you understand the logic.

### ***Listing 9-7.*** Testing Invalidation Events for JavaFX Properties

```
// InvalidationTest.java
package com.jdojo.jfx;

import javafx.beans.Observable;
import javafx.beans.property.IntegerProperty;
import javafx.beans.property.SimpleIntegerProperty;

public class InvalidationTest {
 public static void main(String[] args) {
 // Create a property
 IntegerProperty counter = new
```

```
SimpleIntegerProperty(100);

 // Add an invalidation listener to the
counter property using a
 // method reference. The invalidated()
method of thi class will
 // be called when the counter property
becomes invalid..

counter.addListener(InvalidationTest::invalidated);

 System.out.println("Before changing the
counter value-1");
 counter.set(101);
 System.out.println("After changing the
counter value-1");

/*
 * At this point counter property is
invalid and further changes
 * to its value will not generate any
invalidation events.
 */
System.out.println();
System.out.println("Before changing the
counter value-2");
 counter.set(102);
 System.out.println("After changing the
counter value-2");

 // Make the counter property valid by
calling its get() method
 int value = counter.get();
 System.out.println("Counter value = "
+ value);

/* At this point the counter property is
valid and further changes
to its value will generate invalidation
events.
```

```

 */
 // Try setting the same value
 System.out.println();
 System.out.println("Before changing the
counter value-3");
 counter.set(102);
 System.out.println("After changing the
counter value-3");

 // Try setting a different value
 System.out.println();
 System.out.println("Before changing the
counter value-4");
 counter.set(103);
 System.out.println("After changing the
counter value-4");
 }

 public static void invalidated(Observable prop)
{
 System.out.println("Counter is invalid.");
}

```

---

Before changing the counter value-1  
 Counter is invalid.

After changing the counter value-1

Before changing the counter value-2  
 After changing the counter value-2  
 Counter value = 102

Before changing the counter value-3  
 After changing the counter value-3

Before changing the counter value-4  
 Counter is invalid.  
 After changing the counter value-4

---

In the beginning, the program creates an `IntegerProperty` named `counter` and adds an invalidation listener to the property.

```
// Create the counter property
IntegerProperty counter = new
SimpleIntegerProperty(100);

// Add an invalidation listener to the counter
proepty
counter.addListener(InvalidationTest::invalidated);
```

When you create a property object, it is valid. When you change the `counter` property to 101, it fires an invalidation event. At this point, the `counter` property becomes invalid. When you change its value to 102, it does not fire an invalidation event because it is already invalid. You use the `get()` method to read the `counter` value, which makes it valid again. Now, you set the same a value of 102 to the `counter`, which does not fire an invalidation event, as the value did not really change; its value was already 102. The `counter` property is still valid. At the end, you change its value to a different value, and sure enough, an invalidation event is fired.

---

**Tip** You are not limited to adding only one invalidation listener to a property. You can add as many invalidation listeners as you need. If you do not need an invalidation listener anymore, make sure to remove it by calling the `removeListener()` method of the property; otherwise, it may lead to memory leaks.

---

## Handling Property Change Events

You can register a `ChangeListener` to receive notifications about property change events. A property change event is fired every time the value of a property changes. The `changed()` method of a `ChangeListener` receives three values:

- The reference of the property object

- The old value of the property
- The new value of the property

You will run a similar test case for testing property change events as you did for invalidation events in the previous section. [Listing 9-8](#) contains the program to demonstrate change events that are generated for properties.

***Listing 9-8.*** Testing Change Events for JavaFX Properties

```
// ChangeTest.java
package com.jdojo.jfx;

import javafx.beans.property.IntegerProperty;
import javafx.beans.property.SimpleIntegerProperty;
import javafx.beans.value.ObservableValue;

public class ChangeTest {
 public static void main(String[] args) {
 // Create a counter property
 IntegerProperty counter = new
SimpleIntegerProperty(100);

 // Add a change listener to the counter
 property
 counter.addListener(ChangeTest::changed);

 System.out.println("Before changing the
counter value-1");
 counter.set(101);
 System.out.println("After changing the
counter value-1");

 System.out.println();
 System.out.println("Before changing the
counter value-2");
 counter.set(102);
 System.out.println("After changing the
counter value-2");
 }
}
```

```

 // Try setting the same value
 System.out.println();
 System.out.println("Before changing the
counter value-3");
 counter.set(102); // No change event will
be fired.
 System.out.println("After changing the
counter value-3");

 // Try setting a different value
 System.out.println();
 System.out.println("Before changing the
counter value-4");
 counter.set(103);
 System.out.println("After changing the
counter value-4");
 }

 public static void changed(ObservableValue<?
extends Number> prop,
 Number oldValue,
 Number newValue) {
 System.out.print("Counter changed: ");
 System.out.println("Old = " + oldValue
+ ", new = " + newValue);
 }
}

```

---

Before changing the counter value-1  
 Counter changed: Old = 100, new = 101  
 After changing the counter value-1

Before changing the counter value-2  
 Counter changed: Old = 101, new = 102  
 After changing the counter value-2

Before changing the counter value-3  
 After changing the counter value-3

```
Before changing the counter value-4
Counter changed: Old = 102, new = 103
After changing the counter value-4
```

---

In the beginning, the program creates an `IntegerProperty` named `counter`.

```
// Create a counter property
IntegerProperty counter = new
SimpleIntegerProperty(100);
```

It's little tricky to add a `ChangeListener`. The `addListener()` method in the `IntegerPropertyBase` class is declared as follows:

- `void addListener(ChangeListener<? super Number> listener)`

If you are using generics, the `ChangeListener` for an `IntegerProperty` must be written in terms of the `Number` class or a superclass of the `Number` class. Three ways to add a `ChangeListener` to the `counter` property are as follows. The code uses anonymous classes that I will translate to lambda expressions at the end.

```
// Method-1: Using generics and the Number class
counter.addListener(new ChangeListener<Number>() {
 @Override
 public void changed(ObservableValue<? extends Number> prop,
 Number oldValue,
 Number newValue) {
 System.out.print("Counter changed: ");
 System.out.println("Old = " + oldValue
+ ", new = " + newValue);
 } });

// Method-2: Using generics and the Object class
counter.addListener(new ChangeListener<Object>() {
 @Override
```

```

 public void changed(ObservableValue<? extends
Object> prop,
 Object oldValue,
 Object newValue) {
 System.out.print("Counter changed: ");
 System.out.println("Old = " + oldValue
+ ", new = " + newValue);
 } });

// Method-3: Not using generics. It may generate
compile-time warnings.
counter.addListener(new ChangeListener() {
 @Override
 public void changed(ObservableValue prop,
 Object oldValue,
 Object newValue) {
 System.out.print("Counter changed: ");
 System.out.println("Old = " + oldValue
+ ", new = " + newValue);
 } });

```

[Listing 9-8](#) uses the first method that makes use of generics; as you can see, the signature of the `changed()` method in the `ChangeTest` class matches with the `changed()` method signature in method-1. You have used a lambda expression with a method reference to add a `ChangeListener` as shown:

```
// Add a change listener using a method reference
counter.addListener(ChangeTest::changed);
```

The output shows that a property change event is fired when the property value is changed. Calling the `set()` method with the same value does not fire a property change event.

Unlike generating invalidation events, a property uses an eager evaluation for its value to generate change events because it has to pass the new value to the property change listeners.

## Property Bindings in JavaFX

In JavaFX, a binding is an expression that evaluates to a value. The binding consists of one or more observable values known as its dependencies. The binding observes its dependencies for changes and recomputes its value automatically when needed. JavaFX uses lazy evaluation for all bindings. When a binding is initially defined or when its dependencies change, its value is marked as invalid. The value of an invalid binding is computed when it is requested next time, usually using its `get()` or `getValue()` method. All property classes in JavaFX have built-in support for bindings.

Let's discuss a quick example of binding in JavaFX. Consider the following expression that represents the sum of two integers `x` and `y`:

```
x + y
```

The expression `x + y` represents a binding, which has two dependencies, `x` and `y`. You can give it a name `sum` as follows:

```
sum = x + y
```

To implement the above logic in JavaFX, you create two `IntegerProperty` variables, `x` and `y`:

```
IntegerProperty x = new SimpleIntegerProperty(100);
IntegerProperty y = new SimpleIntegerProperty(200);
```

The following statement creates a binding named `sum` that represents the sum of `x` and `y`:

```
NumberBinding sum = x.add(y);
```

A binding has an `isValid()` method that returns `true`, if it is valid; otherwise, it returns `false`. You can get the value of a `NumberBinding` using the methods `intValue()`, `longValue()`, `floatValue()`, and `doubleValue()` as `int`, `long`, `float`, and `double`, respectively. The program in [Listing 9-9](#) shows how to create and use a binding.

### ***[Listing 9-9](#). Using a Simple Binding in JavaFX***

```
// BindingTest.java
package com.jdojo.jfx;
```

```
import javafx.beans.binding.NumberBinding;
import javafx.beans.property.IntegerProperty;
import javafx.beans.property.SimpleIntegerProperty;

public class BindingTest {
 public static void main(String[] args) {
 // Create two properties x and y
 IntegerProperty x = new
SimpleIntegerProperty(100);
 IntegerProperty y = new
SimpleIntegerProperty(200);

 // Create a binding: sum = x + y
 NumberBinding sum = x.add(y);

 System.out.println("After creating sum");
 System.out.println("sum.isValid(): " +
+ sum.isValid());

 // Let us get the value of sum, so it
computes its value and
 // becomes valid
 int value = sum.intValue();

 System.out.println();
 System.out.println("After requesting
value");
 System.out.println("sum.isValid(): " +
+ sum.isValid());
 System.out.println("sum = " + value);

 // Change the value of x
 x.set(250);

 System.out.println();
 System.out.println("After changing x");
 System.out.println("sum.isValid(): " +
+ sum.isValid());

 // Get the value of sum again
```

```
 value = sum.intValue();

 System.out.println();
 System.out.println("After requesting
value");
 System.out.println("sum.isValid(): " +
+ sum.isValid());
 System.out.println("sum = " + value);
 }
}
```

---

```
After creating sum
sum.isValid(): false
```

```
After requesting value
sum.isValid(): true
sum = 300
```

```
After changing x
sum.isValid(): false
```

```
After requesting value
sum.isValid(): true
sum = 450
```

---

When the `sum` binding is created, it is invalid and it does not know its value. This is evident from the output. Once you request its value, using the `sum.intValue()` method, it computes its value and marks itself as valid. When you change one of its dependencies, it becomes invalid until you request its value again.

---

**Tip** A binding, internally, adds invalidation listeners to all its dependencies. When any of its dependencies become invalid, it marks itself as invalid. An invalid binding does not mean that its value has changed. All it means is that it needs to recompute its value when the value is requested next time.

---

In JavaFX, you can also bind a property to a binding. Recall that a binding is

an expression that is synchronized with its dependencies automatically. Using this definition, a bound property is a property whose value is computed based on an expression, which is automatically synchronized when the dependencies change. Suppose you have three properties called `x`, `y`, and `z` as follows:

```
IntegerProperty x = new SimpleIntegerProperty(10);
IntegerProperty y = new SimpleIntegerProperty(20);
IntegerProperty z = new SimpleIntegerProperty(60);
```

You can bind the property `z` to expression `x + y`, using the `bind()` method of the `Property` interface as follows:

```
// Bind z to x + y
z.bind(x.add(y));
```

Note that you cannot write `z.bind(x + y)` because the `+` operator does not know how to add values of two `IntegerProperty` objects. You need to use the binding API to create a binding expression.

Now, when `x`, `y`, or both change, the `z` property becomes invalid. The next time you request the value of `z`, it recomputes the expression `x.add(y)` to get its value.

You can use the `unbind()` method of the `Property` interface to unbind a bound property. Calling the `unbind()` method on an unbound or never bound property has no effect. You can unbind the `z` property as follows:

```
// Unbind the z proeprty
z.unbind();
```

After unbinding, a property behaves as a normal property, maintaining its value independently. In other words, unbinding a property breaks the link between the property and its dependencies. [Listing 9-10](#) shows how to bind a property to an expression made up of other properties.

### ***Listing 9-10.*** Binding a Property to an Expression

```
// BoundProperty.java
package com.jdojo.jfx;

import javafx.beans.property.IntegerProperty;
import javafx.beans.property.SimpleIntegerProperty;
```

```
public class BoundProperty {
 public static void main(String[] args) {
 // Create three properties
 IntegerProperty x = new
SimpleIntegerProperty(10);
 IntegerProperty y = new
SimpleIntegerProperty(20);
 IntegerProperty z = new
SimpleIntegerProperty(60);

 // Create the binding z = x + y
 z.bind(x.add(y));

 System.out.println("After binding z: Bound
= " +
 z.isBound() + ", z = " + z.get());

 // Change x and y
 x.set(15);
 y.set(19);
 System.out.println("After changing x and
y: Bound = " +
 z.isBound() + ", z = " + z.get());

 // Unbind z
 z.unbind();

 // Will not affect the value of z as it is
not bound
 // to x and y anymore
 x.set(100);
 y.set(200);
 System.out.println("After unbinding z:
Bound = " +
 z.isBound() + ", z = " + z.get());
 }
}
```

---

```
After binding z: Bound = true, z = 30
After changing x and y: Bound = true, z = 34
After unbinding z: Bound = false, z = 34
```

---

A binding has a direction, which is the direction in which changes are propagated. JavaFX supports two types of binding for properties: unidirectional binding and bidirectional binding. A unidirectional binding works only in one direction; changes in dependencies are propagated to the bound property, not vice versa. A bidirectional binding works in both directions; changes in dependencies are reflected in the property and vice versa.

The `bind()` method of the `Property` interface creates a unidirectional binding between a property and an `ObservableValue`, which could be a complex expression. The `bindBidirectional()` method creates a bidirectional binding between a property and another property of the same type.

The statement `z.bind(x.add(y))` in the previous example create a unidirectional binding. In a unidirectional binding, the bound property cannot be changed. Its value is always computed using its dependencies. Attempting to change the value of a unidirectional bound property throws a `RuntimeException`.

A bidirectional binding works in both directions. It has some restrictions. It can only be created between properties of the same type. That is, a bidirectional binding can only be of the type `x = y` and `y = x`, where `x` and `y` are of the same type.

```
// Create two properties called x and y
IntegerProperty x = new SimpleIntegerProperty(10);
IntegerProperty y = new SimpleIntegerProperty(20);

// Create bidirectional binding between x and y
x.bindBidirectional(y);

// Now, both x and y are 20. The values of x and y are
// always the same when x or y is changed.

// Remove the bidirectional binding between x and y
x.unbindBidirectional(y);
```

```
// Now, x and y maintain their values independent of
each other.
```

Bindings are used a lot in JavaFX application to bind properties of UI elements to properties of other UI elements or to the data model. Let's look at an example of a JavaFX GUI application that uses bindings. You will create a screen with a circle that will be centered on the screen. The circumference of the circle will touch the closer sides of the screen. If the width and height of the screen is the same, the circumference of circle will touch all four sides of the screen.

Attempting to develop the screen with a centered circle without bindings is a tedious task. The `Circle` class in the `javafx.scene.shape` package represents a circle. It has three properties, `centerX`, `centerY`, and `radius` of the `DoubleProperty` type. The `centerX` and `centerY` properties define the (x, y) coordinates of the center of the circle. The `radius` property defines the radius of the circle. By default, a circle is filled with black color. You create a circle with `centerX`, `centerY`, and `radius` set to the default value of 0.0 as follows:

```
Circle c = new Circle();
```

Next, add the circle to a group and create a scene with the group as its root node as shown:

```
Group root = new Group(c);
Scene scene = new Scene(root, 150, 150);
```

The following bindings will position and size the circle according to the size of the scene:

```
// The center of the circle is always in the center of
the scene
c.centerXProperty().bind(scene.widthProperty().divide(
c.centerYProperty().bind(scene.heightProperty().divide

// The radius of the circle will be always the half of
the minimum
// of the width and height of the scene
c.radiusProperty().bind(Bindings.min(scene.widthProper
scene.heightProperty()))
```

```
.divide(2));
```

The first two bindings bind the `centerX` and `centerY` of the circle to the middle of the width and height of the scene, respectively. The third binding binds the `radius` of the circle to the half (see `divide(2)`) of the minimum of the width and the height of the scene. That's it! The binding API does the magic of keeping the circle centered when the application is run.

[Listing 9-11](#) contains the complete program. [Figure 9-5](#) shows the screen when the program is initially run. Try resizing the window and you will notice that the center of the circle is always in the middle of the scene.

### **[Listing 9-11](#). Using the Binding API to Keep a Circle Centered on a Scene**

```
// CenteredCircle.java
package com.jdojo.jfx;

import javafx.application.Application;
import javafx.beans.binding.Bindings;
import javafx.scene.Group;
import javafx.scene.Scene;
import javafx.scene.shape.Circle;
import javafx.stage.Stage;

public class CenteredCircle extends Application {
 public static void main(String[] args) {
 Application.launch(args);
 }

 @Override
 public void start(Stage stage) {
 Circle c = new Circle();
 Group root = new Group(c);
 Scene scene = new Scene(root, 100, 100);

 // Bind circle's centerX, centerY, and
 radius
 // to scene's properties


 c.centerXProperty().bind(scene.widthProperty().divide(
```

```

c.centerYProperty().bind(scene.heightProperty().divide
c.radiusProperty().bind(Bindings.min(scene.widthProper-
 scene.heightF
 .divide(2));

 // Set the stage properties and make it
visible
 stage.setTitle("A Centered Circle");
 stage.setScene(scene);
 stage.sizeToScene();
 stage.show();
 }
}

```

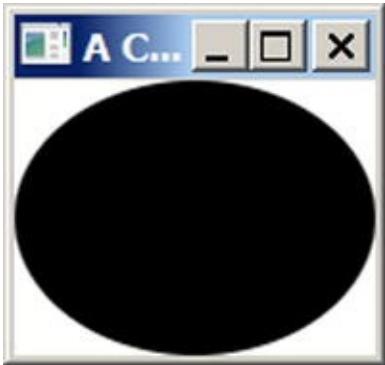

*Figure 9-5.* A circle centered on the scene

## Observable Collections


Observable collections in JavaFX are an extension to collections in the Java programming language. The Collections framework in Java has the `List`, `Set`, and `Map` interfaces. JavaFX adds the following three types of observable collections that may be observed for changes in their contents:

- An observable list
- An observable set
- An observable map

JavaFX supports observable collections through the following three new interfaces:

- ObservableList
- ObservableSet
- ObservableMap

The three interfaces inherit List, Set, and Map from the `java.util` package. In addition to inheriting from the Java collection interfaces, JavaFX collection interfaces also inherit the Observable interface. All JavaFX observable collection interfaces and classes are in the `javafx.collections` package. [Figure 9-6](#) shows a partial class diagram for the interfaces representing observable collections.

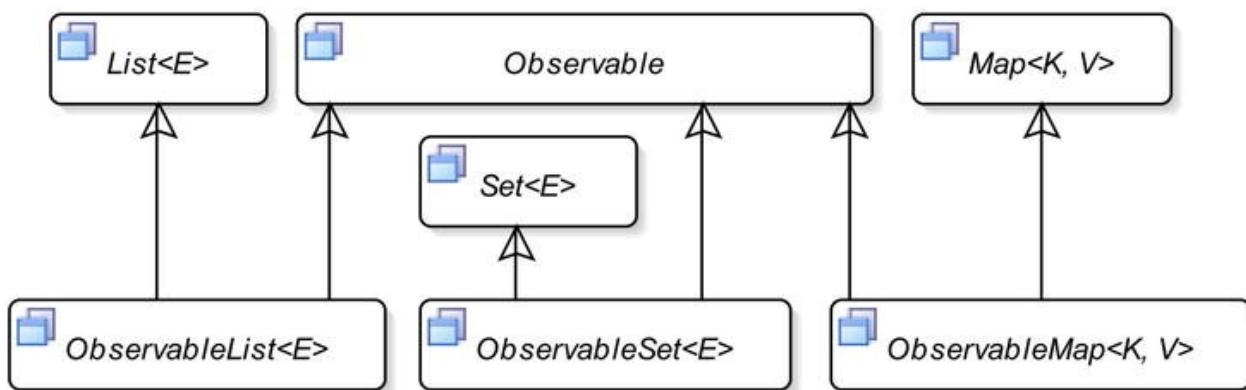

[Figure 9-6](#). A partial class diagram for observable collection interfaces in JavaFX

The observable collections in JavaFX have two additional features:

- They support invalidation notifications as they are inherited from the Observable interface.
- They support change notifications. You can register change listeners that are notified when their contents change.

The `FXCollections` class is a utility class to work with JavaFX collections. It consists of all static methods. JavaFX does not expose the implementation classes of lists, sets, and maps. You need to use one of the factory methods in the `FXCollections` class to create objects of the `ObservableList`, `ObservableSet`, and `ObservableMap` interfaces.

The following snippet of code shows how to create observable collections:

```
// Create an observable list with two elements
ObservableList<String> list
= FXCollections.observableArrayList("One", "Two");

// Create an observable set with two elements
ObservableSet<String> set
= FXCollections.observableSet("one", "two");

// Create an observable map and two key-value pairs
ObservableMap<String, Integer> map
= FXCollections.observableHashMap();
map.put("one", 1);
map.put("two", 2);
```

You can add invalidation and change listeners to observable collections. Adding an `InvalidationListener` to observable collections is the same as adding an `InvalidationListener` to a property that you have seen in the previous section. Each type of observable collection has its own change listener type:

- An instance of the `ListChangeListener` interface represents a change listener for an `ObservableList`.
- An instance of the `SetChangeListener` interface represents a change listener for an `ObservableSet`.
- An instance of the `MapChangeListener` interface represents a change listener for an `ObservableMap`.

Use the `addListener()` method of the observable collections to add a change listener to them. All change listener interfaces for the observable collections declare a static inner class called `Change` that encapsulates the changes in the respective type of collections. For example, you have a `ListChangeListener.Change` static inner class to encapsulate changes in an `ObservableList`. The change listener is passed an instance of the `Change` class. You need to use the `next()` method of the `Change` class to iterate over all changes. The `Change` class contains several methods to provide the details of the changes made to the particular collection. The following

snippet of code shows how to add a change listener to an ObservableList and an ObservableSet:

```
// Create an observable list with two elements
ObservableList<String> list
= FXCollections.observableArrayList("One", "Two");

// Add a change listener to the list
list.addListener((ListChangeListener.Change<? extends String> change) -> {
 System.out.println("The list has changed.");
});

// Create an observable set
ObservableSet<String> set
= FXCollections.observableSet("one", "two");

// Add a change listener to the set
set.addListener((SetChangeListener.Change<? extends String> change) -> {
 System.out.println("The list has changed.");
});
```

Let's look at a detailed example of how to handle changes in an ObservableList. Observing an ObservableList for changes is a bit tricky. There could be several kinds of changes to a list. Some of the changes could be exclusive, whereas some can occur along with other changes. Elements of a list can be permuted, updated, replaced, added, and removed. You can add a change listener to an ObservableList using its addListener() method, which takes an instance of the ListChangeListener interface. The changed() method of the listeners is called every time a change occurs in the list. The following snippet of code shows how to add a change listener to an ObservableList<String>. The onChanged() method is simple; it prints a message on the standard output when it is notified of a change.

```
// Create an observable list
ObservableList<String> list
= FXCollections.observableArrayList();

// Add a change listener to the list
```

```

list.addListener((ListChangeListener.Change<? extends String> change) -> {
 System.out.println("List has changed.");
}) ;

```

[Listing 9-12](#) contains a complete program that shows how to detect changes in an ObservableList. After adding a change listener, it manipulates the list and the listener is notified each time, as is evident from the output. This program is simplified to keep it short and readable. The ListChangeListener.Change object contains all details about the changes in the list such as the affected range, size of addition and removal, etc.

### ***Listing 9-12.*** Detecting Changes in an ObservableList

```

// ObservableListTest.java
package com.jdojo.jfx;

import javafx.collections.FXCollections;
import javafx.collections.ListChangeListener;
import javafx.collections.ObservableList;

public class ObservableListTest {
 public static void main(String[] args) {
 // Create a list with some elements
 ObservableList<String> list =
 FXCollections.observableArrayList("one", "two");

 System.out.println("After creating the
list: " + list);

 // Add a ChangeListener tp teh list
 list.addListener(ObservableListTest::onChanged);

 // Add some more elements to the list
 list.addAll("three", "four");
 System.out.println("After addAll() - list:
" + list);
 }
}

```

```

 // We have four elements. Remove the
middle two
 // from index 1 (inclusive) to index
3 (exclusive)
 list.remove(1, 3);
 System.out.println("After remove() - list:
" + list);

 // Retain only the element "one"
 list retainAll("one");
 System.out.println("After retainAll()
- list: " + list);

 // Replace the first element in the list
 list.set(0, "ONE");
 System.out.println("After set() - list: "
+ list);
 }

 public static void
onChanged(ListChangeListener.Change<? extends String>
change) {
 while (change.next()) {
 if (change.wasPermutated()) {
 System.out.println("A
permutation is detected.");
 }
 else if (change.wasUpdated()) {
 System.out.println("An update
is detected.");
 }
 else if (change.wasReplaced()) {
 System.out.println("A
replacement is detected.");
 }
 else {
 if (change.wasRemoved()) {
 System.out.println("A
removal is detected.");
 }
 }
 }
}

```

```

 }
 else if (change.wasAdded()) {
 System.out.println("An
addition is detected.");
 }
 }
}

```

---

After creating the list: [one, two]  
 An addition is detected.  
 After addAll() - list: [one, two, three, four]  
 A removal is detected.  
 After remove() - list: [one, four]  
 A removal is detected.  
 After retainAll() - list: [one]  
 A replacement is detected.  
 After set() - list: [ONE]

---

## Event Handling

In general, the term *event* is used to describe an occurrence of interest. In a GUI application, an event is an occurrence of a user interaction with the application. Clicking of the mouse, pressing a key on the keyboard, etc. are examples of events in a JavaFX application.

An event in JavaFX is represented by an object of the `javafx.event.Event` class or any of its subclasses. Every event in JavaFX has three properties:

- An event source
- An event target
- An event type

When an event occurs, you typically perform some processing by executing a piece of code. The piece of code that is executed in response to an event is known as an *event handler* or an *event filter*. I will clarify the difference between an event handler and an event filter shortly. For now, think of both as a piece of code and I will refer to both of them as event handlers. When you want to handle an event for a UI element, you need to add event handlers to the UI element. When the UI element detects the event, it executes your event handlers.

The UI element that calls event handlers is the source of the event for those event handlers. When an event occurs, it passes through a chain of event dispatchers. The source of an event is the current element in the event dispatcher chain. The event source changes as the event passes through one dispatcher to another in the event dispatcher chain.

The event target is the destination of an event. The event target determines the route through which the event travels during its processing. Suppose a mouse click occurs over a `Circle` node. In this case, the `Circle` node is the event target of the mouse-clicked event.

The event type describes the type of the event that occurs. Event types are defined in a hierarchical fashion. Each event type has a name and a supertype.

The three properties that are common to all events in JavaFX are represented by objects of three different classes. Specific events define additional event properties; for example, the event class to represent a mouse event adds properties to describe the location of the mouse cursor, state of the mouse buttons, etc.

[Table 9-3](#) lists the classes and interfaces involved in event processing. JavaFX has an event delivery mechanism that defines the details of the occurrence and processing of events.

**Table 9-3. The List of Classes Involved in Events Processing**

Name	Class/Interface	Description
Event	Class	An instance of this class represents an event. Several subclasses of the <code>Event</code> class exist to represent specific types of events.
EventTarget	Interface	An instance of this interface represents an event target.
EventType	Class	An instance of this class represents an event type, such as mouse pressed, mouse released, mouse moved, etc.
EventHandler	Interface	An instance of this interface represents an event handler or an event filter. Its <code>handle()</code> method is called when the event for which it has been registered occurs.

# Event Processing Mechanism

When an event occurs, several steps are performed as part of the event processing:

- Event Target Selection
- Event Route Construction
- Event Route Traversal

## Event Target Selection

The first step in the event processing is the selection of the event target. Recall that an event target is the destination node of an event. The event target is selected based on the event type. For mouse events, the event target is the node at the mouse cursor. Multiple nodes can be at the mouse cursor. For example, you can have a circle placed over a rectangle. The topmost node at the mouse cursor is selected as the event target.

The event target for key events is the node that has focus. How a node gets the focus depends on the type of the node. For example, a `TextField` may get focus by clicking the mouse inside it or using the focus traversal keys such as `Tab` or `Shift-Tab` on the Windows operating system. Shapes such as `Circles`, `Rectangles`, etc. do not get focus, by default. If you want them to receive key events, you can give them focus by calling the `requestFocus()` method of the `Node` class.

## Event Route Construction

An event travels through event dispatchers in an event dispatch chain. The event dispatch chain is the *event route*. The initial and default route for an event is determined by the event target. The default event route consists of the container-children path starting at the stage to the event target node.

Suppose you have placed a `Circle` and a `Rectangle` in an `HBox` and the `HBox` is the root node of the `Scene` of a `Stage`. When you click on the `Circle`, the `Circle` becomes the event target. The `Circle` constructs the default event route, which is the path starting at the stage to the event target (the

Circle).

In fact, an event route consists of event dispatchers that are associated with nodes. However, for all practical and understanding purposes, you can think of the event route as the path made up of the nodes. Typically, you do not deal with event dispatchers directly.

Figure 9-7 shows the event route for the mouse-clicked event. The nodes on the event route are shown in gray background fills. The nodes on the event route are connected by solid lines. Note that the Rectangle that is part of the scene graph is not part of the event path when the Circle is clicked.

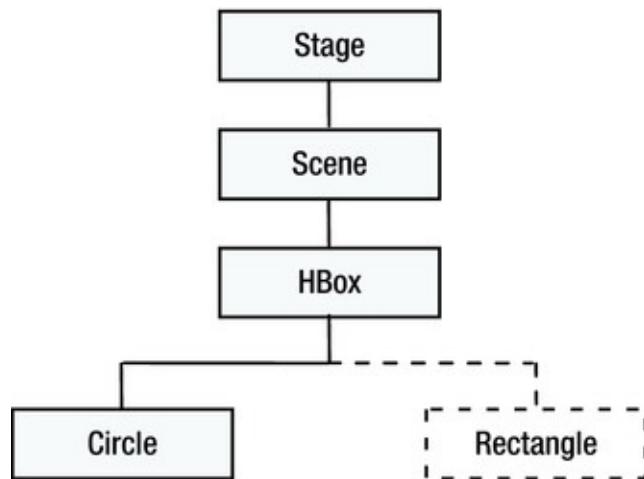


Figure 9-7. Construction of the default event route for an event

An event dispatch chain (or event route) has a *head* and a *tail*. In this case, the Stage and the Circle are the head and the tail of the event dispatch chain, respectively. The initial event route may be modified as the event processing progresses. Typically, but not necessarily, the event passes through all nodes in its route twice during the event traversal step as described in the next section.

## Event Route Traversal

An event route traversal consists of two phases:

- Capture Phase
- Bubbling Phase


An event travels through each node in its route twice: once during capture

phase and once during bubbling phase. You can register event filters and event handlers to a node for specific events types. The event filters are executed as the event passes through the node during the capture phase. The event handlers are executed as the event passes through the node during the bubbling phase. The event filters and handlers are passed in the reference of the current node as the source of the event. As the event travels from one node to another, the event source keeps changing. However, the event target remains the same from the start to the finish of the event route traversal.

During the route traversal, a node can consume the event in event filters or handlers, thus completing the processing of the event. Consuming an event is simply calling the `consume()` method on the event object. When an event is consumed, the event processing is stopped, even though some of the nodes in the route were not traversed at all.

## Event Capture Phase

During the capture phase, an event travels from the head to tail of its event dispatch chain. [Figure 9-8](#) shows the travelling of a mouse-clicked event for the Circle in this example in the capture phase. The down arrows in the figure denote the direction the event travels. As the event passes through a node, the registered event filters for the node are executed. Note that the event capture phase executes only event filters, not event handlers, for the current node.

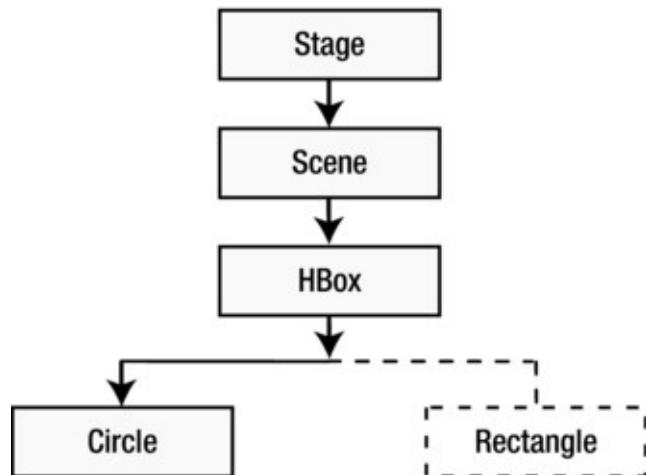

[Figure 9-8.](#) The event capture phase

In this example, the event filters for the Stage, Scene, HBox, and


`Circle` are executed in order, assuming none of the event filters consumes the event.

You can register multiple event filters for a node. If the node consumes the event in one of its event filters, its other event filters, which have not been executed yet, are executed before the event processing stops. Suppose you have registered five event filters for the `Scene` in your example, and the first event filter that is executed consumes the event. In this case, the other four event filters for the `Scene` will still be executed. After executing the fifth event filter for the `Scene`, the event processing will stop, without the event travelling to the remaining nodes (`HBox` and `Circle`).

In the event capture phase, you can intercept events (and provide a generic response) that are targeted at the children of a node. For example, you can add event filters for the mouse-clicked event to the `Stage` in this example to intercept all mouse-clicked events for all its children. You can block events from reaching its target by consuming the event in event filters for a parent node. For example, if you consume the mouse-clicked event in a filter for the `Stage`, the event will not reach its target, say, the `Circle`.

## Event Bubbling Phase

During the bubbling phase, an event travels from the tail to head of its event dispatch chain. [Figure 9-9](#) shows the travelling of a mouse-clicked event for the `Circle` in your example, in the bubbling phase.

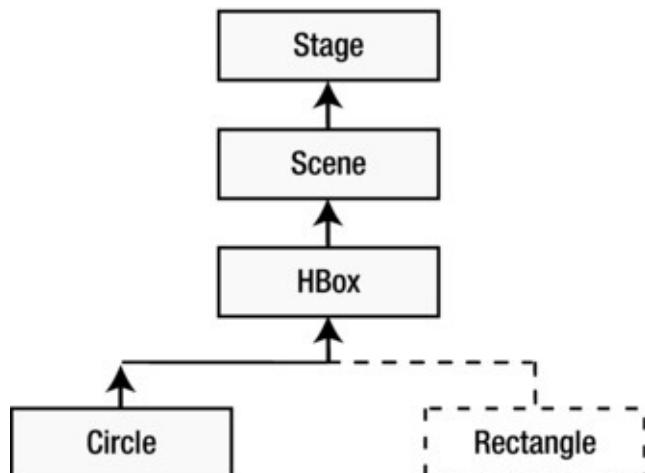

[Figure 9-9](#). The event bubbling phase

The up arrows in the figure denote the direction of the event travel. As the event passes through a node, the registered event handlers for the node are executed. Note that the event bubbling phase executes event handlers for the current node, whereas the event capture phase executes the event filters.

In your example, the event handlers for the `Circle`, `HBox`, `Scene`, and `Stage` are executed in order, assuming none of the event filters consumes the event. Note that the event bubbling phase starts at the target of the event and travels up to the topmost parent in the parent-children hierarchy.

You can register multiple event handlers for a node. If the node consumes the event in one of its event handlers, its other event handlers, which have not been executed yet, are executed before the event processing stops. Suppose you have registered five event handlers for the `Circle` in your example, and the first event handler that is executed consumes the event. In this case, the other four event handlers for the `Circle` will still be executed. After executing the fifth event handler for the `Circle`, the event processing will stop without the event travelling to the remaining nodes (`HBox`, `Scene`, and `Stage`).

Typically, event handlers are registered to target nodes to provide specific response to events. Sometimes, event handlers are installed on parent nodes to provide a default event response for all its children. If an event target decides to provide a specific response to the event, it can do so by adding event handlers and consuming the event, thus blocking the event from reaching the parent nodes in the event bubbling phase.

Let's discuss a trivial example. Suppose you want to display a message box when the user clicks anywhere inside a window. You can register an event handler to the window to display the message box. When the user clicks inside a circle in the window, you want to display a specific message. You can register an event handler to the circle to provide the specific message and consume the event. This will provide a specific event response when the circle is clicked, whereas for other nodes, the window provides a default event response.

## Creating Event Filters and Handlers

Creating event filters and handlers are as simple as creating objects of the class that implements the `EventHandler` interface. Before Java 8, you would use inner classes to create event filters and handlers.

```
EventHandler<MouseEvent> aHandler = new
```

```
EventHandler<MouseEvent>() {
 @Override
 public void handle(MouseEvent e) {
 // Event handling code goes here
 }
};
```

From Java 8, using a lambda expression is the best choice for creating the event filters and handlers, as shown:

```
EventHandler<MouseEvent> aHandler = e -> {
 // Event handling code goes here
};
```

This chapter uses lambda expressions to create event filters and handlers. If you are not familiar with lambda expressions in Java 8, it is suggested that you learn at least the basics, so you can understand the event handling code. The following snippet of code creates a `MouseEvent` handler. It prints the type of the mouse event that occurs.

```
EventHandler<MouseEvent> mouseEventHandler =
 e -> System.out.println("Mouse event type: "
+ e.getEventType());
```

## Registering Event Filters and Handlers

If a node is interested in processing events of specific types, you need to register event filters and handlers for those event types with the node. When the event occurs, the `handle()` method of the registered event filters and handlers for the node are called following the rules discussed in the previous sections. If the node is no longer interested in processing the events, you need to unregister the event filters and handlers from the node. Registering and unregistering event filters and handlers are also known as adding and removing event filters and handlers, respectively.

JavaFX provides two ways to register and unregister event filters and handlers with nodes:

- Using the `addEventFilter()`, `addEventHandler()`, `removeEventFilter()`, and

`removeEventHandler()` methods

- Using the `onXXX` convenience properties

You can use the `addEventFilter()` and `addEventHandler()` methods to register event filters and handlers with nodes, respectively. These methods are defined in the `Node` class, `Scene` class, and `Window` class. Some classes such as `MenuItem` and `TreeItem` can be event targets; however, they are not inherited from the `Node` class.

- `<T extends Event> void addEventFilter(EventType<T> eventType, EventHandler<? super T> eventFilter)`
- `<T extends Event> void addEventHandler(EventType<T> eventType, EventHandler<? super T> eventHandler)`

These methods take two parameters. The first parameter is the event type and the second one is an object of the `EventHandler` interface.

You can handle mouse-clicked events for a `Circle` using the following snippet of code:

```
import javafx.scene.shape.Circle;
import javafx.event.EventHandler;
import javafx.scene.input.MouseEvent;
...
// Create a circle
Circle circle = new Circle(100, 100, 50);

// Create a MouseEvent filter
EventHandler<MouseEvent> mouseEventFilter =
 e -> System.out.println("Mouse event filter has
been called.");

// Create a MouseEvent handler
EventHandler<MouseEvent> mouseEventHandler =
 e -> System.out.println("Mouse event handler
has been called.");
```

```
// Register the MouseEvent filter and handler to the
Circle
// for mouse-clicked events
circle.addEventFilter(MouseEvent.MOUSE_CLICKED,
mouseEventFilter);
circle.addEventHandler(MouseEvent.MOUSE_CLICKED,
mouseEventHandler);
```

The code creates two `EventHandler` objects, which print a message on the console. At this stage, they are not event filters or handlers. They are just two `EventHandler` objects. Note that giving the reference variables names and printing messages that use the words filter and handler does not make any difference in their status as filters and handlers. The last two statements register one of the `EventHandler` objects as an event filter and another as an event handler; both are registered for the mouse-clicked event.

The `Node`, `Scene`, and `Window` classes contain event properties to store event handlers of some selected event types. The property names use the event type pattern. They are named as `onXXX`. For example, the `onMouseClicked` property stores the event handler for the mouse-clicked event type, the `onKeyTyped` property stores the event handler for the key-typed event, and so on. You can use the `setOnXXX()` methods of these properties to register event handlers for a node. For example, use the `setOnMouseClicked()` method to register an event handler for the mouse-clicked event and use the `setOnKeyTyped()` method to register an event handler for the key-typed event, and so on. The `setOnXXX()` methods in various classes are known as convenience methods for registering event handlers.

You need to remember some points about the `onXXX` convenience properties:

- They only support the registration of event handlers, not event filters. If you need to register event filters, use the `addEventFilter()` method.
- They only support the registration of *one event handler* for a node. Multiple event handlers for a node may be registered using the `addEventHandler()` method.
- These properties exist only for the commonly used events for a node type. For example, the `onMouseClicked`

property exists in the `Node` and `Scene` classes, but not the `Window` class; the `onShowing` property exists in the `Window` class, but not in the `Node` and `Scene` classes.

The following snippet of code shows how to use the convenience `onMouseClicked` property to set an event handler for a circle:

```
// Create a circle
Circle circle = new Circle(100, 100, 50);

// Create a MouseEvent handler
EventHandler<MouseEvent> eventHandler =
 e -> System.out.println("Mouse event handler
has been called.");

// Register the handler using the setter method for
the onMouseClicked
// convenience event property
circle.setOnMouseClicked(eventHandler);
```

The following snippet of code show how to add an `ActionEvent` handler to a `Button` using the `setOnAction()` convenience method of the `Button` class:

```
// Create a button
Button exitBtn = new Button("Exit");

// Add the event handler for the Exit button
exitBtn.setOnAction(e -> Platform.exit());
```

The convenience event properties do not provide a separate method to unregister the event handler. Setting the property to `null` unregisters the event handler that has already been registered.

```
// Unregister the mouse-clicked event handler for the
circle
circle.setOnMouseClicked(null);
```

Classes that define the `onXXX` event properties also define `getOnXXX()` getter methods that return the reference of the registered event handler. If no

event handler is set, the getter method returns null.

[Listing 9-13](#) contains a program that shows the event routing and handling mechanisms. It also shows how to consume an event and its effect. [Figure 9-10](#) shows the screen when you run the program.

### ***Listing 9-13.*** Handling and Consuming Events

```
// EventHandling.java
package com.jdojo.jfx;

import javafx.application.Application;
import javafx.event.EventHandler;
import javafx.geometry.Insets;
import javafx.scene.Scene;
import javafx.scene.control.CheckBox;
import javafx.scene.input.MouseEvent;
import static
javafx.scene.input.MouseEvent.MOUSE_CLICKED;
import javafx.scene.layout.HBox;
import javafx.scene.paint.Color;
import javafx.scene.shape.Circle;
import javafx.scene.shape.Rectangle;
import javafx.stage.Stage;

public class EventHandling extends Application {
 private CheckBox consumeEventCbx =
 new CheckBox("Consume Mouse Click at
Circle");

 public static void main(String[] args) {
 Application.launch(args);
 }

 @Override
 public void start(Stage stage) {
 Circle circle = new Circle(50, 50, 50);
 circle.setFill(Color.CORAL);

 Rectangle rect = new Rectangle(100, 100);
```

```

 rect.setFill(Color.TAN);

 HBox root = new HBox();
 root.setPadding(new Insets(20));
 root.setSpacing(20);
 root.getChildren().addAll(circle, rect,
consumeEventCbx);

 Scene scene = new Scene(root);

 // Register mouse-clicked event handlers
to all nodes,
 // except the rectangle and checkbox
 EventHandler<MouseEvent> handler = e ->
handleEvent(e);
 EventHandler<MouseEvent> circleMeHandler =
 e -> handleEventforCircle(e);

 stage.addEventHandler(MOUSE_CLICKED,
handler);
 scene.addEventHandler(MOUSE_CLICKED,
handler);
 root.addEventHandler(MOUSE_CLICKED,
handler);
 circle.addEventHandler(MOUSE_CLICKED,
circleMeHandler);

 stage.setScene(scene);
 stage.setTitle("Event Handling");
 stage.show();
 }

 public void handleEvent(MouseEvent e) {
 print(e);
 }

 public void handleEventforCircle(MouseEvent e)
{
 print(e);
 if (consumeEventCbx.isSelected()) {

```

```

 e.consume();
 }


}

public void print(MouseEvent e) {
 String type = e.getEventType().getName();
 String source
= e.getSource().getClass().getSimpleName();
 String target
= e.getTarget().getClass().getSimpleName();

 // Get coordinates of the mouse relative
to the event source
 double x = e.getX();
 double y = e.getY();

 System.out.println("Type=" + type + ", "
Target=" + target +
 ", Source=" + source +
 ", location(" + x + ", " + y
+ ") ");
 }
}

```

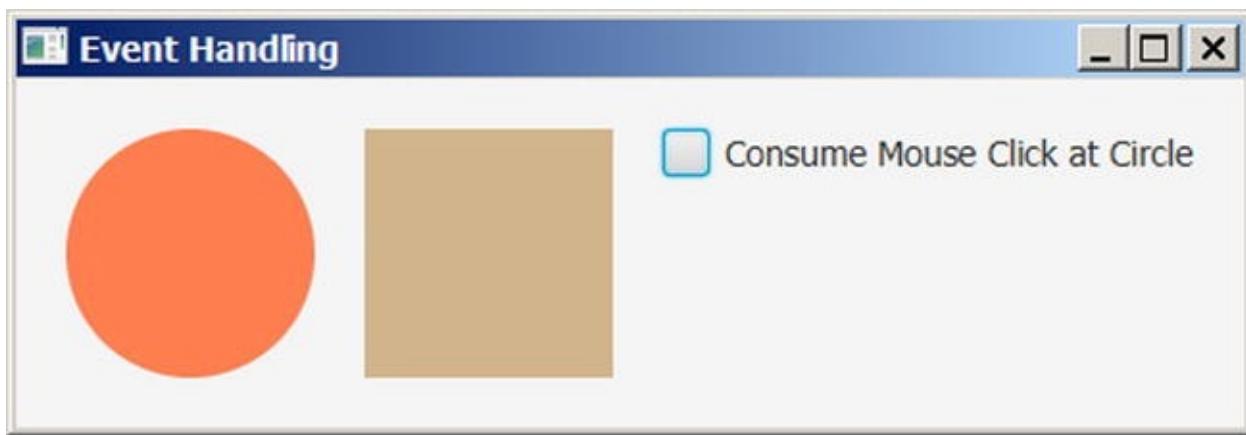

**Figure 9-10.** Handling and consuming events

The program adds a Circle, a Rectangle, and a CheckBox to an HBox. The HBox is a container that lays out its children horizontally on one row. The HBox is added to the scene as the root node. An event handler is added

to the Stage, Scene, HBox, and Circle. Notice that you have a different event handler for the Circle just to keep the program logic simple. When the CheckBox is selected, the event handler for the Circle consumes the mouse-clicked event, thus preventing the event from travelling up to the HBox, Scene, and Stage. If the CheckBox is not selected, the mouse-clicked event on the Circle travels from the Circle to the HBox, Scene, and Stage. Run the program and using the mouse, click on the different areas of the scene to see the effect. Notice that the mouse-clicked event handler for the HBox, Scene, and Stage are executed, even if you click on a point outside the Circle, because they are in the event dispatch chain of the clicked nodes.

Clicking on the CheckBox does not execute the mouse-clicked event handlers for the HBox, Scene, and Stage, whereas clicking on the Rectangle does. Can you think of a reason for this behavior? The reason is simple. The CheckBox has a default event handler that takes a default action and consumes the event, preventing it from travelling up the event dispatch chain. The Rectangle does not consume the event, allowing it to travel up the event dispatch chain.

---

**Tip** Consuming an event by the event target in an event filter has no effect on the execution of any other event filters. However, it prevents the event bubbling phase from happening. Consuming an event in the event handlers of the topmost node, which is the head of the event-dispatch chain, has no effect on the event processing at all.

---

## Layout Panes

You can use two types of layouts to arrange nodes in a scene graph:

- Static Layout
- Dynamic Layout

In a static layout, the position and size of nodes are calculated once and they stay the same as the window is resized. The user interface looks good when the window has the size for which the nodes were originally laid out.


In a dynamic layout, nodes in a scene graph are laid out every time a user action necessitates a change in their position, size, or both. Typically, changing the position or size of one node affects the position and size of other nodes in the scene graph. The dynamic layout forces recomputation of the position and size of some or all nodes as the window is resized.

Both static and dynamic layouts have advantages and disadvantages. A static layout gives developers full control over the design of the user interface. It lets you make use of the available space as you see fit. A dynamic layout requires more programming work and the logic is much more involved. Typically, programming languages supporting GUIs such as JavaFX support dynamic layouts through libraries. Libraries solve most of the use-cases for dynamic layouts. If they do not meet your needs, you must do the hard work to roll out your own dynamic layout.

A *layout pane* is a node that contains other nodes, which are known as its children (or child nodes). The responsibility of a layout pane is to lay out its children whenever needed. A layout pane is also known as a *container* or a *layout container*.

A layout pane has a *layout policy* that controls how the layout pane lays out its children. For example, a layout pane may lay out its children horizontally, vertically, or in any other fashion. The layout policy of a container is a set of rules to compute the position and size of its children. A node has three type sizes called preferred size, minimum size, and maximum size. Most of the containers attempt to give its children their preferred size. The actual (or current) size of a node may be different from its preferred size. The current size of a node depends on the size of the window, the layout policy of the container, and the expanding and shrinking policy for the node, etc.

JavaFX contains several container classes. [Figure 9-11](#) shows a class diagram for the container classes. A container class is a subclass, direct or indirect, of the `Parent` class.

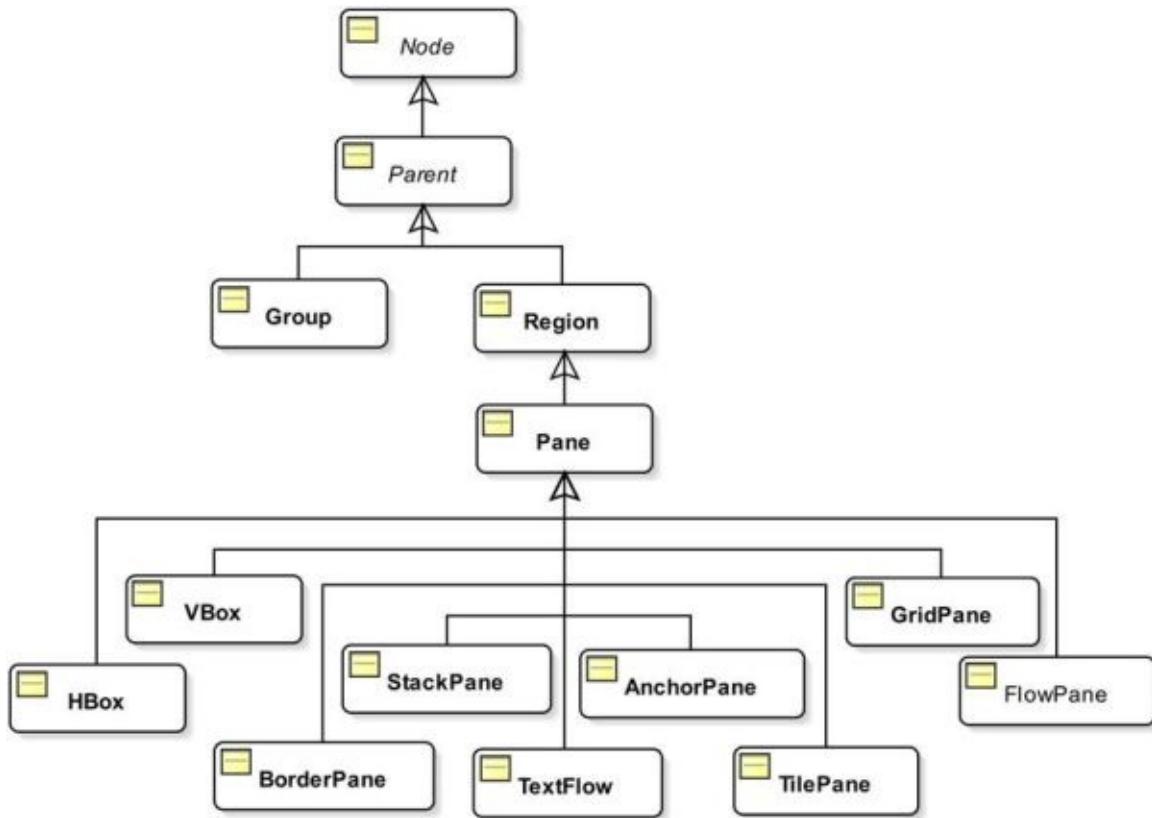

**Figure 9-11.** A class diagram for container classes in JavaFX

A `Group` lets you apply effects and transformations to all its children collectively. The `Group` class is in the `javafx.scene` package.

Subclasses of the `Region` class are used to lay out children. They can be styled with CSS. The `Region` class and most of its subclasses are in the `javafx.scene.layout` package.

It is true that a container needs to be a subclass of the `Parent` class. However, not all subclasses of the `Parent` class are containers. For example, the `Button` class is a subclass of the `Parent` class; however, it is a control, not a container. A node must be added to a container to be part of a scene graph. The container lays out its children according to its layout policy. If you do not want the container to manage the layout for a node, you need to set the `managed` property of the node to false.

A node can be a child node of only one container at a time. If a node is added to a container while it is already the child node of another container, the node is removed from the first container before being added to the second one. Often times, it is necessary to nest containers to create a complex layout. That is, you can add a container to another container as a child node.

The Parent class contains three methods to get the list of children of a container:

- protected ObservableList<Node> getChildren()
- public ObservableList<Node> getChildrenUnmodifiable()
- protected <E extends Node> List<E> getManagedChildren()

The `getChildren()` method returns a modifiable `ObservableList` of the child nodes of a container. If you want to add a node to a container, you add the node to this list. This is the most commonly used method of the container classes. You have been using this method to add children to containers like `Group`, `HBox`, `VBox`, etc. from the very first program.

Notice the `protected` access for the `getChildren()` method. If the subclass of the Parent class does not want to be a container, it will keep the access for this method as `protected`. For example, control-related classes such as `Button` and `TextField` keep this method as `protected`, so you cannot add child nodes to them. A container class overrides this method and makes it `public`. For example, the `Group` and `Pane` classes expose this method as `public`.

The `getChildrenUnmodifiable()` method is declared as `public` in the Parent class. It returns a read-only `ObservableList` of children. It is useful in two scenarios:

- You need to pass the list of children of a container to a method that should not modify the list.
- You want to know what makes up a control, which is not a container.

The `getManagedChildren()` method has the `protected` access. Container classes do not expose it as `public`. They use it internally to get the list of managed children during layouts. You will use this method to roll out your own container classes.

[Table 9-4](#) contains brief descriptions of the container classes in JavaFX. It is

not possible to discuss all types of containers in this chapter. In this section, I will show you examples of using some of them.

**Table 9-4.** Container Classes with a Brief Descriptions in JavaFX

Container Class	Description
Group	Applies effects and transformations collectively to all its children.
Pane	Used for absolute positioning of its children.
HBox	Arranges children horizontally in a single row.
VBox	Arranges children vertically in a single column.
FlowPane	Arranges children horizontally or vertically in rows or columns. If they do not fit in a single row or column, they are wrapped at the specified width or height.
BorderPane	Divides the layout area in the top, right, bottom, left, and center regions, and places each of its children in one of the five regions.
StackPane	Arranges children in a back-to-front stack.
TilePane	Arranges children in a grid of uniformly sized cells.
GridPane	Arranges children in a grid of variable sized cells.
AnchorPane	Arranges children by anchoring their edges to the edges of the layout area.
TextFlow	Lays out rich text whose contents may consist of several Text nodes.

A container is meant to contain children. You can add children to a container when you create the container object or after creating it. All container classes provide constructors that take a varargs Node type argument to add the initial set of children. Some containers provide constructors to add an initial set of children and set initial properties for the containers.

You can also add children to a container at any time after the container is created. Containers store their children in an observable list, which can be retrieved using the `getChildren()` method. Adding a node to a container is as simple as adding a node to that observable list. The following snippet of code shows how to add children to an HBox when it is created and after it is created.

```
// Create two buttons
Button okBtn = new Button("OK");
Button cancelBtn = new Button("Cancel");

// Create an HBox with two buttons as its children
HBox hBox1 = new HBox(okBtn, cancelBtn);
```

```
// Create an HBox with two buttons with 20px
horizontal spacing between them
double hSpacing = 20;
HBox hBox2 = new HBox(hSpacing, okBtn, cancelBtn);

// Create an empty HBox, and afterwards add two
buttons to it
HBox hBox3 = new HBox();
hBox3.getChildren().addAll(okBtn, cancelBtn);
```

---

**Tip** When you need to add multiple child nodes to a container, use the `addAll()` method of the `ObservableList` rather than using the `add()` method multiple times.

---

The program in [Listing 9-14](#) shows how to use a `BorderPane`, a `HBox`, and a `VBox` to arrange UI elements as shown in [Figure 9-12](#).

#### ***Listing 9-14.*** Using the `BorderPane` Container

```
// BorderPaneTest.java
package com.jdojo.jfx;

import javafx.application.Application;
import javafx.geometry.Insets;
import javafx.scene.Node;
import javafx.scene.Scene;
import javafx.scene.control.Button;
import javafx.scene.control.Label;
import javafx.scene.control.TextArea;
import javafx.scene.control.TextField;
import javafx.scene.layout.BorderPane;
import javafx.scene.layout.HBox;
import javafx.scene.layout.Priority;
import javafx.scene.layout.VBox;
import javafx.stage.Stage;

public class BorderPaneTest extends Application {
```

```
public static void main(String[] args) {
 Application.launch(args);
}

public void start(Stage stage) {
 // Set the top and left child nodes to
null
 Node top = null;
 Node left = null;

 // Build the content nodes for the center
region
 VBox center = getCenter();

 // Create the right child node
 Button okBtn = new Button("Ok");
 Button cancelBtn = new Button("Cancel");

 // Make the OK and cancel buttons the same
size
 okBtn.setMaxWidth(Double.MAX_VALUE);
 VBox right = new VBox(okBtn, cancelBtn);
 right.setStyle("-fx-padding: 10;");

 // Create the bottom child node
 Label statusLbl = new Label("Status:
Ready");
 HBox bottom = new HBox(statusLbl);
 BorderPane.setMargin(bottom, new
Insets(10, 0, 0, 0));
 bottom.setStyle("-fx-background-color:
lavender;" +
 "-fx-font-size: 7pt;" +
 "-fx-padding: 10 0 0 0;");

 BorderPane root =
 new BorderPane(center, top, right,
bottom, left);
 root.setStyle("-fx-background-color:
lightgray");
```

```
Scene scene = new Scene(root);
stage.setScene(scene);
stage.setTitle("Using a BorderPane");
stage.show();
}

private VBox getCenter() {
 // A Label and a TextField in an HBox
 Label nameLbl = new Label("Name:");
 TextField nameFld = new TextField();
 HBox.setHgrow(nameFld, Priority.ALWAYS);
 HBox nameFields = new HBox(nameLbl,
nameFld);

 // A Label and a TextArea
 Label descLbl = new Label("Description:");
 TextArea descText = new TextArea();
 descText.setPrefColumnCount(20);
 descText.setPrefRowCount(5);
 VBox.setVgrow(descText, Priority.ALWAYS);

 // Box all controls in a VBox
 VBox center = new VBox(nameFields,
descLbl, descText);

 return center;
}
}
```



**Figure 9-12.** A BorderPane using some controls in its top, right, bottom, and center regions

Notice the use of the `setStyle()` method for the containers in [Listing 9-14](#). You can customize the visual appearance of the containers and controls in JavaFX using CSS. The CSS attributes in JavaFX are named and work very similar to CSS attributes used to customize HTML contents in browsers. CSS attributes in JavaFX starts with `-fx-`; for example, the CSS attribute name for specifying the font size is `-fx-font-size`. You can also set styles to a JavaFX application using a CSS file. [Listing 9-15](#) shows how to add padding and a rounded, blue border around the scene by adding a style to the root node of the scene. [Figure 9-13](#) shows the resulting scene in a window.

**Listing 9-15.** Using CSS to Add a Padding and a Rounded, Blue Border to a Scene

```
// CSSTest.java
package com.jdojo.jfx;

import javafx.application.Application;
import javafx.scene.Scene;
import javafx.scene.control.Label;
import javafx.scene.control.TextField;
import javafx.scene.layout.GridPane;
import javafx.stage.Stage;
```

```
public class CSSTest extends Application {
 public static void main(String[] args) {
 Application.launch(args);
 }


 @Override
 public void start(Stage stage) {
 TextField fNameFld = new TextField();
 Label fNameLbl = new Label("First Name:");

 TextField lNameFld = new TextField();
 Label lNameLbl = new Label("Last Name:");

 GridPane root = new GridPane();
 root.addRow(0, fNameLbl, fNameFld);
 root.addRow(1, lNameLbl, lNameFld);

 // Set a CSS for the GridPane
 root.setStyle("-fx-padding: 10;" +
 "-fx-border-style: solid
inside;" +
 "-fx-border-width: 2;" +
 "-fx-border-insets: 5;" +
 "-fx-border-radius: 5;" +
 "-fx-border-color: blue;");

 Scene scene = new Scene(root);
 stage.setScene(scene);
 stage.setTitle("Using CSS");
 stage.show();
 }
}
```

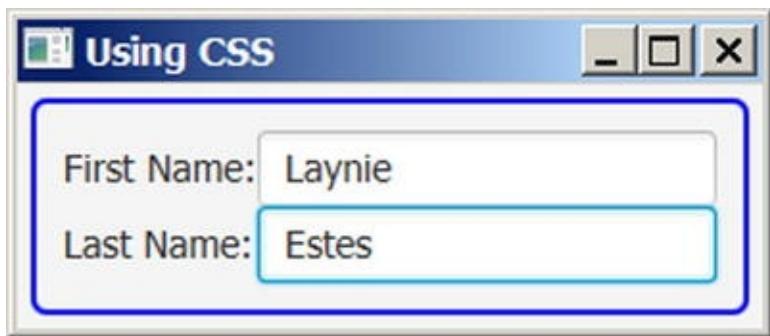

**Figure 9-13.** Using CSS to add padding and a rounded, blue border around the scene

Using CSS in JavaFX is a big topic. This chapter does not discuss CSS in JavaFX in detail. Please refer to the following web page for the CSS reference guide that lists all CSS attributes for all nodes that can be styled using CSS:

[docs.oracle.com/javase/8/javafx/api/javafx/scene/doc-files/cssref.html](https://docs.oracle.com/javase/8/javafx/api/javafx/scene/doc-files/cssref.html)

## Controls

JavaFX lets you create applications using GUI components. An application with a GUI performs three tasks:

- Accepts inputs from the user through input devices such as a keyboard, a mouse, etc.
- Processes the inputs (or takes actions based on the input)
- Displays outputs

A user interface provides a means to exchange information in terms of input and output between an application and users. Entering text using a keyboard, selecting a menu item using a mouse, and clicking a button are examples of providing inputs to a GUI application. The application displays output on a computer monitor using text, charts, dialog boxes, etc.

Users interact with a GUI application using graphical elements called *controls* or *wIDGETS*. Buttons, labels, text fields, text area, radio buttons, and checkboxes are a few examples of controls. Devices like a keyboard, a mouse, and a touch screen are used to provide input to controls. Controls can also display output to the users. Controls generate events that indicate occurrences of

some kind of interaction between the user and the control. For example, pressing a button using a mouse or a spacebar generates an action event indicating that the user has pressed the button.


JavaFX provides a rich set of easy-to-use basic as well as advanced controls. Controls are typically added to layout panes that position and size them. It is not possible to discuss all controls. I will list most controls in JavaFX and provide a brief description of what they do.

Each control in JavaFX is represented by an instance of a class. If multiple controls share basic features, they inherit from a common base class. Control classes are in the `javafx.scene.control` package. A control class is a subclass, direct or indirect, of the `Control` class, which in turn inherits from the `Region`. Recall that the `Region` class inherits from the `Parent` class. Therefore, technically, a `Control` is also a `Parent`.

A `Parent` can have children. Typically, a control is composed of another node (sometimes, multiple nodes) that is its child node. Control classes do not expose the list of its children through the `getChildren()` method, and therefore you cannot add any children to them.

Control classes expose the list of their internal unmodifiable children through the `getChildrenUnmodifiable()` method, which returns an `ObservableList<Node>`. You are not required to know about the internal children of a control to use the control. However, if you need the list of their children, the `getChildrenUnmodifiable()` method will give you that.

[Figure 9-14](#) shows a class diagram for classes of some commonly used controls. The list of control classes is a lot bigger than the one shown in the class diagram. [Table 9-5](#) contains a list of most of the controls in JavaFX with their brief description.

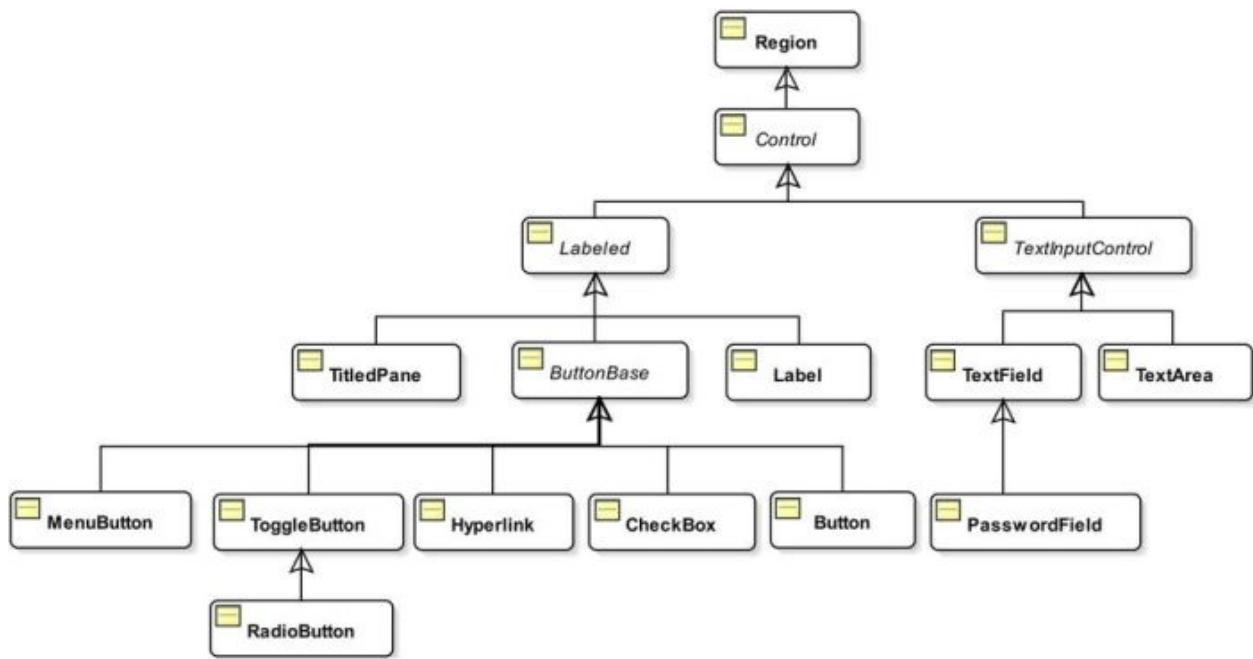

**Figure 9-14.** A partial class diagram for control classes in JavaFX

**Table 9-5. JavaFX Controls**

Control	Description
Label	A non-editable text control that is typically used to display the label for another control.
Button	Represents a command button control. It can display text and an icon. It generates an <code>ActionEvent</code> when it is activated.
Hyperlink	Represents a hyperlink control, which looks like a hyperlink in a webpage. It generates an <code>ActionEvent</code> when it is activated.
MenuButton	Looks like a button and behaves like a menu. When it is activated, it shows a list of options in the form of a pop-up menu. To execute a command when a menu option is selected, you need to add the <code>ActionEvent</code> handler to the <code>MenuItem</code> s added to the <code>MenuButton</code> .
ToggleButton	Represents a two-state button control. The two states are <i>selected</i> and <i>unselected</i> .
RadioButton	Represents a radio button. It is used to provide a mutually exclusive choice from the list of choices.
CheckBox	Represents a three-state selection control. The three states are <i>checked</i> , <i>unchecked</i> , and <i>undefined</i> .
ChoiceBox	Allows users select an item from a small list of predefined items.
ComboBox	An advanced version of the <code>ChoiceBox</code> control. It has many features, such as the ability to be editable, changing appearance of the items in the list, etc., which are not offered by in <code>ChoiceBox</code> .
ListView	Provides users an ability to select multiple items from a list of items. Typically, all or more than one item in a list is visible to the user all the time.
ColorPicker	Allows users select a color from a standard color palette or define a custom color graphically.
DatePicker	Allows users to select a date from a calendar pop-up.
TextField	Represents a single-line text input control.
PasswordField	Represents a single-line text input control to enter passwords or sensitive text where the actual text is masked.
TextArea	Represents a multi-line text input control.
ProgressIndicator	Used to display the progress of a task in a circular area.
ProgressBar	Used to display the progress of a task in a rectangular area.
TitledPane	Used to display contents (typically, a group of controls) with a title bar that may contain title text and a graphic. It can be in the expanded or collapsed state. In the collapsed state, only the title bar

	is visible. In the expanded state, both the contents and the title bar are visible.
Accordion	Used as a container for a group of <code>TitledPane</code> controls in which only one <code>TitledPane</code> is visible at a time.
Pagination	Used to display a large single content by dividing it into smaller chunks called pages, such as the results of a search.
Tooltip	Used to show additional information about a control in a pop-up window for a short time when the mouse hovers over the control.
ScrollBar	Used to add scrolling capability to a control.
ScrollPane	Provides a scrollable view of a node.
Separator	A horizontal or vertical line used to separate two groups of controls.
Slider	Used to select a numeric value from a numeric range graphically by sliding a thumb (or knob) along a track.
MenuBar	A horizontal bar that acts as a container for menus.
Menu	Contains a list of actionable items, which are displayed on demand, for example, by clicking it.
MenuItem	Represents an actionable option in a menu.
ContextMenu	A pop-up control that displays a list of menu items on request.
ToolBar	Used to display a group of nodes, which provide the commonly used action items on a screen.
TabPane	Displays multiple tab pages represented by instances of the <code>Tab</code> class. The contents of only one tab page are visible at a time.
Tab	Represents a tab page in a <code>TabPane</code> .
HTMLEditor	Provides rich text editing capability in JavaFX.
FileChooser	Allows you to select files from the file system graphically.
DirectoryChooser	Allows you to select directories using a platform-dependent directory dialog
TableView	Used to display and edit tabular data using rows and columns.
TreeView	Used to display and edit hierarchical data arranged in a tree-like structure.
TreeTableView	A combination of <code>TableView</code> and <code>TreeView</code> controls. Provides the ability to have a drill-down table.
WebView	Displays a web page.

[Listing 9-16](#) creates a form using JavaFX controls to enter person details such as first name, last name, birth date, and gender as shown in [Figure 9-15](#). Enter the data and click the Save button to display the entered data in the

TextArea at the bottom of the window. The form uses the following controls:

- Two instances of the TextField control to enter the first and last names.
- A DatePicker control to enter the birth date.
- A ChoiceBox control to select a gender.
- A Button control to save the data.
- A Button control to close the window.
- A TextArea control to display the entered data when the Save button is clicked.

***Listing 9-16.*** Creating a Form Using JavaFX Controls to Enter Person Details

```
// PersonView.java
package com.jdojo.jfx;

import javafx.application.Application;
import javafx.scene.Scene;
import javafx.scene.control.Button;
import javafx.scene.control.ChoiceBox;
import javafx.scene.control.DatePicker;
import javafx.scene.control.Label;
import javafx.scene.control.TextArea;
import javafx.scene.control.TextField;
import javafx.scene.layout.GridPane;
import javafx.scene.layout.VBox;
import javafx.stage.Stage;

public class PersonView extends Application {
 // Labels
 Label fNameLbl = new Label("First Name:");
 Label lNameLbl = new Label("Last Name:");
 Label bDateLbl = new Label("Birth Date:");
 Label genderLbl = new Label("Gender:");
```

```

// Fields
TextField fNameFld = new TextField();
TextField lNameFld = new TextField();
DatePicker bDateFld = new DatePicker();
ChoiceBox<String> genderFld = new ChoiceBox<>
();
TextArea dataFld = new TextArea();

// Buttons
Button saveBtn = new Button("Save");
Button closeBtn = new Button("Close");

public static void main(String[] args) {
 Application.launch(args);
}

@Override
public void start(Stage stage) throws Exception
{
 // Populate the gender choice box
 genderFld.getItems().addAll("Male",
"Female", "Unknown");

 // Set the preferred rows and columns for
 // the text area
 dataFld.setPrefColumnCount(30);
 dataFld.setPrefRowCount(5);

 GridPane grid = new GridPane();
 grid.setHgap(5);
 grid.setVgap(5);

 // Place the controls in the grid
 grid.add(fNameLbl, 0, 0); // column=0,
row=0
 grid.add(lNameLbl, 0, 1); // column=0,
row=1
 grid.add(bDateLbl, 0, 2); // column=0,
row=2
 grid.add(genderLbl, 0, 3); // column=0,

```

```

row=3

 grid.add(fNameFld, 1, 0); // column=1,
row=0
 grid.add(lNameFld, 1, 1); // column=1,
row=1
 grid.add(bDateFld, 1, 2); // column=1,
row=2
 grid.add(genderFld, 1, 3); // column=1,
row=3
 grid.add(dataFld, 1, 4, 3, 2); //
column=1, row=4, colspan=3, rowspan=3

 // Add buttons and make them the same
width
 VBox buttonBox = new VBox(saveBtn,
closeBtn);
 saveBtn.setMaxWidth(Double.MAX_VALUE);
 closeBtn.setMaxWidth(Double.MAX_VALUE);

 grid.add(buttonBox, 2, 0, 1, 2); //
column=2, row=0, colspan=1, rowspan=2

 // Show the data in the text area when the
Save button is clicked
 saveBtn.setOnAction(e -> showData());

 // Close the window when the Close button
is clicked
 closeBtn.setOnAction(e -> stage.hide());

 // Set a CSS for the GridPane to add
a padding and a blue border
 grid.setStyle("-fx-padding: 10;" +
 "-fx-border-style: solid
inside;" +
 "-fx-border-width: 2;" +
 "-fx-border-insets: 5;" +
 "-fx-border-radius: 5;" +
 "-fx-border-color: blue;");


```

```

 Scene scene = new Scene(grid);
 stage.setScene(scene);
 stage.setTitle("Person Details");
 stage.sizeToScene();
 stage.show();
 }

 private void showData() {
 String data = "First Name = "
+ fNameFld.getText() +
 "\nLast Name="
+ lNameFld.getText() +
 "\nBirth Date="
+ bDateFld.getValue() +
 "\nGender="
+ genderFld.getValue();
 dataFld.setText(data);
 }
}


```



**Figure 9-15.** A form using JavaFX controls to enter person details

# Using 2D Shapes

JavaFX offers variety nodes to draw different types of shapes, such as lines, circles, rectangles, etc. You can add shapes to a scene graph. You can draw 2D and 3D shapes. In this section, I will show you how to draw 2D shapes. Using 3D shapes in JavaFX has a learning curve. Because of space limitation, I will not discuss 3D shapes in this book. All 2D shape classes are in the `javafx.scene.shape` package. Classes representing 2D shapes are inherited from the abstract `Shape` class as shown in [Figure 9-16](#).

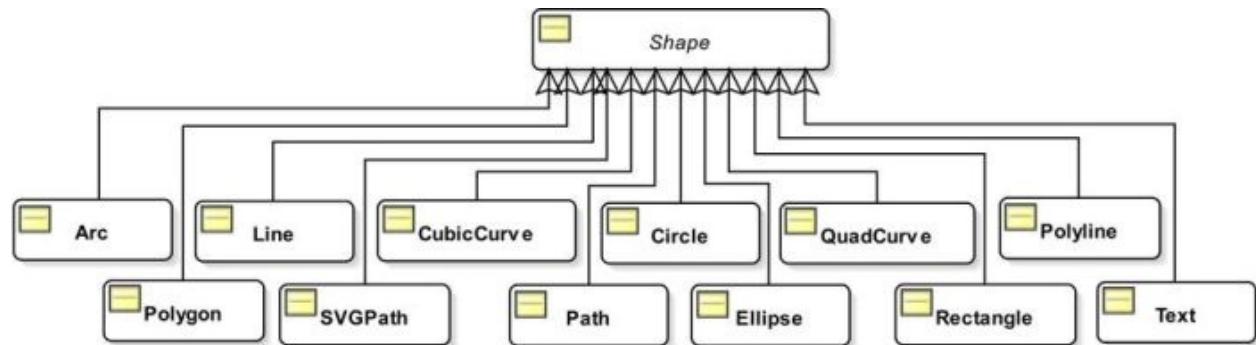

[Figure 9-16](#). A class diagram for 2D shapes

A shape has a size and a position that are defined by its properties. For example, the `width` and `height` properties define the size of a rectangle; the `radius` property defines the size of a circle, the `x` and `y` properties define the position of the upper-left corner of a rectangle, the `centerX` and `centerY` properties define the center of a circle.

Shapes are not resized by their parents during layout. The size of a shape changes only when its size-related properties are changed. You may see a phrase like “JavaFX shapes are non-resizable.” It means shapes are non-resizable by their parent during layout. They can be resized only by changing their properties.

Shapes have an interior and a stroke. All properties for defining the interior and stroke of a shape are declared in the `Shape` class. The `fill` property specifies the color to fill the interior of the shape. The default `fill` is `Color.BLACK`. The `stroke` property specifies the color for the outline stroke, which is `null` by default, except for `Line`, `Polyline`, and `Path` that have `Color.BLACK` as their default `stroke` color.

The `Shape` class contains a `smooth` property, which is true by default. Its `true` value indicates that an antialiasing hint should be used to render the shape. If it is

set to false, the antialiasing hint will not be used, which may result in the edges of shapes being not crisp.

The program in [Listing 9-17](#) creates a circle, a rectangle, a line, a polygon to represent a parallelogram, a polyline to represent a hexagon, and an arc with a chord. The shapes are shown in [Figure 9-17](#). Note the following points about creating the shapes in this program:

- It creates a circle of radius 40px.
- It creates a rectangle of 100px width and 75px height.
- It creates a line from (0, 0) and (50, 50).
- It creates a polygon representing a parallelogram, by connecting four points: (30.0, 0.0), (130.0, 0.0), (100.00, 50.0), and (0.0, 50.0). The polygon is automatically closed by connecting the first and the last points.
- It creates a polyline representing a hexagon. A polyline is similar to a polygon, except that it is not closed automatically. Notice that the first point (100.0, 0.0) and the last point (100.0, 0.0) are the same in the polyline constructor, so it is closed.
- It creates an arc using the constructor `Arc(double centerX, double centerY, double radiusX, double radiusY, double startAngle, double length)` of the `Arc` class. An arc can be chord, round, or open. The program uses the arc type as `ArcType.CHORD` to connect the two extreme points on the arc by a straight line (a chord).

### [Listing 9-17](#). Using 2D Shapes in JavaFX

```
// ShapeTest.java
package com.jdojo.jfx;

import javafx.application.Application;
import javafx.scene.Scene;
import javafx.scene.layout.HBox;
import javafx.scene.paint.Color;
```

```
import javafx.scene.shape.Arc;
import javafx.scene.shape.ArcType;
import javafx.scene.shape.Circle;
import javafx.scene.shape.Line;
import javafx.scene.shape.Polygon;
import javafx.scene.shape.Polyline;
import javafx.scene.shape.Rectangle;
import javafx.stage.Stage;

public class ShapeTest extends Application {
 public static void main(String[] args) {
 Application.launch(args);
 }

 @Override
 public void start(Stage stage) {
 // Create a circle with an yellow fill and
 // a black stroke of 2.0px
 Circle circle = new Circle(40);
 circle.setFill(Color.YELLOW);
 circle.setStroke(Color.BLACK);
 circle.setStrokeWidth(2.0);

 // Create a rectangle
 Rectangle rect = new Rectangle(100, 75);
 rect.setFill(Color.RED);

 // Create a line
 Line line = new Line(0, 0, 50, 50);
 line.setStrokeWidth(5.0);
 line.setStroke(Color.GREEN);

 // Create a parallelogram
 Polygon parallelogram = new Polygon();
 parallelogram.getPoints().addAll(30.0,
0.0,
130.0, 0.0,
100.0, 50.0,
0.0, 50.0);
 parallelogram.setFill(Color.AZURE);
```

```

parallelogram.setStroke(Color.BLACK);


// Create a hexagon
Polyline hexagon = new Polyline(100.0,
0.0,
120.0, 20.0,
120.0, 40.0,
100.0, 60.0,
80.0, 40.0,
80.0, 20.0,
100.0, 0.0);
hexagon.setFill(Color.WHITE);
hexagon.setStroke(Color.BLACK);

// A CHORD arc with no fill and a stroke
Arc arc = new Arc(0, 0, 50, 100, 0, 90);
arc.setFill(Color.TRANSPARENT);
arc.setStroke(Color.BLACK);
arc.setType(ArcType.CHORD);

// Add all shapes to an HBox
HBox root =
 new HBox(circle, rect, line,
parallelogram, hexagon, arc);
root.setSpacing(10);
root.setStyle("-fx-padding: 10;" +
 "-fx-border-style: solid
inside;" +
 "-fx-border-width: 2;" +
 "-fx-border-insets: 5;" +
 "-fx-border-radius: 5;" +
 "-fx-border-color: blue;");

Scene scene = new Scene(root);
stage.setScene(scene);
stage.setTitle("2D Shapes");
stage.show();
}
}

```

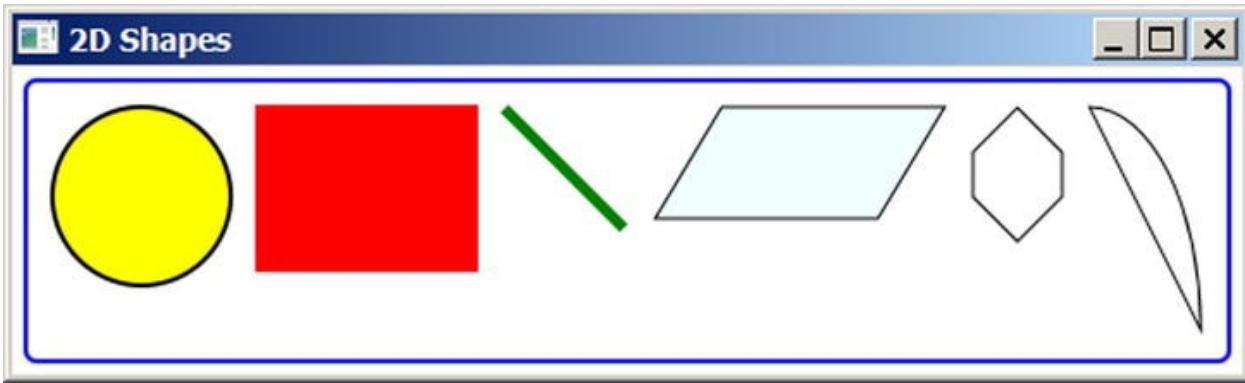

**Figure 9-17.** Some 2D shapes in JavaFX

The Path class, along with many other classes such as MoveTo, LineTo, HLineTo, and VLineTo, can be used to draw very complex shapes in JavaFX. JavaFX also supports Scalable Vector Graphics (SVG) using the SVGPath class from path data in an encoded string. The SVG specification is can be found at [www.w3.org/TR/SVG](http://www.w3.org/TR/SVG). The detailed rules of constructing the path data in string format can be found at [www.w3.org/TR/SVG/paths.html](http://www.w3.org/TR/SVG/paths.html). JavaFX partially supports the SVG specification. This book does not cover creating 2D shapes using the Path and SVGPath class in detail. Listing 9-18 shows how to create triangles using the Path and SVGPath classes as shown in Figure 9-18. Please refer to the JavaFX API documentation for details on how to use these classes.

#### ***Listing 9-18.*** Using Path and SVGPath Classes to Create 2D Shapes

```
// PathTest.java
package com.jdojo.jfx;

import javafx.application.Application;
import javafx.scene.Scene;
import javafx.scene.layout.HBox;
import javafx.scene.paint.Color;
import javafx.scene.shape.LineTo;
import javafx.scene.shape.MoveTo;
import javafx.scene.shape.Path;
import javafx.scene.shape.SVGPath;
import javafx.stage.Stage;
```

```
public class PathTest extends Application {
 public static void main(String[] args) {
 Application.launch(args);
 }

 @Override
 public void start(Stage stage) {
 // Create a triangle using a Path
 Path pathTriangle = new Path(new
 MoveTo(50, 0),
 new LineTo(0, 50),
 new LineTo(100,
50),
 new LineTo(50,
0));

 pathTriangle.setFill(Color.LIGHTGRAY);
 pathTriangle.setStroke(Color.BLACK);

 // Create a triangle using a SVGPath
 SVGPath svgTriangle = new SVGPath();
 svgTriangle.setContent("M50, 0 L0, 50
L100, 50 Z");
 svgTriangle.setFill(Color.LIGHTGRAY);
 svgTriangle.setStroke(Color.BLACK);


 // Add all shapes to an HBox
 HBox root = new HBox(pathTriangle,
 svgTriangle);
 root.setSpacing(10);
 root.setStyle("-fx-padding: 10;" +
 "-fx-border-style: solid
inside;" +
 "-fx-border-width: 2;" +
 "-fx-border-insets: 5;" +
 "-fx-border-radius: 5;" +
 "-fx-border-color: blue;");

 Scene scene = new Scene(root);
 stage.setScene(scene);
```

```

 stage.setTitle("2D Shapes using Path and
SVGPath Classes");
 stage.show();
 }
}

```

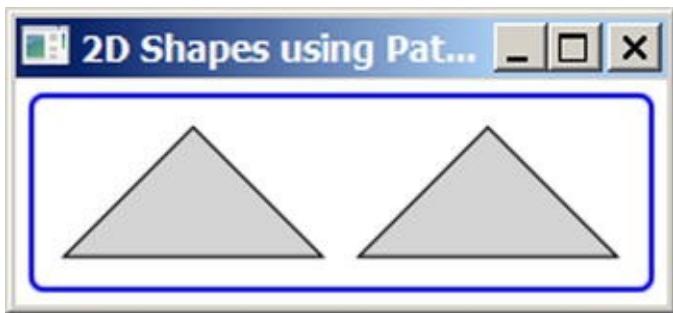

**Figure 9-18.** Creating triangles using the Path and SVGPath classes

## Drawing on a Canvas

Through the `javafx.scene.canvas` package, JavaFX provides the Canvas API that offers a drawing surface to draw shapes, images, and text using drawing commands. The API also gives pixel-level access to the drawing surface where you can write any pixels on the surface. The API consists of the following two classes:

- `Canvas`
- `GraphicsContext`

A canvas is a bitmap image that is used as a drawing surface. An instance of the `Canvas` class represents a canvas. It inherits from the `Node` class.

Therefore, a canvas is a node that can be added to a scene graph, and effects and transformations can be applied to it. A `Canvas` has a graphics context associated with it that is used to issue drawing commands to the `Canvas`. An instance of the `GraphicsContext` class represents a graphics context.

The `Canvas` class contains two constructors. The no-args constructor creates an empty `Canvas`. Later, you can set the size of the canvas using its `width` and `height` properties. The other constructor takes the `width` and `height` of the `Canvas` as parameters. The following snippet of code shows

how to create canvases:

```
// Create a Canvas of zero width and height
Canvas canvas = new Canvas();

// Set the canvas size
canvas.setWidth(400);
canvas.setHeight(200);

// Create a 400X200 canvas
Canvas canvas = new Canvas(400, 200);
```

Once you create a Canvas, you need to get its graphics context using the `getGraphicsContext2D()` method as shown:

```
// Get the graphics context of the canvas
GraphicsContext gc = canvas.getGraphicsContext2D();
```

All drawing commands are provided in the `GraphicsContext` class as methods. Drawings that fall outside the bounds of the Canvas are clipped. The Canvas uses a buffer. The drawing commands push necessary parameters to the buffer. It is important to note that you should use the graphics context from any one thread before adding the Canvas to the scene graph. Once the Canvas is added to the scene graph, the graphics context should be used only on the JavaFX Application Thread.

The program in [Listing 9-19](#) shows how to draw a round rectangle, an oval, and text on a Canvas. [Figure 9-19](#) shows the canvas with all drawings. The `strokeRoundRect(double x, double y, double w, double h, double arcWidth, double arcHeight)` method is used to draw a round rectangle; the `fillOval(double x, double y, double w, double h)` method is used to draw a filled oval. The `strokeText(String text, double x, double y)` method is used to draw text.

#### ***[Listing 9-19](#).*** Drawing on a Canvas

```
// CanvasTest.java
package com.jdojo.jfx;

import javafx.application.Application;
```

```
import javafx.scene.Scene;
import javafx.scene.canvas.Canvas;
import javafx.scene.canvas.GraphicsContext;
import javafx.scene.layout.Pane;
import javafx.scene.paint.Color;
import javafx.stage.Stage;

public class CanvasTest extends Application {
 public static void main(String[] args) {
 Application.launch(args);
 }

 @Override
 public void start(Stage stage) {
 // Create a canvas
 Canvas canvas = new Canvas(300, 100);

 // Get the graphics context of the canvas
 GraphicsContext gc
= canvas.getGraphicsContext2D();

 // Set line width and fill color
 gc.setLineWidth(2.0);
 gc.setFill(Color.RED);

 // Draw a rounded rectangle
 gc.strokeRoundRect(10, 10, 50, 50, 10,
10);

 // Fill an oval
 gc.fillOval(70, 10, 50, 20);

 // Draw text
 gc.strokeText("Hello Canvas", 150, 20);

 Pane root = new Pane();
 root.getChildren().add(canvas);
 Scene scene = new Scene(root);
 stage.setScene(scene);
 stage.setTitle("Drawing on a Canvas");
```

```

 stage.show();
 }
}

```



**Figure 9-19.** A rectangle, an ellipse, and text drawn on a canvas

## Applying Effects

An effect is a filter that accepts one or more graphical inputs, applies an algorithm on the inputs, and produces an output. Typically, effects are applied to nodes to create visually appealing user interfaces. Examples of effects are shadow, blur, warp, glow, reflection, blending, different types of lighting, etc. The JavaFX library provides several effect-related classes. An effect is a conditional feature. Effects applied to nodes will be ignored if they are not available on the platform. [Figure 9-20](#) shows four `Text` nodes using the drop shadow, blur, glow, and bloom effects.



**Figure 9-20.** Text nodes with different effects

Applying effects to a node in JavaFX is easy. The `Node` class contains an `effect` property that specifies the effect applied to the node. By default, it is `null`. To apply an effect, create an object of the specific effect class and set it to the node using the `setEffect()` method. The following snippet of code

applies a drop shadow effect to a Text node:

```
Text t1 = new Text("Drop Shadow");
t1.setFont(Font.font(24));
t1.setEffect(new DropShadow());
```

An instance of the Effect class represents an effect. The Effect class is the abstract base for all effect classes. All effect classes are in the javafx.scene.effect package.

The program in [Listing 9-20](#) creates Text nodes and applies effects to them. The Text nodes look as shown in [Figure 9-20](#).

### ***Listing 9-20.*** Applying Effects to Nodes

```
// EffectTest.java
package com.jdojo.jfx;

import javafx.application.Application;
import javafx.scene.Scene;
import javafx.scene.effect.Bloom;
import javafx.scene.effect.BoxBlur;
import javafx.scene.effect.DropShadow;
import javafx.scene.effect.Glow;
import javafx.scene.layout.HBox;
import javafx.scene.layout.StackPane;
import javafx.scene.paint.Color;
import javafx.scene.shape.Rectangle;
import javafx.scene.text.Font;
import javafx.scene.text.FontWeight;
import javafx.scene.text.Text;
import javafx.stage.Stage;

public class EffectTest extends Application {
 public static void main(String[] args) {
 Application.launch(args);
 }

 @Override
 public void start(Stage stage) {
```

```

 Text t1 = new Text("Drop Shadow!");
 t1.setFont(Font.font(24));
 t1.setEffect(new DropShadow());

 Text t2 = new Text("Blur!");
 t2.setFont(Font.font(24));
 t2.setEffect(new BoxBlur());

 Text t3 = new Text("Glow!");
 t3.setFont(Font.font(24));
 t3.setEffect(new Glow());

 Text t4 = new Text("Bloom!");
 t4.setFont(Font.font("Arial",
 FontWeight.BOLD, 24));
 t4.setFill(Color.WHITE);
 t4.setEffect(new Bloom(0.10));

 // Stack the Text node with bloom effect
 over a Rectangle
 Rectangle rect = new Rectangle(100, 30,
 Color.GREEN);
 StackPane spane = new StackPane(rect, t4);

 HBox root = new HBox(t1, t2, t3, spane);
 root.setSpacing(20);
 root.setStyle("-fx-padding: 10;" +
 "-fx-border-style: solid
inside;" +
 "-fx-border-width: 2;" +
 "-fx-border-insets: 5;" +
 "-fx-border-radius: 5;" +
 "-fx-border-color: blue;");

 Scene scene = new Scene(root);
 stage.setScene(scene);
 stage.setTitle("Applying Effects");
 stage.show();
 }
}

```

---

**Tip** An effect applied to a `Group` is applied to all its children. It is also possible to chain multiple effects where the output of one effect becomes the input for the next effect in the chain.


---

# Applying Transformations

A transformation is a mapping of points in a coordinate space to themselves, preserving distances and directions between them. Several types of transformations can be applied to points in a coordinate space. JavaFX supports the following types of transformation:

- Translation
- Rotation
- Shear
- Scale
- Affine

An instance of the abstract `Transform` class represents a transformation in JavaFX. The `Transform` class contains common methods and properties used by all types of transformations on nodes. It contains factory methods to create specific types of transformations. [Figure 9-21](#) shows a class diagram for the classes representing different types of transformations. The name of the classes match the type of transformation they provide. All classes are in the `javafx.scene.transform` package.

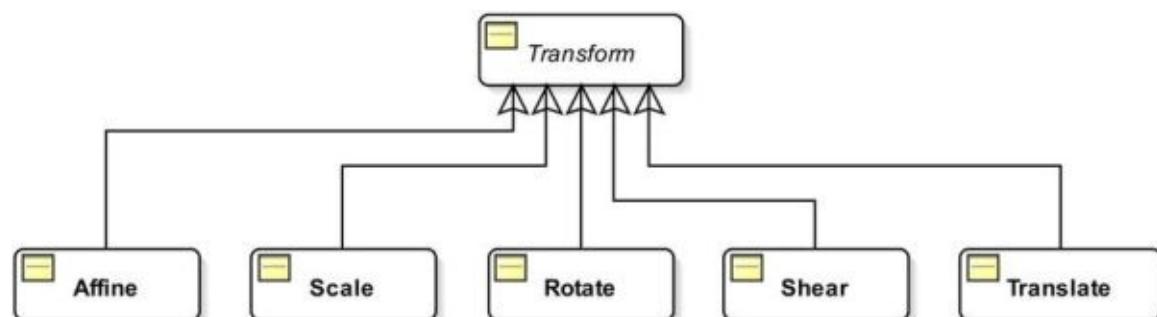

[Figure 9-21](#). A class diagram for transform-related classes

An affine transformation is the generalized transformation that preserves the points, lines, and planes. The parallel lines remain parallel after the transformation. It may not preserve the angles between lines and the distances between points. However, the ratios of distances between points on a straight line are preserved. Translation, scale, homothetic transformation, similarity transformation, reflection, rotation, and shear are examples of the affine transformation.

An instance of the `Affine` class represents an affine transformation. The class is not easy to use for beginners. Its use requires advanced knowledge of mathematics such as matrix. If you need a specific type of transformation, use the specific subclasses such as `Translate`, `Shear`, etc. rather than using the generalized `Affine` class. You can also combine multiple individual transformations to create a more complex one.

Using transformations is easy. However, sometimes it is confusing because there are multiple ways to create and apply them. There are two ways to create a `Transform` instance:

- Use one of the factory methods of the `Transform` class, for example, the `translate()` method to create a `Translate` object, the `rotate()` method to create a `Rotate` object, etc.
- Use the specific class to create a specific type of transform, for example, the `Translate` class for a translation, the `Rotate` class for a rotation, etc.

Both of the following `Translate` objects represent the same translation:

```
double tx = 20.0;
double ty = 10.0;

// Using the factory method in the Transform class
Translate translate1 = Transform.translate(tx, ty);

// Using the Translate class constructor
Translate translate2 = new Translate(tx, ty);
```

There are two ways to apply a transformation to a node:

- Use the specific properties in the `Node` class. For example, use the `translateX`, `translateY`, and `translateZ` properties of the `Node` class to apply a translation to a node. Note that you cannot apply a shear transformation this way.
- Use the `transforms` sequence of a node. The `getTransforms()` method of the `Node` class returns an `ObservableList<Transform>`. Populate this list with all the `Transform` objects. The `Transforms` will be applied in sequence. You can apply a shear transformation using only this method.

The two methods of applying `Transforms` work little differently. I will discuss the differences when I discuss the specific types of transformation. Sometimes it is possible to use both methods to apply transformations, and in that case, the transformations in the `transforms` sequence are applied before the transformation set on the properties of the node.

The following snippet of code applies three transformations called shear, scale, and translation to a Rectangle:

```
// Create a rectangle
Rectangle rect = new Rectangle(100, 50,
Color.LIGHTGRAY);

// Apply transforms using the transforms sequence of
// the Rectangle
Transform shear = Transform.shear(2.0, 1.2);
Transform scale = Transform.scale(1.1, 1.2);
rect.getTransforms().addAll(shear, scale);

// Apply a translation using the translateX and
// translateY
// properties of the Node class
rect.setTranslateX(10);
rect.setTranslateY(10);
```

The shear and scale transformations are applied using the `transforms` sequence. The translation is applied using the `translateX` and `translateY` properties of the `Node` class. The transformations in the `transforms`

sequence, shear and scale, are applied in sequence followed with the translation. Discussing all types of transformations is beyond the scope of this book. Please refer to the JavaFX API documentation for more details.

[Listing 9-21](#) shows how to apply translate, rotate, scale, and shear transformations to a rectangle. It creates two rectangles of the same size and located at the same place. The rectangles use different fill colors to distinguish between them. Translate, rotate, scale, and shear transformations are applied to the rectangle with the yellow fill. No transformations are applied to the rectangle with the light gray fill. [Figure 9-22](#) shows both rectangles.

### ***Listing 9-21.*** Applying Transformations to Nodes

```
// TransformationTest.java
package com.jdojo.jfx;

import javafx.application.Application;
import javafx.scene.Scene;
import javafx.scene.layout.Pane;
import javafx.scene.paint.Color;
import javafx.scene.shape.Rectangle;
import javafx.scene.transform.Rotate;
import javafx.scene.transform.Scale;
import javafx.scene.transform.Shear;
import javafx.scene.transform.Translate;
import javafx.stage.Stage;

public class TransformationTest extends Application {
 public static void main(String[] args) {
 Application.launch(args);
 }

 @Override
 public void start(Stage stage) {
 Rectangle rect1 = new Rectangle(100, 50,
Color.LIGHTGRAY);
 rect1.setStroke(Color.BLACK);

 Rectangle rect2 = new Rectangle(100, 50,
Color.YELLOW);
```


```

 rect2.setStroke(Color.BLACK);

 // Apply a translation, rotate, scale and
shear transformations
 // to rect2
 Translate translate = new Translate(50,
10);
 Rotate rotate = new Rotate(30, 0, 0);
 Scale scale = new Scale(0.5, 0.5);
 Shear shear = new Shear(0.5, 0.5);
 rect2.getTransforms().addAll(translate,
rotate, scale, shear);

 Pane root = new Pane(rect1, rect2);
 root.setPrefSize(200, 100);
 Scene scene = new Scene(root);
 stage.setScene(scene);
 stage.setTitle("Applying
Transformations");
 stage.show();
 }
}

```

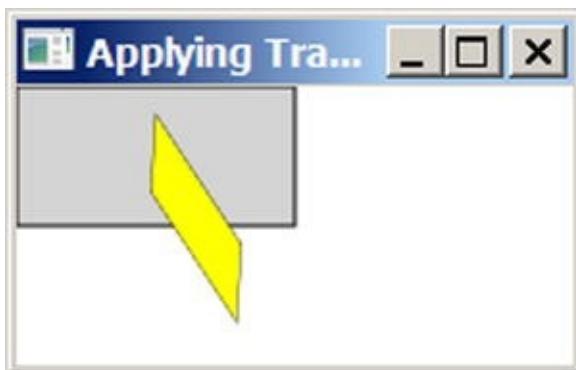

**Figure 9-22.** Two rectangles, one with transformations and one without transformations

## Animation

In the real world, *animation* implies some kind of motion that is generated by displaying images in quick succession. For example, when you watch a movie,

you are watching images that change so quickly that you get an illusion of motion.


In JavaFX, animation is defined as changing the property of a node over time. If the property that changes determines the location of the node, the animation in JavaFX will produce an illusion of motion as found in movies. Not all animations have to involve motion; for example, changing the `fill` property of a `Shape` over time is an animation in JavaFX that does not involve motion.

To understand how animation is performed, it is important to understand some key concepts:

- Timeline
- Key Frame
- Key Value
- Interpolator

Animation is performed over a period of time. A *timeline* denotes the progression of time during animation with an associated key frame at a given instant. A *key frame* represents the state of the node being animated at a specific instant on the timeline. A key frame has associated key values. A *key value* represents the value of a property of the node along with an interpolator to be used.

Suppose you want to move a circle in a scene from left to right horizontally in 10 seconds. [Figure 9-23](#) shows the circle at few positions. The thick horizontal line represents a timeline. Circles with a solid outline represent the key frames at specific instants on the timeline. The key values associated with key frames are shown at the top line. For example, the value for `translateX` property of the circle for the key frame at the fifth second is 500, which is shown as `tx=500` in the figure.

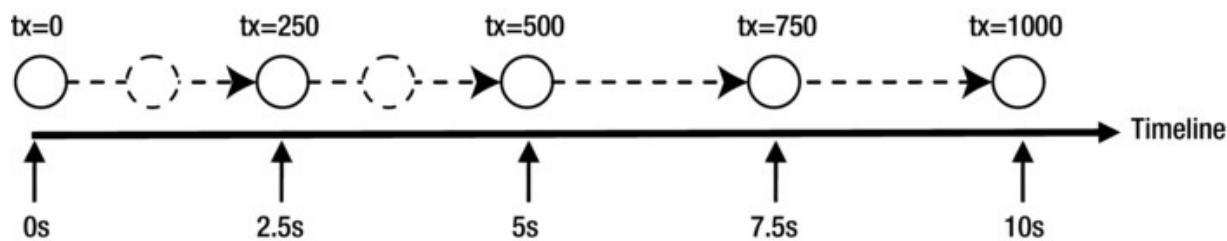


[Figure 9-23](#). Animating a circle along a horizontal line using a timeline

Timeline, key frames, and key values are provided by the developer. In your

example, you have five key frames. If JavaFX shows only five key frames at the five respective instants, the animation will look jerky. To provide a smooth animation, JavaFX needs to interpolate the position of the circle at any instant on the timeline. That is, JavaFX needs to create intermediate key frames between two consecutive key frames. JavaFX does this with the help of an *interpolator*. By default, it uses a *linear interpolator* that changes the property being animated linearly with time. That is, if the time on the timeline passes x%, the value of the property will be x% between the initial and final target values. In the figure, circles with the dashed outline are created by JavaFX using an interpolator.

Classes providing animation in JavaFX are in the `javafx.animation` package, except the `Duration` class, which is in the `javafx.util` package. [Figure 9-24](#) shows a class diagram for the animation-related classes.

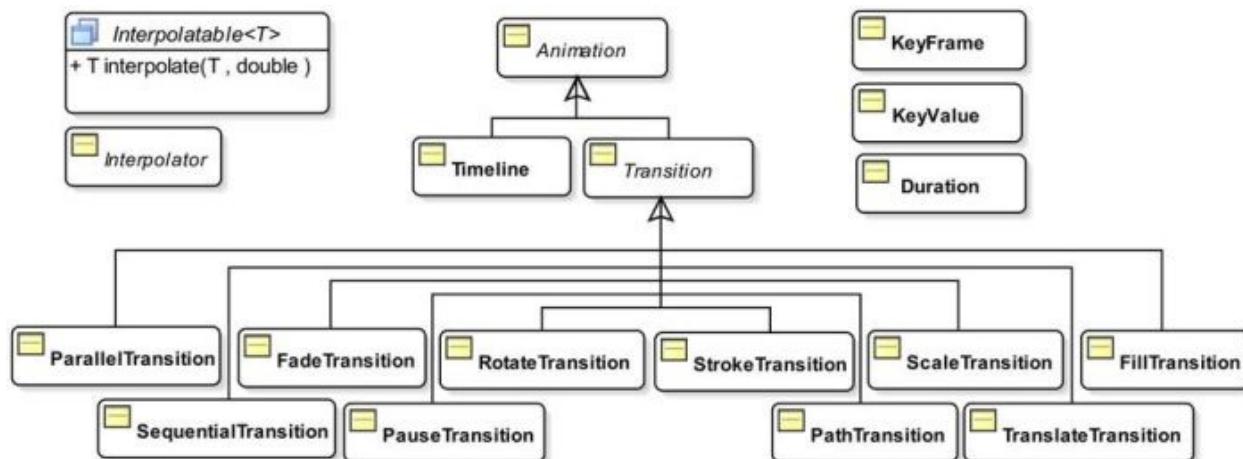

[Figure 9-24](#). A class diagram for core classes used in animation

The abstract `Animation` class represents an animation. It contains common properties and methods used by all types of animations. JavaFX supports two types of animations:

- Timeline Animations
- Transitions

In a timeline animation, you create a timeline and add key frames to it. JavaFX creates the intermediate key frames using an interpolator. An instance of the `Timeline` class is represented by a timeline animation. This type of animation requires more coding on your part, but it gives you more control.

Several types of animations are commonly performed, for example, moving

a node along a path, changing the opacity of a node over time, etc. These types of animations are known as *transitions*. They are performed using an internal timeline. An instance of the `Transition` class represents a transition animation. Several subclasses of the `Transition` class exist to support specific types of transitions. For example, the `FadeTransition` class implements a fading effect animation by changing the opacity of a node over time. You create an instance of one of the subclasses of the `Transition` class, specify the initial and final values for the property to be animated, and the duration for the animation. JavaFX takes care of creating the timeline and performing the animation. This type of animation is easier to use.

Sometimes you may want to perform multiple transitions sequentially or simultaneously. The `SequentialTransition` and `ParallelTransition` classes let you perform a set of transitions sequentially and simultaneously, respectively.

The `Duration` class is in the `javafx.util` package. It represents a duration of time in milliseconds, seconds, minutes, and hours. It is an immutable class. A `Duration` represents the amount of time for each cycle of an animation. A `Duration` can represent a positive or negative duration.

An instance of the `KeyValue` class represents a key value that is interpolated for a particular interval during animation. It encapsulates three things:

- A target
- An end value for the target
- An interpolator

The target is a `WritableValue`, which qualifies all JavaFX properties to be a target. The end value is the value for the target at the end of the interval. The interpolator is used to compute the intermediate key frames.

A key frame defines the target state of a node at a specified point on the timeline. The target state is defined by the key values associated with the key frame. A key frame encapsulates four things:

- An instant on the timeline
- A set of `KeyValues`
- A name

- An ActionEvent handler

The instant on the timeline to which the key frame is associated is defined by a Duration, which is an offset of the key frame on the timeline. The set of KeyValues define the end value of the target for the key frame. A key frame may optionally have a name that can be used as a cue point to jump to the instant defined by it during the animation. The `getCuePoints()` method of the Animation class returns an ObservableMap of cue points on the Timeline. Optionally, you can attach an ActionEvent handler to a KeyFrame. The ActionEvent handler is called when the time for the key frame arrives during animation. An instance of the KeyFrame class represents a key frame.

## Using the Timeline Animation

A timeline animation is used for animating any properties of a node. An instance of the Timeline class represents a timeline animation. Using a timeline animation involves the following steps:

- Construct key frames
- Create a Timeline object with key frames
- Set the animation properties
- Use the `play()` method to run the animation

You can add key frames to a Timeline at the time of creating it or after. The Timeline instance keeps all key frames in an ObservableList<KeyFrame> object. The `getKeyFrames()` method returns the reference of the list. You can modify the list of key frames at any time. If the timeline animation is already running, you need to stop and restart it to pick up the modified list of key frames.

The Timeline class contains several constructors:

- Timeline()
- Timeline(double targetFramerate)

- `Timeline(double targetFramerate, KeyFrame... keyFrames)`
- `Timeline(KeyFrame... keyFrames)`

The no-args constructor creates a `Timeline` with no key frames with animation running at the optimum rate. Other constructors let you specify the target frame rate for the animation, which is the number of frames per second, and the key frames. Note that the order in which the key frames are added to a `Timeline` is not important. The `Timeline` will order them based on their time offset.

The program in [Listing 9-22](#) starts a timeline animation that scrolls a text horizontally from right to left across the scene forever. [Figure 9-25](#) shows a screenshot of the animation.

### ***Listing 9-22.*** Scrolling a Text Node Using a Timeline Animation

```
// ScrollingText.java
package com.jdojo.jfx;

import javafx.animation.KeyFrame;
import javafx.animation.KeyValue;
import javafx.animation.Timeline;
import javafx.application.Application;
import javafx.geometry.VPos;
import javafx.scene.Scene;
import javafx.scene.layout.Pane;
import javafx.scene.text.Font;
import javafx.scene.text.Text;
import javafx.stage.Stage;
import javafx.util.Duration;

public class ScrollingText extends Application {
 public static void main(String[] args) {
 Application.launch(args);
 }

 @Override
 public void start(Stage stage) {
```

```
Text msg = new Text("JavaFX animation is
cool!");
msg.setTextOrigin(VPos.TOP);
msg.setFont(Font.font(24));

Pane root = new Pane(msg);
root.setPrefSize(500, 70);
Scene scene = new Scene(root);

stage.setScene(scene);
stage.setTitle("Scrolling Text");
stage.show();

/* Set up a Timeline animation */
// Get the scene width and the text width
double sceneWidth = scene.getWidth();
double msgWidth
= msg.getLayoutBounds().getWidth();

// Create the initial and final key frames
KeyValue initKeyValue =
 new
KeyValue(msg.translateXProperty(), sceneWidth);
 KeyFrame initFrame = new
KeyFrame(Duration.ZERO, initKeyValue);

KeyValue endKeyValue =
 new
KeyValue(msg.translateXProperty(), -1.0 * msgWidth);
 KeyFrame endFrame =
 new KeyFrame(Duration.seconds(3),
endKeyValue);

// Create a Timeline object
Timeline timeline = new
Timeline(initFrame, endFrame);

// Let the animation run forever
timeline.setCycleCount(Timeline.INDEFINITE);
```

```

 // Start the animation
 timeline.play();
 }
}

```



**Figure 9-25.** Scrolling text using a timeline animation

The logic to perform the animation is in the `start()` method. The method starts with creating a `Text` object, a `Pane` with the `Text` object, and setting up a scene for the stage. After showing the stage, it sets up an animation. First, it gets the width of the scene and the `Text` object.

```

double sceneWidth = scene.getWidth();
double msgWidth = msg.getLayoutBounds().getWidth();

```

Two key frames are created: one for time = 0 seconds and one for time = 3 seconds. The animation uses the `translateX` property of the `Text` object to change its horizontal position to make it look scroll. At zero seconds, the `Text` is positioned at the scene width, so it is invisible. At 3 seconds, it is placed to the left of the scene at a distance equal to its length, so again it is invisible.

```

KeyValue initKeyValue = new
KeyValue(msg.translateXProperty(), sceneWidth);
KeyFrame initFrame = new KeyFrame(Duration.ZERO,
initKeyValue);

KeyValue endKeyValue = new
KeyValue(msg.translateXProperty(), -1.0 * msgWidth);
KeyFrame endFrame = new KeyFrame(Duration.seconds(3),
endKeyValue);

```

A `Timeline` object is created with two key frames.

```
Timeline timeline = new Timeline(initFrame, endFrame);
```

By default, the animation will run only one time. That is, the `Text` will scroll from right to left once and the animation will stop. You can set the cycle count for an animation, which is the number of times the animation needs to run. You run your animation forever by setting the cycle count to `Timeline.INDEFINITE` as follows:

```
timeline.setCycleCount(Timeline.INDEFINITE);
```

Finally, the animation is started by calling the `play()` method.

```
timeline.play();
```

This example has a flaw. The scrolling text does not update its initial horizontal position when the width of the scene changes. You can rectify this problem by updating the initial key frame whenever the scene width changes. Append the following statement to the `start()` method of [Listing 9-22](#). It adds a `ChangeListener` for the scene's width that updates key frames and restarts the animation.

```
scene.widthProperty().addListener((prop, oldValue
, newValue) -> {
 KeyValue kv = new
 KeyValue(msg.translateXProperty(), scene.getWidth());
 KeyFrame kf = new KeyFrame(Duration.ZERO, kv);
 timeline.stop();
 timeline.getKeyFrames().clear();
 timeline.getKeyFrames().addAll(kf, endFrame);
 timeline.play();
});
```

It is possible to create a `Timeline` animation with only one key frame. The key frame is treated as the last key frame. The `Timeline` synthesizes an initial key frame (for time = 0 seconds) using the current values for the property being animated. To see the effect, replace the statement

```
Timeline timeline = new Timeline(initFrame, endFrame);
```

in [Listing 9-22](#) with the following statement

```
Timeline timeline = new Timeline(endFrame);
```

The Timeline will create an initial key frame with the current value of translateX property of the Text object, which is 0.0. This time, the Text scrolls differently. The scrolling starts by placing the Text at 0.0 and scrolling it to the left, so it goes beyond the scene.

## FXML

FXML is an XML-based language for building a user interface for JavaFX applications. You can use FXML to build an entire scene or part of a scene. FXML allows application developers to separate the logic for building the UI from the business logic. If the UI part of the application changes, you do not need to recompile the JavaFX code; you can change the FXML using a text editor and rerun the application. You still use JavaFX to write business logic using the Java programming language. An FXML document is an XML document. A basic knowledge of XML is required to understand FXML.

A JavaFX scene graph is a hierarchical structure of Java objects. The XML format is well suited for storing information representing some kind of hierarchy. Therefore, using FXML to store the scene graph is very intuitive.

It is common to use FXML to build a scene graph in a JavaFX application. However, the use of FXML is not limited to building only scene graphs. It can build a hierarchical object graph of Java objects. In fact, it can be used to create just one object, for example, an object of a Person class.

Let's get a quick preview of what an FXML document looks like. You want to create a simple UI. It consists of a VBox with a Label and a Button.

[Listing 9-23](#) contains the JavaFX code to build the UI, which is familiar to you. [Listing 9-24](#) contains the FXML version for building the same UI.

### ***Listing 9-23.*** Building an Object Graph in JavaFX

```
import javafx.scene.layout.VBox;
import javafx.scene.control.Label;
import javafx.scene.control.Button;

VBox root = new VBox();
root.getChildren().addAll(new Label("FXML is cool"),
 new Button("Say Hello"));
```

***Listing 9-24.*** Building an Object-Graph in FXML

```
<?xml version="1.0" encoding="UTF-8"?>

<?import javafx.scene.layout.VBox?>
<?import javafx.scene.control.Label?>
<?import javafx.scene.control.Button?>

<VBox>
 <children>
 <Label text="FXML is cool"/>
 <Button text="Say Hello"/>
 </children>
</VBox>
```

The first line in FXML is the standard XML declaration that is used by XML parsers. It is optional in FXML. If it is omitted, the version and encoding are assumed to be 1 and UTF-8, respectively. The next three lines are import statements that correspond to the import statements in Java code. Elements representing UI (for example, `VBox`, `Label`, and `Button`) have the same name as the name of JavaFX classes. The `<children>` tag specifies the children of the `VBox`. The text property for the `Label` and `Button` are specified using the `text` attributes of the respective elements.


An FXML document is simply a text file. Typically, the file name has a `.fxml` extension such as `hello.fxml`. For example, you can use Notepad to create an FXML document on Windows. If you have used XML, you know that it is not easy to edit a large XML document in a text editor. Oracle provides a visual editor called *Scene Builder* for editing FXML documents. Scene Builder is open source. You can download its latest version from [www.oracle.com/technetwork/java/javase/downloads/javafinfo-2157684.html](http://www.oracle.com/technetwork/java/javase/downloads/javafinfo-2157684.html). Scene Builder can also be integrated into NetBeans IDE, so you can edit FXML documents using Scene Builder from inside the NetBeans IDE. Using Scene Builder is not discussed in this book.

In this section, I will cover the basics of FXML. You will develop a simple JavaFX application using FXML. The application consists of the following:

- A `VBox`
- A `Label`

- A Button

The spacing for the `VBox` is set to 10px. The text properties for the `Label` and `Button` are set to `FXML is cool!` and `Say Hello`. When the `Button` is clicked, the text in the `Label` changes to `Hello from FXML!`. [Figure 9-26](#) shows two instances of the window displayed by the application.

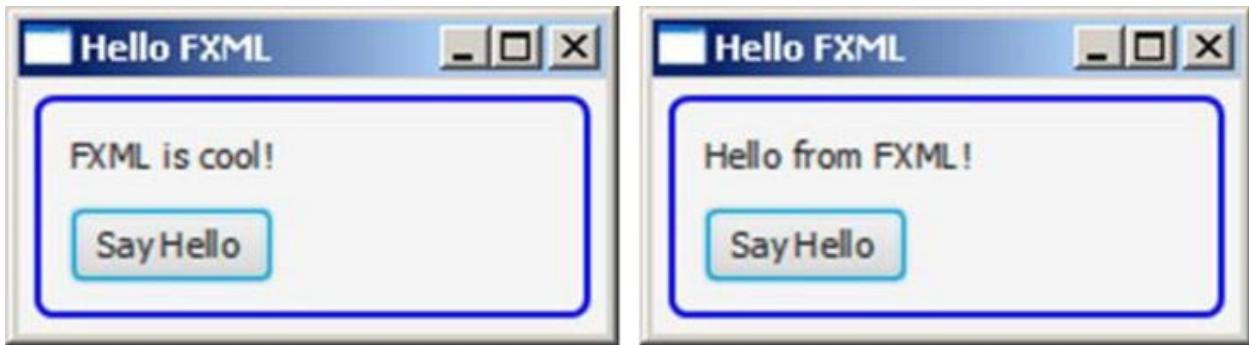

[Figure 9-26](#). Two instances of a window whose scene graph is created using FXML

The program in [Listing 9-25](#) is the JavaFX implementation of this example application using the Java programming language to build the UI.

### [Listing 9-25](#). The JavaFX Version of the FXML Example Application

```
// SayHelloFX.java
package com.jdojo.jfx;

import javafx.application.Application;
import javafx.event.ActionEvent;
import javafx.scene.Scene;
import javafx.scene.control.Button;
import javafx.scene.control.Label;
import javafx.scene.layout.VBox;
import javafx.stage.Stage;

public class SayHelloFX extends Application {
 private Label msgLbl = new Label("FXML is
coll!");
 private Button sayHelloBtn = new Button("Say
Hello");
}
```

```

public static void main(String[] args) {
 Application.launch(args);
}

@Override
public void start(Stage stage) {
 // Set the preferred width of the label
 msgLbl.setPrefWidth(150);

 // Set the ActionEvent handler for the
 button
 sayHelloBtn.setOnAction(this::sayHello);

 VBox root = new VBox(10);
 root.getChildren().addAll(msgLbl,
 sayHelloBtn);
 root.setStyle("-fx-padding: 10;" +
 "-fx-border-style: solid
inside;" +
 "-fx-border-width: 2;" +
 "-fx-border-insets: 5;" +
 "-fx-border-radius: 5;" +
 "-fx-border-color: blue;");

 Scene scene = new Scene(root);
 stage.setScene(scene);
 stage.setTitle("Hello FXML");
 stage.show();
}

public void sayHello(ActionEvent e) {
 msgLbl.setText("Hello from FXML!");
}
}

```

Now let's build another version of the program in [Listing 9-25](#) in which the UI will be built using FXML. Create an FXML file `sayhello.fxml` with the contents shown in [Listing 9-26](#). [Listing 9-26](#) is the FXML document for your example. It will create the root element for the scene shown in [Figure 9-26](#). Save the `sayhello.fxml` file in the `resources/fxml` directory where the parent directory of the `resources` directory is included in the CLASSPATH

for the application. Suppose, on Windows, you have added C:\myjavafx in the CLASSPATH; the path of sayhello.fxml will be

C:\myjavafx\resources\fxml\sayhello.fxml

***Listing 9-26.*** The Contents of the sayhello.fxml File

```
<?xml version="1.0" encoding="UTF-8"?>
<?language javascript?>
<?import javafx.scene.Scene?>
<?import javafx.scene.layout.VBox?>
<?import javafx.scene.control.Label?>
<?import javafx.scene.control.Button?>

<VBox spacing="10" xmlns:fx="http://javafx.com/fxml">
 <Label fx:id="msgLbl" text="FXML is cool!" prefWidth="150"/>
 <Button fx:id="sayHelloBtn" text="Say Hello" onAction="sayHello()"/>
 <style>
 -fx-padding: 10;
 -fx-border-style: solid inside;
 -fx-border-width: 2;
 -fx-border-insets: 5;
 -fx-border-radius: 5;
 -fx-border-color: blue;
 </style>
 <fx:script>
 function sayHello() {
 msgLbl.setText("Hello from FXML!");
 }
 </fx:script>
</VBox>
```

You have set the spacing property for the VBox, the fx:id attribute for the Label and Button controls. You have set the style property of the VBox using a <style> property element. You had an option to set the style using a style attribute or a property element. You used a property element because the style value is a big string and it is more readable if entered on

multiple lines. The `<fx:script>` element defines a script block with one function, `sayHello()`. The function sets the `text` property of the `Label` identified by the `msgLbl fx:id` attribute. You have set the `sayHello()` function as the `onAction` attribute of the `Button`, so when the `Button` is clicked, the `sayHello()` function is executed.

To build the UI from an FXML, you need to load it into the JavaFX program. Loading an FXML is performed by an instance of the `FXMLLoader` class, which is in the `javafx.fxml` package.

The `FXMLLoader` class provides several constructors that let you specify the location, charset, resource bundle, etc. to be used for loading the document. You need to specify at least the location of the FXML document, which is a URL. The class contains a `load()` method to perform the actual loading of the document. The following snippet of code loads an FXML document from a local file system in Windows:

```
// Build the URL to locate the FXML file
String fxmlDocUrl
= "file:///C:/resources/fxml/test.fxml";
URL fxmlUrl = new URL(fxmlDocUrl);

// Create an FXMLLoader object and set its location
// that is the URL of the
// FXML contents
FXMLLoader loader = new FXMLLoader();
loader.setLocation(fxmlUrl);

// Load the FXML that will return a VBox
VBox root = loader.<VBox>load();
```

The `load()` method has a generic return type. In the above snippet of code, you made your intention clear in the call to the `load()` method (`loader.<VBox>load()`) that you are expecting a `VBox` instance from the FXML document. If you prefer, you may omit the generic parameter as shown:

```
// The return type of the load() method will be
// inferred as VBox
VBox root = loader.load();
```

The `FXMLLoader` class supports loading an FXML document using an

`InputStream`. The following snippet of code loads the same FXML document using an `InputStream`:

```
FXMLLoader loader = new FXMLLoader();
String fxmlDocPath = "C:\\resources\\fxml\\test.fxml";
FileInputStream fxmlStream = new
FileInputStream(fxmlDocPath);
VBox root = loader.<VBox>load(fxmlStream);
```

Internally, the `FXMLLoader` reads the document using streams, which may throw an `IOException`. All versions of the `load()` method in `FXMLLoader` class throws an `IOException`. I have omitted the exception handling in these snippets of code to keep the simple. In your application, you will need to handle the exception.

What do you do next after loading an FXML document? At this point, the role of FXML is over and your JavaFX code should take over.

The program in [Listing 9-27](#) contains the JavaFX code for the example. It loads the FXML document stored in the `sayhello.fxml` file. The program loads the document from the CLASSPATH. The loader returns a `VBox`, which is set as the root for the scene. Rest of the code is the same you have used before. Note one difference in the declaration of the `start()` method. The method declares that it may throw an `IOException`, which you have to add because you have called the `load()` method of the `FXMLLoader` inside the method. When you run the program, it displays a window as shown in [Figure 9-26](#). Click the button and the text for the `Label` will change.

### ***[Listing 9-27](#). Using FXML to Build the GUI***

```
// SayHelloFXML.java
package com.jdojo.jfx;

import javafx.application.Application;
import javafx.fxml.FXMLLoader;
import java.io.IOException;
import java.net.URL;
import javafx.scene.Scene;
import javafx.scene.layout.VBox;
import javafx.stage.Stage;
```

```

public class SayHelloFXML extends Application {
 public static void main(String[] args) {
 Application.launch(args);
 }

 @Override
 public void start(Stage stage) throws
IOException {
 // Construct a URL for the FXML document
 URL fxmlUrl = this.getClass()
 .getClassLoader()

.getResource("resources/fxml/sayhello.fxml");

 // Load the FXML document
 VBox root = FXMLLoader.
<VBox>load(fxmlUrl);
 Scene scene = new Scene(root);
 stage.setScene(scene);
 stage.setTitle("Hello FXML");
 stage.show();
 }
}

```

FXML offers a lot more than what you have seen in this example. Using FXML, you can bind the UI elements to variables in JavaFX, data binding, and event handling, create custom controls, etc. Discussing these features is beyond the scope of this book.

# Printing

JavaFX 8 has added support for printing nodes through the Print API in the `javafx.print` package. The API consists of the following classes and a number of enums (not listed):

- `Printer`
- `PrinterAttributes`

- PrintResolution
- PrinterJob
- JobSettings
- Paper
- PaperSource
- PageLayout
- PageRange

Instances of these classes represent different components of the printing process. For example, a `Printer` represents a printer that can be used for printing jobs; a `PrinterJob` represents a print job that can be sent to a `Printer` for printing; a `Paper` represents the paper sizes available on printers, etc.

The Print API provides support for printing nodes that may or may not be attached to a scene graph. It is a common requirement to print the contents of a web page, not the `WebView` node that contains the web page. The `javafx.scene.web.WebEngine` class contains a `print(PrinterJob job)` method that prints the contents of the web page, not the `WebView` node.

If a node is modified during the printing process, the printed node may not appear correct. Note that the printing of a node may span multiple pulse events, resulting in a concurrent change in the content being printed. To ensure correct printing, make sure that the node being printed is not modified during the print process.

Nodes can be printed on any thread including the JavaFX Application Thread. It is recommended that a large, time-consuming print job be submitted on a background thread to keep the UI responsive.

Classes in the Print API are final as they represent existing printing device properties. Most of them do not provide any public constructors as you cannot make up a printing device. Rather, you obtain their references using factory methods in the classes.

The `Printer.getAllPrinters()` static method returns an observable list of installed printers on the machine. Note that the list of printers returned by the method may change over time as new printers are installed or old printers removed. Use the `getName()` method of the `Printer` to get the name of the

printer represented by the `Printer`. The following snippet of code lists all installed printers on the machine running the code. You may get a different output.

```
import javafx.collections.ObservableSet;
import javafx.print.Printer;
...
ObservableSet<Printer> allPrinters
= Printer.getAllPrinters();
for(Printer p : allPrinters) {
 System.out.println(p.getName());
}
```

---

```
ImageRight Printer
Microsoft XPS Document Writer
PDF995
Sybase DataWindow PS
\\pro-print1\\IS-HP4000
\\pro-print1\\IS-HP4650 (Color)
```

---

The `Printer.getDefaultPrinter()` method returns the default `Printer`. The method may return null if no printer is installed. The default printer may be changed on a machine. Therefore, the method may return different printers from call to call, and the printer returned may not be valid after some time. The following snippet of code shows how to get the default printer:

```
Printer defaultPrinter = Printer.getDefaultPrinter();
if (defaultPrinter!= null) {
 String name = defaultPrinter.getName();
 System.out.println("Default printer name: "
+ name);
}
else {
 System.out.println("No printers installed.");
}
```

Printing a node is easy: create a `PrinterJob` and call its `printPage()` method passing the node to be printed. Printing a node using the default printer

with all default settings takes only three lines of code:

```
PrinterJob printerJob = PrinterJob.createPrinterJob();
printerJob.printPage(myNode); // myNode is the node to
be printed
printerJob.endJob();
```

In a real-world application, you want to handle the errors, and the above code is rewritten as follows:

```
// Create a printer job for the default printer
PrinterJob printerJob = PrinterJob.createPrinterJob();
if (printerJob!= null) {
 // Print the node
 boolean printed = printerJob.printPage(node);
 if (printed) {
 // End the printer job
 printerJob.endJob();
 }
 else {
 System.out.println("Printing failed.");
 }
}
else {
 System.out.println("Could not create a printer
job.");
}
```

You can use the `createPrinterJob()` static method of the `PrinterJob` class to create a printer job. The method is overloaded as shown:

- `static PrinterJob createPrinterJob()`
- `static PrinterJob createPrinterJob(Printer printer)`

The method with no-args creates a printer job for the default printer. You can use the other version of the method to create a printer job for the specified printer.

You can change the printer for a `PrinterJob` by calling its

`setPrinter()` method. If the current printer job settings are not supported by the new printer, the settings are reset automatically for the new printer.

```
// Set a new printer for the printer job
printerJob.setPrinter(myNewPrinter);
```

Setting null as the printer for the job will use the default printer. Use one of the following `printPage()` methods of the `PrinterJob` class to print a node:

- `boolean printPage(Node node)`
- `boolean printPage(PageLayout pageLayout, Node node)`

The first version of the method takes only the node to be printed as the parameter. It uses the default page layout for the job for printing. The second version lets you specify a page layout for printing the node. The method returns true if the printing was successful. Otherwise, it returns false.

When you are done printing, call the `endJob()` method. The method returns true if the job can be successfully spooled to the printer queue. Otherwise, it returns false, which may indicate that the job could not be spooled or it was already completed. After a successful completion of the job, the job can no longer be reused.

You can cancel a print job using the `cancelJob()` method of the `PrinterJob`. The printing may not be cancelled immediately, for example, when a page is in the middle of printing. The cancellation occurs as soon as possible. The method does not have any effect if

- The job has already been requested to be cancelled.
- The job is already completed.
- The job has error.

The `PrinterJob` class contains a read-only `jobStatus` property that indicates the current status of the print job. The status is defined by one of the following constants of the `PrinterJob.JobStatus` enum:

- `NOT_STARTED`

- PRINTING
- CANCELED
- DONE
- ERROR

The NOT\_STARTED status indicates a new job. In this status, the job can be configured and printing can be initiated. The PRINTING status indicates that the job has requested to print at least one page and it has not terminated printing. In this status, the job cannot be configured.

The other three statuses, CANCELED, DONE, and ERROR, indicate terminated state of the job. Once the job is in one of these statuses, it should not be reused. There is no need to call the `endJob()` method when the status goes to CANCELED or ERROR. The DONE status is entered when the printing was successful and the `endJob()` method was called.

The program in [Listing 9-28](#) shows how to print nodes. It displays a `TextArea` where you can enter text. Two `Buttons` are provided: one prints the `TextArea` node and the other the entire scene. When printing is initiated, the print job status is displayed in a `Label`. The code in the `print()` method is the same code you have seen in the examples. The method includes the logic to display the job status in the `Label`. The program displays a window as shown in [Figure 9-27](#). Run the program, enter text in the `TextArea`, and click one of the two buttons to print.

### ***[Listing 9-28](#)***. Printing Nodes

```
// PrintingNodes.java
package com.jdojo.jfx;

import javafx.application.Application;
import javafx.print.PrinterJob;
import javafx.scene.Node;
import javafx.scene.Scene;
import javafx.scene.control.Button;
import javafx.scene.control.Label;
import javafx.scene.control.TextArea;
import javafx.scene.layout.HBox;
```

```
import javafx.scene.layout.VBox;
import javafx.stage.Stage;

public class PrintingNodes extends Application {
 private Label jobStatus = new Label();

 public static void main(String[] args) {
 Application.launch(args);
 }

 @Override
 public void start(Stage stage) {
 VBox root = new VBox(5);

 Label textLbl = new Label("Text:");
 TextArea text = new TextArea();
 text.setPrefRowCount(10);
 text.setPrefColumnCount(20);
 text.setWrapText(true);

 // Button to print the TextArea node
 Button printTextBtn = new Button("Print
Text");
 printTextBtn.setOnAction(e ->
print(text));

 // Button to print the entire scene
 Button printSceneBtn = new Button("Print
Scene");
 printSceneBtn.setOnAction(e ->
print(root));

 HBox jobStatusBox =
 new HBox(5, new Label("Print Job
Status:"), jobStatus);
 HBox buttonBox = new HBox(5, printTextBtn,
printSceneBtn);

 root.getChildren().addAll(textLbl, text,
jobStatusBox, buttonBox);
```

```

 Scene scene = new Scene(root);
 stage.setScene(scene);
 stage.setTitle("Printing Nodes");
 stage.show();
 }


 private void print(Node node) {
 jobStatus.textProperty().unbind();
 jobStatus.setText("Creating a printer
job...");

 // Create a printer job for teh default
printer
 PrinterJob job
= PrinterJob.createPrinterJob();
 if (job != null) {
 // Show the printer job status
 jobStatus.textProperty().bind(job.j

 // Print the node
 boolean printed
= job.printPage(node);
 if (printed) {
 // End the printer job
 job.endJob();
 }
 else {

jobStatus.textProperty().unbind();
 jobStatus.setText("Printing
failed.");
 }
 }
 else {
 jobStatus.setText("Could not create
a printer job.");
 }
 }
}

```

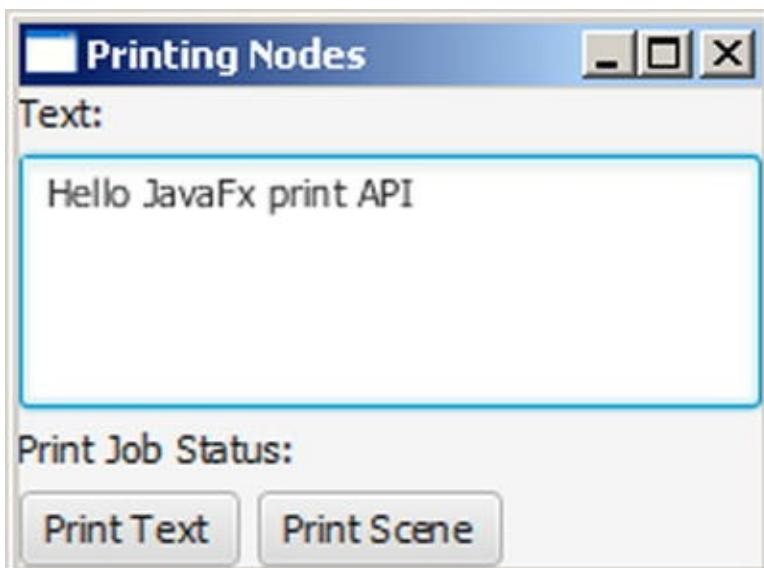

**Figure 9-27.** A window letting the user print text in a `TextArea` and the scene

The Printing API provides more printing features, such as displaying the print dialog. Please refer to the JavaFX API documentation for classes in the `javafx.print` package for more details.

## Summary

JavaFX is an open source Java-based GUI framework for developing rich client applications. It is the successor of Swing in the arena of GUI development technology in the Java platform.

The GUI in JavaFX is shown in a stage. A stage is an instance of the `Stage` class. A stage is a window in a desktop application and an area in the browser in a web application. A stage contains a scene. A scene contains a group of nodes (graphics) arranged in a tree-like structure.

A JavaFX application inherits from the `Application` class. The JavaFX runtime creates the first stage called the primary stage and calls the `start()` method of the application class, passing the reference of the primary stage. The developer needs to add a scene to the stage and make the stage visible.

JavaFX supports property classes whose instances are used to represent properties of classes. Properties support unidirectional and bidirectional bindings. If a property is bound to an expression, the property value is synchronized automatically with the value of the expression. Properties support

invalidation and change notifications. Interested parties can register for these notifications. They are notified when the properties become invalid or its value changes. A property becomes invalid when its dependencies change.

JavaFX provides observable list, set, and map that are instances of the `ObservableList`, `ObservableSet`, and `ObservableMap` interfaces. They can be observed for invalidation and changes. The `FXCollections` class contains factory methods to create instances of such observable collections.

JavaFX supports event-handling for UI elements. You can register event handlers for UI elements. When the event occurs, your registered event handlers are executed.

JavaFX provides layout panes that are containers for nodes. They arrange the nodes in a particular way. For example, the `HBox` layout pane arranges nodes by placing them horizontally in one row whereas the `VBox` layout pane arranges nodes by placing them vertically in one column. JavaFX provides a rich set of controls such as `Button`, `Label`, `ChoiceBox`, `ComboBox`, `TextField`, `DatePicker`, etc. The `HTMLEditor` control provides the editing capability to edit rich text. The `WebView` node is used to display the contents of a webpage.

JavaFX provides extensive support for drawing 2D and 3D shapes. It provides the `Canvas` API to draw 2D shapes on a canvas using the drawing commands. The `Canvas` API also lets you access (read and write) pixels on the canvas surface.

You can apply effects, transformations, and animations to nodes in a scene by writing a few lines of code. JavaFX supports FXML, an XML-based markup language for building the GUI for a JavaFX application. You can print nodes and the contents of a web page using the Printing API.

# CHAPTER 10



## Scripting in Java

---

In this chapter, you will learn

- What scripting in Java is
- How to execute scripts from Java and how to pass parameters to scripts
- How the `ScriptContext` is used in executing scripts
- How to use the Java programming language in scripts
- How to implement a script engine
- How to use the `jrunscript` and `jjs` command-line tools to execute scripts

## What Is Scripting in Java?

Some believe that the Java Virtual Machine (JVM) can execute programs written only in the Java programming language. However, that is not true. The JVM executes language-neutral bytecode. It can execute programs written in any programming language, if the program can be compiled into Java bytecode.

A *scripting language* is a programming language that provides you with the ability to write *scripts* that are evaluated (or interpreted) by a runtime environment called a *script engine* (or an interpreter). A script is a sequence of characters that is written using the syntax of a scripting language and used as the source for a program executed by an interpreter. The interpreter parses the scripts, produces intermediate code, which is an internal representation of the program, and executes the intermediate code. The interpreter stores the variables

used in a script in data structures called *symbol tables*.

Typically, unlike in a compiled programming language, the source code (called a script) in a scripting language is not compiled, but is interpreted at runtime. However, scripts written in some scripting languages may be compiled into Java bytecode that can be run by the JVM.

Java 6 added scripting support to the Java platform that lets a Java application execute scripts written in scripting languages such as Rhino JavaScript, Groovy, Jython, JRuby, Nashorn JavaScript, etc. Two-way communication is supported. It also lets scripts access Java objects created by the host application. The Java runtime and a scripting language runtime can communicate and make use of each other's features.

Support for scripting languages in Java comes through the Java Scripting API. All classes and interfaces in the Java Scripting API are in the `javax.script` package.

Using a scripting language in a Java application provides several advantages:

- Most scripting languages are dynamically typed, which makes it simpler to write programs.
- They provide a quicker way to develop and test small applications.
- Customization by end users is possible.
- A scripting language may provide domain-specific features that are not available in Java.

Scripting languages have some disadvantages as well. For example, dynamic typing is good to write simpler code; however, it turns into a disadvantage when a type is interpreted incorrectly and you have to spend a lot of time debugging it.

Scripting support in Java lets you take advantage of both worlds: it allows you to use the Java programming language for developing statically typed, scalable, and high-performance parts of the application and use a scripting language that fits the domain-specific needs for other parts.

I will use the term *script engine* frequently in this chapter. A *script engine* is a software component that executes programs written in a particular scripting language. Typically, but not necessarily, a script engine is an implementation of an interpreter for a scripting language. Interpreters for several scripting languages have been implemented in Java. They expose programming interfaces so a Java program may interact with them.

JDK 7 was co-bundled with a script engine called Rhino JavaScript. JDK 8 replaced the Rhino JavaScript engine with a lightweight, faster script engine called Nashorn JavaScript. This chapter discusses Nashorn JavaScript, not Rhino JavaScript. Please visit [www.mozilla.org/rhino](http://www.mozilla.org/rhino) for more details on Rhino JavaScript documentation. If you want to migrate programs written with Rhino JavaScript to Nashorn, please visit the *Rhino Migration Guide* at <https://wiki.openjdk.java.net/display/Nashorn/Rhino+Migration+Guide>. If you are interested in using Rhino JavaScript with JDK 8, visit the page at <https://wiki.openjdk.java.net/display/Nashorn/Using+Nashorn+with+JDK8>.

Java includes a command-line shell called `jrunscript` that can be used to run scripts in an interactive mode or a batch mode. The `jrunscript` shell is scripting-language-neutral; the default language is Rhino JavaScript in JDK 7 and Nashorn in JDK 8. I will discuss the `jrunscript` shell in detail later in this chapter. JDK 8 includes another command-line tool called `jjs` that invokes the Nashorn engine and offers Nashorn-specific command-line options. If you are using Nashorn, you should use the `jjs` command-line tool over `jrunscript`. I will discuss the `jjs` command-line tool later in this chapter.

Java can execute scripts in any scripting language that provides an implementation for a script engine. For example, Java can execute scripts written in Nashorn JavaScript, Rhino JavaScript, Groovy, Jython, JRuby, etc. Examples in this chapter use Nashorn JavaScript language.

In this chapter, the terms “Nashorn,” “Nashorn Engine,” “Nashorn JavaScript,” “Nashorn JavaScript Engine,” “Nashorn Scripting Language,” and “JavaScript” have been used synonymously.

## Executing Your First Script

In this section, you will use Nashorn to print a message on the standard output. The same steps can be used to print a message using any other scripting languages, with one difference: you will need to use the scripting language-specific code to print the message. You need to perform the following three steps to run a script in Java:

- Create a script engine manager.
- Get an instance of a script engine from the script engine

manager.

- Call the `eval()` method of the script engine to execute a script.

A script engine manager is an instance of the `ScriptEngineManager` class.

```
// Create an script engine manager
ScriptEngineManager manager = new
ScriptEngineManager();
```

An instance of the `ScriptEngine` interface represents a script engine in a Java program. The `getEngineByName(String engineShortName)` method of a `ScriptEngineManager` is used to get an instance of a script engine. To get an instance of the Nashorn engine, use `JavaScript` as the short name of the engine as shown:

```
// Get the reference of a Nashorn engine
ScriptEngine engine
= manager.getEngineByName("JavaScript");
```

---

**Tip** The short name of a script engine is case-sensitive. Sometimes a script engine has multiple short names. Nashorn engine has the following short names: `nashorn`, `Nashorn`, `js`, `JS`, `JavaScript`, `javascript`, `ECMAScript`, `ecmascript`. You can use any of the short names of an engine to get its instance using the `getEngineByName()` method of the `ScriptEngineManager` class.

---

In Nashorn, the `print()` function prints a message on the standard output and a string literal is a sequence of characters enclosed in single or double quotes. The following snippet of code stores a script in a `String` object that prints `Hello Scripting!` on the standard output:

```
// Store a Nashorn script in a string
String script = "print('Hello Scripting!')";
```

If you want to use double quotes to enclose the string literal in Nashorn, the

statement will look as shown:

```
// Store a Nashorn script in a string
String script = "print(\"Hello Scripting!\")";
```

To execute the script, you need to pass it to the `eval()` method of the script engine. A script engine may throw a `ScriptException` when it runs a script. For this reason, you need to handle this exception when you call the `eval()` method of the `ScriptEngine`. The following snippet of code executes the script stored in the `script` variable:

```
try {
 engine.eval(script);
}
catch (ScriptException e) {
 e.printStackTrace();
}
```

[Listing 10-1](#) contains the complete code for the program to print a message on the standard output.

### ***Listing 10-1.*** Printing a Message on the Standard Output Using Nashorn

```
// HelloScripting.java
package com.jdojo.script;

import javax.script.ScriptEngine;
import javax.script.ScriptEngineManager;
import javax.script.ScriptException;

public class HelloScripting {
 public static void main(String[] args) {
 // Create a script engine manager
 ScriptEngineManager manager = new
 ScriptEngineManager();

 // Obtain a Nashorn script engine from
 // the manager
 ScriptEngine engine
 = manager.getEngineByName("JavaScript");
```

```

 // Store the script in a String
 String script = "print('Hello
Scripting!');");
 }

 try {
 // Execute the script
 engine.eval(script);
 }
 catch (ScriptException e) {
 e.printStackTrace();
 }
}

```

---

Hello Scripting!

---

## Using Other Scripting Languages

It is very simple to use a scripting language, other than Nashorn, in a Java program. You need to perform only one task before you can use a script engine: include the JAR files for a particular script engine in your application CLASSPATH. Implementers of script engines provide those JAR files.

Java uses a discovery mechanism to list all script engines whose JAR files have been included in the application CLASSPATH. An instance of the `ScriptEngineFactory` interface is used to create and describe a script engine. The provider of a script engine provides an implementation for the `ScriptEngineFactory` interface. The `getEngineFactories()` method of the `ScriptEngineManager` returns a `List<ScriptEngineFactory>` of all available script engines factories. The `getScriptEngine()` method of the `ScriptEngineFactory` returns an instance of the `ScriptEngine`. Several other methods of the factory return metadata about the engine.

[Listing 10-2](#) shows how to print details of all available script engines. The output shows that the script engine for Groovy, Jython, and JRuby are available.

They are available because I have added the JAR files for their engines to the CLASSPATH on my machine. This program is helpful when you have included the JAR files for a script engine in the CLASSPATH and you want to know the short name of the script engine. You may get a different output when you run the program.

***Listing 10-2.*** Listing All Available Script Engines

```
// ListingAllEngines.java
package com.jdojo.script;

import java.util.List;
import javax.script.ScriptEngineFactory;
import javax.script.ScriptEngineManager;

public class ListingAllEngines {
 public static void main(String[] args) {
 ScriptEngineManager manager = new
ScriptEngineManager();

 // Get the list of all available engines
 List<ScriptEngineFactory> list
= manager.getEngineFactories();

 // Print the details of each engine
 for (ScriptEngineFactory f : list) {
 System.out.println("Engine Name:" +
f.getEngineName());
 System.out.println("Engine
Version:" +
 f.getEngineVersion());
 System.out.println("Language
Name:" + f.getLanguageName());
 System.out.println("Language
Version:" +
 f.getLanguageVersion());
 System.out.println("Engine Short
Names:" + f.getNames());
 System.out.println("Mime Types:"
```

```
+ f.getMimeTypes());
 System.out.println("-----");
-----");
 }
}
}
```

---

```
Engine Name:jython
Engine Version:2.5.3
Language Name:python
Language Version:2.5
Engine Short Names:[python, jython]
Mime Types:[text/python, application/python, text/x-
python, application/x-python]

Engine Name:JSR 223 JRuby Engine
Engine Version:1.7.0.preview1
Language Name:ruby
Language Version:jruby 1.7.0.preview1
Engine Short Names:[ruby, jruby]
Mime Types:[application/x-ruby]

Engine Name:Groovy Scripting Engine
Engine Version:2.0
Language Name:Groovy
Language Version:2.0.0-rc-2
Engine Short Names:[groovy, Groovy]
Mime Types:[application/x-groovy]

Engine Name:Oracle Nashorn
Engine Version:1.8.0_05
Language Name:ECMAScript
Language Version:ECMA - 262 Edition 5.1
Engine Short Names:[nashorn, Nashorn, js, JS,
JavaScript, javascript, ECMAScript, ecmascript]
Mime Types:[application/javascript,
application/ecmascript, text/javascript,
text/ecmascript]
```

---

---

**Table 10-1** lists details on how to install script engines before you can use them in your Java application. The list of web sites and instructions are valid at the time of this writing; they may become invalid at the time of reading. However, they show you how a script engine for a scripting language is installed. If you are interested in using Nashorn, you do not need to install anything on your machine. Nashorn is available in JDK 8.

**Table 10-1.** Installation Details for Installing Some Script Engines

Script Engine	Version	Website	Installation Instructions
Groovy	2.3	<a href="http://groovy.codehaus.org">groovy.codehaus.org</a>	Download the installation file for Groovy; it's a ZIP file. Unzip it. Look for a JAR file named <code>groovy-all-2.0.0-rc-2.jar</code> in the embeddable folder. Add this JAR file to the CLASSPATH.
Jython	2.5.3	<a href="http://www.jython.org">www.jython.org</a>	Download the Jython installer file that is a JAR file. Extract the <code>jython.jar</code> file and add it to the CLASSPATH.
JRuby	1.7.13	<a href="http://www.jruby.org">www.jruby.org</a>	Download the JRuby installation file. You have an option to download a ZIP file. Unzip it. In the <code>lib</code> folder, you will find a <code>jruby.jar</code> file that you need to include in the CLASSPATH.

**Listing 10-3** shows how to print a message on the standard output using JavaScript, Groovy, Jython, and JRuby. If a script engine is not available, the program prints a message to that effect.

**Listing 10-3.** Printing a Message on the Standard Output Using Different Scripting Languages

```
// HelloEngines.java
package com.jdojo.script;

import javax.script.ScriptEngine;
import javax.script.ScriptEngineManager;
import javax.script.ScriptException;

public class HelloEngines {
 public static void main(String[] args) {
 // Get the script engine manager
 ScriptEngineManager manager = new
 ScriptEngineManager();
```

```

 // Try executing scripts in Nashorn,
Groovy, Jython, and JRuby
 execute(manager, "JavaScript",
"print('Hello JavaScript')");
 execute(manager, "Groovy",
"println('Hello Groovy')");
 execute(manager, "jython", "print 'Hello
Jython'");
 execute(manager, "jruby", "puts('Hello
JRuby')");
 }

 public static void execute(ScriptEngineManager
manager,
 String engineName,
 String script) {
 // Try getting the engine
 ScriptEngine engine
= manager.getEngineByName(engineName);
 if (engine == null) {
 System.out.println(engineName + "
is not available.");
 return;
 }

 // If we get here, it means we have the
engine installed.
 // So, run the script
 try {
 engine.eval(script);
 }
 catch (ScriptException e) {
 e.printStackTrace();
 }
 }
}

```

---

Hello JavaScript

```
Hello Groovy
Hello Jython
Hello JRuby
```

---

Sometimes you may want to play with a scripting language just for fun, and you do not know the syntax that is used to print a message on the standard output. The `ScriptEngineFactory` class contains a method named `getOutputStatement(String toDisplay)` that you can use to find the syntax for printing text on the standard output. The following snippet of code shows how to get the syntax for Nashorn:

```
// Get the script engine factory for Nashorn
ScriptEngineManager manager = new
ScriptEngineManager();
ScriptEngine engine
= manager.getEngineByName("JavaScript");
ScriptEngineFactory factory = engine.getFactory();

// Get the script
String script = factory.getOutputStatement("\\"Hello
JavaScript\\\"");
System.out.println("Syntax: " + script);

// Evaluate the script
engine.eval(script);
```

---

```
Syntax: print("Hello JavaScript")
Hello JavaScript
```

---

For other scripting languages, use their engine factories to get the syntax.

## Exploring the `javax.script` Package

The Java Scripting API in Java consists of a small number of classes and interfaces. They are in the `javax.script` package. This chapter contains a

brief description of classes and interfaces in this package. I will discuss their usage in subsequent chapters.

## The ScriptEngine and ScriptEngineFactory Interfaces

The `ScriptEngine` interface is the main interface of the Java Scripting API whose instances facilitate the execution of scripts written in a particular scripting language.

The implementer of the `ScriptEngine` interface also provides an implementation of the `ScriptEngineFactory` interface. A `ScriptEngineFactory` performs two tasks:

- It creates instances of the script engine.
- It provides information about the script engine such as engine name, version, language, etc.

## The AbstractScriptEngine Class

The `AbstractScriptEngine` class is an abstract class. It provides a partial implementation for the `ScriptEngine` interface. You will not use this class directly unless you are implementing a script engine.

## The ScriptEngineManager Class

The `ScriptEngineManager` class provides a discovery and instantiation mechanism for script engines. It also maintains a mapping of key-value pairs as an instance of the `Bindings` interface storing state that is shared by all script engines that it creates.

## The Compilable Interface and the CompiledScript Class

The `Compilable` interface may optionally be implemented by a script engine that allows compiling scripts for their repeated execution without recompilation.

The `CompiledScript` class is an abstract class. It is extended by the providers of a script engine. It stores a script in a compiled form, which may be executed repeatedly without recompilation. Note that using a `ScriptEngine` to execute a script repeatedly causes the script to recompile every time, thus slowing down the performance.

A script engine is not required to support script compilation. It must implement the `Compilable` interface if it supports script compilation.

## The Invocable Interface

The `Invocable` interface may optionally be implemented by a script engine that may allow invoking procedures, functions, and methods in scripts that have been compiled previously.

## The Bindings Interface and the SimpleBindings Class

An instance of a class that implements the `Bindings` interface is a mapping of key-value pairs with a restriction that a key must be non-null, non-empty `String`. It extends the `java.util.Map` interface. The `SimpleBindings` class is an implementation of the `Bindings` interface.

## The ScriptContext Interface and the SimpleScriptContext Class

An instance of the `ScriptContext` interface acts as a bridge between the Java host application and the script engine. It is used to pass the execution context of the Java host application to the script engine. The script engine may use the context information while executing a script. A script engine may store its state in an instance of a class that implements the `ScriptContext` interface, which may be accessible to the Java host application.

The `SimpleScriptContext` class is an implementation of the `ScriptContext` interface.

## The ScriptException Class

The `ScriptException` class is an exception class. A script engine throws a `ScriptException` if an error occurs during the execution, compilation, or invocation of a script. The class contains three useful methods called `getLineNumber()`, `getColumnNumber()`, and `getFileName()`. These methods report the line number, the column number, and the file name of the script in which the error occurs. The `ScriptException` class overrides the `getMessage()` method of the `Throwable` class and includes the line number, column number, and the file name in the message that it returns.

## Discovering and Instantiating ScriptEngines

You can create a script engine using a `ScriptEngineFactory` or `ScriptEngineManager`. Who is actually responsible for creating a script engine: `ScriptEngineFactory`, `ScriptEngineManager`, or both? The short answer is that a `ScriptEngineFactory` is always responsible for creating instances of a script engine. The next question is “What is the role of a `ScriptEngineManager`? ”

A `ScriptEngineManager` uses the service provider mechanism to locate all available script engine factories. It searches all JAR files in the CLASSPATH and other standard directories. It looks for a resource file, which is a text file named `javax.script.ScriptEngineFactory` under a directory named `META-INF/services`. The resource file consists of the fully qualified names of the classes implementing the `ScriptEngineFactory` interface. Each class name is specified in a separate line. The file may include comments that start with a # character. A sample resource file may have the following contents that include class names for two script engine factories:

```
#Java Kishori Script Engine Factory class
com.jdojo.script.JKScriptEngineFactory

#Another factory class
```

```
com.jdojo.script.FunScriptFactory
```

A `ScriptEngineManager` locates and instantiates all available `ScriptEngineFactory` classes. You can get a list of instances of all factory classes using the `getEngineFactories()` method of the `ScriptEngineManager` class. When you call a method of the manager to get a script engine based on a criterion such as the `getEngineByName(String shortName)` method to get an engine by name, the manager searches all factories for that criterion and returns the matching script engine reference. If no factories are able to provide a matching engine, the manager returns `null`. Please refer to [Listing 10-2](#) for more details on listing all available factories and describing script engines that they can create.

Now you know that a `ScriptEngineManager` does not create instances of a script engine. Rather, it queries all available factories and passes the reference of a script engine created by the factory back to the caller.

To make the discussion complete, let's add a twist to the ways a script engine can be created. You can create an instance of a script engine in three ways:

- Instantiate the script engine class directly.
- Instantiate the script engine factory class directly and call its `getScriptEngine()` method.
- Use one of the `getEngineByXXX()` methods of the `ScriptEngineManager` class.

It is advised to use the `ScriptEngineManager` class to get instances of a script engine. This method allows all engines created by the same manager to share a state that is a set of key-value pairs stored as an instance of the `Bindings` interface. The `ScriptEngineManager` instance stores this state.

---

**Tip** It is possible to have more than one instance of the `ScriptEngineManager` class in an application. In that case, each `ScriptEngineManager` instance maintains a state common to all engines that it creates. That is, if two engines are obtained by two different instances of the `ScriptEngineManager` class, those engines will not share a common state maintained by their managers unless you make it happen programmatically.

---

# Executing Scripts

A ScriptEngine can execute a script in a String and a Reader. Using a Reader, you can execute a script stored on the network or in a file. One of the following versions of the eval() method of the ScriptEngine interface is used to execute a script:

- Object eval(String script)
- Object eval(Reader reader)
- Object eval(String script, Bindings bindings)
- Object eval(Reader reader, Bindings bindings)
- Object eval(String script, ScriptContext context)
- Object eval(Reader reader, ScriptContext context)

The first argument of the eval() method is the source of the script. The second argument lets you pass information from the host application to the script engine that can be used during the execution of the script.

In Listing 10-1, you saw how to use a String object to execute a script using the first version of the eval() method. In this section, you will store your script in a file and use a Reader object as the source of the script, which will use the second version of the eval() method. The next section discusses the other four versions of the eval() method. Typically, a script file is given a .js extension.

Listing 10-4 shows the contents of a file named helloscript.js. It contains only one statement in Nashorn that prints a message on the standard output.

**Listing 10-4.** The Contents of the helloscript.js File

```
// Print a message
print('Hello from JavaScript!');
```

[Listing 10-5](#) has the Java program that executes the script stored in the `helloscript.js` file, which should be stored in the current directory. If the script file is not found, the program prints the full path of the `helloscript.js` file where it is expected. If you have trouble executing the script file, try using the absolute path in the `main()` method such as `C:\scripts\helloscript.js` on Windows, assuming that the `helloscript.js` file is saved in the `C:\scripts` directory.

**Listing 10-5.** Executing a Script Stored in a File

```
// ReaderAsSource.java
package com.jdojo.script;

import java.io.IOException;
import java.io.Reader;
import java.nio.file.Files;
import java.nio.file.Path;
import java.nio.file.Paths;
import javax.script.ScriptEngine;
import javax.script.ScriptEngineManager;
import javax.script.ScriptException;

public class ReaderAsSource {
 public static void main(String[] args) {
 // Construct the script file path
 String scriptFileName = "helloscript.js";
 Path scriptPath
= Paths.get(scriptFileName);

 // Make sure the script file exists. If
not, print the full path of
 // the script file and terminate the
program.
 if (! Files.exists(scriptPath)) {
 System.out.println(scriptPath.toAbs
```

```

 " does not exist.");
 return;
}

// Get the Nashorn script engine
ScriptEngineManager manager = new
ScriptEngineManager();
 ScriptEngine engine
= manager.getEngineByName("JavaScript");

try {
 // Get a Reader for the script
file
 Reader scriptReader
= Files.newBufferedReader(scriptPath);

 // Execute the script in the file
engine.eval(scriptReader);
}
catch (IOException | ScriptException e) {
 e.printStackTrace();
}
}
}

```

---

Hello from JavaScript!

---

In a real-world application, you should store all scripts in files that allow modifying scripts without modifying and recompiling your Java code. You will not follow this rule in most of the examples in this chapter; you will store your scripts in `String` objects to keep the code short and simple.

## Passing Parameters

The Java Scripting API allows you to pass parameters from the host environment (Java application) to the script engine and vice versa. In this section, you will see

the technical details of parameter passing mechanisms between the host application and the script engine.

## Passing Parameters from Java Code to Scripts

A Java program may pass parameters to scripts. A Java program may also access global variables declared in a script after the script is executed. Let's discuss a simple example of this kind where a Java program passes a parameter to a script. Consider the program in [Listing 10-6](#) that passes a parameter to a script.

***Listing 10-6.*** Passing Parameters From a Java Program to Scripts

```
// PassingParam.java
package com.jdojo.script;

import javax.script.ScriptEngine;
import javax.script.ScriptEngineManager;
import javax.script.ScriptException;

public class PassingParam {
 public static void main(String[] args) {
 // Get the Nashorn engine
 ScriptEngineManager manager = new
ScriptEngineManager();
 ScriptEngine engine
= manager.getEngineByName("JavaScript");

 // Store the script in a String. Here,
msg is a variable
 // that we have not declared in the
script
 String script = "print(msg)";

 try {
 // Store a parameter named msg in
the engine
 engine.put("msg", "Hello from Java
program");
 }
 }
}
```

```
 // Execute the script
 engine.eval(script);
 }
 catch (ScriptException e) {
 e.printStackTrace();
 }
}
}
```

---

Hello from Java program

---

The program stores a script in a `String` object as follows:

```
// Store a Nashorn script in a String object
String script = "print(msg);"
```

In the statement, the script is

```
print(msg)
```

Note that `msg` is a variable used in the `print()` function call. The script does not declare the `msg` variable or assign it a value. If you try to execute the above script without telling the engine what the `msg` variable is, the engine will throw an exception stating that it does not understand the meaning of the variable `msg`. This is where the concept of passing parameters from a Java program to a script engine comes into play.

You can pass a parameter to a script engine in several ways. The simplest way is to use the `put(String paramName, Object paramValue)` method of the script engine, which accepts two arguments:

- The first argument is the name of the parameter, which needs to match the name of the variable in the script.
- The second argument is the value of the parameter.

In your case, you want to pass a parameter named `msg` to the script engine and its value is a `String`. The call to the `put()` method is

```
// Store the value of the msg parameter in the engine
```

```
engine.put("msg", "Hello from Java program");
```

Note that you must call the `put()` method of the engine before calling the `eval()` method. In your case, when the engine attempts to execute `print(msg)`, it will use the value of the `msg` parameter that you passed to the engine.

Most script engines let you use the parameter names that you pass to it as the variable name in the script. You saw this kind of example when you passed the value of the parameter named `msg` and used it as a variable name in the script in [Listing 10-6](#). A script engine may have a requirement for declaring variables in scripts, for example, a variable name must start with a `$` prefix in PHP and a global variable name contains a `$` prefix in JRuby. If you want to pass a parameter named `msg` to a script in JRuby, your code would be as shown:

```
// Get the JRuby script engine
ScriptEngineManager manager = new
ScriptEngineManager();
ScriptEngine engine
= manager.getEngineByName("jruby");

// Must use the $ prefix in JRuby script
String script = "puts($msg)";

// No $ prefix used in passing the msg parameter to
// the JRuby engine
engine.put("msg", "Hello from Java");

// Execute the script
engine.eval(script);
```

Properties and methods of Java objects passed to scripts can be accessed in scripts, as they are accessed in Java code. Different scripting languages use different syntax to access Java objects in scripts. For example, you can use the expression `msg.toString()` in the example shown in [Listing 10-6](#) and the output will be the same. In this case, you are calling the `toString()` method of the variable `msg`. Change the statement that assigns the value to the `script` variable in [Listing 10-6](#) to the following and run the program, which will produce the same output:

```
String script = "println(msg.toString())";
```

# Passing Parameters from Scripts to Java Code

A script engine may make variables in its global scope available to Java code. The `get(String variableName)` method of a `ScriptEngine` is used to access those variables in Java code. It returns a Java Object. The declaration of a global variable is scripting-language-dependent. The following snippet of code declares a global variable and assigns it a value in JavaScript:

```
// Declare a variable named year in Nashorn
var year = 1969;
```

[Listing 10-7](#) contains a program that shows how to access a global variable in Nashorn from Java code.

## ***Listing 10-7.*** Accessing Script Global Variables in Java Code

```
// AccessingScriptVariable.java
package com.jdojo.script;

import javax.script.ScriptEngine;
import javax.script.ScriptEngineManager;
import javax.script.ScriptException;

public class AccessingScriptVariable {
 public static void main(String[] args) {
 // Get the Nashorn engine
 ScriptEngineManager manager = new
ScriptEngineManager();
 ScriptEngine engine
= manager.getEngineByName("JavaScript");

 // Write a script that declares a global
variable named year and
 // assign it a value of 1969.
 String script = "var year = 1969";

 try {
 // Execute the script
 engine.eval(script);
```

```

 // Get the year global variable
from the engine
 Object year = engine.get("year");

 // Print the class name and the
value of the variable year
 System.out.println("year's class:"
+
 year.getClass().getName());
 System.out.println("year's value:"
+ year);
 }
}

```

---

```

year's class:java.lang.Integer
year's value:1969

```

---

The program declares a global variable `year` in the script and assigns it a value of 1969 as shown:

```
String script = "var num = 1969";
```

When the script is executed, the engine adds the `year` variable to its state. In Java code, the `get()` method of the engine is used to retrieve the value of the `year` variable as shown:

```
Object year = engine.get("year");
```

When the `year` variable was declared in the script, you did not specify its data type. The conversion of a script variable value to an appropriate Java object is automatically performed. If you run the program in Java 7, your output will show `java.lang.Double` as the class name and `1960.0` as the value for the `year` variable. This is because Java 7 uses Rhino script engine that interprets

1969 as a `Double` whereas Java 8 uses Nashorn script engine that interprets it as an `Integer`.

# Advanced Parameter Passing Techniques

To understand the details of the parameter passing mechanism, three terms must be understood clearly: bindings, scope, and context. These terms are confusing at first. This section explains the parameter passing mechanism using the following steps:

- First, it defines these terms.
- Second, it defines the relationship between these terms.
- Third, it explains how to use them in Java code.

## Bindings

A `Bindings` is a set of key-value pairs where all keys must be non-empty, non-null `String`s. In Java code, a `Bindings` is an instance of the `Bindings` interface. The `SimpleBindings` class is an implementation of the `Bindings` interface. A script engine may provide its own implementation of the `Bindings` interface.

---

**Tip** If you are familiar with the `java.util.Map` interface, it is easy to understand `Bindings`. The `Bindings` interface inherits the `Map<String, Object>` interface. Therefore, a `Bindings` is just a `Map` with a restriction that its keys must be non-empty, non-null `String`s.

---

[Listing 10-8](#) shows how to use a `Bindings`. It creates an instance of `SimpleBindings`, adds some key-value pairs to it, retrieves the values of the keys, removes a key-value pair, etc. The `get()` method of the `Bindings` interface returns `null` if the key does not exist or the key exists and its value is

null. If you want to test if a key exists, you need to call its contains() method.

***Listing 10-8.*** Using Bindings Objects

```
// BindingsTest.java
package com.jdojo.script;

import javax.script.Bindings;
import javax.script.SimpleBindings;

public class BindingsTest {
 public static void main(String[] args) {
 // Create a Bindings instance
 Bindings params = new SimpleBindings();

 // Add some key-value pairs
 params.put("msg", "Hello");
 params.put("year", 1969);

 // Get values
 Object msg = params.get("msg");
 Object year = params.get("year");
 System.out.println("msg = " + msg);
 System.out.println("year = " + year);

 // Remove year from Bindings
 params.remove("year");
 year = params.get("year");

 boolean containsYear
 = params.containsKey("year");
 System.out.println("year = " + year);
 System.out.println("params contains year
 = " + containsYear);
 }
}

msg = Hello
```

```
year = 1969
year = null
params contains year = false
```

---

You will not use a `Bindings` by itself. Often, you will use it to pass parameters from Java code to a script engine. The `ScriptEngine` interface contains a `createBindings()` method that returns an instance of the `Bindings` interface. This method gives a script engine a chance to return an instance of the specialized implementation of the `Bindings` interface. You can use this method as shown:

```
// Get the Nashorn engine
ScriptEngineManager manager = new
ScriptEngineManager();
ScriptEngine engine
= manager.getEngineByName("JavaScript");

// Instead of instantiating the SimpleBindings class,
use the
// createBindings() method of the engine
Bindings params = engine.createBindings();

// Work with params as usual
```

## Scope

Let's move to the next term, which is scope. A scope is used for a `Bindings`. The scope of a `Bindings` determines the visibility of its key-value pairs. You can have multiple `Bindings` occurring in multiple scopes. However, one `Bindings` may occur only in one scope. How do you specify the scope for a `Bindings`? I will cover this shortly.

Using the scope for a `Bindings` lets you define parameter variables for script engines in a hierarchical order. If a variable name is searched in an engine state, the `Bindings` with a higher precedence is searched first, followed by `Bindings` with lower precedence. The first found value of the variable is returned.

The Java Scripting API defines two scopes. They are defined as two `int` constants in the `ScriptContext` interface. They are

- `ScriptContext.ENGINE_SCOPE`
- `ScriptContext.GLOBAL_SCOPE`

The engine scope has higher precedence than the global scope. If you add two key-value pairs with the same key to two `Bindings` (one in engine scope and one in global scope), the key-value pair in the engine scope will be used whenever a variable with the same name as the key has to be resolved.

Understanding the role of the scope for a `Bindings` is so important that I will run through another analogy to explain it. Think about a Java class that has two sets of variables: one set contains all instance variables in the class and another contains all local variables in a method. These two sets of variables with their values are two `Bindings`. The type of variables in a `Bindings` defines the scope. Just for the sake of this discussion, I will define two scopes: instance scope and local scope. When a method is executed, a variable name is looked up in the local scope `Bindings` first because the local variables take precedence over instance variables. If a variable name is not found in the local scope `Bindings`, it is looked up in the instance scope `Bindings`. When a script is executed, `Bindings` and their scopes play a similar role.

## Defining the Script Context

A script engine executes a script in a context. You can think of the context as the environment in which a script is executed. A Java host application provides two things to a script engine: a script and the context in which the script needs to be executed. An instance of the `ScriptContext` interface represents the context for a script. The `SimpleScriptContext` class is an implementation of the `ScriptContext` interface. A script context consists of four components:

- A set of `Bindings`, where each `Bindings` is associated with a different scope
- A `Reader` that is used by the script engine to read inputs
- A `Writer` that is used by the script engine to write outputs

- An error Writer that is used by the script engine to write error outputs

The set of Bindings in a context is used to pass parameters to the script. A reader and writers in a context control input source and output destinations of the script, respectively. For example, by setting a file writer as a writer, you can send all outputs from a script to a file.

Each script engine maintains a default script context, which it uses to execute scripts. So far, you have executed several scripts without providing script contexts. In those cases, script engines were using their default script contexts to execute scripts. In this section, I will cover how to use an instance of the ScriptContext interface by itself. In the next section, I will cover how an instance of the ScriptContext interface is passed to a ScriptEngine during script execution.

You can create an instance of the ScriptContext interface using the SimpleScriptContext class, like so:

```
// Create a script context
ScriptContext ctx = new SimpleScriptContext();
```

An instance of the SimpleScriptContext class maintains two instances of Bindings: one for engine scope and one for global scope. The Bindings in the engine scope is created when you create the instance of the SimpleScriptContext. To work with the global scope Bindings, you will need to create an instance of the Bindings interface.

By default, the SimpleScriptContext class initializes the input reader, the output writer, and the error writer for the context to the standard input System.in, the standard output System.out, and standard error output System.err, respectively. You can use the getReader(), getWriter(), and getErrorWriter() methods of the ScriptContext interface to get the references of the reader, writer, and the error writer from the ScriptContext, respectively. Setter methods are also provided to set a reader and writers. The following snippet of code shows how to obtain the reader and writers. It also shows how to set a writer to a FileWriter to write the script output to a file.

```
// Get the reader and writers from the script context
Reader inputReader = ctx.getReader();
```

```
Writer outputWriter = ctx.getWriter();
Writer errWriter = ctx.getErrorWriter();

// Write all script outputs to an out.txt file
Writer fileWriter = new FileWriter("out.txt");
ctx.setWriter(fileWriter);
```

After you create a `SimpleScriptContext`, you can start storing key-value pairs in the engine scope `Bindings` because an empty `Bindings` in the engine scope is created when you create the `SimpleScriptContext` object. The `setAttribute()` method is used to add a key-value pair to a `Bindings`. You must provide the key name, value, and the scope for the `Bindings`. The following snippet of code adds three key-value pairs.

```
// Add three key-value pairs to the engine scope
bindings
ctx.setAttribute("year", 1969,
ScriptContext.ENGINE_SCOPE);
ctx.setAttribute("month", 9,
ScriptContext.ENGINE_SCOPE);
ctx.setAttribute("day", 19,
ScriptContext.ENGINE_SCOPE);
```


If you want to add key-value pairs to a `Bindings` in global scope, you will need to create and set the `Bindings` first, like so:

```
// Add a global scope Bindings to the context
Bindings globalBindings = new SimpleBindings();
ctx.setBindings(globalBindings,
ScriptContext.GLOBAL_SCOPE);
```

Now you can add key-value pairs to the `Bindings` in global scope using the `setAttribute()` method, like so:

```
// Add two key-value pairs to the global scope
bindings
ctx.setAttribute("year", 1982,
ScriptContext.GLOBAL_SCOPE);
ctx.setAttribute("name", "Boni",
ScriptContext.GLOBAL_SCOPE);
```

At this point, you can visualize the state of the `ScriptContext` instance as shown in [Figure 10-1](#).

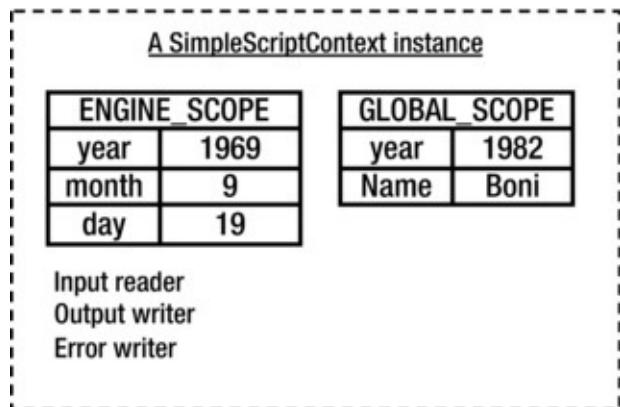

*Figure 10-1.* A pictorial view of an instance of the `SimpleScriptContext` class

You can perform several operations on a `ScriptContext`. You can set a different value for an already stored key using the `setAttribute(String name, Object value, int scope)` method. You can remove a key-value pair using the `removeAttribute(String name, int scope)` method for a specified key and a scope. You can get the value of a key in the specified scope using the `getAttribute(String name, int scope)` method.

The most interesting thing that you can do with a `ScriptContext` is to retrieve a key value without specifying its scope using its `getAttribute(String name)` method. A `ScriptContext` searches for the key in the engine scope Bindings first. If it is not found in the engine scope, the Bindings in the global scope is searched. If the key is found in these scopes, the corresponding value from the scope, in which it is found first, is returned. If neither scope contains the key, `null` is returned.

In your example, you have stored the key named `year` in the engine scope as well as in the global scope. The following snippet of code returns 1969 for the key `year` from the engine scope as the engine scope is searched first. The return type of the `getAttribute()` method is `Object`.

```
// Get the value of the key year without specifying
// the scope.
// It returns 1969 from the Bindings in the engine
// scope.
```

```
int yearValue = (Integer)ctx.getAttribute("year");
```

You have stored the key named `name` only in the global scope. If you attempt to retrieve its value, the engine scope is searched first, which does not return a match. Subsequently, the global scope is searched and the value "Boni" is returned as shown:

```
// Get the value of the key named name without specifying the scope.
// It returns "Boni" from the Bindings in the global scope.
String nameValue = (String)ctx.getAttribute("name");
```

You can also retrieve the value of a key in a specific scope. The following snippet of code retrieves values for the key "year" from the engine scope and the global scope:

```
// Assigns 1969 to engineScopeYear and 1982 to globalScopeYear
int engineScopeYear
= (Integer)ctx.getAttribute("year",
ScriptContext.ENGINE_SCOPE);
int globalScopeYear
= (Integer)ctx.getAttribute("year",
ScriptContext.GLOBAL_SCOPE);
```

---

**Tip** The Java Scripting API defines only two scopes: engine and global. A subinterface of the `ScriptContext` interface may define additional scopes. The `getScopes()` method of the `ScriptContext` interface returns a list of supported scopes as a `List<Integer>`. Note that a scope is represented as an integer. The two constants, `ENGINE_SCOPE` and `GLOBAL_SCOPE` in the `ScriptContext` interface, are assigned values 100 and 200, respectively. When a key is searched in multiple Bindings occurring in multiple scopes, the scope with the lower integer value is searched first. Because the value 100 for the engine scope is lower than the value 200 for the global scope, the engine scope is searched for a key first when you do not specify the scope.

---

[Listing 10-9](#) shows how to work with an instance of a class implementing the `ScriptContext` interface. Note that you do not use a `ScriptContext` in your application by itself. It is used by script engines during script execution. Most often, you manipulate a `ScriptContext` indirectly through a `ScriptEngine` and a `ScriptEngineManager`, which is discussed in detail in the next section.

***Listing 10-9.*** Using an Instance of the `ScriptContext` Interface

```
// ScriptContextTest.java
package com.jdojo.script;

import java.util.List;
import javax.script.Bindings;
import javax.script.ScriptContext;
import javax.script.SimpleBindings;
import javax.script.SimpleScriptContext;
import static javax.script.ScriptContext.ENGINE_SCOPE;
import static javax.script.ScriptContext.GLOBAL_SCOPE;

public class ScriptContextTest {
 public static void main(String[] args) {
 // Create a script context
 ScriptContext ctx = new
SimpleScriptContext();

 // Get the list of scopes supported by
the script context
 List<Integer> scopes = ctx.getScopes();
 System.out.println("Supported Scopes: "
+ scopes);

 // Add three key-value pairs to the
engine scope bindings
 ctx.setAttribute("year", 1969,
ENGINE_SCOPE);
 ctx.setAttribute("month", 9,
ENGINE_SCOPE);
 ctx.setAttribute("day", 19,
```

```
ENGINE_SCOPE) ;

 // Add a global scope Bindings to the
 context
 Bindings globalBindings = new
SimpleBindings();
 ctx.setBindings(globalBindings,
GLOBAL_SCOPE);

 // Add two key-value pairs to the global
 scope bindings
 ctx.setAttribute("year", 1982,
GLOBAL_SCOPE);
 ctx.setAttribute("name", "Boni",
GLOBAL_SCOPE);

 // Get the value of year without
 specifying the scope
 int yearValue
= (Integer)ctx.getAttribute("year");
 System.out.println("yearValue = "
+ yearValue);

 // Get the value of name
 String nameValue
= (String)ctx.getAttribute("name");
 System.out.println("nameValue = "
+ nameValue);

 // Get the value of year from engine and
 global scopes
 int engineScopeYear
= (Integer)ctx.getAttribute("year", ENGINE_SCOPE);
 int globalScopeYear
= (Integer)ctx.getAttribute("year", GLOBAL_SCOPE);

 System.out.println("engineScopeYear = "
+ engineScopeYear);
 System.out.println("globalScopeYear = "
+ globalScopeYear);
```

```
 }
}
```

---

```
Supported Scopes: [100, 200]
yearValue = 1969
nameValue = Boni
engineScopeYear = 1969
globalScopeYear = 1982
```

---

## Putting Them Together

In this section, I will show you how instances of Bindings and their scopes, ScriptContext, ScriptEngine, ScriptEngineManager, and the host application work together. The focus will be on how to manipulate the key-value pairs stored in Bindings in different scopes using a ScriptEngine and a ScriptEngineManager.

A ScriptEngineManager maintains a set of key-value pairs in a Bindings. It lets you manipulate those key-value pairs using the following four methods:

- void put(String key, Object value)
- Object get(String key)
- void setBindings(Bindings bindings)
- Bindings getBindings()

The put() method adds a key-value pair to the Bindings. The get() method returns the value for the specified key; it returns null if the key is not found. The Bindings for an engine manager can be replaced using the setBindings() method. The getBindings() method returns the reference of the Bindings of the ScriptEngineManager.

Every ScriptEngine, by default, has a ScriptContext known as its default context. Recall that, besides readers and writers, a ScriptContext has two Bindings: one in the engine scope and one in the global scope. When

a ScriptEngine is created, its engine scope Bindings is empty and its global scope Bindings refers to the Bindings of the ScriptEngineManager that created it.

By default, all instances of the ScriptEngine created by a ScriptEngineManager share the Bindings of the ScriptEngineManager. It is possible to have multiple instances of ScriptEngineManager in the same Java application. In that case, all instances of ScriptEngine created by the same ScriptEngineManager share the Bindings of the ScriptEngineManager as their global scope Bindings for their default contexts.

The following snippet of code creates a ScriptEngineManager, which is used to create three instances of ScriptEngine:

```
// Create a ScriptEngineManager
ScriptEngineManager manager = new
ScriptEngineManager();

// Create three ScriptEngines using the same
ScriptEngineManager
ScriptEngine engine1
= manager.getEngineByName("JavaScript");
ScriptEngine engine2
= manager.getEngineByName("JavaScript");
ScriptEngine engine3
= manager.getEngineByName("JavaScript");
```

Now, let's add three key-value pairs to the Bindings of the ScriptEngineManager and two key-value pairs to the engine scope Bindings of each ScriptEngine.

```
// Add three key-value pairs to the Bindings of the
manager
manager.put("K1", "V1");
manager.put("K2", "V2");
manager.put("K3", "V3");


// Add two key-value pairs to each engine
engine1.put("KE11", "VE11");
engine1.put("KE12", "VE12");
```

```

engine2.put("KE21", "VE21");
engine2.put("KE22", "VE22");
engine3.put("KE31", "VE31");
engine3.put("KE32", "VE32");

```

[Figure 10-2](#) shows a pictorial view of the state of the ScriptEngineManager and three ScriptEngines after the snippet of code is executed. It is evident from the figure that the default contexts of all ScriptEngines share the Bindings of the ScriptEngineManager as their global scope Bindings.

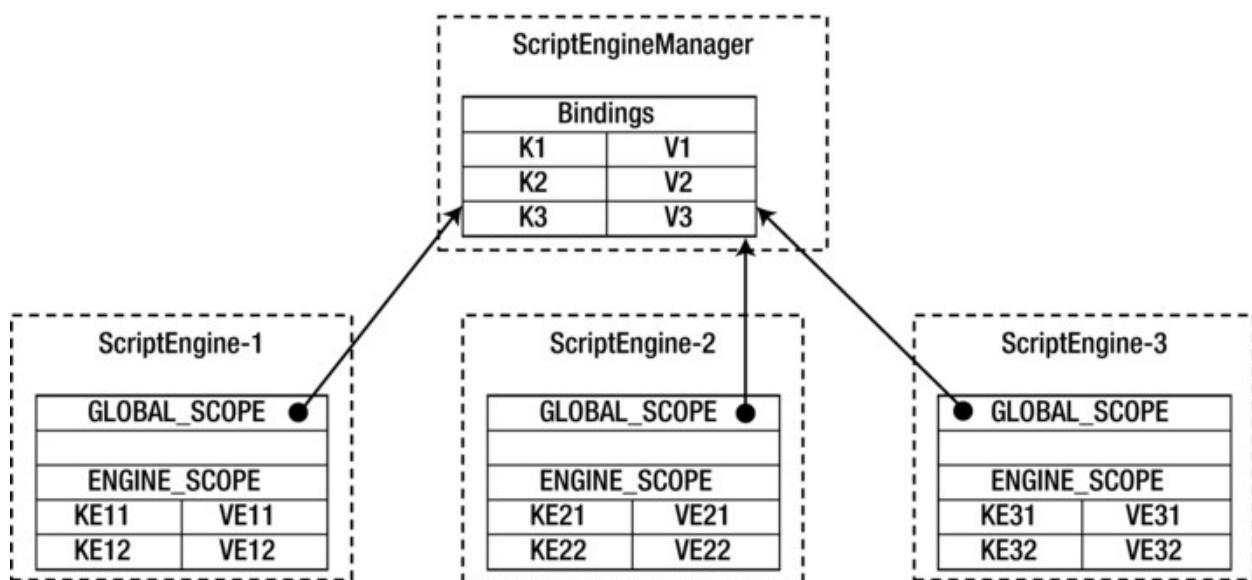

[Figure 10-2](#). A pictorial view of three ScriptEngines created by a ScriptEngineManager

The Bindings in a ScriptEngineManager can be modified in the following ways:

- By using the `put()` method of the ScriptEngineManager
- By getting the reference of the Bindings using the `getBindings()` method of the ScriptEngineManager, and then using the `put()` and `remove()` method on the Bindings
- By getting the reference of the Bindings in the global scope of the default context of a ScriptEngine using its

`getBindings()` method, and then using the `put()` and `remove()` method on the Bindings

When the Bindings in a `ScriptEngineManager` is modified, the global scope Bindings in the default context of all `ScriptEngines` created by this `ScriptEngineManager` are modified because they share the same Bindings.

The default context of each `ScriptEngine` maintains an engine scope Bindings separately. To add a key-value pair to the engine scope Bindings of a `ScriptEngine`, use its `put()` method as shown:

```
ScriptEngine engine1 = null; // get an engine

// Add an "engineName" key with its value as "Engine-
1" to the
// engine scope Bindings of the default context of
engine1
engine1.put("engineName", "Engine-1");
```

The `get(String key)` method of the `ScriptEngine` returns the value of the specified key from its engine scope Bindings. The following statement returns “Engine-1”, which is the value for the `engineName` key.

```
String eName = (String)engine1.get("engineName");
```

It is a two-step process to get to the key-value pairs of the global scope Bindings in the default context of a `ScriptEngine`. First, you need to get the reference of the global scope Bindings using its `getBindings()` method as shown:

```
Bindings e1Global
= engine1.getBindings(ScriptContext.GLOBAL_SCOPE);
```

Now you can modify the global scope Bindings of the engine using the `e1Global` reference. The following statement adds a key-value pair to the `e1Global` Bindings:

```
e1Global.put("id", 89999);
```

Because of the sharing of the global scope Bindings of a

ScriptEngine by all ScriptEngines, the above snippet of code will add the key “id” with its value to the global scope Bindings of the default context of all ScriptEngines created by the same ScriptEngineManager that created engine1. Modifying the Bindings in a ScriptEngineManager using code as shown above is not recommended. You should modify the Bindings using the ScriptEngineManager reference instead, which makes the logic clearer to the readers of the code.

**Listing 10-10** demonstrates the concepts discussed in this section. A ScriptEngineManager adds two key-value pairs with keys n1 and n2 to its Bindings. Two ScriptEngines are created; they add a key called engineName to their engine scope Bindings. When the script is executed, the value of the engineName variable in the script is used from the engine scope of the ScriptEngine. The values for variables n1 and n2 in the script are retrieved from the global scope Bindings of the ScriptEngine. After executing the script for the first time, each ScriptEngine adds a key called n2 with a different value to their engine scope Bindings. When you execute the script for the second time, the value for the n1 variable is retrieved from the global scope Bindings of the engine, whereas the value for the variable n2 is retrieved from the engine scope Bindings as shown in the output.

**Listing 10-10.** Using Global and Engine Scope Bindings of Engines Created by the Same ScriptEngineManager

```
// GlobalBindings.java
package com.jdojo.script;

import javax.script.ScriptEngine;
import javax.script.ScriptEngineManager;
import javax.script.ScriptException;

public class GlobalBindings {
 public static void main(String[] args) {
 ScriptEngineManager manager = new
 ScriptEngineManager();

 // Add two numbers to the Bindings of the
 // manager that will be
 // shared by all its engines
```

```
manager.put("n1", 100);
manager.put("n2", 200);

 // Create two JavaScript engines and add
the name of the engine
 // in the engine scope of the default
context of the engines
 ScriptEngine engine1
= manager.getEngineByName("JavaScript");
 engine1.put("engineName", "Engine-1");

 ScriptEngine engine2
= manager.getEngineByName("JavaScript");
 engine2.put("engineName", "Engine-2");

 // Execute a script that adds two numbers
and prints the result
 String script = "var sum = n1 + n2; "
 + "print(engineName + ' - Sum = '
+ sum)";

 try {
 // Execute the script in two
engines
 engine1.eval(script);
 engine2.eval(script);

 // Now add a different value for
n2 for each engine
 engine1.put("n2", 1000);
 engine2.put("n2", 2000);

 // Execute the script in two
engines again
 engine1.eval(script);
 engine2.eval(script);
 }
 catch (ScriptException e) {
 e.printStackTrace();
 }
 }
```

```
 }
}
```

---

```
Engine-1 - Sum = 300
Engine-2 - Sum = 300
Engine-1 - Sum = 1100
Engine-2 - Sum = 2100
```


---

The story of the global scope Bindings shared by all ScriptEngines that are created by a ScriptEngineManager is not over yet. It is as complex, and confusing, as it can get! Now the focus will be on the effects of using the `setBindings()` method of ScriptEngineManager class and the ScriptEngine interface. Consider the following snippet of code:

```
// Create a ScriptEngineManager and two ScriptEngines
ScriptEngineManager manager = new
ScriptEngineManager();
ScriptEngine engine1
= manager.getEngineByName("JavaScript");
ScriptEngine engine2
= manager.getEngineByName("JavaScript");

// Add two key-value pairs to the manager
manager.put("n1", 100);
manager.put("n2", 200);
```

[Figure 10-3](#) shows the state of the engine manager and its engines after the above script is executed. At this point, there is only one Bindings stored in the ScriptEngineManager and two ScriptEngines are referring to it as their global scope Bindings.

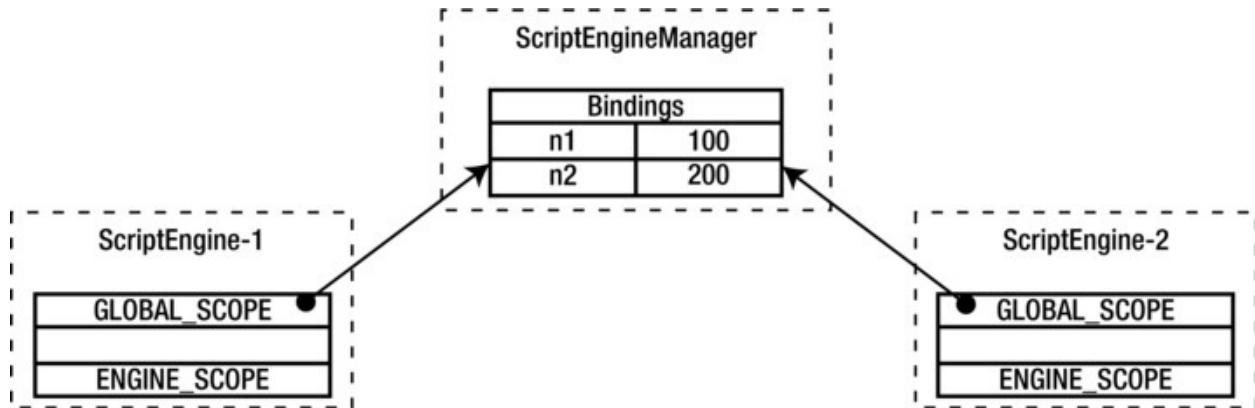


**Figure 10-3.** Initial state of ScriptEngineManager and two ScriptEngines

Let's create a new Bindings and set it as the Bindings for the ScriptEngineManager using its `setBindings()` method, like so:

```
// Create a Bindings, add two key-value pairs to it,
and set it as the new Bindings
// for the manager
Bindings newGlobal = new SimpleBindings();
newGlobal.put("n3", 300);
newGlobal.put("n4", 400);
manager.setBindings(newGlobal);
```

**Figure 10-4** shows the state of the ScriptEngineManager and two ScriptEngines after the code is executed. Notice that the ScriptEngineManager has a new Bindings and the two ScriptEngines are still referring to the old Bindings as their global scope Bindings.

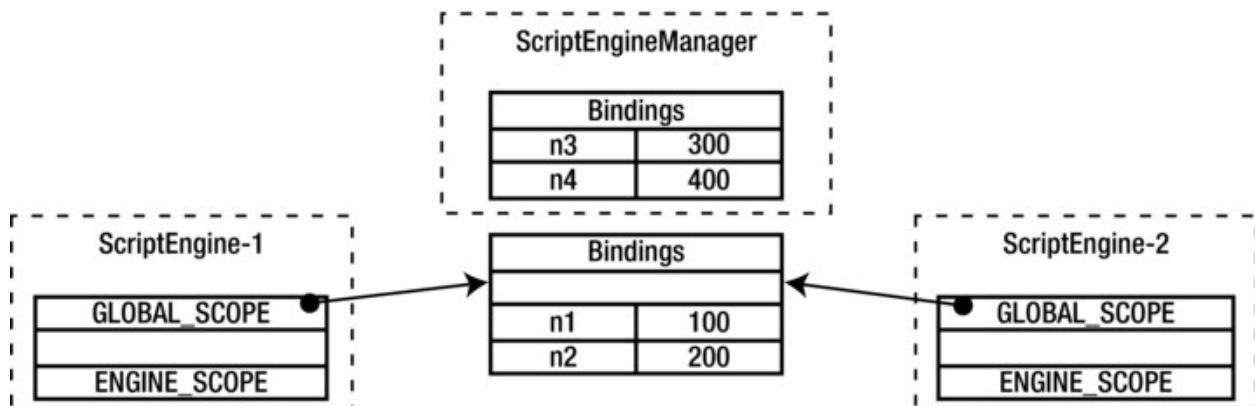


**Figure 10-4.** State of ScriptEngineManager and two ScriptEngines after a new Bindings is set to the ScriptEngineManager

At this point, any changes made to the Bindings of the ScriptEngineManager will not be reflected in the global scope Bindings of the two ScriptEngines. You can still make changes to the Bindings shared by the two ScriptEngines and both ScriptEngines will see the changes made by either of them.

Let's create a new ScriptEngine as shown:

```
// Create a new ScriptEngine
ScriptEngine engine3
= manager.getEngineByName("JavaScript");
```

Recall that a ScriptEngine gets a global scope Bindings at the time it is created and that Bindings is the same as the Bindings of the ScriptEngineManager. The state of the ScriptEngineManager and three ScriptEngines, after the above statement is executed, are shown in [Figure 10-5](#).

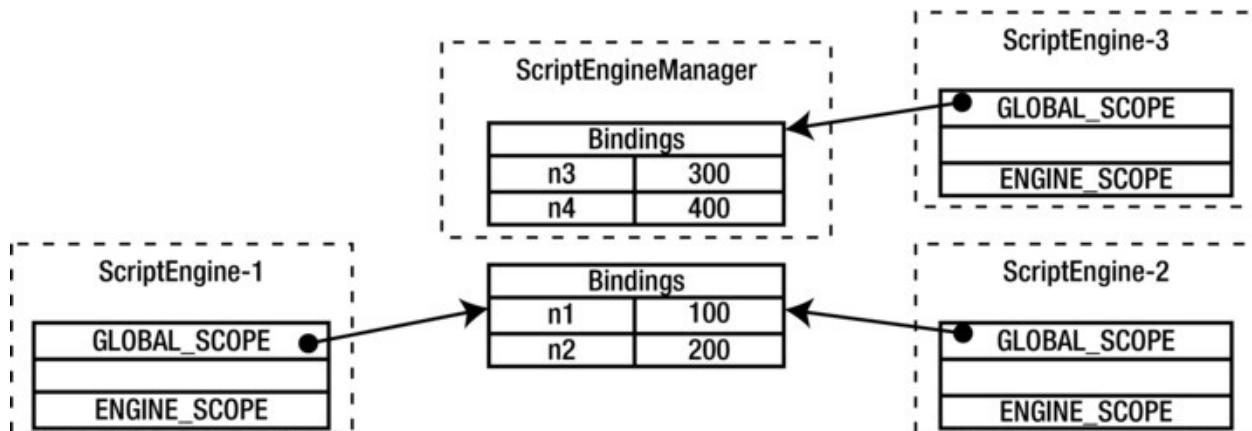


[Figure 10-5](#). State of ScriptEngineManager and three ScriptEngines after the third ScriptEngine is created

Here is another twist to the so-called “globalness” of the global scope of ScriptEngines. This time, you will use the `setBindings()` method of a ScriptEngine to set its global scope Bindings. [Figure 10-6](#) shows the state of the ScriptEngineManager and three ScriptEngines after the following snippet of code is executed:

```
// Set a new Bindings for the global scope of engine1
Bindings newGlobalEngine1 = new SimpleBindings();
newGlobalEngine1.put("n5", 500);
newGlobalEngine1.put("n6", 600);
```

```
engine1.setBindings(newGlobalEngine1,
ScriptContext.GLOBAL_SCOPE);
```

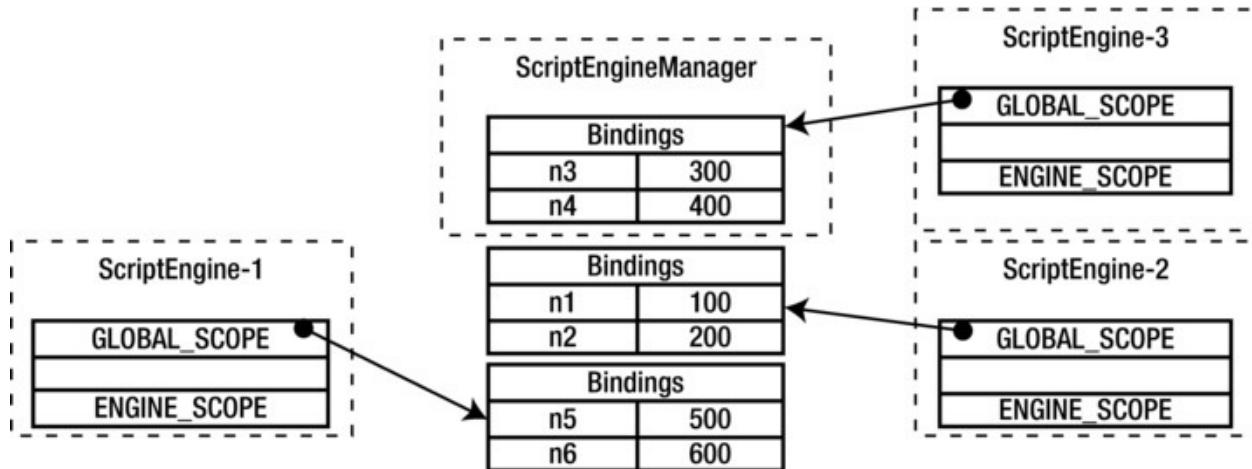

**Figure 10-6.** State of **ScriptEngineManager** and Three **ScriptEngines** After a New Global Scope Bindings Is Set for **engine1**

**Tip** By default, all **ScriptEngines** that a **ScriptEngineManager** creates share its **Bindings** as their global scope **Bindings**. If you use the **setBindings()** method of a **ScriptEngine** to set its global scope **Bindings** or if you use the **setBindings()** method of a **ScriptEngineManager** to set its **Bindings**, you break the “globalness” chain as discussed in this section. To keep the “globalness” chain intact, you should always use the **put()** method of the **ScriptEngineManager** to add key-value pairs to its **Bindings**. To remove a key-value pair from the global scope of all **ScriptEngines** created by a **ScriptEngineManager**, you need to get the reference of the **Bindings** using the **getBindings()** method of the **ScriptEngineManager** and use the **remove()** method on the **Bindings**.

## Using a Custom **ScriptContext**

In the previous section, you saw that each **ScriptEngine** has a default script context. The **get()**, **put()**, **getBindings()**, and **setBindings()** methods of the **ScriptEngine** operate on its default **ScriptContext**. When no **ScriptContext** is specified to the **eval()** method of the

`ScriptEngine`, the default context of the engine is used. The following two versions of the `eval()` method of the `ScriptEngine` use its default context to execute the script:

- `Object eval(String script)`
- `Object eval(Reader reader)`

You can pass a `Bindings` to the following two versions of the `eval()` method:

- `Object eval(String script, Bindings bindings)`
- `Object eval(Reader reader, Bindings bindings)`

These versions of the `eval()` method do not use the default context of the `ScriptEngine`. They use a new `ScriptContext` whose engine scope `Bindings` is the one passed to these methods and the global scope `Bindings` is the same as for the default context of the engine. Note that these two versions of the `eval()` method keep the default context of the `ScriptEngine` untouched.

You can pass a `ScriptContext` to the following two versions of the `eval()` method:

- `Object eval(String script, ScriptContext context)`
- `Object eval(Reader reader, ScriptContext context)`

These versions of the `eval()` method use the specified context to execute the script. They keep the default context of the `ScriptEngine` untouched.

The three sets of the `eval()` method let you execute scripts using different isolation levels:

- The first set lets you share the default context by all scripts.
- The second set lets scripts use different engine scope

Bindings and share the global scope Bindings.

- The third set lets scripts execute in an isolated ScriptContext.

[Listing 10-11](#) shows how scripts are executed in different isolation levels using the different version of the `eval()` method. The program uses three variables called `msg`, `n1`, and `n2`. It displays the value stored in the `msg` variable. The values of `n1` and `n2` are added and the sum is displayed. The script prints what values of `n1` and `n2` were used in computing the sum. The value of `n1` is stored in the Bindings of `ScriptEngineManager` that is shared by the default context of all `ScriptEngines`. The value of `n2` is stored in the engine scope of the default context and the custom contexts. The script is executed twice using the default context of the engine, once in the beginning and once in the end, to prove that using a custom Bindings or a `ScriptContext` in the `eval()` method does not affect the Bindings in the default context of the `ScriptEngine`. The program declares a `throws` clause in its `main()` method to keep the code shorter.

#### ***Listing 10-11.*** Using Different Isolation Levels for Executing Scripts

```
// CustomContext.java
package com.jdojo.script;

import javax.script.Bindings;
import javax.script.ScriptContext;
import javax.script.ScriptEngine;
import javax.script.ScriptEngineManager;
import javax.script.ScriptException;
import javax.script.SimpleScriptContext;
import static
javax.script.SimpleScriptContext.ENGINE_SCOPE;
import static
javax.script.SimpleScriptContext.GLOBAL_SCOPE;

public class CustomContext {
 public static void main(String[] args) throws
ScriptException {
 ScriptEngineManager manager = new
```

```
ScriptEngineManager();
 ScriptEngine engine
= manager.getEngineByName("JavaScript");

 // Add n1 to Bindings of the manager,
which will be shared
 // by all engines as their global scope
Bindings
 manager.put("n1", 100);

 // Prepare the script
String script = "var sum = n1 + n2;" +
 "print(msg + " +
 "' n1=' + n1 + ', n2=' + n2
+ " +
 "', sum=' + sum);";

 // Add n2 to the engine scope of the
default context of the engine
 engine.put("n2", 200);
 engine.put("msg", "Using the default
context");
 engine.eval(script);

 // Use a Bindings to execute the script
Bindings bindings
= engine.createBindings();
 bindings.put("n2", 300);
 bindings.put("msg", "Using a Bindings:");
 engine.eval(script, bindings);

 // Use a ScriptContext to execute the
script
 ScriptContext ctx = new
SimpleScriptContext();
 Bindings ctxGlobalBindings
= engine.createBindings();
 ctx.setBindings(ctxGlobalBindings,
GLOBAL_SCOPE);
 ctx.setAttribute("n1", 400,
```

```

GLOBAL_SCOPE);
 ctx.setAttribute("n2", 500,
ENGINE_SCOPE);
 ctx.setAttribute("msg", "Using
a ScriptContext:", ENGINE_SCOPE);
 engine.eval(script, ctx);

 // Execute the script again using the
default context to
 // prove that the default context is
unaffected.
 engine.eval(script);
 }
}

```

---

```

Using the default context: n1=100, n2=200, sum=300
Using a Bindings: n1=100, n2=300, sum=400
Using a ScriptContext: n1=400, n2=500, sum=900
Using the default context: n1=100, n2=200, sum=300

```

---

## Return Value of the eval() Method

The `eval()` method of the `ScriptEngine` returns an `Object`, which is the last value in the script. It returns `null` if there is no last value in the script. It is error prone, and confusing at the same time, to depend on the last value in a script. The following snippet of code shows some examples of using the return value of the `eval()` method for Nashorn. The comments in the code indicate the returned value from the `eval()` method.

```

Object result = null;

// Assigns 3 to result
result = engine.eval("1 + 2;");

// Assigns 7 to result
result = engine.eval("1 + 2; 3 + 4;");

```

```

// Assigns 6 to result
result = engine.eval("1 + 2; 3 + 4; var v = 5; v =
6;");

// Assigns 7 to result
result = engine.eval("1 + 2; 3 + 4; var v = 5;");

// Assigns null to result
result = engine.eval("print(1 + 2)");

```

It is better not to depend on the returned value from the `eval()` method. You should pass a Java object to the script as a parameter and let the script store the returned value of the script in that object. After the `eval()` method is executed, you can query that Java object for the returned value. [Listing 10-12](#) contains the code for a `Result` class that wraps an integer. You will pass an object of the `Result` class to the script that will store the returned value in it. After the script finishes, you can read the integer value stored in the `Result` object in your Java code. The `Result` needs to be declared public so it is accessible to the script engine. The program in [Listing 10-13](#) shows how to pass a `Result` object to a script that populates the `Result` object with a value. The program contains a `throws` clause in the `main()` method's declaration to keep the code short.

### ***[Listing 10-12](#).*** A Result Class That Wraps an Integer

```

// Result.java
package com.jdojo.script;

public class Result {
 private int val = -1;

 public void setValue(int x) {
 val = x;
 }

 public int getValue() {
 return val;
 }
}

```

```
}
```

***Listing 10-13.*** Collecting the Return Value of a Script in a Result Object

```
// ResultBearingScript.java
package com.jdojo.script;

import javax.script.ScriptEngine;
import javax.script.ScriptEngineManager;
import javax.script.ScriptException;

public class ResultBearingScript {
 public static void main(String[] args) throws
ScriptException {
 // Get the Nashorn engine
 ScriptEngineManager manager = new
ScriptEngineManager();
 ScriptEngine engine
= manager.getEngineByName("JavaScript");

 // Pass a Result object to the script.
The script will store the
 // result of the script in the result
object
 Result result = new Result();
 engine.put("result", result);

 // Store the script in a String
 String script = "3 + 4;
result.setValue(101);";

 // Execute the script, which uses the
passed in Result object to
 // return a value
 engine.eval(script);

 // Use the result object to get the
returned value from the script
 int returnedValue = result.getValue(); // Will be 101
```

```

 System.out.println("Returned value is "
+ returnedValue);
 }
}

```

---

Returned value is 101

---

## Reserved Keys for Engine Scope Bindings

Typically, a key in the engine scope Bindings represents a script variable. Some keys are reserved and they have special meanings. Their values may be passed to the engine by the implementation of the engine. An implementation may define additional reserved keys.

[Table 10-2](#) contains the list of all reserved keys. Those keys are also declared as constants in the ScriptEngine interface. An implementation of a script engine is not required to pass all these keys to the engine in the engine scope bindings. As a developer, you are not supposed to use these keys to pass parameters from a Java application to a script engine.

**Table 10-2.** The List of Reserved Keys for Engine Scope Bindings

Key	Constant in ScriptEngine Interface	Meaning of the Value of the key
“javax.script.argv”	ScriptEngine.ARGS	Used to pass an array of Object to pass a set of positional argument.
“javax.script.engine”	ScriptEngine.ENGINE	The name of the script engine.
“javax.script.engine_version”	ScriptEngine.ENGINE_VERSION	The version of the script engine.

“javax.script.filename”	ScriptEngine.FILENAME	Used to pass the name of the file or the resource that the source of the script.
“javax.script.language”	ScriptEngine.LANGUAGE	The name of the language supported by the script engine.
“javax.script.language_version”	ScriptEngine.LANGUAGE_VERSION	The version of the scripting language supported by the engine.
“javax.script.name”	ScriptEngine.NAME	The short name of the scripting language.

---

## Changing the Default ScriptContext

You can get and set the default context of a ScriptEngine using its `getContext()` and `setContext()` methods, respectively, as shown:

```
ScriptEngineManager manager = new
ScriptEngineManager();
ScriptEngine engine
= manager.getEngineByName("JavaScript");

// Get the default context of the ScriptEngine
ScriptContext defaultCtx = engine.getContext();

// Work with defaultCtx here

// Create a new context
ScriptContext ctx = new SimpleScriptContext();

// Configure ctx here

// Set ctx as the new default context for the engine
```

```
engine.setContext(ctx);
```

Note that setting a new default context for a ScriptEngine will not use the Bindings of the ScriptEngineManager as its global scope Bindings. If you want the new default context to use the Bindings of the ScriptEngineManager, you need set it explicitly as shown:

```
// Create a new context
ScriptContext ctx = new SimpleScriptContext();

// Set the global scope Bindings for ctx the same as
// the Bindings for the manager
ctx.setBindings(manager.getBindings(),
ScriptContext.GLOBAL_SCOPE);

// Set ctx as the new default context for the engine
engine.setContext(ctx);
```

## Sending Scripts Output to a File

You can customize the input source, output destination, and error output destination of a script execution. You need to set appropriate reader and writers for the ScriptContext that is used to execute a script. The following snippet of code will write the script output to a file named `jsoutput.txt` in the current directory:

```
// Create a FileWriter
FileWriter writer = new FileWriter("jsoutput.txt");

// Get the default context of the engine
ScriptContext defaultCtx = engine.getContext();

// Set the output writer for the default context of
// the engine
defaultCtx.setWriter(writer);
```

The code sets a custom output writer for the default context of the ScriptEngine that will be used during the execution of scripts that use the

default context. If you want to use a custom output writer for a specific execution of a script, you need to use a custom `ScriptContext` and set its writer.

---

**Tip** Setting a custom output writer for a `ScriptContext` does not affect the destination of the standard output of the Java application. To redirect the standard output of the Java application, you need to use the `System.setOut()` method.

---

[Listing 10-14](#) shows how to write output of a script execution to a file named `jsoutput.txt`. The program prints the full path of the output file on the standard output. You may get a different output when you run the program. You need to open the output file in a text editor to see the script's output.

#### ***Listing 10-14.*** Writing the Output of Scripts to a File

```
// CustomScriptOutput.java
package com.jdojo.script;

import java.io.File;
import java.io.FileWriter;
import java.io.IOException;
import javax.script.ScriptContext;
import javax.script.ScriptEngine;
import javax.script.ScriptEngineManager;
import javax.script.ScriptException;

public class CustomScriptOutput {

 public static void main(String[] args) {
 // Get the Nashorn engine
 ScriptEngineManager manager = new
 ScriptEngineManager();
 ScriptEngine engine
 = manager.getEngineByName("JavaScript");

 // Print the absolute path of the output
 file
```

```
 File outputFile = new
File("jsoutput.txt");
 System.out.println("Script output will be
written to " +
outputFile.getAbsolutePath());
 FileWriter writer = null;
 try {
 writer = new
FileWriter(outputFile);
 // Set a custom output writer for
the engine
 ScriptContext defaultCtx
= engine.getContext();
 defaultCtx.setWriter(writer);
 // Execute a script
 String script = "print('Hello
custom output writer')";
 engine.eval(script);
 }
 catch (IOException | ScriptException e) {
 e.printStackTrace();
 }
 finally {
 if (writer != null) {
 try {
 writer.close();
 }
 catch (IOException e) {
 e.printStackTrace();
 }
 }
 }
 }
}
```

---

Script output will be written to C:\jsoutput.txt

---

# Invoking Procedures in Scripts

A scripting language may allow for creating procedures, functions, and methods. The Java Scripting API lets you invoke such procedures, functions, and methods from a Java application. I will use the term “procedure” to mean procedure, function, and method in this section. I will use the specific term when the context of the discussion requires it.

Not all script engines are required to support procedure invocation. The Nashorn JavaScript engine supports procedure invocation. If a script engine supports it, the implementation of the script engine class must implement the `Invocable` interface. It is the responsibility of the developer to check if a script engine implements the `Invocable` interface, before invoking a procedure. Invoking a procedure is a four-step process:

- Check if the script engine supports procedure invocation.
- Cast the engine reference to the `Invocable` type.
- Evaluate the script that contains the source code for the procedure.
- Use the `invokeFunction()` method of the `Invocable` interface to invoke procedures and functions. Use the `invokeMethod()` method to invoke methods of the objects created in a scripting language.

The following snippet of code performs the check that the script engine implementation class implements the `Invocable` interface:

```
// Get the Nashorn engine
ScriptEngineManager manager = new
ScriptEngineManager();
ScriptEngine engine
= manager.getEngineByName("JavaScript");

// Make sure the script engine implements the
```

```
Invocable interface
if (engine instanceof Invocable) {
 System.out.println("Invoking procedures is
supported.");
else
 System.out.println("Invoking procedures is not
supported.");
}
```

The second step is to cast the engine reference to the `Invocable` interface type.

```
Invocable inv = (Invocable)engine;
```

The third step is to evaluate the script, so the script engine compiles and stores the compiled form of the procedure for later invocation. The following snippet of code performs this step:

```
// Declare a function named add that adds two numbers
String script = "function add(n1, n2) { return n1
+ n2; }";

// Evaluate the function. Call to eval() does not
// invoke the function.
// It just compiles it.
engine.eval(script);
```

The last step is to invoke the procedure or function.

```
// Invoke the add function with 30 and 40 as the
// function's arguments.
// It is as if you called add(30, 40) in the script.
Object result = inv.invokeFunction("add", 30, 40);
```

The first argument to the `invokeFunction()` is the name of the procedure or function. The second argument is a varargs that is used to specify arguments to the procedure or function. The `invokeFunction()` method returns the value returned by the procedure or function.

[Listing 10-15](#) shows how to invoke a function. It invokes a function written in Nashorn JavaScript.

***Listing 10-15.*** Invoking a Function Written in Nashorn JavaScript

```
// InvokeFunction.java
package com.jdojo.script;

import javax.script.Invocable;
import javax.script.ScriptEngine;
import javax.script.ScriptEngineManager;
import javax.script.ScriptException;

public class InvokeFunction {
 public static void main(String[] args) {
 ScriptEngineManager manager = new
ScriptEngineManager();
 ScriptEngine engine
= manager.getEngineByName("JavaScript");

 // Make sure the script engine implements
the Invocable interface
 if (!(engine instanceof Invocable)) {
 System.out.println("Invoking
procedures is not supported.");
 return;
 }

 // Cast the engine reference to the
Invocable type
 Invocable inv = (Invocable)engine;

 try {
 String script = "function add(n1,
n2) { return n1 + n2; }";

 // Evaluate the script first
 engine.eval(script);

 // Invoke the add function twice
 Object result1
= inv.invokeFunction("add", 30, 40);
 System.out.println("Result1 = "
```

```

+ result1);

 Object result2
= inv.invokeFunction("add", 10, 20);
 System.out.println("Result2 = "
+ result2);
 }
 catch (ScriptException
| NoSuchMethodException e) {
 e.printStackTrace();
 }
 }
 }
}

```

---

```

Result1 = 70
Result2 = 30

```

---

An object-oriented or object-based scripting language may let you define objects and their methods. You can invoke methods of such objects using the `invokeMethod()` method of the `Invocable` interface, which is declared as follows:

```

Object invokeMethod(Object objectRef, String name,
Object... args)

```

The first argument is the reference of the object, the second argument is the name of the method that you want to invoke on the object, and the third argument is a varargs argument that is used to pass arguments to the method being invoked.

[Listing 10-16](#) demonstrates the invocation of a method on an object that is created in Nashorn JavaScript. Note that the object is created inside the Nashorn script. To invoke the method of the object from Java, you need to obtain the reference of the object through the script engine. The program evaluates the script that creates an object with an `add()` method and stores its reference in a variable named `calculator`. The `engine.get("calculator")` method returns the reference of the `calculator` object to the Java code.

***Listing 10-16.*** Invoking a Method on an Object Created in Nashorn JavaScript

```
// InvokeMethod.java
package com.jdojo.script;

import javax.script.Invocable;
import javax.script.ScriptEngine;
import javax.script.ScriptEngineManager;
import javax.script.ScriptException;

public class InvokeMethod {
 public static void main(String[] args) {
 // Get the Nashorn engine
 ScriptEngineManager manager = new
ScriptEngineManager();
 ScriptEngine engine
= manager.getEngineByName("JavaScript");

 // Make sure the script engine implements
the Invocable interface
 if (!(engine instanceof Invocable)) {
 System.out.println("Invoking
methods is not supported.");
 return;
 }

 // Cast the engine reference to the
Invocable type
 Invocable inv = (Invocable) engine;

 try {
 // Declare a global object with an
add() method
 String script = "var calculator
= new Object();" +
 "calculator.add = function
add(n1, n2){return n1 + n2;};"

 // Evaluate the script first
 engine.eval(script);
 }
 }
}
```

```

 // Get the calculator object
reference created in the script
 Object calculator
= engine.get("calculator");

 // Invoke the add() method on the
calculator object
 Object result
= inv.invokeMethod(calculator, "add", 30, 40);
 System.out.println("Result = "
+ result);
 }
 catch (ScriptException
| NoSuchMethodException e) {
 e.printStackTrace();
 }
}

```

---

Result = 70

---



---

**Tip** Use the `Invocable` interface to execute procedures, functions, and methods repeatedly. Evaluation of the script, having procedures, functions, and methods, stores the intermediate code in the engine that results in performance gain on their repeated execution.

---

## Implementing Java Interfaces in Scripts

The Java Scripting API lets you implement Java interfaces in a scripting language. Methods of the Java interface may be implemented in scripts using top-level procedures or instance methods of an object.

The advantage of implementing a Java interface in a scripting language is that you can use instances of the interface in Java code as if the interface was implemented in Java. You can pass instances of the interface as arguments to Java methods.

The `getInterface()` method of the `Invocable` interface is used to obtain the instances of a Java interface that is implemented in scripts. The method has two versions:

- `<T> T getInterface(Class<T> cls)`
- `<T> T getInterface(Object obj, Class<T> cls)`

The first version is used to obtain an instance of a Java interface whose methods are implemented as top-level procedures in scripts. The interface type is passed to this method as its argument. Suppose you have a `Calculator` interface, as declared in [Listing 10-17](#), that has two methods called `add()` and `subtract()`.

#### ***[Listing 10-17](#). A Calculator Interface***

```
// Calculator.java
package com.jdojo.script;

public interface Calculator {
 int add (int n1, int n2);
 int subtract (int n1, int n2);
}
```

Consider the following two top-level functions written in JavaScript:

```
function add(n1, n2) {
 return n1 + n2;
}

function subtract(n1, n2) {
 return n1 - n2;
}
```

The above two functions provide the implementations for the two methods of

the Calculator interface. After the above functions are compiled by a JavaScript engine, you can obtain an instance of the Calculator interface as shown:

```
// Cast the engine reference to the Invocable type
Invocable inv = (Invocable)engine;

// Get the reference of the Calculator interface
Calculator calc = inv.getInterface(Calculator.class);
if (calc == null) {
 System.err.println("Calculator interface
implementation not found.");
}
else {
 // Use calc to call add() and subtract()
methods
}
```

You can add two numbers as shown:

```
int sum = calc.add(15, 10);
```

[Listing 10-18](#) shows how to implement a Java interface using top-level procedures in Nashorn. Please consult the documentation of a scripting language to learn how it supports this functionality.

**[Listing 10-18.](#)** Implementing a Java Interface Using Top-Level Functions in Script

```
// UsingInterfaces.java
package com.jdojo.script;

import javax.script.Invocable;
import javax.script.ScriptEngine;
import javax.script.ScriptEngineManager;
import javax.script.ScriptException;

public class UsingInterfaces {
 public static void main(String[] args) {
 // Get the Nashorn engine
```

```
 ScriptEngineManager manager = new
ScriptEngineManager();
 ScriptEngine engine
= manager.getEngineByName("JavaScript");

 // Make sure the script engine implements
Invocable interface
 if (!(engine instanceof Invocable)) {
 System.out.println("Interface
implementation in script"
 + " is not supported.");
 return;
 }

 // Cast the engine reference to the
Invocable type
 Invocable inv = (Invocable) engine;

 // Create the script for add() and
subtract() functions
 String script = "function add(n1, n2)
{ return n1 + n2; } "
 + "function subtract(n1, n2)
{ return n1 - n2; }";

 try {
 // Compile the script that will be
stored in the engine
 engine.eval(script);

 // Get the interface
implementation
 Calculator calc
= inv.getInterface(Calculator.class);
 if (calc == null) {
 System.err.println("Calculate
interface " +
 "implementation not
found.");
 }
 return;
 }
```

```

 }

 int result1 = calc.add(15, 10);
 System.out.println("add(15, 10)
= " + result1);

 int result2 = calc.subtract(15,
10);
 System.out.println("subtract(15,
10) = " + result2);
 }
 catch (ScriptException e) {
 e.printStackTrace();
 }
}
}

```

---

```

add(15, 10) = 25
subtract(15, 10) = 5

```

---

The second version of the `getInterface()` method is used to obtain an instance of a Java interface whose methods are implemented as instance methods of an object. Its first argument is the reference of the object that is created in the scripting language. The instance methods of the object implement the interface type passed in as the second argument. The following code in Nashorn creates an object whose instance methods implement the `Calculator` interface:

```

// Create an object
var calc = new Object();

// Add add() and subtract() methods to the calc object
calc.add = function add(n1, n2) {
 return n1 + n2;
};
calc.subtract = function subtract(n1, n2) {
 return n1 - n2;
};

```

When instance methods of a script object implements methods of a Java interface, you need to perform an extra step. You need to get the reference of the script object before you can get the instance of the interface, as shown:

```
// Get the reference of the global script object obj
Object calc = engine.get("calc");

// Get the implementation of the Calculator interface
Calculator calculator = inv.getInterface(calc,
Calculator.class);
```

[Listing 10-19](#) shows how to implement methods of a Java interface as instance methods of an object using Nashorn.

**[Listing 10-19.](#)** Implementing Methods of a Java Interface as Instance Methods of an Object in a Script

```
// ScriptObjectImplInterface.java
package com.jdojo.script;

import javax.script.Invocable;
import javax.script.ScriptEngine;
import javax.script.ScriptEngineManager;
import javax.script.ScriptException;

public class ScriptObjectImplInterface {
 public static void main(String[] args) {
 // Get the Nashorn engine
 ScriptEngineManager manager = new
 ScriptEngineManager();
 ScriptEngine engine
= manager.getEngineByName("JavaScript");

 // Make sure the engine implements the
 Invocable interface
 if (!(engine instanceof Invocable)) {
 System.out.println("Interface
implementation in " +
 "script is not
supported.");
```

```

 return;
 }

 // Cast the engine reference to the
Invocable type
 Invocable inv = (Invocable)engine;

 String script = "var calc = new Object();
" +
 "calc.add = function add(n1, n2)
{return n1 + n2; };" +
 "calc.subtract = function
subtract(n1, n2) {return n1 - n2;};"

 try {
 // Compile and store the script in
the engine
 engine.eval(script);

 // Get the reference of the global
script object calc
 Object calc = engine.get("calc");

 // Get the implementation of the
Calculator interface
 Calculator calculator
= inv.getInterface(calc, Calculator.class);
 if (calculator == null) {
 System.err.println("Calculate
interface " +
"implementation not found.");
 return;
 }

 int result1 = calculator.add(15,
10);
 System.out.println("add(15, 10)
= " + result1);

```

```

 int result2
= calculator.subtract(15, 10);
 System.out.println("subtract(15,
10) = " + result2);
}
catch (ScriptException e) {
 e.printStackTrace();
}
}
}

```

---

```

add(15, 10) = 25
subtract(15, 10) = 5

```

---

## Using Compiled Scripts

A script engine may allow compiling a script and executing it repeatedly. Executing compiled scripts may increase the performance of an application. A script engine may compile and store scripts in the form of Java classes, Java class files, or in a language-specific form.

Not all script engines are required to support script compilation. Script engines that support script compilation must implement the `Compilable` interface. Nashorn engine supports script compilation. The following snippet of code checks if a script engine implements the `Compilable` interface:

```

// Get the script engine reference
ScriptEngineManager manager = new
ScriptEngineManager();
ScriptEngine engine
= manager.getEngineByName("YOUR_ENGINE_NAME");

if (engine instanceof Compilable) {
 System.out.println("Script compilation is
supported.");
}
else {

```

```
 System.out.println("Script compilation is not
supported.");
 }
```

Once you know that a script engine implements the `Compilable` interface, you can cast its reference to a `Compilable` type as

```
// Cast the engine reference to the Compilable type
Compilable comp = (Compilable)engine;
```

The `Compilable` interface contains two methods:

- `CompiledScript compile(String script)`  
`throws ScriptException`
- `CompiledScript compile(Reader script)`  
`throws ScriptException`

The two versions of the method differ only in the type of the source of the script. The first version accepts the script as a `String` and the second one as a `Reader`.

The `compile()` method returns an object of the `CompiledScript` class. `CompiledScript` is an abstract class. The provider of the script engine provides the concrete implementation of this class. A `CompiledScript` is associated with the `ScriptEngine` that creates it. The `getEngine()` method of the `CompiledScript` class returns the reference of the `ScriptEngine` to which it is associated.

To execute a compiled script, you need to call one of the following `eval()` methods of the `CompiledScript` class:

- `Object eval() throws ScriptException`
- `Object eval(Bindings bindings) throws ScriptException`
- `Object eval(ScriptContext context)`  
`throws ScriptException`

The `eval()` method without any arguments uses the default script context of the script engine to execute the compiled script. The other two versions work

the same as the `eval()` method of the `ScriptEngine` interface when you pass a `Bindings` or a `ScriptContext` to them.

[Listing 10-20](#) shows how to compile a script and execute it. It executes the same compiled script twice with different parameters.

### ***Listing 10-20.*** Using Compiled Scripts

```
// CompilableTest.java
package com.jdojo.script;

import javax.script.Bindings;
import javax.script.Compilable;
import javax.script.CompiledScript;
import javax.script.ScriptEngine;
import javax.script.ScriptEngineManager;
import javax.script.ScriptException;

public class CompilableTest {
 public static void main(String[] args) {
 // Get the Nashorn engine
 ScriptEngineManager manager = new
 ScriptEngineManager();
 ScriptEngine engine
 = manager.getEngineByName("JavaScript");
 if (!(engine instanceof Compilable)) {
 System.out.println("Script
compilation not supported.");
 return;
 }

 // Cast the engine reference to the
 Compilable type
 Compilable comp = (Compilable)engine;
 try {
 // Compile a script
 String script = "print(n1 + n2)";
 CompiledScript cScript
 = comp.compile(script);
```

```

 // Store n1 and n2 script
variables in a Bindings
 Bindings scriptParams
= engine.createBindings();
 scriptParams.put("n1", 2);
 scriptParams.put("n2", 3);
 cScript.eval(scriptParams);

 // Execute the script again with
different values for n1 and n2
 scriptParams.put("n1", 9);
 scriptParams.put("n2", 7);
 cScript.eval(scriptParams);
 }
 catch (ScriptException e) {
 e.printStackTrace();
 }
}

```

---

5  
16

---

## Using Java in Scripting Languages

Scripting languages allow using Java class libraries in scripts. Each scripting language has its own syntax for using Java classes. It is not possible, and is outside the scope of this book, to discuss the syntax of all scripting languages. In this section, I will discuss the syntax of using some Java constructs in Nashorn. For the complete coverage of the Nashorn language, please refer to the web site at <https://wiki.openjdk.java.net/display/Nashorn/Main>.

## Declaring Variables

Declaring variables in a scripting language is not related to Java. Typically, scripting languages let you assign values to variables without declaring them. The types of variables are determined at runtime based on the types of the values they store.

In Nashorn, the keyword `var` is used to declare a variable. If you wish, you can omit the keyword `var` in a variable declaration. The following snippet of code declares two variables and assigns them a value:

```
// Declare a variable named msg using the var keyword
var msg = "Hello";

// Declare a variable named greeting without using the
// keyword var
greeting = "Hello";
```

## Importing Java Classes

There are four ways to import Java classes in scripts in Nashorn:

- Using the `Packages` global object
- Using the `type()` function of the Java global object
- Using the `importPackage()` and `importClass()` functions
- Using a `JavaImporter` in a `with` clause

The following sections will describe the four ways of importing Java classes in script in detail.

## Using the Packages Global Object

Nashorn defines all Java packages as properties of a global variable named `Packages`. For example, the `java.lang` and `javax.swing` packages may be referred to as `Packages.java.lang` and `Packages.javax.swing`, respectively. The following snippet of code uses the `java.util.List` and `javax.swing.JFrame` in Nashorn:

```
// Create a List
var list1 = new Packages.java.util.ArrayList();

// Create a JFrame
var frame1 = new Packages.javax.swing.JFrame("Test");
```

Nashorn declares `java`, `javax`, `org`, `com`, `edu`, and `net` as global variables that are aliases for `Packages.java`, `Packages.javax`, `Packages.org`, `Packages.com`, `Packages.edu`, and `Packages.net`, respectively. Class names in examples in this book start with the prefix `com`, for example, `com.jdojo.script.Test`. To use this class name inside the JavaScript code, you may use `Packages.com.jdojo.script.Test` or `com.jdojo.script.Test`. However, if a class name does not start with one of these predefined prefixes, you must use the `Packages` global variable to access it; for example, if your class name is `p1.Test`, you need to access it using `Packages.p1.Test` inside JavaScript code. The following snippet of code uses the `java` and `javax` aliases for `Packages.java` and `Packages.javax`:

```
// Create a List
var list2 = new java.util.ArrayList();

// Create a JFrame
var frame2 = new javax.swing.JFrame("Test");
```

## Using the Java Global Object

Accessing packages as the properties of the `Packages` object was also supported in Rhino JavaScript in Java 7. Using the `Packages` object is slower and error-prone. Nashorn defines a new global object called `Java` that contains many useful functions to work with Java packages and classes. If you are using Java 8 or later, you should use the `Java` object over the `Packages` object. The `type()` function of the `Java` object imports a Java type into the script. You need to pass the fully qualified name of the Java type to import. In Nashorn, the following snippet of code imports the `java.util.ArrayList` class and creates its object:

```
// Import java.util.ArrayList type and call it
```

```
ArrayList
var ArrayList = Java.type("java.util.ArrayList");

// Create an object of the ArrayList type
var list = new ArrayList();
```

In the code, you call the imported type returned from the `Java.type()` function as `ArrayList` that is also the name of the class that is imported. You do it to make the next statement read as if it was written Java. Readers of the second statement will know that you are creating an object of the `ArrayList` class. However, you can give the imported type any name you want. The following snippet of code imports `java.util.ArrayList` and calls it `MyList`:

```
// Import java.util.ArrayList type and call it MyList
var MyList = Java.type("java.util.ArrayList");

// Create an object of the MyList type
var list2 = new MyList();
```

## Using the `importPackage()` and `importClass()` Functions

Rhino JavaScript allowed using the simple names of the Java types in script. Rhino JavaScript had two built-in functions called `importPackage()` and `importClass()` to import all classes from a package and a class from a package, respectively. For compatibility reasons, Nashorn keeps these functions. To use these functions in Nashorn, you need to load the compatibility module from `mozilla_compat.js` file using the `load()` function. The following snippet of code rewrites the above logic using these functions:

```
// Load the compatibility module. It is needed in
Nashorn, not in Rhino.
load("nashorn:mozilla_compat.js");

// Import ArrayList class from the java.util package
importClass(java.util.ArrayList);

// Import all classes from the javax.swing package
```

```
importPackage(javax.swing);

// Use simple names of classes
var list1 = new ArrayList();
var frame1 = new JFrame("Test");
```

JavaScript does not import all classes from the `java.lang` package automatically because JavaScript classes with the same names, for example, `String`, `Object`, `Number`, etc., will conflict with class names in the `java.lang` package. To use a class from the `java.lang` package, you can import it or use the `Packages` or `Java` variable to use its fully qualified name. You cannot import all classes from the `java.lang` package. The following snippet of code generates an error because the `String` class name is already defined in JavaScript:

```
// Load the compatibility module. It is needed in
Nashorn, not in Rhino.
load("nashorn:mozilla_compat.js");

importClass(java.lang.String); // An error
```

If you want to use the `java.lang.String` class, you need to use its fully qualified name. The following snippet of code uses the built-in JavaScript `String` class and the `java.lang.String` class:

```
var javaStr = new java.lang.String("Hello"); // Java
String class
var jsStr = new String("Hello"); //
JavaScript String class
```

If a class name in the `java.lang` package does not conflict with a JavaScript top-level class name, you can use the `importClass()` function to import the Java class. For example, you can use the following snippet of code to use the `java.lang.System` class:

```
// Load the compatibility module. It is needed in
Nashorn, not in Rhino.
load("nashorn:mozilla_compat.js");

importClass(java.lang.System);
```

```
var jsStr = new String("Hello");
System.out.println(jsStr);
```

In the above snippet of code, `jsStr` is a JavaScript `String` that has been passed to the `System.out.println()` Java method that accepts a `java.lang.String` type. JavaScript takes care of the conversion from a JavaScript type to a Java type automatically in such cases.

## Using the JavaImporter Object

In JavaScript, you can use the simple names of classes using a `JavaImporter` object reference in a `with` clause. The constructor of the `JavaImporter` class accepts a list of Java packages and classes. You can create a `JavaImporter` object as shown:

```
// Import all classes from the java.lang package
var langPkg = new JavaImporter(Packages.java.lang);

// Import all classes from the java.lang and java.util
// packages and the
// JFrame class from the javax.swing package
var pkg2 = JavaImporter(java.lang, java.util,
javax.swing.JFrame);
```

Note the use of the `new` operator in the first statement. The second statement does not use the `new` operator. Both statements are valid in JavaScript.

The following snippet of code creates a `JavaImporter` object and uses it in a `with` clause:

```
// Create a Java importer for java.lang and java.util
// packages
var javaLangAndUtilPkg = JavaImporter(java.lang,
java.util);

// Use the imported types in the with clause
with (javaLangAndUtilPkg) {
 var list = new ArrayList();
 list.add("one");
```

```
list.add("two");
System.out.println("Hello");
System.out.println("List is " + list);
}
```

---

```
Hello
List is [one, two]
```

---

## Creating and Using Java Objects

Use the `new` operator with a constructor to create a new Java object in scripts. The following snippet of code creates a `String` object in Nashorn:

```
// Create a Java String object
var javaString = new java.lang.String("A Java
string");
```

Accessing methods and properties of Java objects is similar in most scripting languages. Some scripting languages let you invoke getter and setter methods on an object using the property name. The following snippet of code in Nashorn creates a `java.util.Date` object and accesses the object's method using both the property names and the method names:

```
var dt = new java.util.Date();
var year = dt.year + 1900;
var month = dt.month + 1;
var date = dt.getDate();
println("Date:" + dt);
println("Year:" + year + ", Month:" + month + ", Day:"
+ date);
```

---

```
Date:Wed Jul 09 00:35:31 CDT 2014
Year:2014, Month:7, Day:9
```

---

While using JavaScript, it is important to understand the different types of

String objects. A String object may be a JavaScript String object or a Java java.lang.String object. JavaScript defines a length property for its String class, whereas Java has a length() method for its java.lang.String class. The following snippet of code shows the difference in creating and accessing the length of a JavaScript String and a Java java.lang.String objects:

```
// JavaScript String
var jsStr = new String("Hello JavaScript String");
print("JavaScript String: " + jsStr);
print("JavaScript String Length: " + jsStr.length);

// Java String
var javaStr = new java.lang.String("Hello Java
String");
print("Java String: " + javaStr);
print("Java String Length: " + javaStr.length());
```

---

```
JavaScript String: Hello JavaScript String
JavaScript String Length: 23
Java String: Hello Java String
Java String Length: 17
```

---

## Using Overloaded Java Methods

Java resolves an overloaded method call at compile time. That is, the Java compiler determines the signature of the method that will be called when the code is run. Consider the code for a PrintTest class shown in [Listing 10-21](#). You may get a different output in the second line.

***Listing 10-21.*** Using Overloaded Methods in Java

```
// PrintTest.java
package com.jdojo.script;

public class PrintTest {
```

```
public void print(String str) {
 System.out.println("print(String): "
+ str);
}

public void print(Object obj) {
 System.out.println("print(Object): "
+ obj);
}

public void print(Double num) {
 System.out.println("print(Double): "
+ num);
}

public static void main(String[] args) {
 PrintTest pt = new PrintTest();
 Object[] list = new Object[]{"Hello", new
Object(), 10.5};

 for(Object arg : list) {
 pt.print(arg);
 }
}
```

---

```
print(Object): Hello
print(Object): java.lang.Object@afffc70
print(Object): 10.5
```

---

When the `PrintTest` class is run, all three calls to the `print()` method call the same version, `print(Object)` of the `PrintTest` class. When the code is compiled, the Java compiler sees the call `pt.print(arg)` as a call to the `print()` method with an `Object` type argument (which is the type of `arg`) and therefore binds this call to `print(Object)` method.

In a scripting language, the type of a variable is known at runtime, not at compile time. The interpreters of scripting languages resolve an overloaded method call appropriately depending on the runtime type of the arguments in a

method call. The output of the following JavaScript code shows that the call to the `print()` method of the `PrintTest` class is resolved at runtime depending on the type of the argument:

```
// In JavaScript
var pt = new com.jdojo.script.PrintTest();
var list = ["Hello", new Object(), 10.5];
for (var i = 0; i < list.length; ++i) {
 pt.print(list[i]);
}
```

---

```
print(String): Hello
print(Object): [object Object]
print(Double): 10.5
```

---

JavaScript lets you select a specific version of the overloaded method explicitly. You can pass the signature of the overloaded method to be invoked with the object reference. The following snippet of code selects the `print(Object)` version:

```
// In JavaScript
var pt = new com.jdojo.script.PrintTest();
pt["print(java.lang.Object)"](10.5); // Calls
print(Object)
pt["print(java.lang.Double)"](10.5); // Calls
print(Double)
```

---

```
print(Object): 10.5
print(Double): 10.5
```

---

## Using Java Arrays

The way Java arrays can be created in JavaScript differs in Rhino and Nashorn. In Rhino, you need to needed to create a Java array using the `newInstance()` static method of the `java.lang.reflect.Array` class. This syntax is also

supported in Nashorn. The following snippet of code shows how to create and access Java arrays using the Rhino syntax:

```
// Create a java.lang.String array of 2 elements,
// populate it, and print the // elements
// Rhino you were able to use java.lang.String as the
// first argument, but in // Nashorn, you
// need to use java.lang.String.class instead.
var strArray
= java.lang.reflect.Array.newInstance(java.lang.String
 2);
strArray[0] = "Hello";
strArray[1] = "Array";
for(var i = 0; i < strArray.length; i++) {
 print(strArray[i]);
}
```

---

```
Hello
Array
```

---

To create primitive type arrays such as `int`, `double`, etc., you need to use their `TYPE` constants for their corresponding wrapper classes as shown:

```
// Create an int array of 2 elements, populate it, and
print the elements
var intArray
= java.lang.reflect.Array.newInstance(java.lang.Integer,
 2);
intArray[0] = 100;
intArray[1] = 200;
for(var i = 0; i < intArray.length; i++) {
 print(intArray[i]);
}
```

---

```
100
200
```

---

Nashorn supports a new syntax to create Java arrays. First, create the appropriate Java array type using the `Java.type()` method, and then use the familiar `new` operator to create the array. The following snippet of code shows how to create a `String[]` of two elements in Nashorn:

```
// Get the java.lang.String[] type
var StringArray = Java.type("java.lang.String[]");

// Create a String[] array of 2 elements
var strArray = new StringArray(2);
strArray[0] = "Hello";
strArray[1] = "Array";
for(var i = 0; i < strArray.length; i++) {
 print(strArray[i]);
}
```

---

```
Hello
Array
```

---

Nashorn supports creating the arrays of primitive types the same way. The following snippet of code creates an `int[]` of two elements in Nashorn:

```
// Get the int[] type
var IntArray = Java.type("int[]");

// Create a int[] array of 2 elements
var intArray = new IntArray(2);
intArray[0] = 100;
intArray[1] = 200;
for(var i = 0; i < intArray.length; i++) {
 print(intArray[i]);
}
```

---

```
100
200
```

---

You can use a JavaScript array when a Java array is expected. JavaScript will perform the necessary conversion from a JavaScript array to a Java array. Suppose you have a `PrintArray` class, as shown in [Listing 10-22](#), that contains a `print()` method that accepts a `String` array as an argument.

### ***Listing 10-22.*** A `PrintArray` Class

```
// PrintArray.java
package com.jdojo.script;

public class PrintArray {
 public void print(String[] list) {
 System.out.println("Inside print(String[] list):");
 for(String s : list) {
 System.out.println(s);
 }
 }
}
```

The following snippet of JavaScript code passes a JavaScript array to the `PrintArray.print(String[])` method. JavaScript takes care of converting the native array to a `String` array, as shown in the output.

```
// Create a JavaScript array and populate it with
// three strings
var names = new Array();
names[0] = "Rhino";
names[1] = "Nashorn";
names[2] = "JRuby";

// Create an object of the PrintArray class
var pa = new com.jdojo.script.PrintArray();

// Pass a JavaScript array to the
PrintArray.print(String[] list) method
pa.print(names);
```

---

```
Inside print(String[] list):
Rhino
Nashorn
JRuby
```

---

Nashorn supports array type conversion between Java and JavaScript arrays using the `Java.to()` and `Java.from()` function. The `Java.to()` function converts a JavaScript array type to a Java array type. The function takes the array object as the first argument and the target Java array type as the second argument. The target array type can be specified as a string or a type object. The following snippet of code converts a JavaScript array to a Java `String[]`:

```
// Create a JavaScript array and populate it with
// three integers
var personIds = [100, 200, 300];

// Convert the JavaScript integer array to java
String[]
var JavaStringArray = Java.to(personIds,
"java.lang.String[]")
```

If the second argument in the `Java.to()` function is omitted, the JavaScript array is converted to a Java `Object[]`.

The `Java.from()` function converts a Java array type to a JavaScript

array. The function takes the Java array as an argument. The following snippet of code shows how to convert a Java int [] to a JavaScript array:

```
// Create a Java int[]
var IntArray = Java.type("int[]");
var personIds = new IntArray(3);
personIds[0] = 100;
personIds[1] = 200;
personIds[2] = 300;

// Convert the Java int[] array to a JavaScript array
var jsArray = Java.from(personIds);

// Print the elements in the JavaScript array
for(var i = 0; i < jsArray.length; i++) {
 print(jsArray[i]);
}
```

---

```
100
200
300
```

---

It seems that Nashorn is not able to convert a Java String [] to a JavaScript array. An attempt to do so in the following script results in the error shown:

```
// Create a Java String object
var str = new java.lang.String("Rhino,Nashorn,JRuby");
var strDelimiter = new java.lang.String(",");
var strArray = str.split(strDelimiter);

// Convert the Java String[] array to a JavaScript
array
var jsArray = Java.from(strArray); // Nashorn throws
an ScriptException here

// Print the elements in tje JavaScript array
for(var i = 0; i < jsArray.length; i++) {
```

```
 print(jsArray[i]);
}
```

---

```
javax.script.ScriptException: TypeError: Can only
convert Java arrays and lists to
JavaScript arrays. Cant convert object of type {0}. in
<eval> at line number 8...
```

---

 **Tip** It is possible to return a JavaScript array to Java code from a JavaScript function. You need to extract the elements of the native array in Java code, and therefore you need to use JavaScript-specific classes in Java. This approach is not advised. You should convert a JavaScript array to a Java array and return the Java array from a JavaScript function so the Java code deals only with Java classes.

---

## Extending Java Classes Implementing Interfaces

JavaScript lets you extend Java classes and implement Java interfaces in JavaScript. The following sections describe different ways of achieving this.

### Using a Script Object

You need to create a script object that contains implementations of the methods of the interface and pass it to the constructor of the Java interface using the `new` operator. In Java, an interface does not have a constructor and it cannot be used with the `new` operator. However, JavaScript lets you do that.

Let's implement the `Calculator` interface shown in [Listing 10-17](#). The following statement creates a script object that implements the `add()` and `subtract()` methods. Note that the two method's implementations are separated by a comma. The method name and its implementation are separated by a colon.

```
var calFuncObj = {
 add: function (n1, n2) {
```

```
 return n1 + n2;
 },
 subtract: function (n1, n2) {
 return n1 - n2;
 }
};
```

The following statement creates an implementation of the Calculator interface:

```
var calc = new
com.jdojo.script.Calculator(calFuncObj);
```

Now you can start using the calc object as if it were an implementation of the Calculator interface as shown:

```
var n1 = 15;
var n2 = 10;
var result1 = calc.add(n1, n2);
var result2 = calc.subtract(n1, n2);
print(n1 + " + " + n2 + " = " + result1);
print(n1 + " - " + n2 + " = " + result2);
```

---

```
15 + 10 = 25
15 - 10 = 5
```

---

## Using the Anonymous Class-like Syntax

This method uses a syntax that is very similar to the syntax of creating an anonymous class in Java. The following statement implements the Java Calculator interface and creates an instance of that implementation:

```
var calc = new com.jdojo.script.Calculator() {
 add: function (n1, n2) {
 return n1 + n2;
 },
 subtract: function (n1, n2) {
```

```

 return n1 - n2;
 }
} ;

```

Now you can use the `calc` object the same way as you did before.

## Using JavaAdapter Object and Java.extend( ) Function

JavaScript lets you implement multiple interfaces and extend a class using the `JavaAdapter` class. However, the Rhino JavaScript implementation that is bundled with JDK has overridden the implementation of `JavaAdapter`, which allows you to implement only one interface; it does not let you extend a class. The first argument to the `JavaAdapter` constructor is the interface to implement and the second argument is the script object that implements the methods. To use the `JavaAdapter` object in Nashorn, you need to load the Rhino compatibility module. The following snippet of code implements the `Calculator` interface using `JavaAdapter`:

```

// Need to load the compatibility module in Nashorn.
// You do not need to the following load() call in
Rhino.
load("nashorn:mozilla_compat.js");

var calFuncObj = {
 add: function (n1, n2) {
 return n1 + n2;
 },
 subtract: function (n1, n2) {
 return n1 - n2;
 }
};

var calc = new
JavaAdapter(com.jdojo.script.Calculator, calFuncObj);

```

Now you can use the `calc` object the same way as you did before. Nashorn provides a better way that can let you extend a class and implement

multiple interfaces using the `Java.extend()` function. In the `extend()` function, you can pass maximum one class type and multiple interface type. It returns a type that combines all passed in types. You need to use the previously discussed anonymous class-like syntax to provide the implementation for the abstract methods of the new type or override the existing method of the types being extended. The following snippet of code uses the `Java.extend()` method to implement the `Calculator` interface:

```
// Get the Calculator interface type
var CalculatorType
= Java.type("com.jdojo.script.Calculator");

// Get a type that extends the Calculator type
var CalculatorExtender = Java.extend(CalculatorType);

// Implement the abstract methods in
CalculatorExtender
// using an anonymous class like syntax
var calc = new CalculatorExtender() {
 add: function (n1, n2) {
 return n1 + n2;
 },
 subtract: function (n1, n2) {
 return n1 - n2;
 }
};

var n1 = 15;
var n2 = 10;
var result1 = calc.add(n1, n2);
var result2 = calc.subtract(n1, n2);
print(n1 + " + " + n2 + " = " + result1);
print(n1 + " - " + n2 + " = " + result2);
```

---

```
15 + 10 = 25
15 - 10 = 5
```

---

## Using a JavaScript Function

Sometimes a Java interface has only one method. In those cases, you can pass a JavaScript function object in place of an implementation of the interface. The `Runnable` interface in Java has only one method `run()`. When you need to use an instance of the `Runnable` interface in JavaScript, you can pass a JavaScript function object.

The following snippet of code shows how to create a `Thread` object and start it. In the constructor of the `Thread` class, a JavaScript function object `myRunFunc` is passed instead of an instance of the `Runnable` interface.

```
function myRunFunc() {
 print("A thread is running.");
}

// Call Thread(Runnable) constructor and pass the
myRunFunc function object // that
// will serve as an implementation for the run()
method of the Runnable // interface.
var thread = new java.lang.Thread(myRunFunc);
thread.start();
```

---

A thread is running.

---

## Using Lambda Expressions

JavaScript supports anonymous functions that can be used as lambda expressions. The following is an anonymous function that takes a number as an argument and returns its square:

```
function (n) {
 return n * n;
}
```

The following is an example of creating a `Runnable` object in JavaScript using an anonymous function as a lambda expression. The `Runnable` object is

used in the constructor of the Thread class.

```
var Thread = Java.type("java.lang.Thread");

// Create a Thread using a Runnable object. The
Runnable
// object is created using an anonymous function as
a lambda expressions.
var thread = new Thread(function() {
 print("Hello Thread");
});

// Start the thread
thread.start();
```

The Java equivalent of the JavaScript code using a lambda expression is as follows:

```
// Create a Thread using a Runnable object. The
Runnable object is created using a
// lambda expressions.
Thread thread = new Thread(() -> {
 System.out.println("Hello Thread");
});

// Start the thread
thread.start();
```

## Implementing a Script Engine

Implementing a full-blown script engine is no simple task and it is out of scope of this book. This section is meant to give you a brief, but complete, overview of the setup needed to implement a script engine. In this section, you will implement a simple script engine called the JKScript engine. It will evaluate arithmetic expressions with the following rules:

- It will evaluate an arithmetic expression that consists of two operands and one operator.

- The expression may have two number literals, two variables, or one number literal and one variable as operands. The number literals must be in decimal format. Hexadecimal, octal, and binary number literals are not supported.
- The arithmetic operations in an expression are limited to add, subtract, multiply, and divide.
- It will recognize +, -, \*, and / as arithmetic operators.
- The engine will return a `Double` object as the result of the expression.
- Operands in an expression may be passed to the engine using global scope or engine scope bindings of the engine.
- It should allow executing scripts from a `String` object and a `java.io.Reader` object. However, a `Reader` should have only one expression as its contents.
- It will not implement the `Invocable` and `Compilable` interfaces.

Using these rules, some valid expressions for your script engine are as follows:

- `10 + 90`
- `10.7 + 89.0`
- `+10 + +90`
- `num1 + num2`
- `num1 * num2`
- `78.0 / 7.5`

You need to provide implementation for the following two interfaces when you implement a script engine:

- `javax.script.ScriptEngineFactory` interface.
- `javax.script.ScriptEngine` interface

As part of your implementation for the JKScript script engine, you will develop three classes as listed in [Table 10-3](#). In the subsequent sections, you will develop these classes.

**Table 10-3.** *The List of Classes to be Developed for the JKScript Script Engine*

Class	Description
Expression	The Expression class is the heart of your script engine. It performs the work of parsing and evaluating an arithmetic expression. It is used inside the eval() methods of the JKScriptEngine class.
JKScriptEngine	An implementation of the ScriptEngine interface. It extends the AbstractScriptEngine class that implements the ScriptEngine interface. The AbstractScriptEngine class provides a standard implementation for several versions of the eval() methods of the ScriptEngine interface. You need to implement the following two versions of the eval() method: <code>Object eval(String, ScriptContext)</code> <code>Object eval(Reader, ScriptContext)</code>
JKScriptEngineFactory	An implementation of the ScriptEngineFactory interface.

## The Expression Class

The Expression class contains the main logic for parsing and evaluating an arithmetic expression. [Listing 10-23](#) contains the complete code for the Expression class.

**Listing 10-23.** The Expression Class That Parses and Evaluates an Arithmetic Expression

```
// Expression.java
package com.jdojo.script;

import java.util.regex.Matcher;
import java.util.regex.Pattern;
import javax.script.ScriptContext;
```

```
public class Expression {
 private String exp;
 private ScriptContext context;

 private String op1;
 private char op1Sign = '+';

 private String op2;
 private char op2Sign = '+';

 private char operation;

 private boolean parsed;

 public Expression(String exp, ScriptContext
context) {
 if (exp == null || exp.trim().equals(""))
{
 throw new
IllegalArgumentException(this.getErrorString());
 }
 this.exp = exp.trim();

 if (context == null) {
 throw new
IllegalArgumentException("ScriptContext cannot be
null.");
 }
 this.context = context;
 }

 public String getExpression() {
 return exp;
 }

 public ScriptContext getScriptContext() {
 return context;
 }

 public Double eval() {
 // Parse the expression
```

```
 if (!parsed) {
 this.parse();
 this.parsed = true;
 }

 // Extract the values for the operand
 double op1Value
= getOperandValue(op1Sign, op1);
 double op2Value
= getOperandValue(op2Sign, op2);

 // Evaluate the expression
 Double result = null;
 switch (operation) {
 case '+':
 result = op1Value
+ op2Value;
 break;
 case '-':
 result = op1Value
- op2Value;
 break;
 case '*':
 result = op1Value
* op2Value;
 break;
 case '/':
 result = op1Value
/ op2Value;
 break;
 default:
 throw new
RuntimeException("Invalid operation:" + operation);
 }
 return result;
 }

 private double getOperandValue(char sign,
String operand) {
```

```

 // Check if operand is a double
 double value;
 try {
 value
= Double.parseDouble(operand);
 return sign == '-' ? -value
: value;
 }
 catch (NumberFormatException e) {
 // Ignore it. Operand is not in
a format that can be
 // converted to a double value.
 }

 // Check if operand is a bind variable
 Object bindValue
= context.getAttribute(operand);
 if (bindValue == null) {
 throw new RuntimeException(operand
+ " is not found in the script context.");
 }

 if (bindValue instanceof Number) {
 value = ((Number)
bindValue).doubleValue();
 return sign == '-' ? -value
: value;
 }
 else {
 throw new RuntimeException(operand
+ " must be bound to a number.");
 }
 }

 public void parse() {
 // Supported expressiona are of the form
v1 op v2, where v1 and v2
 // are variable names or numbers, and op
could be +, -, *, or /

```

```

 // Prepare the pattern for the expected
expression
 String operandSignPattern = "([+-]?)";
 String operandPattern = "
([\p{Alnum}]\p{Sc}_.]+)";
 String whileSpacePattern = "([\s]*)";
 String operationPattern = "[+*/-]";
 String pattern = "^" + operandSignPattern
+ operandPattern +
 whileSpacePattern
+ operationPattern + whileSpacePattern +
 operandSignPattern
+ operandPattern + "$";

 Pattern p = Pattern.compile(pattern);
 Matcher m = p.matcher(exp);
 if (!m.matches()) {
 // The expression is not in the
expected format
 throw new
IllegalArgumentException(this.getErrorMessage());
 }

 // Get operand-1
 String temp = m.group(1);
 if (temp != null && !temp.equals("")) {
 this.op1Sign = temp.charAt(0);
 }
 this.op1 = m.group(2);

 // Get operation
 temp = m.group(4);
 if (temp != null && !temp.equals("")) {
 this.operation = temp.charAt(0);
 }

 // Get operand-2
 temp = m.group(6);
 if (temp != null && !temp.equals("")) {
 this.op2Sign = temp.charAt(0);
 }
 }
}
```

```

 }
 this.op2 = m.group(7);
 }

 private String getErrorString() {
 return "Invalid expression[" + exp + "]"
+
 "\nSupported expression syntax is:
op1 operation op2" +
 "\n where op1 and op2 can be
a number or a bind variable" +
 " , and operation can be +, -, *, and /.";
 }

 @Override
 public String toString() {
 return "Expression: " + this.exp + ", op1
Sign = " +
 op1Sign + ", op1 = " + op1 + ", op2
Sign = " +
 op2Sign + ", op2 = " + op2 + ", operation =
operation; }
}

```

The Expression class is designed to parse and evaluate an arithmetic expression of the form

`op1 operation op2`

Here, `op1` and `op2` are two operands that can be numbers in decimal format or variables, and `operation` can be `+`, `-`, `*`, or `/`.

The suggested use of the Expression class is

```
Expression exp = new Expression(expression,
scriptContext);
Double value = exp.eval();
```

Let's discuss important components of the Expression class in detail.

## The Instance Variables

Instance variables `exp` and `context` are the expression and the `ScriptContext` to evaluate the expression, respectively. They are passed in to the constructor of this class.

The instance variables `op1` and `op2` represent the first and the second operands in the expression, respectively. The instance variables `op1Sign` and `op2Sign` represent signs, which could be '+' or '-', for the first and the second operands in the expression, respectively. The operands and their signs are populated when the expression is parsed using the `parse()` method.

The instance variable `operation` represents an arithmetic operation (+, -, \*, or /) to be performed on the operands.

The instance variable `parsed` is used to keep track of the fact whether the expression has been parsed or not. The `parse()` method sets it to `true`,

## The Constructor

The constructor accepts an expression and a `ScriptContext` and makes sure that they are not `null` and stores them in the instance variables. It trims the leading and trailing whitespaces from the expression before storing it in the instance variable `exp`.

## The `parse()` Method

The `parse()` method parses the expression into operands and operations. It uses a regular expression to parse the expression text. The regular expression expects the expression text in the following form:

- An optional sign + or - for the first operand
- The first operand that may consist of a combination of alphanumeric letters, currency signs, underscores, and decimal points
- Any number of whitespaces
- An operation sign that may be +, -, \*, or /

- An optional sign + or - for the second operand
- The second operand that may consist of a combination of alphanumeric letters, currency signs, underscores, and decimal points

The regular expression `([+-]?)` will match the optional sign for the operand. The regular expression `([\p{Alnum}\p{Sc}_.]+)` will match an operand, which may be a decimal number or a name. The regular expression `([\s]*)` will match any number of whitespaces. The regular expression `([+*/-])` will match an operation sign. All regular expressions are enclosed in parentheses to form groups, so you can capture the matched parts of the expression.

If an expression matches the regular expression, the `parse()` method stores the matches parts into respective instance variables.

Note that the regular expression to match the operand is not perfect. It will allow several invalid cases, such as an operand having multiple decimal points, etc. However, for this demonstration purpose, it will do.

## **The getOperandValue( ) Method**

This method is used during an expression evaluation after the expression has been parsed. If the operand is a `double` number, it returns the value by applying the sign of the operand. Otherwise, it looks up the name of the operand in the `ScriptContext`. If the name of the operand is not found in the `ScriptContext`, it throws a `RuntimeException`. If the name of the operand is found in the `ScriptContext`, it checks if the value is a number. If the value is a number, it returns the value after applying the sign to the value; otherwise, it throws a `RuntimeException`.

The `getOperandValue()` method does not support operands in hexadecimal, octal, and binary formats. For example, an expression like “`0x2A + 0b1011`” will not be treated as an expression having two operands with `int` literals. It is left to readers to enhance this method to support numeric literals in hexadecimal, octal, and binary formats.

## **The eval( ) Method**

The `eval()` method evaluates the expression and returns a `double` value. First, it parses the expression if it has not already been parsed. Note that multiple calls to the `eval()` parses the expression only once.

It obtains values for both operands, performs the operation, and returns the value of the expression.

## The JKScriptEngine Class

[Listing 10-24](#) contains the implementation for the JKScript script engine. Its `eval(String, ScriptContext)` method contains the main logic.

```
Expression exp = new Expression(script, context);
Object result = exp.eval();
```

It creates an object of the `Expression` class. It calls the `eval()` method of the `Expression` object that evaluates the expression and returns the result.

The `eval(Reader, ScriptContext)` method reads all lines from the `Reader`, concatenates them, and passes the resulting `String` to the `eval(String, ScriptContext)` method to evaluate the expression. Note that a `Reader` must have only one expression. An expression may be split into multiple lines. Whitespaces in the `Reader` are ignored.

[Listing 10-24](#). An Implementation of JKScript Script Engine

```
// JKScriptEngine.java
package com.jdojo.script;

import java.io.BufferedReader;
import java.io.IOException;
import java.io.Reader;
import javax.script.AbstractScriptEngine;
import javax.script.Bindings;
import javax.script.ScriptContext;
import javax.script.ScriptEngineFactory;
import javax.script.ScriptException;
import javax.script.SimpleBindings;
```

```
public class JKScriptEngine extends
AbstractScriptEngine {
 private ScriptEngineFactory factory;

 public JKScriptEngine(ScriptEngineFactory
factory) {
 this.factory = factory;
 }

 @Override
 public Object eval(String script, ScriptContext
context)
 throws ScriptException {
 try {
 Expression exp = new
Expression(script, context);
 Object result = exp.eval();
 return result;
 }
 catch (Exception e) {
 throw new
ScriptException(e.getMessage());
 }
 }

 @Override
 public Object eval(Reader reader, ScriptContext
context)
 throws ScriptException {
 // Read all lines from the Reader
 BufferedReader br = new
BufferedReader(reader);

 String script = "";
 String str = null;
 try {
 while ((str = br.readLine()) !=
null) {
 script = script + str;
 }
 }
 catch (IOException e) {
 throw new
ScriptException("Error reading script from reader");
 }
 }
}
```

```

 }
 catch (IOException e) {
 throw new ScriptException(e);
 }

 // Use the String version of eval()
 return eval(script, context);
 }

 @Override
 public Bindings createBindings() {
 return new SimpleBindings();
 }

 @Override
 public ScriptEngineFactory getFactory() {
 return factory;
 }
}

```

## The JKScriptEngineFactory Class

[Listing 10-25](#) contains the implementation for the `ScriptEngineFactory` interface for the `JKScript` engine. Some of its methods return a “Not Implemented” string because you do not support features exposed by those methods. The code in the `JKScriptEngineFactory` class is self-explanatory. An instance of the `JKScript` engine may be obtained using `ScriptEngineManager` with a name of `jks`, `JKScript`, or `jkscript` as coded in the `getNames()` method.

**[Listing 10-25.](#)** A `ScriptEngineFactory` Implementation for `JKScript` Script Engine

```

// JKScriptEngineFactory.java
package com.jdojo.script;

import java.util.ArrayList;
import java.util.Arrays;

```

```
import java.util.Collections;
import java.util.List;
import javax.script.ScriptEngine;
import javax.script.ScriptEngineFactory;

public class JKScriptEngineFactory implements
ScriptEngineFactory {
 @Override
 public String getEngineName() {
 return "JKScript Engine";
 }

 @Override
 public String getEngineVersion() {
 return "1.0";
 }

 @Override
 public List<String> getExtensions() {
 return
Collections.unmodifiableList(Arrays.asList("jks"));
 }

 @Override
 public List<String> getMimeTypes() {
 return Collections.unmodifiableList(
 Arrays.asList("text/jkscript")
);
 }

 @Override
 public List<String> getNames() {
 List<String> names = new ArrayList<>();
 names.add("jks");
 names.add("JKScript");
 names.add("jkscript");
 return
Collections.unmodifiableList(names);
 }
}
```

```
 @Override
 public String getLanguageName() {
 return "JKScript";
 }

 @Override
 public String getLanguageVersion() {
 return "1.0";
 }

 @Override
 public Object getParameter(String key) {
 switch (key) {
 case ScriptEngine.ENGINE:
 return getEngineName();
 case ScriptEngine.ENGINE_VERSION:
 return getEngineVersion();
 case ScriptEngine.NAME:
 return getEngineName();
 case ScriptEngine.LANGUAGE:
 return getLanguageName();
 case
ScriptEngine.LANGUAGE_VERSION:
 return getLanguageVersion();
 case "THREADING":
 return "MULTITHREADED";
 default:
 return null;
 }
 }

 @Override
 public String getMethodCallSyntax(String obj,
String m, String[] p) {
 return "Not implemented";
 }

 @Override
 public String getOutputStatement(String
toDisplay) {
```

```

 return "Not implemented";
 }

@Override
public String getProgram(String[] statements) {
 return "Not implemented";
}

@Override
public ScriptEngine getScriptEngine() {
 return new JKScriptEngine(this);
}
}

```

## Preparing for Deployment

Before you package the classes for the JKScript script engine, you need to perform one more step. Create a directory named META-INF. Under the META-INF directory, create a subdirectory named services. In the services directory, create a text file named javax.script.ScriptEngineFactory. Note the file name must be the way it is mentioned and it should not have any extension such as .txt.

Edit the javax.script.ScriptEngineFactory file and enter the contents as shown in [Listing 10-26](#). The first line in the file is a comment that starts with a # sign. The second line is the fully qualified name of the JKScript script engine factory class.

***Listing 10-26.*** Contents of the File Named javax.script.ScriptEngineFactory

```
#The factory class for the JKScript engine
com.jdojo.script.JKScriptEngineFactory
```

Why do you have to perform this step? You will package the javax.script.ScriptEngineFactory file along with the class files for the JKScript engine in a JAR file. The discovery mechanism for script engines searches for this file in the META-INF/services directory in all JAR files in the CLASSPATH. If this file is found, its contents are read and all script

factory classes are instantiated and included in the list of script engine factory. Therefore, this step is necessary to make your JKScript engine auto-discoverable by the ScriptEngineManager.

## Packaging the JKScript Files

You need to package all files for the JKScript script engine in a JAR file named `jkscript.jar`. You can name the file anything else as well. The following is the list of files with their directories. Note that an empty `manifest.mf` file will work in this case.

- `com\jdojo\script\Expression.class`
- `com\jdojo\script\JKScriptEngine.class`
- `com\jdojo\script\JKScriptEngineFactory.class`
- `META-INF\manifest.mf`
- `META-INF\services\javax.script.ScriptEngineFactory`

You can create the `jkscript.jar` file manually by copying all of the above listed files, except the `manifest.mf` file, in a directory, say `C:\build` on Windows, and then executing the following command from the `C:\build` directory:

```
C:\build> jar cf jkscript.jar com\jdojo\script*.class
META-INF\services*.*
```

## Using the JKScript Script Engine

It is time to test your JKScript script engine. The first and most important step is to include the `jkscript.jar`, which you created the previous section, to the application CLASSPATH. Once you have included the `jkscript.jar` file in your application CLASSPATH, using JKScript is no different from using any other script engines.

The following snippet of code creates an instance of the JKScript script

engine using JKScript as its name. You can also use its other names, jks and jkscript.

```
// Create the JKScript engine
ScriptEngineManager manager = new
ScriptEngineManager();
ScriptEngine engine
= manager.getEngineByName("JKScript");
if (engine == null) {
 System.out.println("JKScript engine is not
available. ");
 System.out.println("Add jkscript.jar to
CLASSPATH.");
}
else {
 // Evaluate your JKScript
}
```

[Listing 10-27](#) contains a program that uses the JKScript script engine to evaluate different types of expressions. Expressions stored in String objects and files are executed. Some expressions use numeric literals and some bind variables whose values are passed in bindings in engine scope and global scope of the default ScriptContext of the engine. Note that this program expects a file named jkscript.txt in the current directory that contains an arithmetic expression that can be understood by the JKScript script engine. If the script file does not exist, the program prints a message on the standard output with the path of the expected script file. You may get a different output in the last line.

### **[Listing 10-27](#). Using the JKScript Script Engine**

```
// JKScriptTest.java
package com.jdojo.script;

import java.io.FileNotFoundException;
import java.io.IOException;
import java.io.Reader;
import java.nio.file.Files;
import java.nio.file.Path;
import java.nio.file.Paths;
```

```
import javax.script.ScriptEngine;
import javax.script.ScriptEngineManager;
import javax.script.ScriptException;

public class JKScriptTest {
 public static void main(String[] args) throws
FileNotFoundException, IOException {
 // Create JKScript engine
 ScriptEngineManager manager = new
ScriptEngineManager();
 ScriptEngine engine
= manager.getEngineByName("JKScript");
 if (engine == null) {
 System.out.println("JKScript
engine is not available. ");
 System.out.println("Add
jkscript.jar to CLASSPATH.");
 return;
 }

 // Test scripts as String
 testString(manager, engine);

 // Test scripts as a Reader
 testReader(manager, engine);
 }

 public static void
testString(ScriptEngineManager manager,
 ScriptEngine
engine) {
 try {
 // Use simple expressions with
numeric literals
 String script = "12.8 + 15.2";
 Object result
= engine.eval(script);
 System.out.println(script + " = "
+ result);
 }
 }
}
```

```
 script = "-90.0 - -10.5";
 result = engine.eval(script);
 System.out.println(script + " = "
+ result);

 script = "5 * 12";
 result = engine.eval(script);
 System.out.println(script + " = "
+ result);

 script = "56.0 / -7.0";
 result = engine.eval(script);
 System.out.println(script + " = "
+ result);

 // Use global scope bindings
variables
manager.put("num1", 10.0);
manager.put("num2", 20.0);
script = "num1 + num2";
result = engine.eval(script);
System.out.println(script + " = "
+ result);

 // Use global and engine scopes
bindings. num1 from
 // engine scope and num2 from
global scope will be used.
engine.put("num1", 70.0);
script = "num1 + num2";
result = engine.eval(script);
System.out.println(script + " = "
+ result);

 // Try mixture of number literal
and bindings. num1 from
 // the engine scope bindings will
be used
script = "10 + num1";
result = engine.eval(script);
```

```
 System.out.println(script + " = "
+ result);
 }
 catch (ScriptException e) {
 e.printStackTrace();
 }
}

public static void
testReader(ScriptEngineManager manager,
 ScriptEngine
engine) {
 try {
 Path scriptPath
= Paths.get("jkscript.txt").toAbsolutePath();
 if (!Files.exists(scriptPath)) {
 System.out.println(scriptPath
+
 " script file does not
exist.");
 return;
 }

 try(Reader reader
= Files.newBufferedReader(scriptPath);) {
 Object result
= engine.eval(reader);
 System.out.println("Result
of " +
 scriptPath + " = "
+ result);
 }
 }
 catch(ScriptException | IOException e) {
 e.printStackTrace();
 }
}
```

---

```
12.8 + 15.2 = 28.0
-90.0 - -10.5 = -79.5
5 * 12 = 60.0
56.0 / -7.0 = -8.0
num1 + num2 = 30.0
num1 + num2 = 90.0
10 + num1 = 80.0
Result of C:\jkscript.txt = 190.0
```

---

## The jrunscript Command-line Shell

The JDK includes a command-line script shell called `jrunscript`. It is script-engine-independent and it can be used to evaluate any script including your JKScript. You can find this shell in the `JAVA_HOME\bin` directory, where `JAVA_HOME` is the directory in which you have installed the JDK. IN this section, I will discuss how to use the `jrunscript` shell to evaluate script using different script engines.

## The Syntax

The syntax to use the `jrunscript` shell is

```
jrunscript [options] [arguments]
```

Both [options] and [arguments] are optional. However, if both are specified, [options] must precede [arguments]. [Table 10-4](#) lists all available options for the `jrunscript` shell.

**Table 10-4.** The List of Options for the `jrunscript` shell

Option	Description
<code>-classpath &lt;path&gt;</code>	Used to specify the CLASSPATH.
<code>-cp &lt;path&gt;</code>	The same as the option <code>-classpath</code> .
<code>-D&lt;name&gt;=&lt;value&gt;</code>	Sets a system property for Java runtime.
	Passes the specified <code>&lt;flag&gt;</code> to the JVM on

<code>-J&lt;flag&gt;</code>	which <code>jrunscript</code> is run.
<code>-l &lt;language&gt;</code>	Allows you to specify a scripting language that you want to use. By default, Rhino JavaScript is used in JDK 6 and JDK 7. In JDK 8, Nahsorn is the default. If you want to use a language other than JavaScript, say JKScript, you will need to use <code>-cp</code> or <code>-classpath</code> option to include the JAR file that contains the script engine.
<code>-e &lt;script&gt;</code>	Executes the specified script. Typically, it is used to execute a one-liner script.
<code>-encoding &lt;encoding&gt;</code>	Specifies the character encoding used while reading script files.
<code>-f &lt;script-file&gt;</code>	Evaluates the specified <code>script-file</code> in batch mode.
<code>-f -</code>	Allows you to evaluate scripts in interactive mode. It reads scripts from the standard input and executes.
<code>-help</code>	Outputs the help message and exits.
<code>-?</code>	Outputs the help message and exits.
<code>-q</code>	Lists all available script engines and exits. Note that script engines other than JavaScript are available only when you include their JAR files using the <code>-cp</code> or <code>-classpath</code> option.

The [arguments] part of the command is a list of arguments, which are interpreted depending on whether the `-e` or `-f` option is used or not. Arguments that are passed to the script are available inside the script as an array named `arguments`. [Table 10-5](#) lists interpretations of the arguments when they are used with the `-e` or `-f` option.

**Table 10-5.** Interpretation of [arguments] in Combination of the `-e` or `-f` Option

<b>-e or -f option</b>	<b>Arguments</b>	<b>Interpretation</b>
Yes	Yes	If <code>-e</code> or <code>-f</code> option is specified, all arguments are passed to the script as script arguments.
No	Yes	If arguments are specified with no <code>-e</code> or <code>-f</code> option, the first argument is considered a script file to run. The rest of the arguments,

No	No	if any, are passed to the script as script arguments. If arguments and <code>-e</code> or <code>-f</code> option are missing, the shell works in interactive mode, where the shell executes the script entered in the standard input interactively.
----	----	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

---

## Execution Modes of the Shell

You can use the `jrunscript` shell in the following three modes:

- One-liner mode
- Batch mode
- Interactive mode

### One-liner Mode

The `-e` option lets you use the shell in one-liner mode. It executes one line of script. The following command prints a message on the standard output using Rhino JavaScript engine:

```
C:\>jrunscript -e "print('Hello Rhino Nashorn!')"
Hello Rhino Nashorn!
```

In one-liner mode, the entire script must be entered on one line. However, a one-liner script may contain multiple statements.

### Batch Mode

The `-f` option lets you use the shell in batch mode. It executes a script file. Consider a script file named `nashorntest.js` as shown in [Listing 10-28](#).

***Listing 10-28.*** A `nashorntest.js` Script File Written in Nashorn JavaScript

```
// Print a message
print("Hello Nashorn!");
```

```
// Add two integers and print the value
var x = 10;
var y = 20;
var z = x + y;
print(x + " + " + y + " = " + z);
```

The following command runs the script in the `nashorntest.js` file in a batch mode. You may need to specify the full path of the `nashorntest.js` file if it is not in the current directory.

```
C:\>jrunscript -f nashorntest.js
Hello Nashorn!
10 + 20 = 30
```

## Interactive Mode

In interactive mode, the shell reads and evaluates script as it is entered on the standard input. There are two ways to use the shell in interactive mode:

- Using no `-e` or `-f` option and no arguments
- Using “`-f -`” option

The following command uses no options and arguments to enter into interactive mode. Pressing the Enter key makes the shell evaluate the entered script.

```
c:\>jrunscript
nashorn> print("Hello Interactive mode!");
Hello Interactive mode!
nashorn> var num = 190;
nashorn> print("num is " + num);
num is 190
nashorn> exit();
```

## Listing Available Script Engines

The `jrunscript` shell is a scripting-language-neutral shell. You can use it to run scripts in any scripting language for which the script engine JAR files are available. By default, the Nashorn JavaScript engine is available. To list all available script engines, you use the `-q` option as shown:

```
c:\>jrunscript -q
Language ECMAScript ECMA - 262 Edition 5.1
implementation "Oracle Nashorn" 1.8.0_05
```

Please refer to the next section on how to add a script engine to the shell.

## Adding a Script Engine to the Shell

How do you make script engines other than the Nashorn JavaScript engine available to the shell? To make a script engine available to the shell, you need to provide the list of JAR files for the script engine using the `-classpath` or `-cp` option. The following command makes `JKScript` and `jython` script engines available to the shell by providing the list of JAR files for `Jython` and `JKScript` engines. Note that the Nashorn engine is always available by default. The command uses the `-q` option to list all available script engines.

```
c:\> jrunscript -cp C:\jython-standalone-
2.5.3.jar;C:\jkscript.jar -q
Language python 2.5 implementation "jython" 2.5.3
Language ECMAScript ECMA - 262 Edition 5.1
implementation "Oracle Nashorn" 1.8.0_05
Language JKScript 1.0 implementation "JKScript Engine"
1.0
```

---

**Tip** The `CLASSPATH` set using the `-cp` or `-classpath` option is effective only for the command in which the option is used. If you run the shell in interactive mode, the `CLASSPATH` is effective for the entire interactive session.

---

## Using Other Script Engines

You can use other script engines by specifying the script engine name with the `-l` option. You must use the `-cp` or `-classpath` option to specify the JAR files for the script engine, so the shell has the access to the engine. The following command uses the JKScript engine in interactive mode:

```
C:\>jrunscript -cp C:\jkscript.jar -l JKScript
jks> 10 + 30
40.0
jks> +89.7 + -9.7
80.0
jks>
```

## Passing Arguments to Scripts

The `jrunscript` shell allows passing arguments to scripts. The arguments are made available to the script in an array named `arguments`. You can access the `arguments` array inside the script in the language-specific way. The following command passes three arguments of 10, 20, and 30, and prints the value of the first argument.

```
C:\>jrunscript -e "print('First argument is '
+ arguments[0])" 10 20 30
First argument is 10
```

Consider the Nashorn JavaScript file `nashornargstest.js` shown in [Listing 10-29](#), which prints the number of arguments and their values that are passed to the script.

***Listing 10-29.*** A `nashornargstest.js` File Written in Nashorn JavaScript to Print Command-Line Arguments

```
// nashornargstest.js
print("Number of arguments:" + arguments.length);
print("Arguments are ");
for(var i = 0; i < arguments.length; i++) {
 print(arguments[i]);
}
```

The following commands run the nashornargstest.js file using the jrunscript shell.

```
C:\>jrunscript nashornargstest.js
```

```
Number of arguments:0
```

```
Arguments are
```

```
C:\>jrunscript nashornargstest.js 10 20 30
```

```
Number of arguments:3
```

```
Arguments are
```

```
10
```

```
20
```

```
30
```

If you want to run the nashornargstest.js file from a Java application, you need to pass an argument named arguments to the engine. The argument named arguments is passed to the script by the shell automatically, not by a Java application.

## The jjs Command-Line Tool

To work with the Nashorn script engine, JDK 8 includes a new command-line tool called jjs. The command is located in the `JDK_HOME\bin` directory. The command can be used to run scripts in files or scripts entered on the command-line in interactive mode. It can also be used to execute shell scripts. The syntax to invoke the command is

```
jjs <options> <script-files> <-- arguments>
```

Here,

- <options> are options for the jjs command. Two options are separated by spaces.
- <script-files> is the list of script files to be interpreted by the Nashorn engine.
- <-- arguments> is the list of arguments to be passed to the scripts or the interactive shell as arguments. Arguments

are specified after double hyphens and they can be accessed using the `arguments` property.

**Table 10-6** lists some of the commonly used options for the `jjs` tool. To print the list of all options, run the tool with the `-xhelp` option, like so:

```
jjs -xhelp
```

**Table 10-6.** Options for the `jjs` Command-line Tool

Option	Description
<code>-classpath &lt;path&gt;</code> or <code>-cp &lt;path&gt;</code>	Used to specify the CLASSPATH.
<code>-D&lt;name&gt;=&lt;value&gt;</code>	Sets a system property for Java runtime. This option can be repeated to set multiple runtime properties values.
<code>-J&lt;flag&gt;</code>	Passes the specified <code>&lt;flag&gt;</code> to the JVM.
<code>-scripting</code>	Enabled shell scripting features.
<code>-strict</code>	Enables strict mode where the scripts are executed using the ECMAScript Edition 5.1 standards.
<code>-fx</code>	Launches the script as a JavaFX application.
<code>-doe</code> or <code>-dump-on-error</code>	When this is specified, a full stack trace of the error is printed. By default, a brief error message is printed.
<code>-v</code> or <code>-version</code>	Prints the version of the Nashorn engine.
<code>-fv</code> or <code>-fullversion</code>	Prints the full version of the Nashorn engine.
<code>-t=&lt;timezone&gt;</code> or <code>-timezone=&lt;timezone&gt;</code>	Sets the time zone for the script execution. The default time zone is Chicago/America.
<code>-help</code> or <code>-h</code>	Outputs the help message and exits.
<code>-xhelp</code>	Prints extended help.

If you run `jjs` without specifying any options or script files, it is run in interactive mode. The script is interpreted as you enter it. Strings in Nashorn can be enclosed in single quotes or double quotes. The following are some examples of using the `jjs` tool in interactive mode. It is assumed that you have included the path to the `jjs` tool in the PATH environment variable on your machine. If you have not done so, you can replace `jjs` with `JDK_HOME\bin\jjs` in the following command. You can execute the `quit()` or `exit()` function to exit the `jjs` tool.

```
c:\>jjs
jjs> "Hello Nashorn"
Hello Nashorn
jjs> "Hello".toLowerCase();
hello
jjs> var list = [1, 2, 3, 4, 5]
jjs> var sum = 0;
jjs> for each (x in list) { sum = sum + x};
15
jjs> quit()

c:\>
```

The following is an example of passing arguments to the `jjs` tool. The first five natural numbers are passed to the `jjs` tool as arguments and they are accessed using the `arguments` property later. Note that you must add a space between the two hyphens and the first argument.

```
c:\>jjs -- 1 2 3 4 5
jjs> for each (x in arguments) print(x)
1
2
3
4
5
jjs> quit()

c:\>
```

Consider the script in [Listing 10-30](#). The script has been saved in a file named `stream.js`. The script works on a list of integers. The list can be passed to the script as the command-line arguments. If the list is not passed as arguments, it uses the first five natural numbers as the list. It computes the sum of the squares of odd integers in the list. It prints the list and the sum.

**[Listing 10-30](#).** A Script to Compute the Sum of the Squares of Odd Integers in a List

```
// stream.js
```

```

var list;
if (arguments.length == 0) {
 list = [1, 2, 3, 4, 5];
}
else {
 list = arguments;
}

print("List of numbers: " + list);

var sumOfSquaredOdds = list.filter(function(n) {return
n % 2 == 1; })
 .map(function(n) {return n *
n; })
 .reduce(function(sum, n) {return
sum + n; }, 0);

print("Sum of the squares of odd numbers: "
+ sumOfSquaredOdds);

```

Using the `jjs` tool, you can run the script in the `stream.js` file as follows. It is assumed that the `stream.js` file is in the current directory. Otherwise, you need to specify the full path of the file.

```

c:\>jjs stream.js
List of numbers: 1,2,3,4,5
Sum of the squares of odd numbers: 35

c:\>jjs stream.js -- 10 11 12 13 14 15
List of numbers: 10,11,12,13,14,15
Sum of the squares of odd numbers: 515

c:\>

```

The `jjs` tool can be invoked in scripting mode that allows you to run shell commands. You can start the `jjs` tool in scripting mode using the `-scripting` option. The shell commands are enclosed in back quotes. The following are examples of using the `date` and `ls` shell commands using the `jjs` tool in scripting mode:

```
c:\>jjs -scripting
jjs> `date`
Mon Jul 14 22:42:26 CDT 2014

stream.js
test.js

jjs> quit()

c:\>
```

You can capture the output of the shell command in a variable. Scripting mode allows for expression substitution in strings enclosed in double quotes. Note that the expression substitution feature is not available in strings enclosed in single quotes. The expression is enclosed in  `${expression}`. The following commands capture the value of the `date` shell command in a variable and embed the date value in a string using the expression substitution. Note that in the example, the expression substitution does not work when the string is enclosed in single quotes:

```
c:\>jjs -scripting
jjs> var today = `date`
jjs> "Today is ${today}"
Today is Mon Jul 14 22:48:26 CDT 2014

jjs> 'Today is ${today}'
Today is ${today}
jjs> quit()

c:\>
```

You can also execute the shell script stored in a file using the scripting mode, like so:

```
C:\> jjs -scripting myscript.js
```

The `jjs` tool supports heredocs in script files that can be run in scripting mode. A heredoc is also known as a here document, here-string, or here-script. It is a multiline string where whitespaces are preserved. A heredoc starts with a double angle brackets (`<<`) and a delimiting identifier. Typically, `EOF` or `END` is used as the delimiting identifier. However, you can use any other identifier that

is not used as an identifier elsewhere in the script. The multiline string starts at the end line. The string is ended with the same delimiting identifier. The following is an example of using a heredoc in Nashorn:

```
var str = <<EOF
This is a multi-line string using the heredoc syntax.
Bye Heredoc!
EOF
```

[Listing 10-31](#) contains the script that uses a heredoc in Nashorn. The \$ARG property is defined only in scripting mode and its value is the arguments passed to the script using the jjs tool.

**[Listing 10-31](#).** The Contents of the heredoc.js File That Using Heredoc Style a Multiline String

```
// heredoc.js
var str = <<EOF
This is a multiline string.
Number of arguments passed to this
script is ${$ARG.length}
Arguments are ${$ARG}

Bye Heredoc!
EOF

print(str);
```

You can execute the heredoc.js script file as shown:

```
c:\> jjs -scripting heredoc.js
This is a multi-line string.
Number of arguments passed to this
script is 0
Arguments are

Bye Heredoc!
```

```
c:\> jjs -scripting heredoc.js -- Kishori Sharan
This is a multi-line string.
```

```
Number of arguments passed to this
script is 2
Arguments are Kishori,Sharan
```

Bye Heredoc!

For more information on shell scripting in Nashorn, please refer to  
<http://docs.oracle.com/javase/8/docs/technotes/guides/>.

## JavaFX in Nashorn

The `jjs` command-line tool for Nashorn lets you use JavaFX from scripts. You need to create a `start()` function in JavaScript as you do to launch a JavaFX application in Java. Nashorn will take care of the rest. Optionally, you can also declare `init()` and `stop()` functions for your JavaFX application. You can use the fully qualified name of the JavaFX classes or import them using the `Java.type()` function. The following snippet of code shows the two approaches to create a `Label` in JavaFX:

```
// Using the fully qualified name of the Label class
var msg = new javafx.scene.control.Label("Hello
JavaFX!") ;

// Using Java.type() function
var Label = Java.type("javafx.scene.control.Label") ;
var msg = new Label("Hello JavaFX!") ;
```

It may be cumbersome to type the fully qualified names of all JavaFX classes. Aren't scripts supposed to be shorter than Java code? Nashorn has a way to make your JavaFX script shorter. It includes several script files that import the JavaFX types as their simple names. You will need to load those script files using the `load()` method, and then you can use the simple names of JavaFX classes in your script. Nashorn includes a `fx:controls.js` script file that imports all JavaFX control classes as their simple class names. [Table 10-7](#) contains the list of script files and the classes/packages they import.

**Table 10-7.** *The List of Nashorn Script Files and the Classes/Packages They Import*

Nashorn Script File	Imported Classes/Packages
	javafx.stage.Stage
	javafx.scene.Scene
	javafx.scene.Group
fx:base.js	javafx.beans
	javafx.collections
	javafx.events
	javafx.util
	javafx.animation
	javafx.application
	javafx.concurrent
	javafx.css
fx:graphics.js	javafx.geometry
	javafx.print
	javafx.scene
	javafx.stage
	javafx.scene.chart
fx:controls.js	javafx.scene.control
fx:fxml.js	javafx.fxml
fx:web.js	javafx.scene.web
fx:media.js	javafx.scene.media
fx:swing.js	javafx.embed.swing
fx:swt.js	javafx.embed.swt

The following snippet of code shows how to load this script file and use the simple name of the `javafx.scene.control.Label` class:

```
// Import all JavaFX control class names
load("fx:controls.js")

// Use the simple name of the Label control
var msg = new Label("Hello JavaFX!");
```

[Listing 10-32](#) contains the code for a JavaFX application. Save the code in a file named `hellojavafx.js`.

***Listing 10-32.*** A JavaFX Application Using Nashorn Script

```
// hellojavafx.js

// Load Nashorn predefined scripts to import JavaFX
specific classes and packages
load("fx:base.js")
load("fx:controls.js")
load("fx:graphics.js")

// Define the start() method of the JavaFX application
// class
function start(stage) {
 var nameLbl = new Label("Enter your name:");
 var nameFld = new TextField();
 var msg = new Label();
 msg.setStyle("-fx-text-fill: blue;");

 // Create buttons
 var sayHelloBtn = new Button("Say Hello");
 var exitBtn = new Button("Exit");

 // Add the event handler for the Say Hello
button
 sayHelloBtn.onAction = function() {
 var name = nameFld.getText();
 if (name.trim().length() > 0) {
 msg.text = "Hello " + name;
 }
 else {
 msg.text = "Hello there";
 }
 };

 // Add the event handler for the Exit button
 exitBtn.onAction = function() {
 Platform.exit();
 };

 // Create the root node
```

```

var root = new VBox();

 // Set the vertical spacing between children to
5px
 root.spacing = 5;

 // Add children to the root node
 root.children.addAll(nameLbl, nameFld, msg,
sayHelloBtn, exitBtn);

 // Set the scene and title for the stage
 stage.scene = new Scene(root, 350, 150);
 stage.title = "Hello JavaFX from Nashorn";

 // Show the stage
 stage.show();
}

```

This is the Nashorn script equivalent of the JavaFX application defined as the `ImprovedHelloFXApp` Java class in [Chapter 9](#). The Nashorn version of the code is little simpler to write. In the script, you are able to call the methods of the Java classes using their properties. For example, instead of writing

```
root.setSpacing(5);
```

in Java, you can write

```
root.spacing = 5;
```

in Nashorn JavaScript.

Adding the event handler for buttons is easier. You can set an anonymous function as the event handler for the buttons. Note that you are able to use `onAction` property to set the event handler rather than calling the `setOnAction()` method of the `Button` class. The following snippet of code shows how to set the `ActionEvent` handler for a button:


```

// Add the event handler for the Say Hello button
sayHelloBtn.onAction = function() {
 // Script code to handle the ActionEvent goes
here
};

```

To run a JavaFX application, you need to start the `jjs` tool with a `-fx` option. The following command starts the JavaFX application that displays a window as shown in [Figure 10-7](#). Enter a name and click the `Say Hello` button to see a message. Click the `Exit` button to exit the application.

```
C:\> jjs -fx hellojavafx.js
```

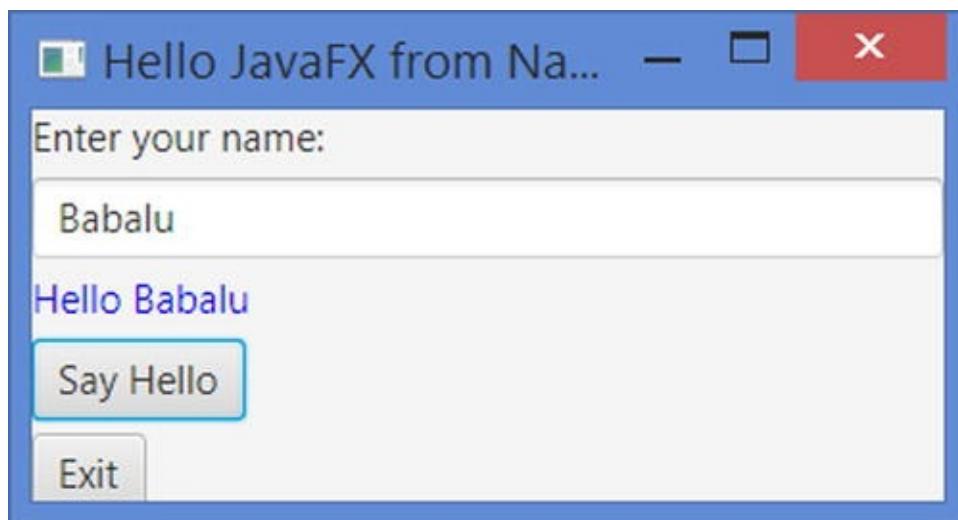

[Figure 10-7](#). A JavaFX window created using Nashorn script


The `jjs` command-line tool makes it really easy to work with JavaFX applications. You can display a message in a JavaFX window in just one line of code. Nashorn creates a global variable named `$STAGE` that is the reference of the primary stage of the JavaFX application. Note that the `$STAGE` global variable is available in the script only when you use the `jjs` tool with the `-fx` option. [Listing 10-33](#) shows the code for the simplest JavaFX application that displays a `Label` with a message in a JavaFX window. Save it in a file named `simplestfxapp.js`. Note that you do not have to create any function for the `start()` method any more. You do not need to even call the `show()` method on the `$STAGE` variable. Nashorn will show the stage automatically.

#### [Listing 10-33](#). Using the `$STAGE` Global Variable in Nashorn Script

```
// simplestfxapp.js

$STAGE.scene = new javafx.scene.Scene(new
javafx.scene.control.Label("Hello JavaFX Scripting"));
```

The following command will run the simplest JavaFX application that displays a window as shown in [Figure 10-8](#).

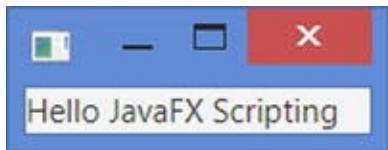

[Figure 10-8](#). The simplest JavaFX application using Nashorn script

## Summary

A scripting language is a programming language that provides you the ability to write scripts that are evaluated (or interpreted) by a runtime environment called a script engine (or an interpreter). A script is a sequence of characters that is written using the syntax of a scripting language and used as the source for a program executed by an interpreter. The Java Scripting API allows you to execute scripts written in any scripting language that can be compiled to Java bytecode from the Java application. JDK 6 and 7 shipped with a script engine called Rhino JavaScript engine. In JDK 8, the Rhino JavaScript engine has been replaced with a script engine called Nashorn.

Scripts are executed using a script engine that is an instance of the `ScriptEngine` interface. The implementer of the `ScriptEngine` interface also provides an implementation of the `ScriptEngineFactory` interface whose job is to create instances of the script engine and provide details about the script engine. The `ScriptEngineManager` class provides a discovery and instantiation mechanism for script engines. A `ScriptManager` maintains a mapping of key-value pairs as an instance of the `Bindings` interface that is shared by all script engines that it creates.

You can execute scripts contained in a `String` or a `Reader`. The `eval()` method of the `ScriptEngine` is used execute the script. You can pass parameters to the script using the `ScriptContext`. Parameters passed can be local to a script engine, local to a script execution, or global to all script engines created by a `ScriptManager`. Using the Java Scripting API, you can also execute procedures and functions written in scripting languages. You can also pre-compile the scripts, if the script engine supports it, and execute the scripts repeated from Java to get a better performance.

You can implement your script engine using the Java Scripting API. You will need to provide the implementation for the `ScriptEngine` and the `ScriptEngineFactory` interfaces. You need to package your script engine code in a certain way so the engine can be discovered by the `ScriptManager` at runtime.

The Java 8 ships two command-line tools called `jrunscript` and `jjs`. They are located in the `JDK_HOME\bin` directory. They are used to run scripts on a command line. The `jrunscript` tool is script-language-neutral; it can be used to execute scripts in any script language such as Nashorn, JRuby, groovy, etc. The `jjs` tool is used to run Nashorn scripts and its extensions; you can run shell commands, scripts, and Java application using the `jjs` tool.

# Index

---

## ■ A

Abstract Window Toolkit (AWT)  
AccessControlException  
Action Interface  
Adaptive Server Anywhere database  
addRow() method  
Applets  
    appletviewer command  
        debug option  
        encoding option  
        Google Chrome browser  
        Jjavaoptions option  
        syntax  
    codebase attribute  
    definition  
    deployment  
        <applet> tag  
        HTML document creation  
        JAR files  
        testing  
    development process  
    event-dispatching thread  
    getAppletContext() method  
    getAppletInfo() method  
    getAudioClip() method  
    getImage() method  
        getDocumentBase() method  
        HTML content  
        URL  
    getParameterInfo() method  
    getParameter() method  
    HelloApplet class  
    HTML and JavaScript  
    JApplet class  
    Java code trusted  
        codebase option  
        configuration file  
        file/directory path format  
        JVM option  
        partial error  
        policy files  
        SecurityTest class  
    Java Plug-in  
        configuration  
        installation

Java Control Panel program  
life cycle  
  destroy() method  
  init() method  
  start() method  
  stop() method  
list of attributes, <applet> tag  
MAYSCRIPT attribute  
package  
paint() method  
<param> tag  
security restrictions for  
signed document  
  CA  
  HTML file creation  
  JAR file  
  jarsigner command  
  Java Plug-in setup  
  keytool command  
  manifest.mf file creation  
  ReadUserHomeApplet class  
view  
Asynchronous socket channel  
  client applications  
    Attachment class  
    ReadWriteHandler class  
  CompletionHandler class  
  server application  
    AsyncEchoServerSocket class  
    Attachment class  
    CompletionHandler class  
    ReadWriteHandler class  
Auto-commit mode

**B**  
BatchUpdateException command  
Binary Large Object (Blob)  
Bootstrap class loader  
Borders  
  Bevel Border  
  Compound Border  
  Empty Border  
  Etched Border  
  Line Border  
  Matte Border  
  Soft Bevel Border  
  Titled Border  
ButtonGroup

**C**  
CachedRowSet

- acceptChanges() method
- execute() method
- paging
- populate() method
- size() method
- updation and deletion
- CallableStatement interface
  - Adaptive Server Anywhere
  - DB2
  - INOUT parameters
  - IN parameters
  - Java DB
  - MySQL
  - Oracle
  - OUT parameters
  - return parameter
  - SQL server
  - stored procedure
- Certification Authority (CA)
- Character Large Object (Clob)
- Clean message
- close() method
- Color Chooser
- commit() method
- Compilable interface
- compile() method
- ComponentEvent
- ComponentListener
- Connected rowset
- ConnectionPoolDataSource interface
- createBindings() method
- createJdbcRowSet() method
- Custom ScriptContext

## ■ D

- Data control language (DCL) statement
- Data definition language (DDL) statement
- Datagram channel
  - binding
  - client application
  - close() method
  - echo server
  - multicast
    - binding
    - close() method
    - creation
    - DGCMulticastClient class
    - DGCMulticastServer class
    - join() method
    - network interface
    - receive() method
    - send() method

- setOption() method
- open() method
- receive() method
- send() method
- setOption() method

Data manipulation language (DML) statement

DataSource

DB2 database

Derby.properties

destroy() method

Dirty message

Disconnected rowset

Document base attribute

Drag and drop (DnD) mechanism

## **E**

- EditorKit
- Engine scope bindings
- eval() method
- evaluate() method
- Event handling
  - classes and interfaces
  - dispatch chain
  - filters and handlers
  - route traversal
    - bubbling phase
    - capture phase
  - source
  - target
  - types
- execute() method
- executeQuery() method
- executeUpdate() method

## **F**

- FileChooser
- FilteredRowSet
- FocusEvent
- FocusListener
- Font class

## **G, H**

- getAppletContext() method
- getAppletInfo() method
- getApplet() method
- getAudioClip() method
- getBindings() method
- getCodeBase() method
- getConnection() method
- getDocumentBase() method

getMetaData() method  
getParameterInfo() method  
getParameter() method  
getScopes() method  
get(String key) method  
getTransactionIsolation() method  
getXxx() method  
give\_raise stored procedure

## **I**

Implementing Remote Interface  
initApplet() method  
init() method  
INOUT parameters  
IN parameters  
Interpreter  
Invocable interface  
Invocation API  
    C++ console application  
    EmbeddedJVMJNI class  
    JavaVMIInitArgs structure  
    JavaVMoption structure  
    printMsg() method  
    setout() and setErr() methods  
    version field  
invokeAndWait() method  
invokeLater() method  
IP address  
    anycast  
    broadcast  
    definition  
    InetAddress class  
    Internet Assigned Numbers Authority (IANA)  
    IPv4  
    IPv6  
    loopback  
    machine address  
    multicast  
    Regional Internet Registry (RIR) organizations  
    unicast  
    unspecified

## **J**

Java data types  
Java DB database  
    configuration  
    embedded mode  
    installation files  
    NetBeans IDE  
    server mode  
Java.from() function

## JavaFX

- 2D shapes
  - class diagram
  - code implementation
  - path and SVGpath classes
- animation
  - class diagram
  - interpolator
  - key frame
  - keyvalue
  - timeline
- binding
  - bidirectional
  - eager binding
  - isValid() method
  - NumberBinding methods
  - unbind() method
  - unidirectional
- canvas, drawing
- components
  - glass windowing toolkit
  - media engine
  - prism
  - Quantum toolkit
  - scene graph
  - web engine
- container class (*see* Layout panes)
- controls
- definition
- effects
- event handling
  - classes and interfaces
  - dispatch chain
  - filters and handlers
  - route traversal
  - source
  - target
  - types
- features
- FXML, user interface
- GUI components
- HelloJavaFX class
  - getChildren() method
  - launch() method
  - main() method
  - scene class
  - setOnAction() method
  - setScene() method
  - setStyle() method
  - setTitle() method
  - start() method
  - text node

- [history](#)
- [layout panes](#)
  - [BorderPane](#)
  - [class diagram](#)
  - [dynamic layout](#)
  - [parent class](#)
  - [setStyle\(\) method](#)
  - [static layout](#)
  - [using CSS](#)
- [lifecycle](#)
  - [code implementation](#)
  - [init\(\) method](#)
  - [launch\(\) method](#)
  - [start\(\) method](#)
  - [stop\(\) method](#)
- [new versions](#)
- [observable collections](#)
  - [addListener\(\) method](#)
  - [changed\(\) method](#)
  - [class diagram](#)
  - [FXCollections class](#)
  - [next\(\) method](#)
  - [ObservableList](#)
  - [ObservableMap](#)
  - [ObservableSet](#)
- [printing nodes](#)
- [properties](#)
  - [change events](#)
  - [counter property](#)
  - [get\(\) and set\(\) methods](#)
  - [getReadOnlyProperty\(\) method](#)
  - [idWrapper property](#)
  - [IntegerProperty](#)
  - [invalidation event](#)
  - [ISBN property, book class](#)
  - [printDetails\(\) method](#)
  - [removeListener\(\) method](#)
  - [SimpleIntegerProperty](#)
  - [title property, book class](#)
  - [toString\(\) methods](#)
- [runtime library](#)
- [source code](#)
- [termination](#)
- [timeline animation](#)
- [transformations](#)
  - [Affine](#)
  - [class diagram](#)
  - [rotate class](#)
  - [scale class](#)
  - [shear class](#)
  - [translate class](#)
- [Java Interface implementation](#)

- Calculator interface
- getInterface() method
- instance methods
- java.lang.AutoCloseable interface
- java.lang.ClassNotFoundException
- Java Naming and Directory Interface (JNDI) service
- Java Native Interface (JNI)
  - architecture
  - arrays
  - C/C++
    - header file creation
    - program implementation
  - class libraries
  - compiling
  - definition
  - dynamic link library (DLL)
  - exception handling
    - Exceptioncheck() function
    - ExceptionClear() function
    - ExceptionOccurred() function
    - FatalError() function
    - FindClass() function
    - return statement
    - ThrowNew() function
  - functions, C/C++
  - JVM creation (see Invocation API)
  - mapping
    - primitive data types
    - reference type
  - naming rules
    - header file
    - javadoc command
    - mangled method's signature
    - method's parameter signature
    - test class
  - objects (see Java objects)
  - program implementation
    - abstract method
    - loadLibrary() method
    - load() method
    - native method
  - run command
  - shared library creation
    - on Linux
    - on Windows
  - strings
  - synchronization
    - MonitorEnter()
    - MonitorExit()
  - system requirements
- Java objects
  - class reference

FindClass() function  
GetObjectClass() function  
creation  
AllocObject() function  
getValue() method  
methodID parameter  
wrapperObject  
field access  
cls parameter  
GetField() function  
GetStaticField() function  
JNISourceCode class  
methods  
callIntMethod()  
CallMethod() function  
GetMethodID()  
GetStaticMethodID()  
instance method  
javap command  
static methods  
Java Plug-in  
configuration  
installation  
Java Control Panel program  
Java Remote Method Invocation (Java RMI)  
architecture  
client and server  
client program  
debugging  
dynamic class downloading  
garbage collector  
remote interface  
client program  
implementation  
requirements  
server program  
remote object  
RMI client program  
RMI registry application  
RMI server  
server program  
troubleshooting  
java.lang.ClassNotFoundException  
java.rmi.server.ExportException  
java.rmi.StubNotFoundException  
java.security.AccessControlException  
UnicastRemoteObject class  
java.rmi.server.ExportException  
java.rmi.StubNotFoundException  
Java Runtime Environment (JRE)  
java.security.AccessControlException  
Java.security.manager JVM option

java.sql.Connection interface  
java.sql.SQLException  
Java.to() function  
Java.type() method  
Javax.script Package  
    AbstractScriptEngine class  
    Bindings interface  
    Compilable interface  
    CompiledScript class  
    getEngineFactories() method  
    Invocable interface  
    ScriptContext interface  
    ScriptEngineFactory interface  
    ScriptEngine interface  
    ScriptEngineManager class  
    ScriptException class  
JButton  
JCheckBox  
JColorChooser  
JComboBox  
JDBC  
    auto-commit mode  
    batch updates  
        BatchUpdateException  
        BatchUpdateException command  
        CallableStatement interface  
        coding implementation  
        executeBatch() method  
        multi-step process  
    commit() method  
    DatabaseMetaData  
    data types  
    driver  
        Adaptive Server Anywhere  
        CLASSPATH setting up  
        DB2  
        getConnection() method  
        Java DB  
        java.sql.DriverManager class  
        jdbc.drivers system property  
        MySQL  
        Oracle  
        registerDriver() method  
        SQL Server  
        types of  
        URL format  
    execute() method  
    getMoreResults() method  
    LOB (*see* Large object (LOB))  
    result sets (*see* Result sets)  
    rollback() method  
    RowSets (*see* RowSets)

- SQL statements (see SQL statements)
- SQL warning
- table creation
  - Adaptive Server Anywhere
  - DB2
  - Java DB
  - MySQL
  - Oracle
  - SQL Server
- transaction
  - INSERT statement
  - person table creation
  - rollback() method
  - setSavepoint() method
  - SQLException
  - using savepoints
- transaction isolation level
  - dirty read
  - non-repeatable read
  - phantom read
- JDBC API
- JDBC-Native API driver
- JDBC-Net driver
- JDBC trace
- JEditorPane
- JFileChooser
  - accept() method
  - addChoosableFileFilter() method
  - dialog box
  - isAcceptAllFileFilterUsed() method
  - in JDialog
  - setCurrentDirectory() method
  - showDialog() method
  - showSaveDialog() method
- JFormattedTextField
- JFrame
  - components
    - add() method
    - BorderLayout
    - closeButton
    - containment hierarchy
    - content pane
    - glass pane
    - Help button
    - JButton
    - layered pane
    - Layout Managers
    - pack() method
    - root pane
    - setBounds() method
  - creation
    - program implementation

resizing  
setDefaultCloseOperation() method  
setSize()method  
setVisible () method  
WindowsConstants interface  
reusable creation  
initFrame() method  
main() method  
**jjs** command-line tool  
\$ARG property  
EOF/END identifier  
exit() function  
\${expression}  
**JavaFX**  
ActionEvent handler  
classes/packages  
fx option  
hellojavafx.js  
Label creation  
scripting option  
\$STAGE global variable  
stream.js  
syntax  
xhelp option  
**JKScriptEngine** class  
**JKScriptEngineFactory** class  
**JLabel**  
**JList**  
**JMenuBar**  
**JMenuItem**  
**JoinRowSet**  
**JOptionPane**  
**JPanel**  
**JPasswordField**  
**JProgressBar**  
**JRadioButton**  
**jrunscript** command-line shell  
arguments array  
arguments list  
batch mode  
cp/-classpath option  
interactive mode  
JKScript and jython script engines  
one-liner mode  
syntax  
types of  
**JScrollBar**  
**JScrollPane**  
**JSeparator**  
**JSlider**  
**JSpinner**  
**JSplitPane**

JTabbedPane  
JTable  
JTextArea  
JTextComponent  
JTextField  
JTextPane  
JToggleButton  
JToolBar  
JTree  
JWindow

## ■ K

Keyboard indicator  
Keyboard shortcut  
KeyEvent

## ■ L

Large object (LOB)  
  Blob and Clob columns  
  Clob interface  
  Connection interface  
  data retrieval  
  OutputStream  
  PreparedStatement interface  
  table creation, Java DB  
  types  
Layout managers  
  BorderLayout  
    close button  
    code implementation  
    containers orientation  
    help button  
  BoxLayout  
    code implementation  
    container alignment  
    filler  
    glue  
    rigid area  
    static methods  
    struct  
  CardLayout  
    actionPerformed() method  
    addActionListener() method  
    class methods  
    code implementation  
  FlowLayout  
    code implementation  
    component orientation  
    JFrame buttons  
    nesting  
    setAlignment() method

- setHgap() methods
  - setVgap() methods
- GridBagConstraints
  - anchor constraint
  - gridx and gridy constraints
  - instance variables
  - ipadx constraints
  - ipady constraints
- GridBagLayout
  - code implementation
  - contentPane.add() method
  - fill constraint
  - insets constraint
  - weightx and weighty constraints
- GridLayout
  - code implementation
  - constructors
  - containers
- GroupLayout
  - addComponent() method
  - addGap() method
  - grouping alignment
- JFrame
  - leading alignment
  - linkSize() method
  - nested groups
- ParallelGroup
  - sequential groups
  - setVerticalGroup() method
- null
- snippet code
- SpringLayout
  - code implementation
  - constants
  - constant() static method
  - pack() method
  - putConstraint() method
  - scale() method
  - setting x and y constraints
  - strut
  - subtract() method
  - sum() method
- Layout panes
  - BorderPane
  - class diagram
  - dynamic layout
  - parent class
    - getChildren() method
    - getChildrenUnmodifiable() method
    - getManagedChildren() method
  - setStyle() method
  - static layout

- using CSS
- length() method
- Life cycle
  - destroy() method
  - init() method
  - start() method
  - stop() method
- Live remote reference
- Locator

## ■ M

- main() method
- MAYSCRIPT attribute
- Menu
- META-INF/services directory
- MouseEvent
- MouseListener
- MouseMotionListener
- MouseWheelEvent
- MouseWheelListener
- MySQL database

## ■ N

- National Character Large Object (NClob)
- NetBeans IDE
- Network programming
  - asynchronous socket channel
    - client applications
    - server application
  - blocking vs. non-blocking classes
  - campus area network (LAN)
  - client-server paradigm
  - communication
  - datagram channel (*see* Datagram channel)
  - data transmission
  - definition
  - host
  - internet
  - IP address
    - anycast
    - broadcast
    - InetAddress class
    - IPv4
    - IPv6
    - loopback
    - machine address
    - multicast
    - Regional Internet Registry (RIR) organizations
    - unicast
    - unspecified
  - local area network (LAN)

- metropolitan area network (MAN)
- network
  - non-blocking socket
    - architecture
    - ByteBuffer object
    - echo server
    - operations
    - SelectionKey object
    - ServerSocketChannel
  - packet switching networks
  - port number
    - application layer
    - IANA
  - protocol suite
    - application layer
    - internet layer
    - network interface layer
    - physical layer
    - transmission packets
    - transport layer
  - socket
    - accept primitive
    - bind primitive
    - close primitive
    - connectionless socket
    - connection-oriented socket
    - connect primitive
    - datagram socket
    - lifecycle
    - listen primitive
    - receive/receiveFrom primitive
    - security permissions
    - send/sendto primitive
  - socket address
  - topology
- transmission control protocol (TCP)
  - client socket
  - server socket
- uniform resource identifier (URI)
  - ASCII value
  - hierarchical syntax
  - http scheme
  - Java objects
  - rules
  - specifications
- uniform resource locator (URL)
  - content reader
  - getContent() method
  - HTTP request method
  - Java objects
  - openConnection() method
  - Reader/Writer Class

- uniform resource name (URN)
- user datagram protocol (UDP)
  - connect() method
  - DatagramPacket
  - DatagramSocket
  - echo server
  - multicast sockets
  - sockets
- virtual connection
- wide area network (WAN)

newFactory() method

## ■ O

- Oracle database
- OUT parameters

## ■ P, Q

- Paging
- paint() method
- parse() method
- Peer
- Plugin.jar file
- PreparedStatement interface
- prepareStatement() method
- put() method

## ■ R

- registerDriver() method
- Relational database management system (RDBMs)
- Remote Interface
- Remote method Invocation
- Reserved keys
- ResultSetMetaData
- Result sets
  - absolute cursor movement
  - bidirectional scrollable
    - getHoldability() method
    - getType() method
    - SQLException
  - close() method
  - Concurrency
  - deleteRow() method
  - displayPersonUsingPreparedStatement()
  - displayPersonUsingStatement()
  - executeQuery() method
  - getRow() method
  - getXxx() methods
  - Holdability
  - insertRow() method
  - next() method

PreparedStatement  
query execution  
relative cursor movement  
rows and column, structures of  
Scrollability  
SELECT statement  
stored procedure (*see* Stored procedure)  
toString() method  
try-catch block  
updateRow() method  
using while-loop  
wasNull() method  
Retrieving LOB Data  
Rhino JavaScript  
RMI architecture  
RMI client program  
RMI server program  
    exportObject() method  
    rebind() method  
    security manager installation  
rollback() method  
RowSets  
    advantages of  
    bidirectional scrollable and updateable  
    CachedRowSet  
        acceptChanges() method  
        execute() method  
        paging  
        populate() method  
        size() method  
        updation and deletion  
    class diagram  
    command setting  
    creation  
    database connection properties  
    disadvantages of  
    FilteredRowSet  
    JdbcRowSet  
    JoinRowSet  
    RowSetUtil class  
    types of  
    updateRow() method  
    WebRowSet

## ■ S

Scope  
Script context  
    Bindings  
    FileWriter  
    getAttribute() method  
    global scope  
    interface

setAttribute() method  
SimpleScriptContext class  
Script engine  
arithmetic expressions rules  
Custom ScriptContext  
Default ScriptContext  
discovering and instantiating  
eval() method  
Expression class  
    eval() method  
    getOperandValue() method  
    instance variables  
    parse() method  
Groovy installation  
helloscript.js  
JKScriptEngine class  
JKScriptEngineFactory class  
JKScript script engine  
JRuby installation  
Jython installation  
manifest.mf file  
Scripting language  
advantages  
compiled scripts  
definition  
disadvantage  
eval() method  
getEngineFactories() method  
Invocable interface  
invokeFunction() method  
java in  
    anonymous class creation  
    arrays  
    Calculator interface  
    global variable  
    importClass() function  
    importPackage() function  
    JavaAdapter object  
    Java.extend() method  
    lambda expressions  
    method overloading  
    Runnable interface  
    String object creation  
    type() function  
    variable declaration  
    with clause  
java Interface (see Java Interface implementation)  
javax.script Package (see Javax.script Package)  
jrunscript shell  
jsoutput.txt  
Nashorn JavaScript  
passing parameters

- bindings
  - java code to scripts
  - put() method
  - scope
    - script context (see Script context)
  - ScriptEngineManager
    - scripts to java code
  - print() function
  - ScriptEngineFactory class
  - ScriptEngineManager class
- Servlet
  - setAsciiStream() method
  - setBinaryStream() method
  - setBindings() method
  - setBytes() method
  - setCharacterStream() method
  - setFilter() method
  - setJoinType() method
  - setNull() method
  - setString() method
  - showDocument() method
  - showStatus() method
- SQL Server database
- SQL statements
  - CallableStatement interface (see CallableStatement interface)
  - DELETE
    - execute() method
    - executeQuery() method
    - executeUpdate() method
  - INSERT
    - person table creation
    - PreparedStatement interface
    - statement object
    - time and timestamp escape sequences
  - UPDATE
- start() method
- stop() method
- Stored procedure
  - Adaptive Server Anywhere
  - DB2
  - Java DB
    - coding implementation
    - JDBCUtil.getConnection() method
    - in Oracle database
    - printResultSet() static method
  - MySQL
  - Oracle
  - SQL server
- supportsStoredProcedures() method
- Swing
  - character-based user interface
  - container

- containment hierarchy
- Dimension class
- DnD
  - canImport() and importData() methods
  - data transfer mechanism
  - drop modes
  - exportDone() method
  - JFrame
  - JList
  - myComponent
  - Transferable interface
  - TransferHandler class
- event handling
  - ActionEvent class
  - Action listener
  - ActionListener interface
  - event handler
  - event listener/eventhandler
  - EventListener interface
  - event source
  - getActionCommand() method
  - JButton
  - listener interface
  - triggering an event
- graphical user interface(GUI)
- HTML
- Insets class
- JLayer, component decoration
  - BlueBorderUI class
  - eventDispatched() method
  - event processing task
  - getView() and getUI() methods
  - JTextField components
  - paint() method
  - processFocusEvent() method
  - uninstallUI() method
- layout managers
  - BorderLayout
  - BoxLayout
  - CardLayout
  - FlowLayout
  - GridBagConstraints
  - GridBagLayout
  - GridLayout
  - GroupLayout
  - null
  - setLayout() method
  - SpringLayout
- MDI applications
  - DesktopManager interface
  - JDesktopPane class
  - JFrame class

JInternalFrame class  
on Windows  
mouse event handler  
  ActionListener interface  
  adapter class  
  code implementation  
  JButton  
  methods  
    MouseListener interface  
pluggable look and feel  
Point class  
Rectangle class  
SDI applications  
shaped window  
simplest program (*see* JFrame)  
Synth XML file  
  buttonStyle style  
  CLASSPATH  
  <color> element  
  definition  
  <imageIcon> element  
  <imagePainter> element  
  JFrame  
  key attribute  
  loading process  
  load() method  
  <property> element  
  painterCenter attribute  
  paintTextFieldBorder() and paintButtonBorder() methods  
  <state> element  
  <style> element  
  type attribute  
  using URL  
TDI applications  
threading mechanisms  
threading model  
  JVM  
  SwingUtilities class  
  SwingWorker class  
Toolkit class  
translucent windows  
  initFrame() method  
  JFrame  
   JPanel  
  per-pixel translucency  
  setOpacity(float opacity) method  
  translucent and opaque  
  transparent  
    WindowTranslucency enum  
user interface (UI)  
Swing components  
  Border class

- bevel border
- Bevel Border
- compound border
- empty border
- etched border
- line border
- matte border
- Soft Bevel Border
- Titled Border
- color class
- custom dialogs
  - confirmation dialog
  - Input dialog
  - message dialog
  - modalities
  - Modal JDialog
  - Modeless JDialog
  - setModalityType() method
- Double Buffering
- drawing shapes
  - DrawingCanvas
  - getGraphics() method
  - Graphics class, methods of
    - paintComponent() method
- font class
  - Dialog
  - DialogInput
  - glyph
  - Monospace
  - object-oriented font
  - outline font
  - pitch
  - SansSerif
  - scalable font
  - Serif
  - setFont() method
  - typeface
- Immediate Painting
- JButton
  - AbstractAction class
  - ActionListener interface
  - Action object
  - actionPerformed() method
  - constructors
  - ImageIcon class
  - keyboard mnemonic
  - methods
  - modifier key
- JCheckBox
- JColorChooser
- JComboBox
- JComponent class

- accessibility
- border
- class hierarchy
- events
- heavyweight components
- key binding
- layout manager
- lightweight components
- look and feel
- methods
- on-screen painting
- putClientProperty() and getClientProperty() methods
- tool tip

JEditorPane

- EditorKit object
- getEditPaneBox() method
- getURLBox() method
- go() method
- HTML Browser
- hyperlinkUpdate() method
- main() method
- read(InputStream in, Object description) method
- setContentType(String contentType) method
- setPage() method

JFileChooser

JFormattedTextField

- advantages of
- constructors
- Default Formatter
- Display Formatter
- Edit Formatter
- formatter factory
- getValue() method
- mask formatter
- Null formatter
- salaryField
- setFormatterFactory() method

JFrame

JLabel

- constructors
- setDisplayedMnemonic() method
- setLabelFor() method
- setText() method

JList

- getSize() method
- horizontal wrapping
- methods
- multiple interval selection
- setSelectionMode() method
- setVisibleRowCount() method
- single interval selection mode
- single selection mode

- vertical argument
- vertical wrapping

JMenu

JOptionPane

- arguments
- CANCEL\_OPTION
- CLOSED\_OPTION
- Confirmation Dialog
- createDialog() methods
- Input dialog
- Message dialog
- NO\_OPTION
- OK\_OPTION
- Option dialog
- showConfirmDialog() method
- showInputDialog() method
- showMessageDialog() methods
- showOptionDialog() method
- YES\_OPTION

JPanel

- constructors
- FlowLayout
- with BorderLayout

JPasswordField

- echo character
- getText() and getPassword() method
- setEchoChar() method

JProgressBar

JRadioButton

JScrollBar

JScrollPane

- four corners
- JScrollBars
- Row/Column headers
- show always
- show as needed
- show never
- viewport

JSeparator

JSlider

JSpinner

- components
- JSpinner.DateEditor
- JSpinner.ListEditor
- JSpinner.NumberEditor
- SpinnerDateModel
- SpinnerListModel
- SpinnerModel interface
- SpinnerNumberModel

JSplitPane

JTabbedPane

JTable

- `AbstractTableModel` class
  - `addColumn()` and `addRow()` methods
  - constructors
- `DefaultTableModel` class
  - `getColumnClass()` method
  - `getModel()` method
  - `getSelectedRowCount()` method
  - `getSelectedRow()` method
  - `getTableHeader()` method
  - no-args constructor
  - `setColumnIdentifiers()` method
  - `setValueAt()` method
- `TableModel` interface
- `JTextArea`
  - code implementation
  - constructors
  - `JScrollPane`
  - methods
    - `setWrapStyleWord()` method
- `JTextComponent`
- `JTextField`
  - constructors
  - `createDefaultModel()` method
  - `insertString()` method
  - `JFormattedTextField`
  - `LimitedCharDocument`
  - named name and mirroredName
  - `PlainDocument` class
- `JTextPane`
  - `addStyle()` method
  - attributes
  - buttons
  - `dump()` method
  - `insertString()` method
  - methods
  - plain document
  - root element
  - `StyleContext` object
  - styled document
  - `StyledDocument` interface
  - word processor
  - `write()` method
- `JToggleButton`
- `JToolBar`
  - action interface
  - in `JFrame`
- `JTree`
  - branch node
  - `DefaultMutableTreeNode`
  - `getPath()` method
  - `getRowCount()` method
  - leaf node

- [MutableTreeNode](#)
- [node](#)
- [parent node](#)
- [siblings](#)
- [toString\(\) method](#)
- [tree-expansion event](#)
- [TreeNode](#)
- [TreePath](#)
- [TreeSelectionListener](#)
- [TreeSelectionModel interface](#)
- [tree-will-expand event](#)
- [JWindow](#)
- [Menus](#)
  - [JMenuBar](#)
  - [JMenuItem](#)
  - [Nesting menus](#)
  - [pop-up menu](#)
  - [program](#)
  - [setAccelerator\(\) method](#)
  - [setMnemonic\(\) method](#)
  - [show\(\) method](#)
- [Painting mechanism](#)
  - [Graphics object](#)
  - [paintComponent\(\) method](#)
  - [RepaintManager class](#)
  - [repaint\(\) method](#)
- [text components](#)
  - [class diagram](#)
  - [document interface](#)
  - [getDocument\(\) method](#)
  - [JEditorPane and JTextPane](#)
  - [JTextArea](#)
  - [multiline text component](#)
  - [MVC pattern](#)
  - [plain text component](#)
  - [single-line text component](#)
  - [styled text component](#)
- [Validation](#)
  - [invalidate\(\) method](#)
  - [isValid\(\) method](#)
  - [pack\(\) method](#)
  - [revalidate\(\) method](#)
  - [setVisible\(\) method](#)
- [Symbol tables](#)
- [Synth](#)
- [System.setProperty\(\) method](#)

## **T**

- [Text Components](#)
- [Thread class](#)
- [toCachedRowSet\(\) method](#)
- [Transaction Control Language \(TCL\) Statement](#)

Transaction isolation level  
dirty read  
non-repeatable read  
phantom read  
Transport Network Substrate(TNS)

 **U**

[updateXxx\(\) method](#)

 **V**

Validating text input  
[setInputVerifier\(\) method](#)  
[verify\(\) method](#)

 **W**

[WebRowSet](#)

 **X, Y, Z**

[XADataSource interface](#)