


Activity 4: LeetCode Practice & Portfolio Integration


GitHub Repository: <https://github.com/Yagami-akshay/leetcode-solutions.git>

Student Name: Akshay N | **SRN:** R25EF021

Class & Section: CSE-B / 3rd Sem | **Course:** Portfolio Building for Engineering Students (B25GE0101)

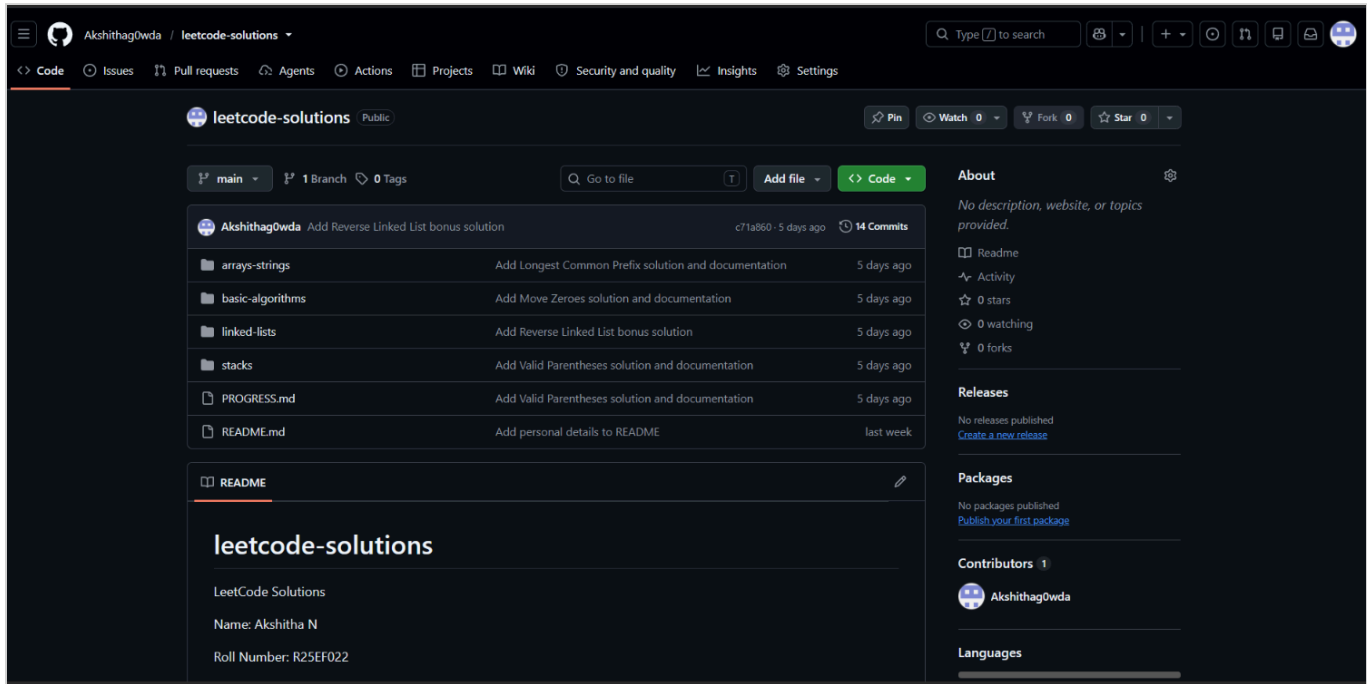

1. a) Repository Structure

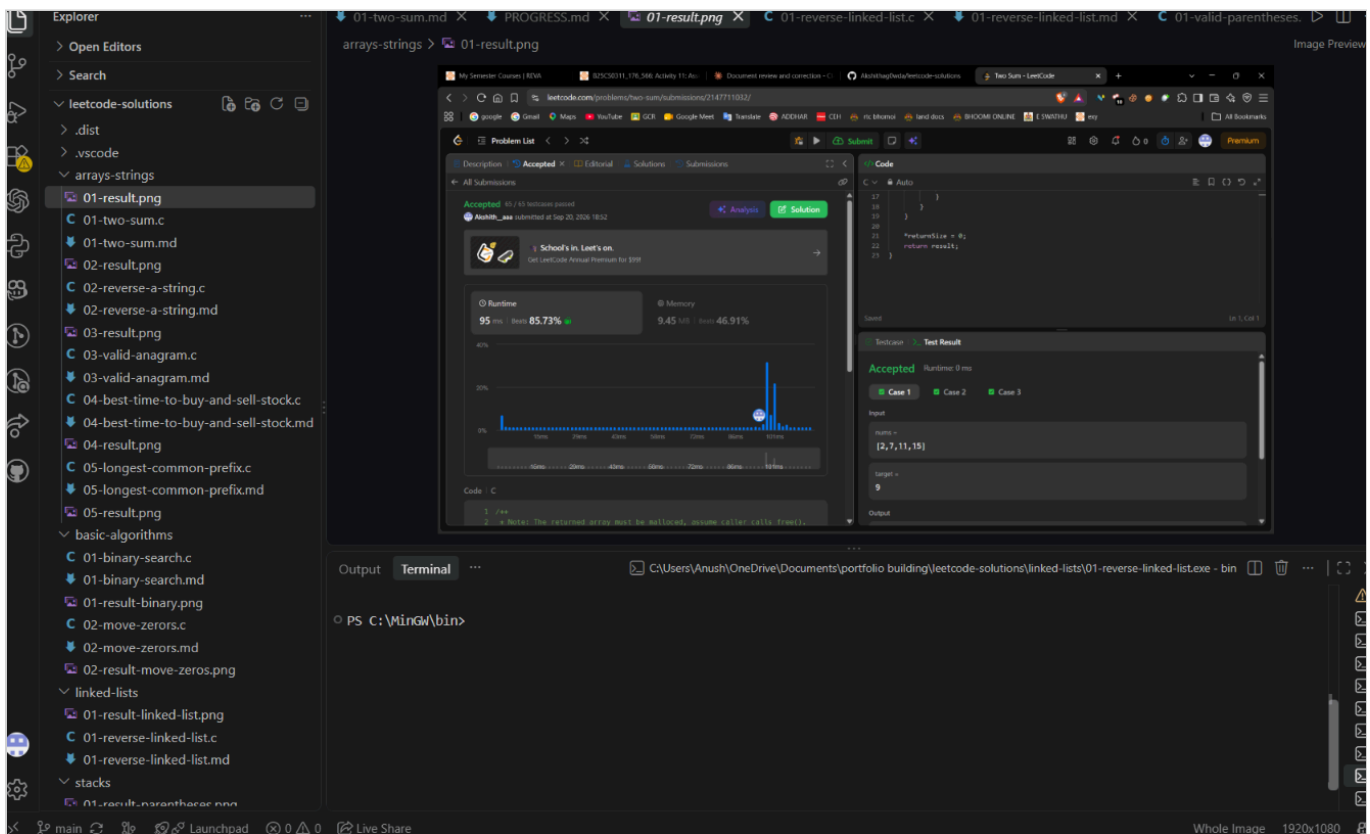

1. b) Repository Structure

Explorer

> Open Editors

> Search

leetcode-solutions

arrays-strings

02-result.png

02-reverse-a-string.c

02-reverse-a-string.md

03-result.png

03-valid-anagram.c

03-valid-anagram.md

04-best-time-to-buy-and-sell-stock.md

04-best-time-to-buy-and-sell-stock.png

04-result.png

05-longest-common-prefix.c

05-longest-common-prefix.md

05-result.png

basic-algorithms

01-binary-search.c

01-binary-search.md

01-result-binary.png

02-move-zeros.c

02-move-zeros.md

02-result-move-zeros.png

linked-lists

01-result-linked-list.png

01-reverse-linked-list.c

01-reverse-linked-list.md

stacks

01-result-parentheses.png

01-valid-parentheses.c

01-valid-parentheses.md

PROGRESS.md

README.md

01-two-sum.md

PROGRESS.md

01-result.png

01-reverse-linked-list.c

01-reverse-linked-list.md

Text

PROGRESS.md

You, 5 days ago | author (You)

LeetCode Progress Tracker

1

2

3 | Date | Problem | Topic | Difficulty | Status | Time Taken |

4 |---|---|---|---|---|---|

5 | 20/09/2026 | Two Sum | Arrays & Strings | Easy | Accepted | 30 min |

6 | 20/09/2026 | Reverse a String | Arrays & Strings | Easy | Accepted | 20 min |

7 | 20/09/2026 | Valid Anagram | Arrays & Strings | Easy | Accepted | 20 min |

8 | 20/09/2026 | Best Time to Buy and Sell Stock | Arrays & Strings | Easy-Medium | Accepted | 35 min | You,

9 | 20/09/2026 | Longest Common Prefix | Arrays & Strings | Easy-Medium | Accepted | 35 min |

10

11 | 20/09/2026 | Valid Parentheses | Stacks | Easy-Medium | Accepted | 25 min |

12 | 20/09/2026 | Valid Parentheses | Stacks | Easy-Medium | Accepted | 35 min |


Output

Terminal

C:\Users\Anush\OneDrive\Documents\portfolio building\leetcode-solutions\linked-lists\01-reverse-linked-list.exe - bin

PS C:\mingw\bin>

2. README and Project Documentation

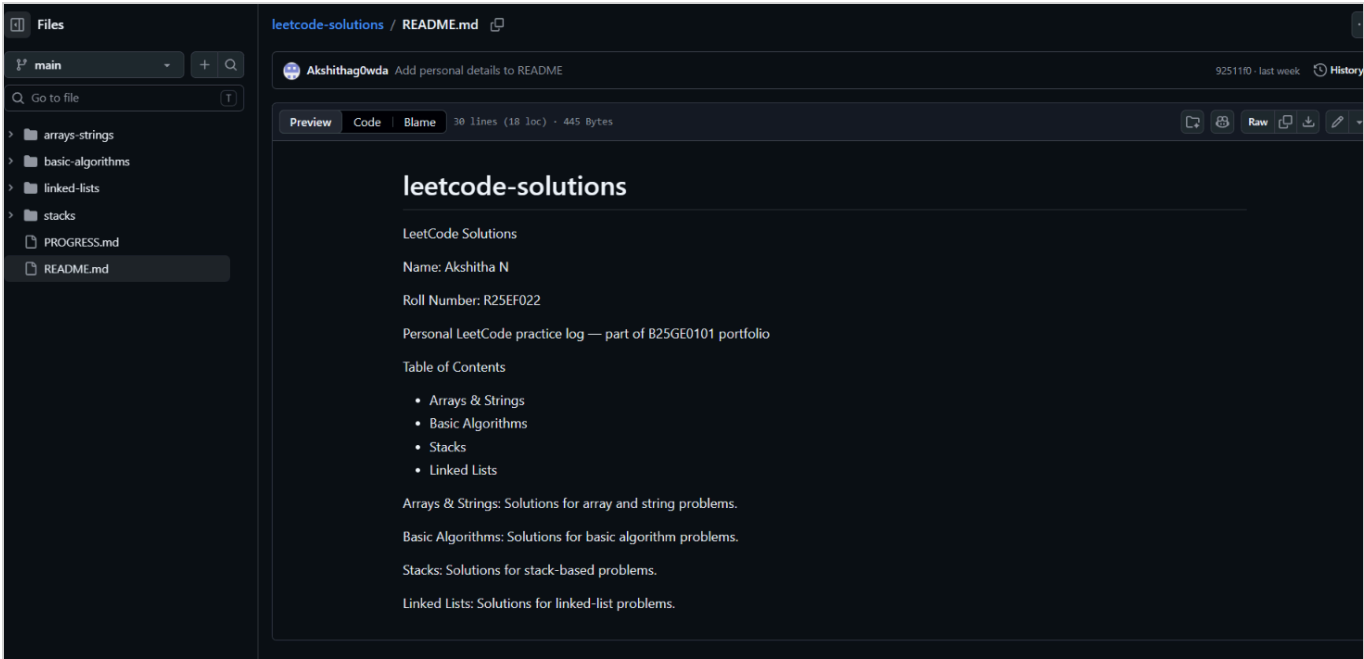


3. LeetCode Problems Completed

No.	Problem	Topic	Status
1	Two Sum	Arrays & Strings	Accepted
2	Reverse a String	Arrays & Strings	Accepted
3	Valid Anagram	Arrays & Strings	Accepted
4	Best Time to Buy and Sell Stock	Arrays & Strings	Accepted
5	Longest Common Prefix	Arrays & Strings	Accepted
6	Binary Search	Basic Algorithms	Accepted
7	Move Zeroes	Basic Algorithms	Accepted
8	Valid Parentheses	Stacks	Accepted
9	Reverse a Linked List (Bonus)	Linked Lists	Accepted

4. Local Testing Evidence

1. Two Sum – Local Testing

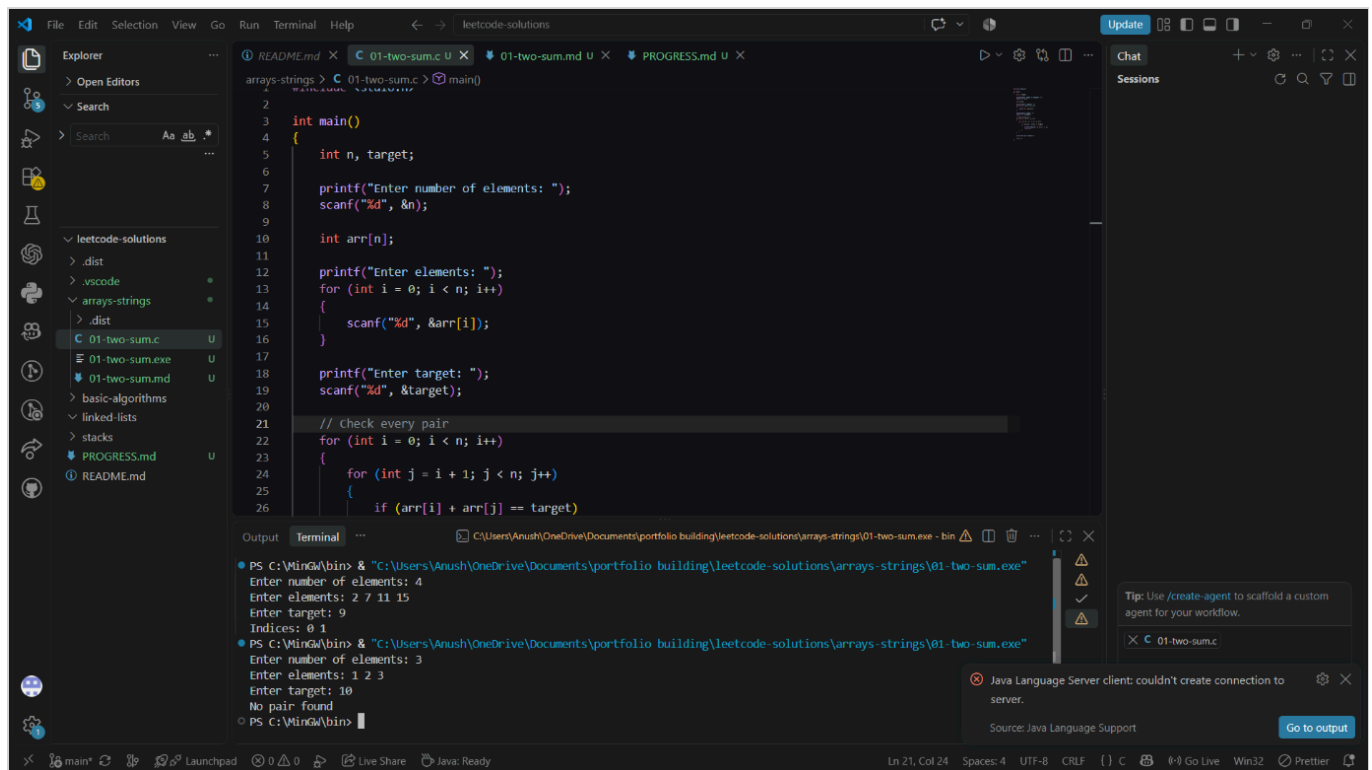


The screenshot displays the Visual Studio Code editor with the following components:

- Explorer:** Shows the file structure of the 'leetcode-solutions' project, including '01-two-sum.c', '01-two-sum.exe', '01-two-sum.md', 'PROGRESS.md', and 'README.md'.
- Editor:** Contains the C code for the Two Sum problem. The code is as follows:

```
1 // Two Sum  
2  
3 int main()  
4 {  
5     int n, target;  
6  
7     printf("Enter number of elements: ");  
8     scanf("%d", &n);  
9  
10    int arr[n];  
11  
12    printf("Enter elements: ");  
13    for (int i = 0; i < n; i++)  
14    {  
15        scanf("%d", &arr[i]);  
16    }  
17  
18    printf("Enter target: ");  
19    scanf("%d", &target);  
20  
21    // Check every pair  
22    for (int i = 0; i < n; i++)  
23    {  
24        for (int j = i + 1; j < n; j++)  
25        {  
26            if (arr[i] + arr[j] == target)
```
- Terminal:** Shows the execution of the program. The output is as follows:

```
PS C:\Windows\bin> "C:\Users\Anush\OneDrive\Documents\portfolio building\leetcode-solutions\arrays-strings\01-two-sum.exe"  
Enter number of elements: 4  
Enter elements: 2 7 11 15  
Enter target: 9  
Indices: 0 1  
PS C:\Windows\bin> "C:\Users\Anush\OneDrive\Documents\portfolio building\leetcode-solutions\arrays-strings\01-two-sum.exe"  
Enter number of elements: 3  
Enter elements: 1 2 3  
Enter target: 10  
No pair found  
PS C:\Windows\bin>
```
- Chat:** Displays a tip: "Tip: Use /create-agent to scaffold a custom agent for your workflow." and a session for '01-two-sum.c'.
- Output:** Shows a message: "Java Language Server client couldn't create connection to server." with a source link to "Java Language Support".

2. Reverse a String – Local Testing

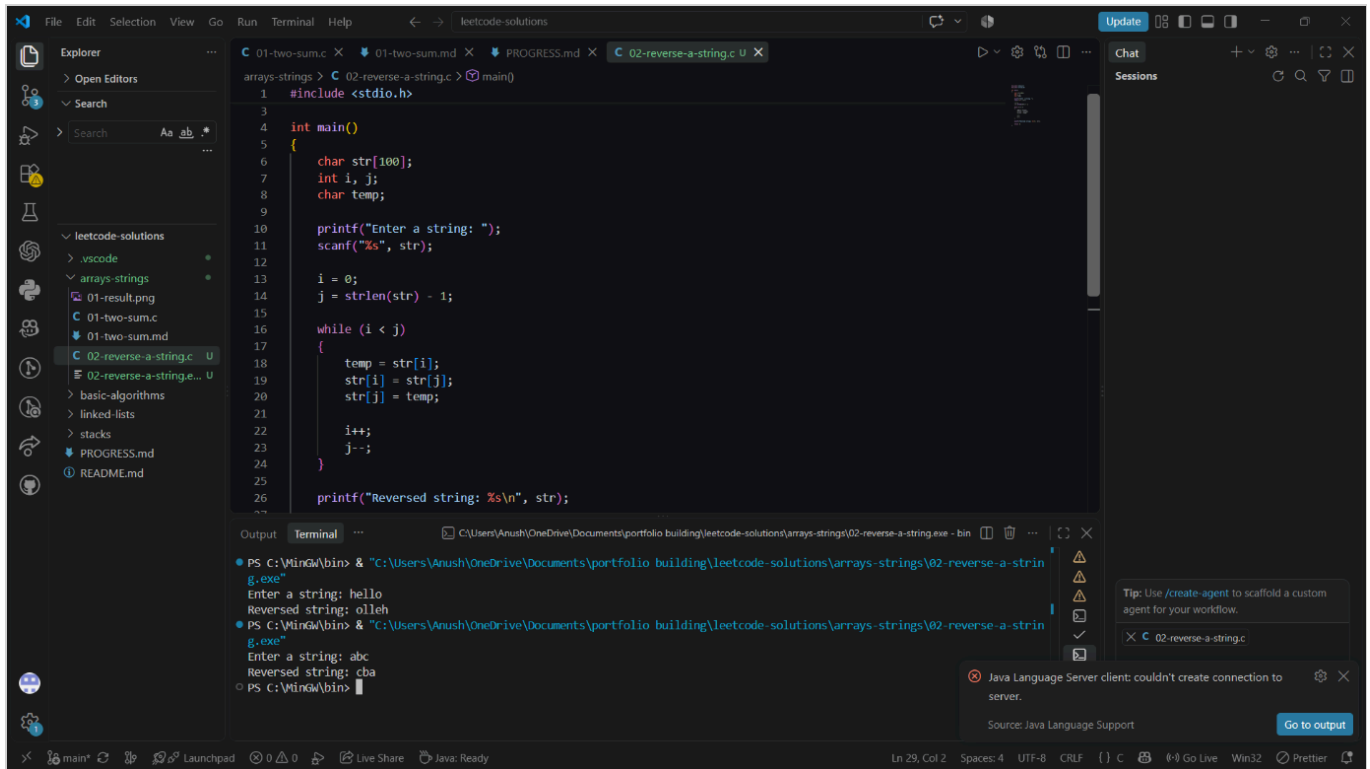

The screenshot shows the Visual Studio Code editor with a C program for reversing a string. The Explorer sidebar on the left shows the project structure, including files like `01-two-sum.c`, `02-reverse-a-string.c`, and `PROGRESS.md`. The main editor displays the source code for `02-reverse-a-string.c`, which includes a `main` function that reads a string and prints its reverse. The Output and Terminal panels at the bottom show the program's execution, demonstrating the reversal of the input strings "hello" and "abc".

```
1 #include <stdio.h>
2
3
4 int main()
5 {
6     char str[100];
7     int i, j;
8     char temp;
9
10    printf("Enter a string: ");
11    scanf("%s", str);
12
13    i = 0;
14    j = strlen(str) - 1;
15
16    while (i < j)
17    {
18        temp = str[i];
19        str[i] = str[j];
20        str[j] = temp;
21
22        i++;
23        j--;
24    }
25
26    printf("Reversed string: %s\n", str);
27 }
```

Output:

```
PS C:\Windows\bin> & "C:\Users\Anush\OneDrive\Documents\portfolio building\leetcode-solutions\arrays-strings\02-reverse-a-string.exe"
g.exe"
Enter a string: hello
Reversed string: olleh
PS C:\Windows\bin> & "C:\Users\Anush\OneDrive\Documents\portfolio building\leetcode-solutions\arrays-strings\02-reverse-a-string.exe"
g.exe"
Enter a string: abc
Reversed string: cba
PS C:\Windows\bin>
```

3. Valid Anagram – Local Testing

```
arrays-strings > C 03-valid-anagram.c > main()
25     count[256] = {0};
26
27     for (i = 0; str2[i] != '\0'; i++)
28     {
29         count[(unsigned char)str2[i]]--;
30     }
31
32     for (i = 0; i < 256; i++)
33     {
34         if (count[i] != 0)
35         {
36             printf("Not an Anagram\n");
37             return 0;
38         }
39     }
40
41     printf("Anagram\n");
42
43     return 0;
44 }
```

Output Debug Console Terminal Ports C:\Users\Anush\OneDrive\Documents\portfolio building\leetcode-solutions\arrays-strings\03-valid-anagram.exe - bin

- PS C:\MinGW\bin> & "C:\Users\Anush\OneDrive\Documents\portfolio building\leetcode-solutions\arrays-strings\03-valid-anagram.exe"
- Enter first string: anagram
- Enter second string: nagaram
- Anagram
- PS C:\MinGW\bin> & "C:\Users\Anush\OneDrive\Documents\portfolio building\leetcode-solutions\arrays-strings\03-valid-anagram.exe"
- Enter first string: rat
- Enter second string: cat
- Not an Anagram
- PS C:\MinGW\bin>

Ln 44, Col 2 Spaces: 4 UTF-8 CRLF () C Go Live Win32 Prettier

4. Best Time to Buy and Sell Stock – Local Testing

The screenshot shows the Visual Studio Code editor with a C program for finding the maximum profit from a single transaction in a stock price array. The code is located in `arrays-strings\04-best-time-to-buy-and-sell-stock.c`. The program prompts the user for the number of prices and then the prices themselves, calculating the maximum profit.

```
1 int prices[100];
2 int n;
3 int minPrice, maxProfit = 0, profit;
4
5 int main()
6 {
7     printf("Enter number of prices: ");
8     scanf("%d", &n);
9
10    printf("Enter prices: ");
11    for (i = 0; i < n; i++)
12    {
13        scanf("%d", &prices[i]);
14    }
15
16    minPrice = prices[0];
17
18    for (i = 1; i < n; i++)
19    {
20        profit = prices[i] - minPrice;
21
22        if (profit > maxProfit)
23            maxProfit = profit;
24
25        if (prices[i] < minPrice)
26            minPrice = prices[i];
27    }
28
29    printf("Maximum Profit: %d\n", maxProfit);
30
31    return 0;
32 }
```


The terminal output shows two test cases:

```
PS C:\MinGW\bin> & "C:\Users\Anush\OneDrive\Documents\portfolio building\leetcode-solutions\arrays-strings\04-best-time-to-buy-and-sell-stock.exe"
Enter number of prices: 6
Enter prices: 7 1 5 3 6 4
Maximum Profit: 5

PS C:\MinGW\bin> & "C:\Users\Anush\OneDrive\Documents\portfolio building\leetcode-solutions\arrays-strings\04-best-time-to-buy-and-sell-stock.exe"
Enter number of prices: 5
Enter prices: 7 6 4 3 1
Maximum Profit: 0

PS C:\MinGW\bin>
```

5. Longest Common Prefix – Local Testing

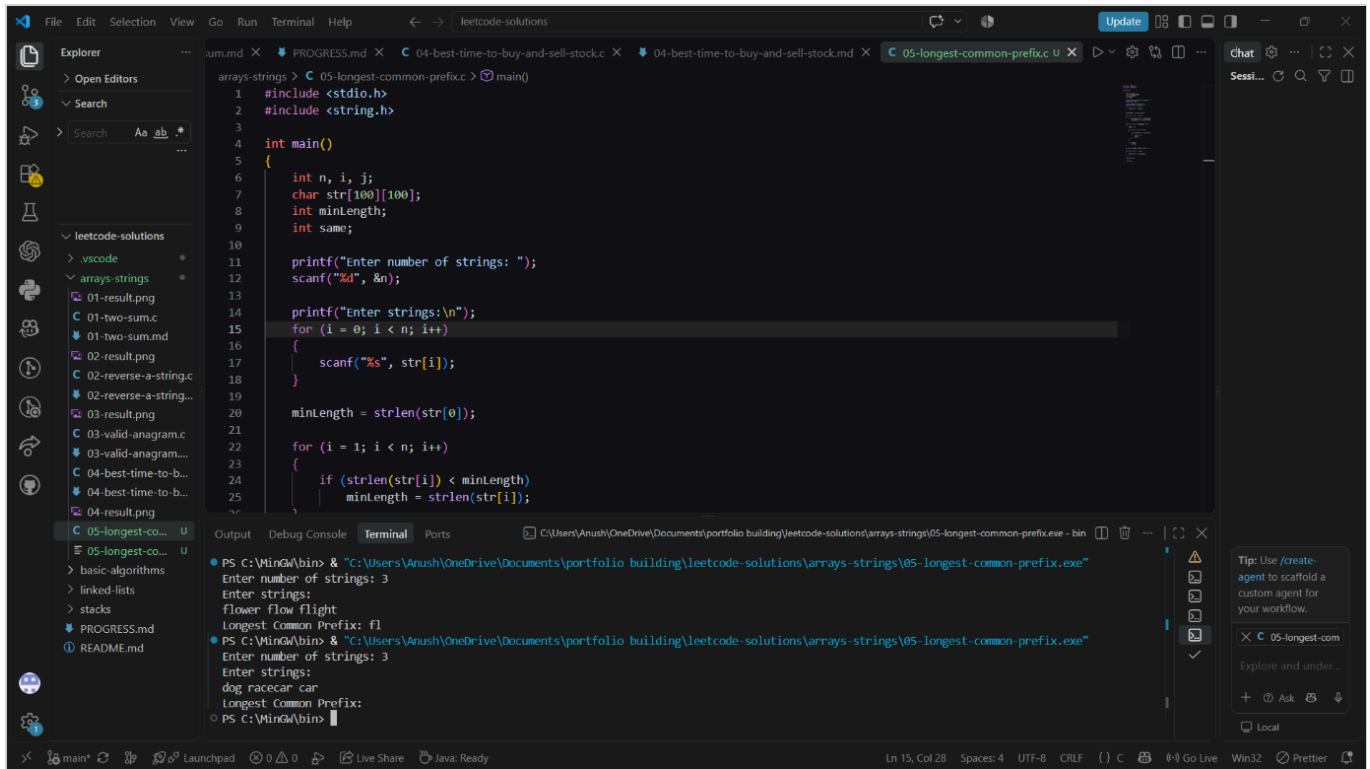

The screenshot displays the Visual Studio Code editor with a C program for finding the longest common prefix of an array of strings. The Explorer sidebar on the left shows the project structure, including a folder named 'arrays-strings' and various files. The main editor window shows the source code for '05-longest-common-prefix.c'. The code includes `<stdio.h>` and `<string.h>`, and implements a function `main()` that prompts the user for the number of strings and the strings themselves, then calculates the longest common prefix. The Output and Terminal panels at the bottom show the program's execution with sample input: 3 strings ('flower', 'flow', 'flight') resulting in a common prefix of 'fl', and another set of strings ('dog', 'racecar', 'car') resulting in an empty prefix.

```
1 #include <stdio.h>
2 #include <string.h>
3
4 int main()
5 {
6     int n, i, j;
7     char str[100][100];
8     int minLength;
9     int same;
10
11     printf("Enter number of strings: ");
12     scanf("%d", &n);
13
14     printf("Enter strings:\n");
15     for (i = 0; i < n; i++)
16     {
17         scanf("%s", str[i]);
18     }
19
20     minLength = strlen(str[0]);
21
22     for (i = 1; i < n; i++)
23     {
24         if (strlen(str[i]) < minLength)
25             minLength = strlen(str[i]);
26     }
```


Output

```
PS C:\MinGW\bin> & "C:\Users\Anush\OneDrive\Documents\portfolio building\leetcode-solutions\arrays-strings\05-longest-common-prefix.exe"
Enter number of strings: 3
Enter strings:
flower flow flight
Longest Common Prefix: fl

PS C:\MinGW\bin> & "C:\Users\Anush\OneDrive\Documents\portfolio building\leetcode-solutions\arrays-strings\05-longest-common-prefix.exe"
Enter number of strings: 3
Enter strings:
dog racecar car
Longest Common Prefix:

PS C:\MinGW\bin>
```

6. Binary Search – Local Testing

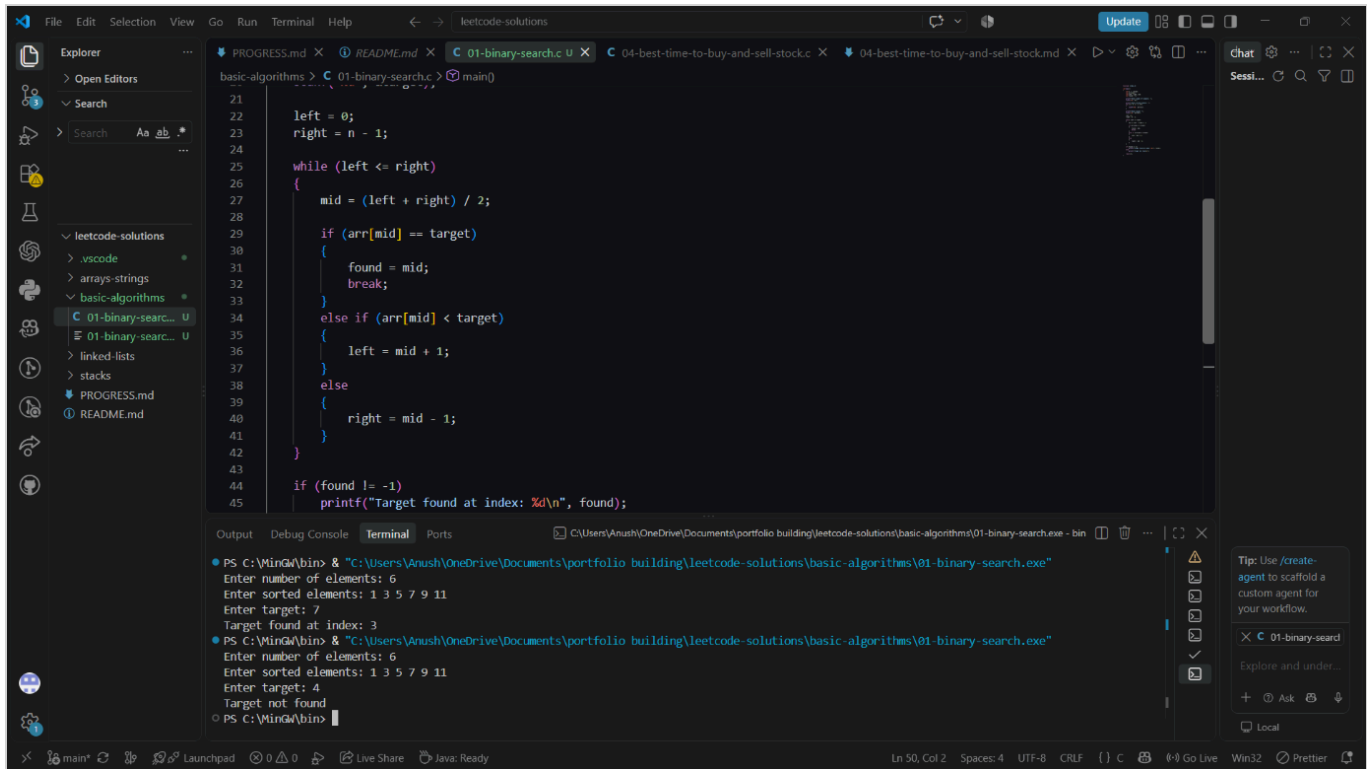


The screenshot shows the Visual Studio Code editor with a C++ file named `01-binary-search.c` open. The code implements a binary search algorithm. The Explorer sidebar on the left shows the project structure, including `basic-algorithms` and `01-binary-search.c`. The Output window at the bottom shows the execution of the program, demonstrating two successful searches and one failure.

```
21
22     left = 0;
23     right = n - 1;
24
25     while (left <= right)
26     {
27         mid = (left + right) / 2;
28
29         if (arr[mid] == target)
30         {
31             found = mid;
32             break;
33         }
34         else if (arr[mid] < target)
35         {
36             left = mid + 1;
37         }
38         else
39         {
40             right = mid - 1;
41         }
42     }
43
44     if (found != -1)
45         printf("Target found at index: %d\n", found);
```

Output:

```
PS C:\MinGW\bin> & "C:\Users\Anush\OneDrive\Documents\portfolio building\leetcode-solutions\basic-algorithms\01-binary-search.exe"
Enter number of elements: 6
Enter sorted elements: 1 3 5 7 9 11
Enter target: 7
Target found at index: 3
PS C:\MinGW\bin> & "C:\Users\Anush\OneDrive\Documents\portfolio building\leetcode-solutions\basic-algorithms\01-binary-search.exe"
Enter number of elements: 6
Enter sorted elements: 1 3 5 7 9 11
Enter target: 4
Target not found
PS C:\MinGW\bin>
```

7. Move Zeroes – Local Testing

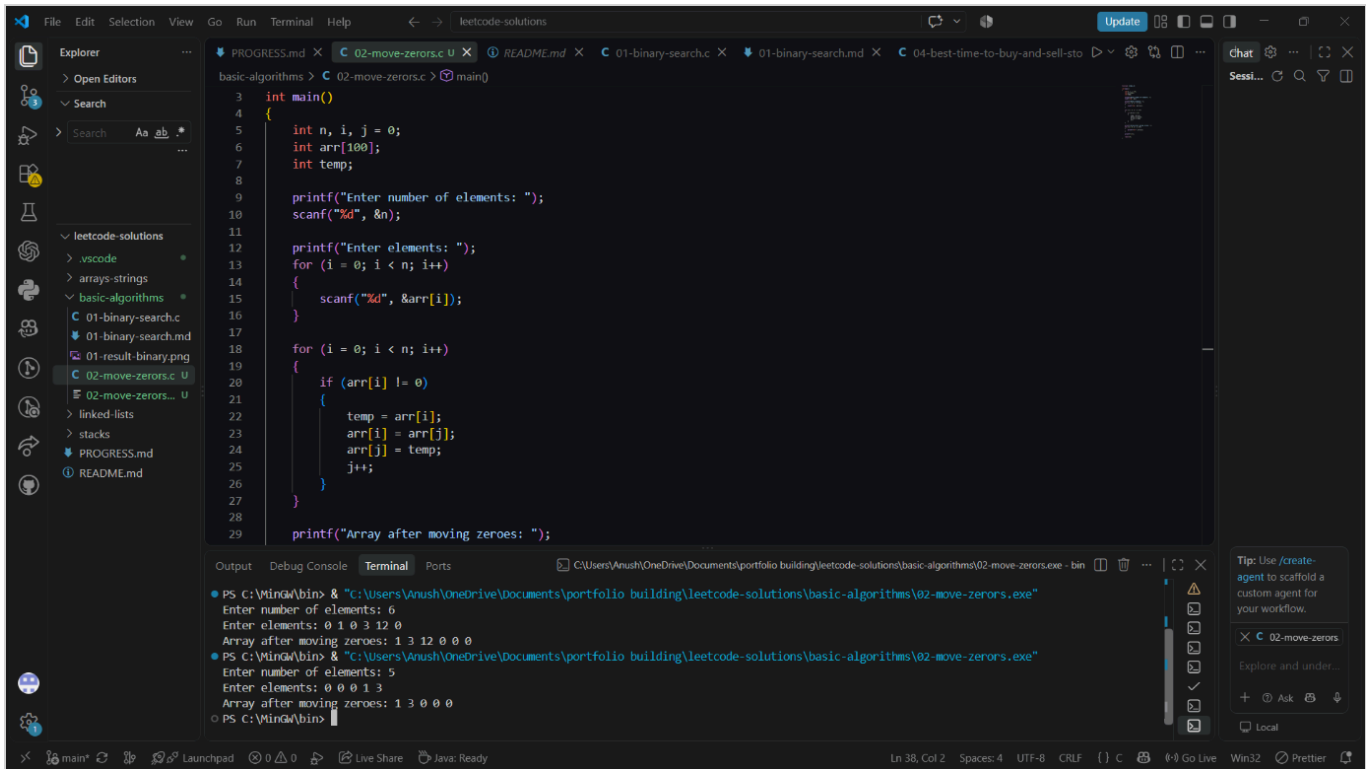


The screenshot displays the Visual Studio Code editor with the file `02-move-zeroes.c` open. The code implements a function to move all zeros in an array to the end. The terminal shows two test cases: one with 6 elements (0 1 0 3 12 0) and one with 5 elements (0 0 0 1 3). Both cases result in the array [1, 3, 12, 0, 0, 0] and [1, 3, 0, 0, 0] respectively after moving the zeros.

```
3  int main()
4  {
5      int n, i, j = 0;
6      int arr[100];
7      int temp;
8
9      printf("Enter number of elements: ");
10     scanf("%d", &n);
11
12     printf("Enter elements: ");
13     for (i = 0; i < n; i++)
14     {
15         scanf("%d", &arr[i]);
16     }
17
18     for (i = 0; i < n; i++)
19     {
20         if (arr[i] != 0)
21         {
22             temp = arr[i];
23             arr[i] = arr[j];
24             arr[j] = temp;
25             j++;
26         }
27     }
28
29     printf("Array after moving zeroes: ");
```

Output

```
PS C:\MinGW\bin> & "C:\Users\Anush\OneDrive\Documents\portfolio building\leetcode-solutions\basic-algorithms\02-move-zeroes.exe"
Enter number of elements: 6
Enter elements: 0 1 0 3 12 0
Array after moving zeroes: 1 3 12 0 0 0
PS C:\MinGW\bin> & "C:\Users\Anush\OneDrive\Documents\portfolio building\leetcode-solutions\basic-algorithms\02-move-zeroes.exe"
Enter number of elements: 5
Enter elements: 0 0 0 1 3
Array after moving zeroes: 1 3 0 0 0
PS C:\MinGW\bin>
```

8. Valid Parentheses – Local Testing

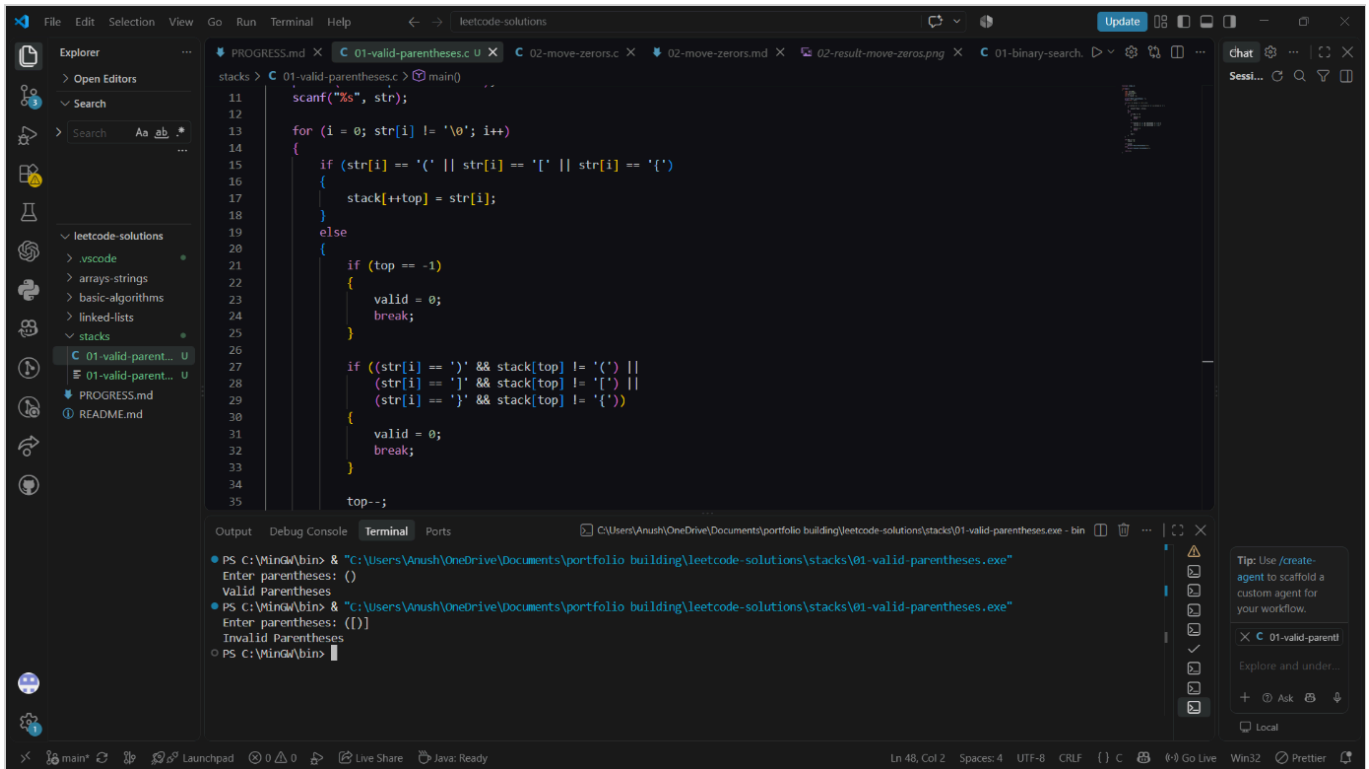

The screenshot shows the Visual Studio Code editor with a C program for validating parentheses. The Explorer sidebar on the left shows the project structure, including a file named `01-valid-parent...`. The main editor displays the source code for `01-valid-parentes.c`, which uses a stack to check if parentheses in a string are valid. The code includes a `scanf` call to read a string and a loop that iterates through each character, pushing opening parentheses onto a stack and popping them when a closing parenthesis is encountered. If the stack is empty at the end of the string, the parentheses are valid.

```
11 scanf("%s", str);
12
13 for (i = 0; str[i] != '\0'; i++)
14 {
15     if (str[i] == '(' || str[i] == '[' || str[i] == '{')
16     {
17         stack[++top] = str[i];
18     }
19     else
20     {
21         if (top == -1)
22         {
23             valid = 0;
24             break;
25         }
26
27         if ((str[i] == ')' && stack[top] != '(') ||
28             (str[i] == ']' && stack[top] != '[') ||
29             (str[i] == '}' && stack[top] != '{'))
30         {
31             valid = 0;
32             break;
33         }
34
35         top--;
```

The Terminal window at the bottom shows the execution of the program. It prompts the user to "Enter parentheses: ()" and outputs "Valid Parentheses". It then prompts for "Enter parentheses: ([)]" and outputs "Invalid Parentheses".

```
PS C:\MinGW\bin> "C:\Users\Anush\OneDrive\Documents\portfolio building\leetcode-solutions\stacks\01-valid-parentes.exe"
Enter parentheses: ()
Valid Parentheses
PS C:\MinGW\bin> "C:\Users\Anush\OneDrive\Documents\portfolio building\leetcode-solutions\stacks\01-valid-parentes.exe"
Enter parentheses: ([)]
Invalid Parentheses
PS C:\MinGW\bin>
```

5. LeetCode Accepted Submissions

1. Two Sum – Accepted

My Semester Courses | REVA

B25CS0311_176_566: Activity 11: Ass...

Document review and correction - C...

Akshithag0wda/leetcode-solutions

Two Sum - LeetCode

leetcode.com/problems/two-sum/submissions/2147711032/

Problem List

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

Accepted 65 / 65 testcases passed

Akshith_aaa submitted at Sep 20, 2026 18:52

School's in. Leet's on. Get LeetCode Annual Premium for \$99!

Runtime 95 ms Beats 85.73%

Memory 9.45 MB Beats 46.91%

Code C

1 /**

2 * Note: The returned array must be malloced, assume caller calls free().

Code

C Auto

17 }

18 }

19 }

20 }

21 *returnSize = 0;

22 return result;

23 }

Saved

Ln 1, Col 1

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 Case 2 Case 3

Input

nums =

[2,7,11,15]

target =

9

Output

2. Reverse a String – Accepted

The screenshot displays a web browser window with the LeetCode website. The main content area shows the submission details for the problem "Reverse String". The submission is marked as "Accepted" with 477/477 testcases passed. The user "Akshith_aaa" submitted it on Sep 20, 2026 at 20:24. The submission is analyzed and shows a runtime of 0 ms (Beats 100.00%) and memory usage of 17.85 MB (Beats 46.56%). A bar chart shows the runtime performance relative to other submissions. The code is written in C and is as follows:

```
1 void reverseString(char* s, int sSize) {
2     int i = 0;
```

The test result section shows the input string "h","e","l","l","o" and the output string "o","l","l","e","h".

3. Valid Anagram – Accepted

The screenshot displays a web browser window with the LeetCode website. The page shows the submission details for the 'Valid Anagram' problem. The submission is marked as 'Accepted' and was submitted by 'Akshith_aaa' on September 20, 2026, at 20:37. The submission passed all 55 test cases.

Runtime and Memory Performance:

- Runtime: 0 ms, Beats 100.00%
- Memory: 8.99 MB, Beats 67.45%

Code:

```
1 bool isAnagram(char* s, char* t) {
2     int count[26] = {0};
3     int i;
4
5     if (strlen(s) != strlen(t))
6         return false;
7
8     for (i = 0; s[i] != '\0'; i++)
9         count[s[i] - 'a']++;
10
11     for (i = 0; t[i] != '\0'; i++)
```

Testcase Results:

The test results show that the submission is 'Accepted' with a runtime of 0 ms. Two test cases are listed:

- Case 1: Input s = "anagram", t = "nagaram". Output: Accepted.
- Case 2: Input s = "anagram", t = "nagaram". Output: Accepted.

4. Best Time to Buy and Sell Stock – Accepted

The screenshot shows a LeetCode submission for the problem "Best Time to Buy and Sell Stock". The submission is accepted, with 213/213 testcases passed. The user, Akshith_aaa, submitted it on Sep 20, 2026 at 20:46. The submission is analyzed, showing a runtime of 0 ms (Beats 100.00%) and memory usage of 15.94 MB (Beats 86.27%).

The code is in C++ and implements a single-pass algorithm to find the maximum profit:

```
1 int maxProfit(int* prices, int pricesSize) {
2     int minPrice = prices[0];
3     int maxProfit = 0;
4     for (int i = 1; i < pricesSize; i++) {
5         if (prices[i] < minPrice) {
6             minPrice = prices[i];
7         }
8         else {
9             maxProfit = max(maxProfit, prices[i] - minPrice);
10        }
11    }
12    return maxProfit;
13 }
```

The test result shows the input prices = [7, 1, 5, 3, 6, 4] and the output is 5. The expected output is also 5.

5. Longest Common Prefix – Accepted

My Semester Courses | REVA

B25CS0311_176_566 Activity 11: Ass...

leetcode-solutions/PROGRESS.md at

Longest Common Prefix - LeetC...

leetcode.com/problems/longest-common-prefix/submissions/2147830940/

google Gmail Maps YouTube GCR Google Meet Translate ADDHAR CEH rtc bhomi land docs BHOOMI ONLINE E SWATHU exy

Problem List

Description Accepted Editorial Solutions Submissions

All Submissions

Accepted 126 / 126 testcases passed

Akshith_aaa submitted at Sep 20, 2026 21:08

School's in. Leet's on.
Get LeetCode Annual Premium for \$99!

Runtime
0 ms | Beats 100.00%

Memory
8.92 MB | Beats 38.97%



Code | C

```
1 char* longestCommonPrefix(char** strs, int strsSize) {
2     static char prefix[201];
```

Code

C Auto

```
17     }
18     }
19     }
20     prefix[j] = '\0';
21     if (prefix[0] == '\0')
22         return "";
23     }
24     }
25     return prefix;
26 }
```

Saved

Ln 25, Col 19

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 Case 2

Input

strs =
["flower", "flow", "flight"]

Output

"f"

Expected

6. Binary Search – Accepted

My Semester Courses | REVA

B25CS0311_176_566 Activity 11: As...

leetcode-solutions/arrays-strings/05

Binary Search - LeetCode

leetcode.com/problems/binary-search/submissions/2147848333/

Problem List

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

Accepted 47 / 47 testcases passed

Akshith_aaa submitted at Sep 20, 2026 21:28

Analysis Solution

Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

0 ms | Beats 100.00%

Memory

10.17 MB | Beats 8.54%

100%

1ms 2ms 3ms 6ms

Code | C

1 int search(int* nums, int numsSize, int target) {
2 int left = 0;

Code

Auto

9
10 mid = (left + right) / 2;
11 if (nums[mid] == target)
12 return mid;
13 else if (nums[mid] < target)
14 left = mid + 1;
15 else
16 right = mid - 1;
17 }
18 return -1;
19 }

Saved

Ln 18, Col 15

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 Case 2

Input

nums =
[-1,0,3,5,9,12]

target =
9

Output

7. Move Zeroes – Accepted

The screenshot displays the LeetCode interface for the 'Move Zeroes' problem. The page is divided into several sections:

- Problem List:** Shows the problem is 'Accepted' with 75 / 75 testcases passed. The user 'Akshith_aaa' submitted the solution on Sep 20, 2026 at 21:36. There are buttons for 'Analysis' and 'Solution'.
- School's in. Leet's on.:** A promotional banner for the LeetCode Annual Premium for \$99.
- Runtime and Memory:** The solution has a runtime of 0 ms (Beats 100.00%) and a memory usage of 20.46 MB (Beats 9.31%).
- Graph:** A line graph showing the runtime performance across various test cases, with a single data point at 0 ms.
- Code:** The solution is written in C++ using a two-pointer technique. The code is as follows:

```
1 void moveZeroes(int* nums, int numsSize) {  
2     int i, j = 0;  
3     for (i = 0; i < numsSize; i++)  
4     {  
5         if (nums[i] != 0)  
6         {  
7             temp = nums[i];  
8             nums[i] = nums[j];  
9             nums[j] = temp;  
10            j++;  
11        }  
12    }  
13 }
```
- Testcase:** The 'Test Result' section shows 'Accepted' with a runtime of 0 ms. It includes input and output fields for 'Case 1' and 'Case 2', both showing '[0]'.

8. Valid Parentheses – Accepted

My Semester Courses | REVA

B25CS0311_176_566 Activity 11: Ass...

leetcode-solutions/PROGRESS.md at

Valid Parentheses - LeetCode

leetcode.com/problems/valid-parentheses/submissions/2147862421/

google Gmail Maps YouTube GCR Google Meet Translate ADDHAR CEH rtc bhomoi land docs BHOOOMI ONLINE E SWATHU exy

Problem List

Description Accepted Editorial Solutions Submissions

All Submissions

Accepted 103 / 103 testcases passed

Akshith_aaa submitted at Sep 20, 2026 21:44

School's in. Leet's on. Get LeetCode Annual Premium for \$99!

Runtime 0 ms Beats 100.00%

Memory 9.17 MB Beats 42.90%

100% 50% 0% 1ms 2ms 3ms 4ms

Code C

1 bool isValid(char* s) {
2 char stack[10000];

Code

10
19
20
21
22
23
24
25
26
27
28
29

(s[i] == ']' && stack[top] != '[') ||
(s[i] == '}' && stack[top] != '{'))
{
return false;
}
top--;
}
return top == -1;

Saved

Ln 28, Col 22

Testcase

Test Result

Accepted Runtime: 0 ms

Case 1 Case 2 Case 3 Case 4 Case 5

Input


s =
"()"

Output


true

Expected


6. Problem Documentation and Complexity Analysis

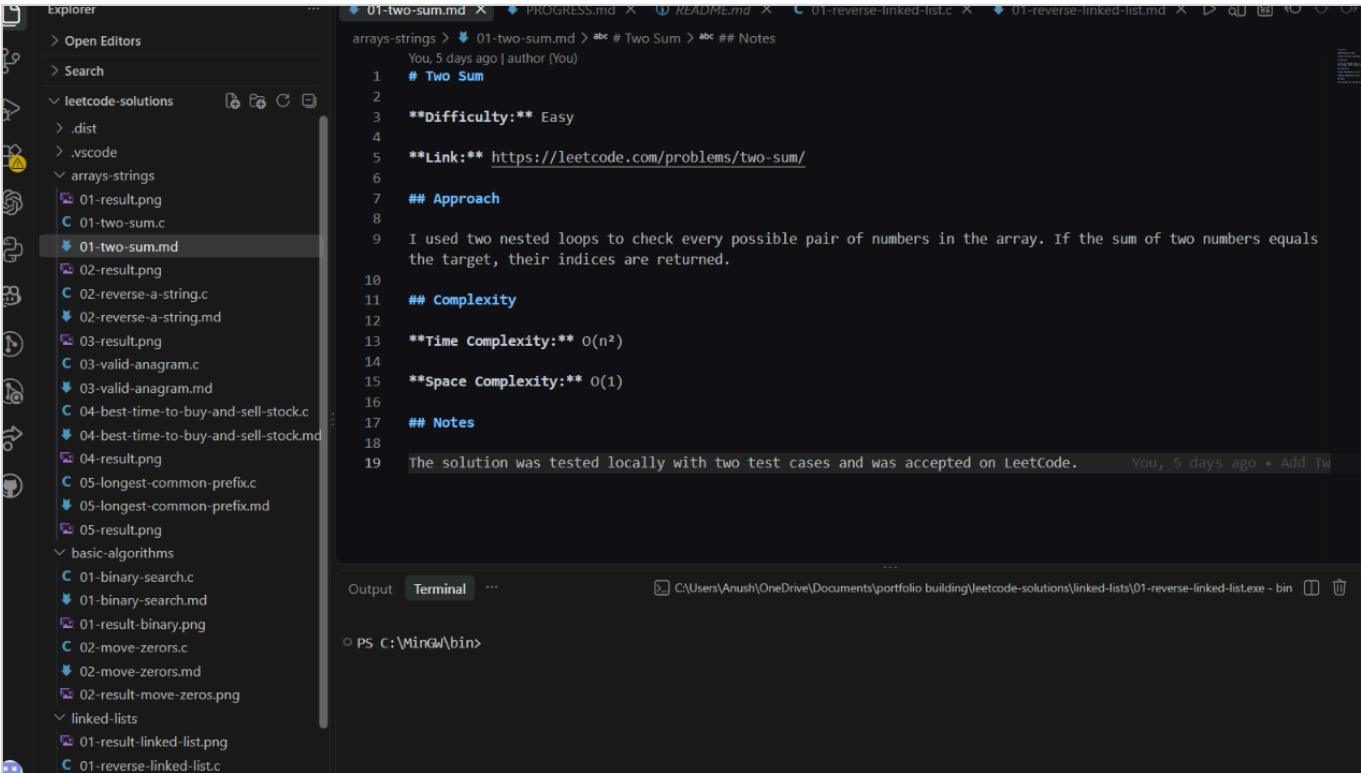


7. Progress Tracker

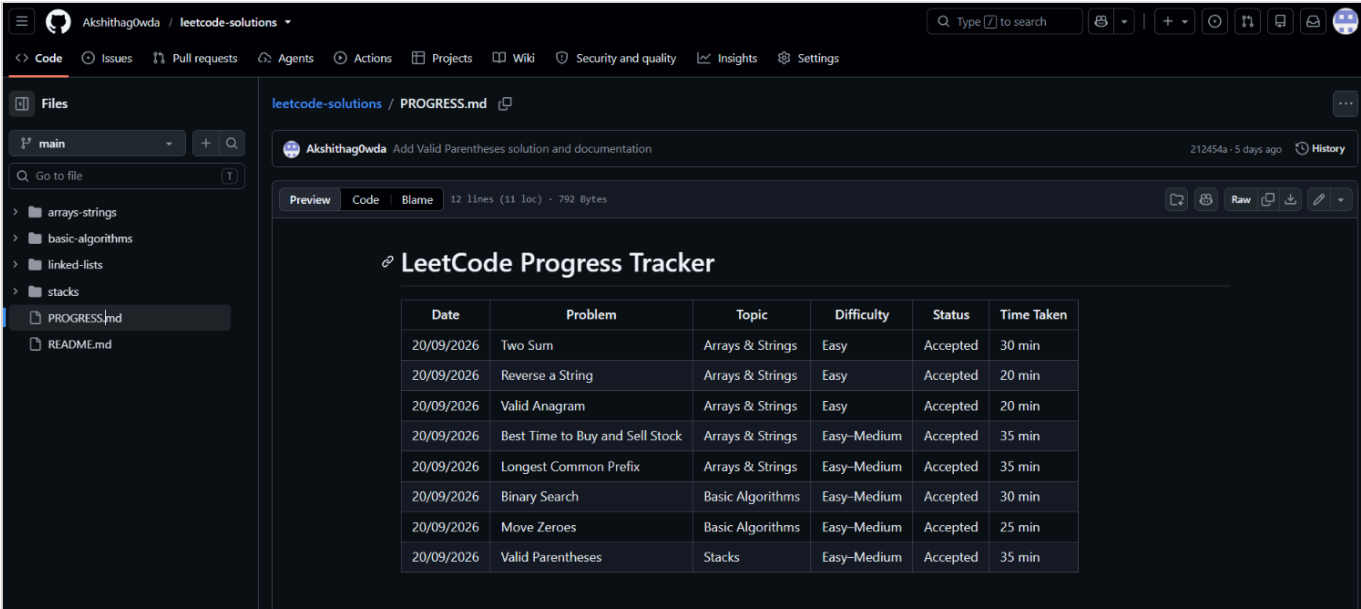


8. GitHub Commit History

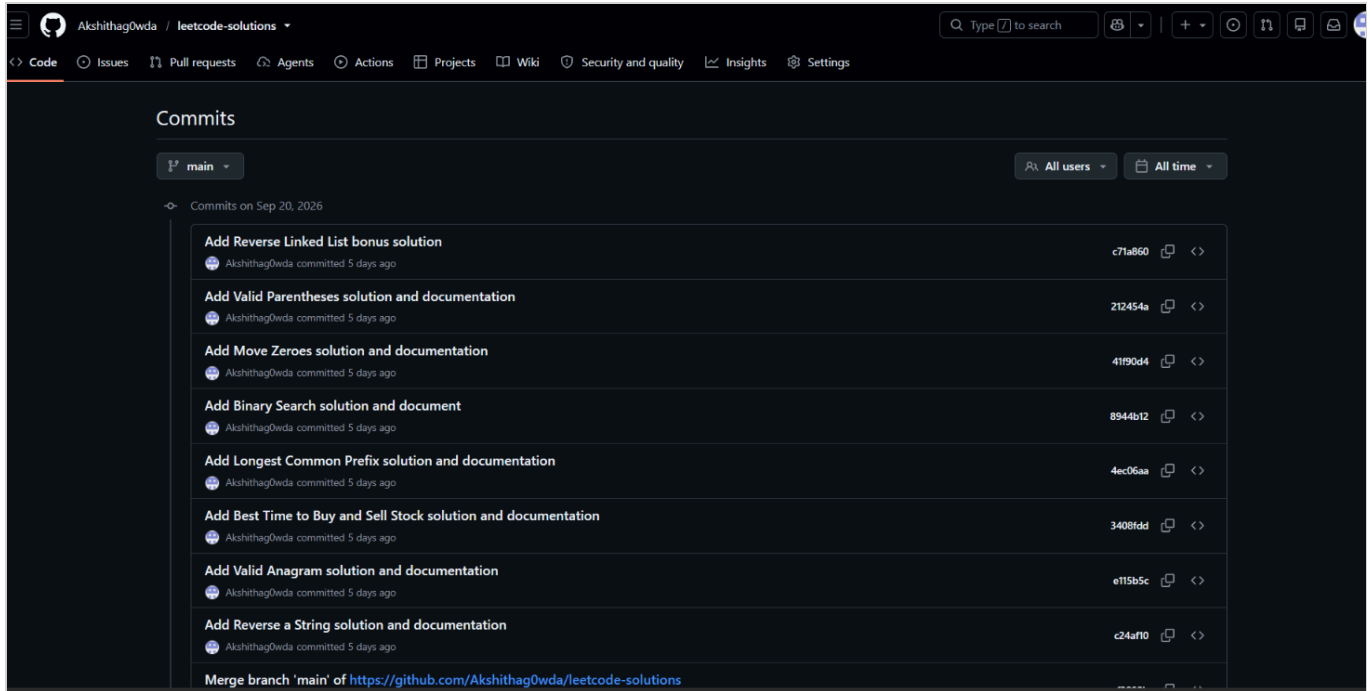

9. Bonus Problem – Reverse a Linked List

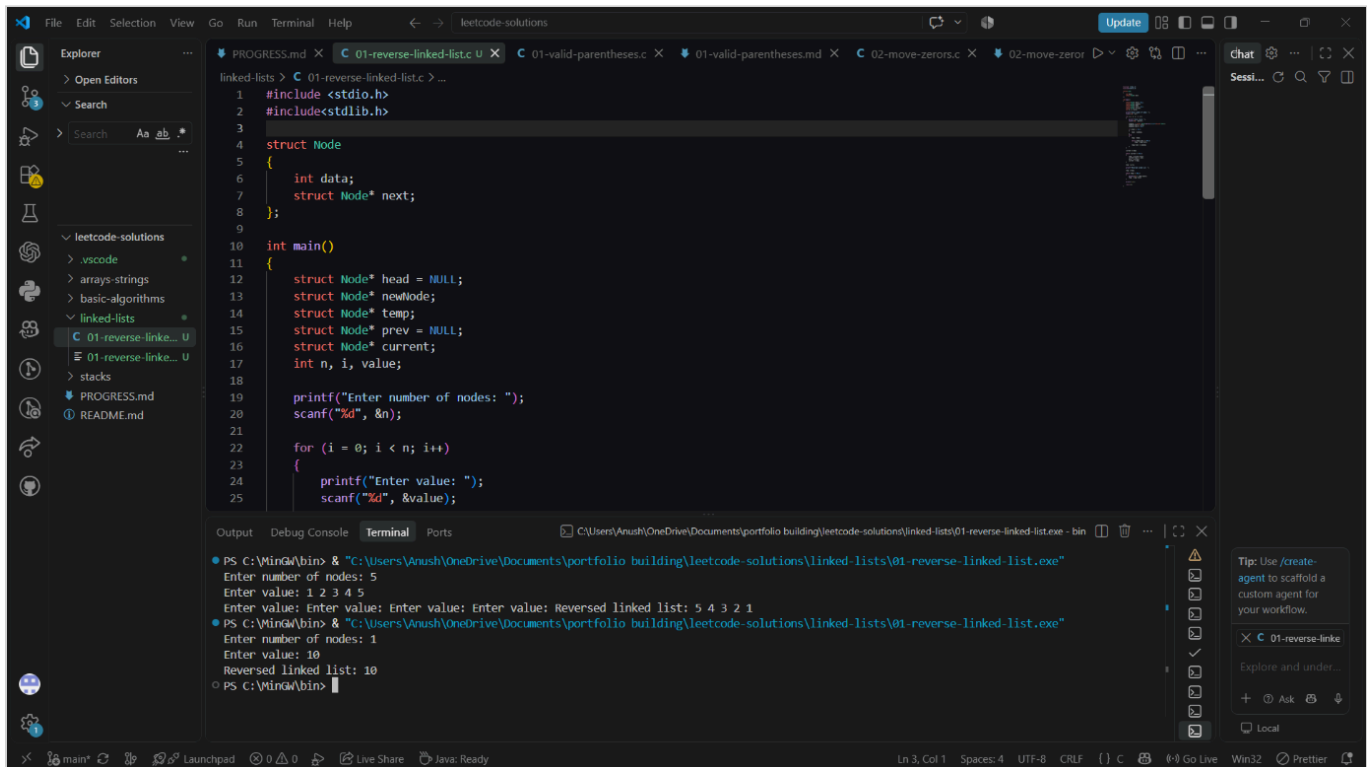

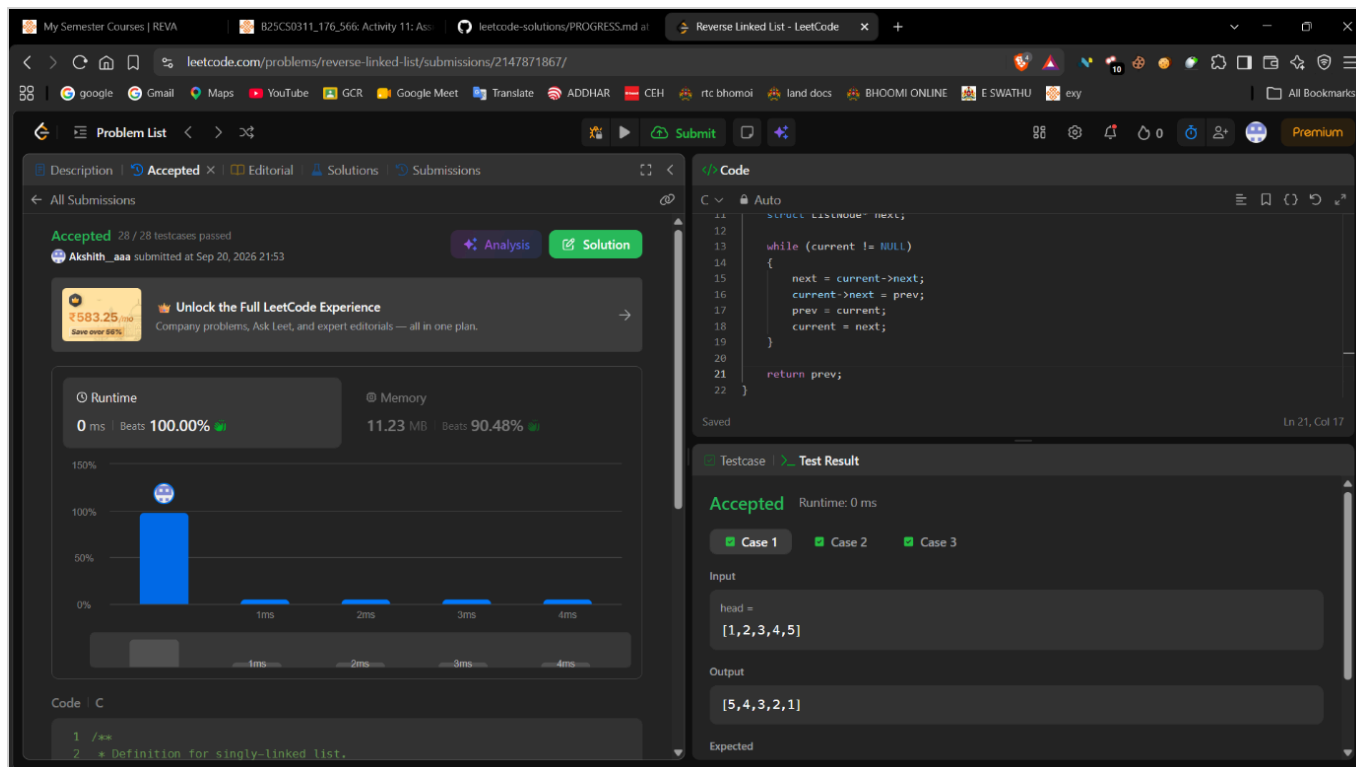

10. Conclusion / Reflection

During this activity, I practiced solving different LeetCode problems using C/Python and learned how to approach problems step by step. I worked with arrays, strings, searching, stacks, and linked lists. Writing and testing the programs locally before submitting them to LeetCode helped me understand the logic better and find mistakes early. I also learned the importance of choosing an efficient approach by considering time and space complexity. Problems such as Binary Search helped me understand how an algorithm can reduce unnecessary operations, while Valid Parentheses helped me understand the use of stacks. I maintained separate solution files and documentation for each problem and updated my progress tracker regularly. I also learned how to use GitHub to organize my work and maintain a history of my changes through individual commits. The Accepted results on LeetCode gave me confidence that my solutions were working correctly. Overall, this activity improved my problem-solving skills, programming practice, and understanding of basic data structures and algorithms. It also helped me build a more organized coding practice portfolio that I can continue updating with new problems.