

HYPERTEXT MARKUP LANGUAGE

HTML Lists

HTML lists are used to organize related items in a structured format. Instead of writing information in long paragraphs, lists present content in a clean and easy-to-read manner. Lists improve readability, make information easier to scan, and help users understand relationships between items.

HTML provides three primary types of lists:

1. Ordered Lists
2. Unordered Lists
3. Description Lists

Lists can also be combined to create **Nested Lists**.

Why Use Lists?

Lists help to:

- Organize information clearly
- Improve readability
- Present steps and instructions
- Group related items together
- Simplify navigation menus
- Create structured content layouts

Types of HTML Lists

List Type	Tag
Ordered List	<code></code>
Unordered List	<code></code>
Description List	<code><dl></code>

HTML Ordered Lists

An ordered list displays items in a specific sequence. Each item automatically receives a number, letter, or other ordered marker.

Ordered lists are useful when the order of items is important.

Real-Life Examples

- Recipe instructions
- Exam procedures
- Installation steps
- Ranking systems
- Task sequences



Structure of an Ordered List

An ordered list uses:


```
<ol>
  <li>Item</li>
</ol>
```

Where:

- creates the ordered list.
- defines each list item.

Basic Example

```
<ol>
  <li>Wake up</li>
  <li>Brush teeth</li>
  <li>Eat breakfast</li>
</ol>
```

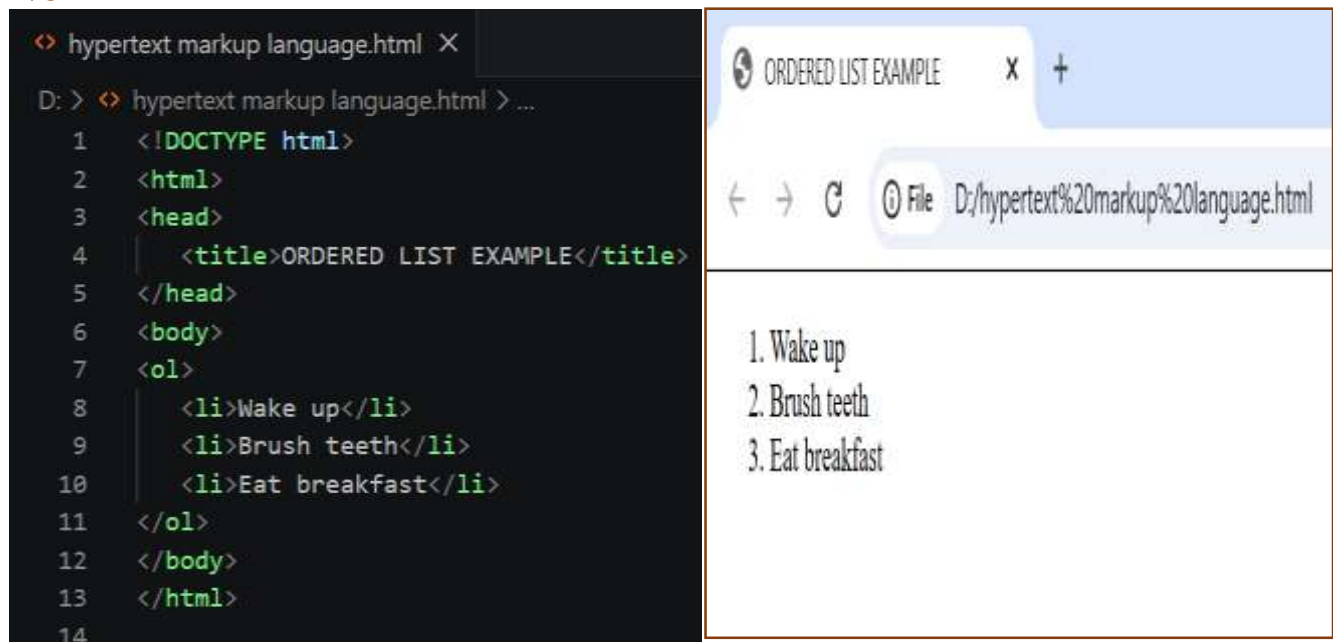

Ordered List Hierarchy:



The acts as the container, while each represents an item.

Ordered List Types


Different numbering styles can be used.

Type	Result
1	1, 2, 3
A	A, B, C
a	a, b, c
I	I, II, III
i	i, ii, iii

Example

```
<ol type="A">
  <li>HTML</li>
  <li>CSS</li>
  <li>JavaScript</li>
</ol>
```

```
hypertext markup language.html X
D: > hypertext markup language.html > ...
1  <!DOCTYPE html>
2  <html>
3  <head>
4  | <title>ORDERED LIST EXAMPLE</title>
5  </head>
6  <body>
7  Example
8  <ol type="A">
9  | <li>HTML</li>
10 | <li>CSS</li>
11 | <li>JavaScript</li>
12 </ol>
13 </body>
14 </html>
15
```

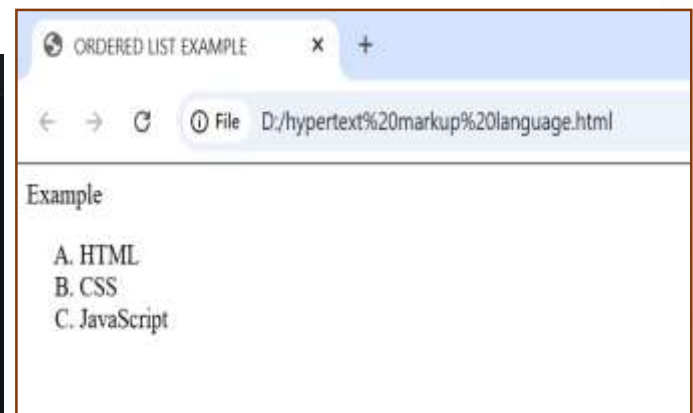

Starting From a Different Number

The start attribute changes the starting point.

```
<ol start="5">
  <li>Chapter Five</li>
  <li>Chapter Six</li>
</ol>
```

```
hypertext markup language.html X
D: > hypertext markup language.html > ...
1  <!DOCTYPE html>
2  <html>
3  <head>
4  | <title>ORDERED LIST EXAMPLE</title>
5  </head>
6  <body>
7  Example
8  <ol start="5">
9  | <li>Chapter Five</li>
10 | <li>Chapter Six</li>
11 </ol>
12 </body>
13
```



HTML Unordered Lists

An unordered list displays items without a specific order. Each item usually appears with a bullet symbol.

Real-Life Examples

- Shopping lists
- Features lists
- Navigation menus
- Categories
- Product specifications

Structure of an Unordered List

```
<ul>
<li>Item</li>
</ul>
```

Basic Example

```
<ul>
  <li>Apple</li>
  <li>Mango</li>
  <li>Banana</li>
</ul>
```

<pre>hypertext markup language.html X D: > hypertext markup language.html > ... 1 <!DOCTYPE html> 2 <html> 3 <head> 4 <title>UNORDERED LIST EXAMPLE</title> 5 </head> 6 <body> 7 Basic Example 8 9 Apple 10 Mango 11 Banana 12 13 </body></pre>	UNORDERED LIST EXAMPLE X + ← → ↻ File D:/hypertext%20markup%20language.html Basic Example • Apple • Mango • Banana
--	---

Unordered List Hierarchy



Bullet Styles

The bullet appearance can be changed.

	Style	Appearance
Disc	→	●
Circle	→	○
Square	→	■

Example

```
<ul type="square">
  <li>HTML</li>
  <li>CSS</li>
  <li>JavaScript</li>
</ul>
```

```
hypertext markup language.html X
D: > hypertext markup language.html > ...
1 <!DOCTYPE html>
2 <html>
3 <head>
4   <title>UNORDERED LIST EXAMPLE</title>
5 </head>
6 <body>
7   <ul type="square">
8     <li>HTML</li>
9     <li>CSS</li>
10    <li>JavaScript</li>
11  </ul>
12 </body>
13 </html>
```

UNORDERED LIST EXAMPLE X +

← → ↺ File D:/hypertext%20markup%20language.html

- HTML
- CSS
- JavaScript



Description Lists

A description list is used when each item requires an explanation or definition. Instead of simple bullets or numbers, description lists contain terms and their descriptions.

Real-Life Examples

- Glossaries
- Dictionaries
- Product details
- FAQ sections
- Technical definitions

Structure of Description Lists

Three tags are used:

Tag	Purpose
<code><dl></code>	Description list container
<code><dt></code>	Description term
<code><dd></code>	Description details

Basic Example

```
<dl>
  <dt>HTML</dt>
  <dd>Used to structure webpages.</dd>
  <dt>CSS</dt>
  <dd>Used to style webpages.</dd>
</dl>
```

```
hypertext markup language.html X
D:\> hypertext markup language.html > ...
1  <!DOCTYPE html>
2  <html>
3  <head>
4    <title>DESCRIPTION LIST EXAMPLE</title>
5  </head>
6  <body>
7    <dl>
8      <dt>HTML</dt>
9      <dd>Used to structure webpages.</dd>
10     <dt>CSS</dt>
11     <dd>Used to style webpages.</dd>
12   </dl>
13 </body>
14 </html>
```

DESCRIPTION LIST EXAMPLE x +

← → ↻ Ⓜ File D:/hypertext%20markup%20language.html

HTML
Used to structure webpages.
CSS
Used to style webpages.

Description List Hierarchy




Multiple Descriptions for One Term

A single term can have multiple descriptions.

```
<dl>
  <dt>HTML</dt>
  <dd>Markup language.</dd>
  <dd>Foundation of webpages.</dd>
</dl>
```

```
hypertext markup language.html X
D: > hypertext markup language.html > ...
1  <!DOCTYPE html>
2  <html>
3  <head>
4    <title>DESCRIPTION LIST EXAMPLE</title>
5  </head>
6  <body>
7    <dl>
8      <dt>HTML</dt>
9      <dd>Markup language.</dd>
10     <dd>Foundation of webpages.</dd>
11  </dl>
12 </body>
13 </html>
14
```

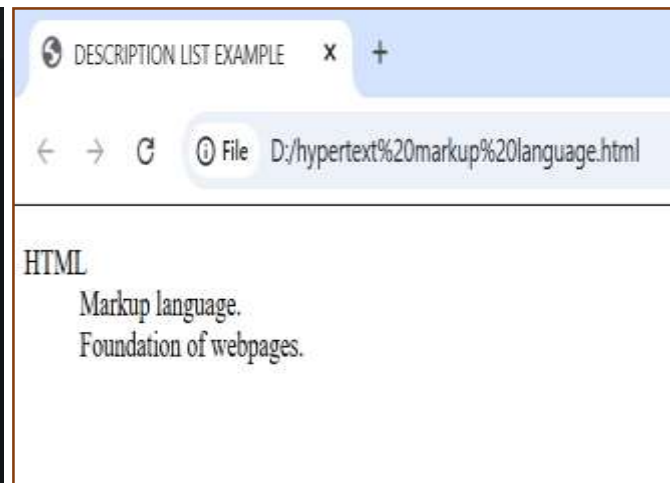

Nested Lists

A nested list is a list placed inside another list.

Nested lists help create subcategories and multi-level structures.

Real-Life Examples

- Website menus
- Course outlines
- Folder structures
- Product categories
- Organizational charts

