

HYPERTEXT MARKUP LANGUAGE

HTML Basic Tags:

HTML basic tags are the core instructions used to build and arrange webpage content. These tags are written inside angle brackets `< >`, and most tags contain both opening and closing forms.

Different tags perform different tasks such as creating headings, paragraphs, line breaks, lists, and page sections.

Common Basic Tags:

`<h1>` to `<h6>` - Heading Tags:

Heading tags are used to define titles and subtitles on a webpage. HTML provides six heading levels, from `<h1>` to `<h6>`.

- `<h1>` defines the largest and most important heading.
- `<h6>` defines the smallest heading.
- Browsers automatically display headings in bold style with spacing.

`<p>` - Paragraph Tag:

The `<p>` tag is used to create paragraphs of text. Each paragraph starts on a new line with spacing before and after it.

`<br>` - Line Break Tag:

The `<br>` tag is used to break a line and continue content on the next line without starting a new paragraph.

- It is an empty tag.
- No closing tag is needed.



<center> - Center Tag:

The <center> tag is used to align content in the center of the webpage.

- This tag is deprecated in HTML5.
- CSS is recommended for modern webpages.

<hr> - Horizontal Rule Tag:

The <hr> tag inserts a horizontal line across the webpage. It is mainly used to separate sections of content.

- It is an empty tag.
- No closing tag is required.

<pre> - Preserve Formatting Tag:

The <pre> tag displays text exactly as written in the HTML document.

- Spaces and line breaks are preserved.
- Commonly used for code display.

** - Non-Breaking Space:**

 is an HTML entity used to insert extra spaces between words without allowing line breaks.

, , - List Tags:

List tags are used to create ordered and unordered lists.

** - Unordered List:**

Displays list items with bullets.

** - Ordered List:**

Displays list items with numbers.

<dl> - Definition List:

Displays list items with numbers.

** - List Item:**


Defines each item inside or lists.



<h1> to <h6> (HEADING TAGS) EXAMPLE:

```
<!DOCTYPE html>
<html>
<head>
<title>Heading Example</title>
</head>
<body>
<h1>Heading 1</h1>
<h2>Heading 2</h2>
<h3>Heading 3</h3>
<h4>Heading 4</h4>
<h5>Heading 5</h5>
<h6>Heading 6</h6>
</body>
</html>
```

```
hypertext markup language.html X
D: > hypertext markup language.html > html
1 <!DOCTYPE html>
2 <html>
3   <head>
4     <title>HEADING TAGS EXAMPLE</title>
5   </head>
6   <body>
7     <h1>Heading 1</h1>
8     <h2>Heading 2</h2>
9     <h3>Heading 3</h3>
10    <h4>Heading 4</h4>
11    <h5>Heading 5</h5>
12    <h6>Heading 6</h6>
13  </body>
14 </html>
```

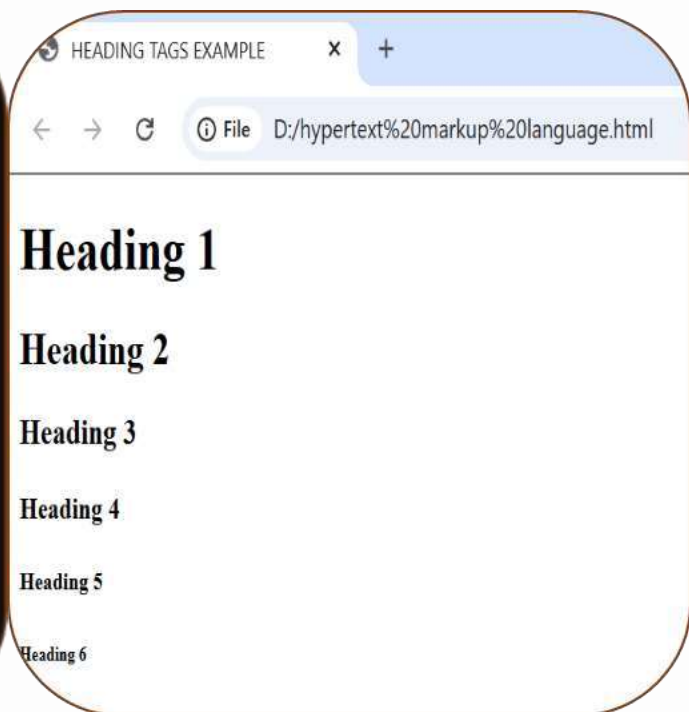

<p> (PARAGRAPH TAG) EXAMPLE:

```
<!DOCTYPE html>
<html>
<head>
<title>Paragraph Tag Example</title>
</head>
<body>
<p>This is a first.</p>
<p>This is a second para.</p>
</body>
</html>
```

hypertext markup language.html X

D: > hypertext markup language.html > ...

```
1  <!DOCTYPE html>
2  <html>
3    <head>
4      <title>PARAGRAPH TAG EXAMPLE</title>
5    </head>
6    <body>
7      <P>This is first para.</P>
8      <P>This is first para.</P>
9    </body>
10 </html>
11
```

PARAGRAPH TAG EXAMPLE X +

← → ↻ ⓘ File D:/hypertext%20markup%20language.html

This is first para.

This is first para.



(Line Break Tag) Example:

```
<!DOCTYPE html>
<html>
<head>
<title>Line Break Example</title>
</head>
<body>
<p>Hi !<br>This is Roshan.<br>Thanks</p>
</body>
</html>
```




<center>(center TAGS) EXAMPLE:

```
<!DOCTYPE html>
<html>
<head>
<title>CENTER TAG EXAMPLE</title>
</head>
<body>
<center>Hi! This is Roshan. Thanks</center>
</body>
</html>
```

hypertext markup language.html X


D: > hypertext markup language.html > _

```
1 <!DOCTYPE html>
2 <html>
3   <head>
4     <title>CENTER TAG EXAMPLE</title>
5   </head>
6   <body>
7     <center>Hi! This is Roshan. Thanks</center>
8   </body>
9 </html>
10
```

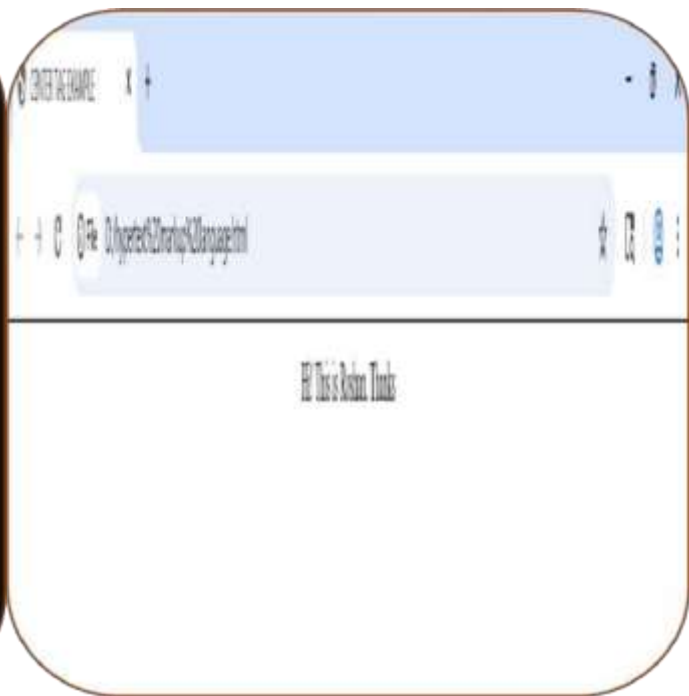


<hr> (HORIZONTAL SEPERATOR TAG) EXAMPLE:

```
<!DOCTYPE html>
<html>
<head>
<title>HORIZONTAL SEPERATOR EXAMPLE</title>
</head>
<body>
<p>This is 1st paragraph.</p>
<hr>
<p>This is 2nd paragraph.</p>
</body>
</html>
```

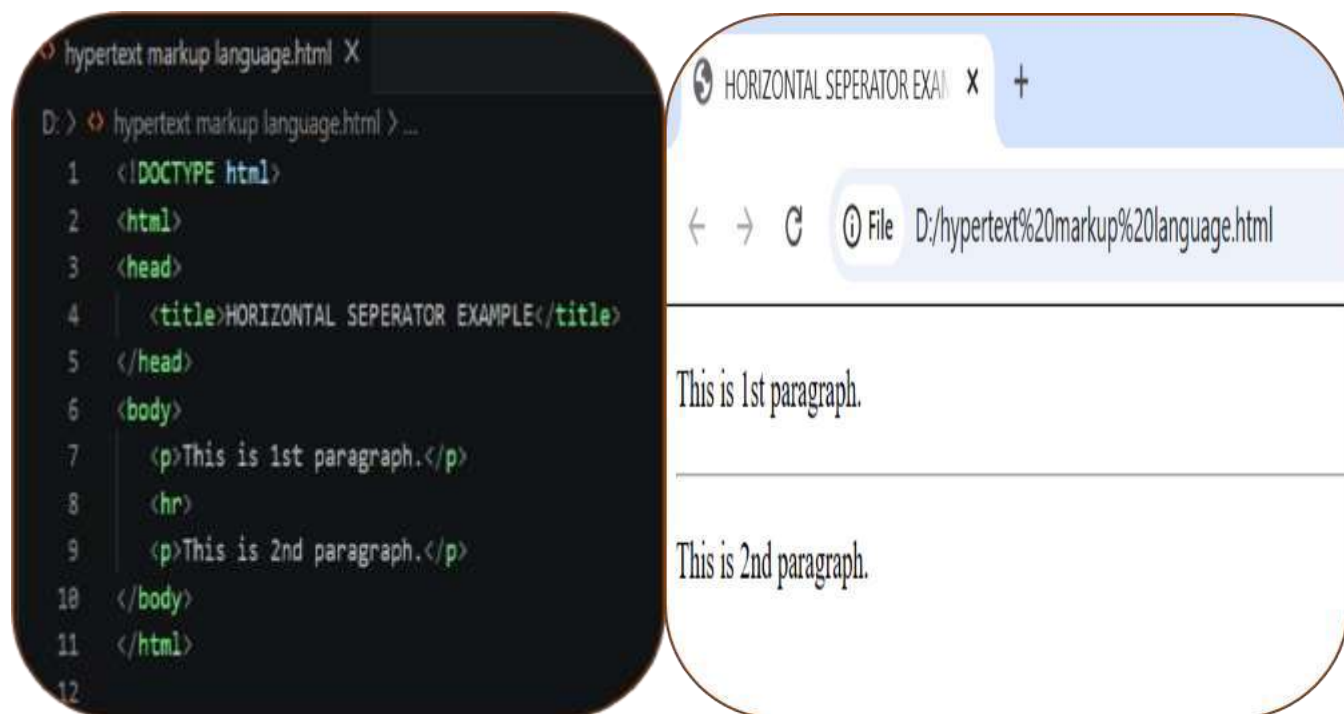

<PRE> TAG EXAMPLE:

```
<!DOCTYPE html>
<html>
<head>
  <title>PRESERVE FORMATTING EXAMPLE</title>
</head>
<body>
  <pre>
    function addNumbers( a , b ){
      print(a + b)
    }
  </pre>
</body>
</html>
```

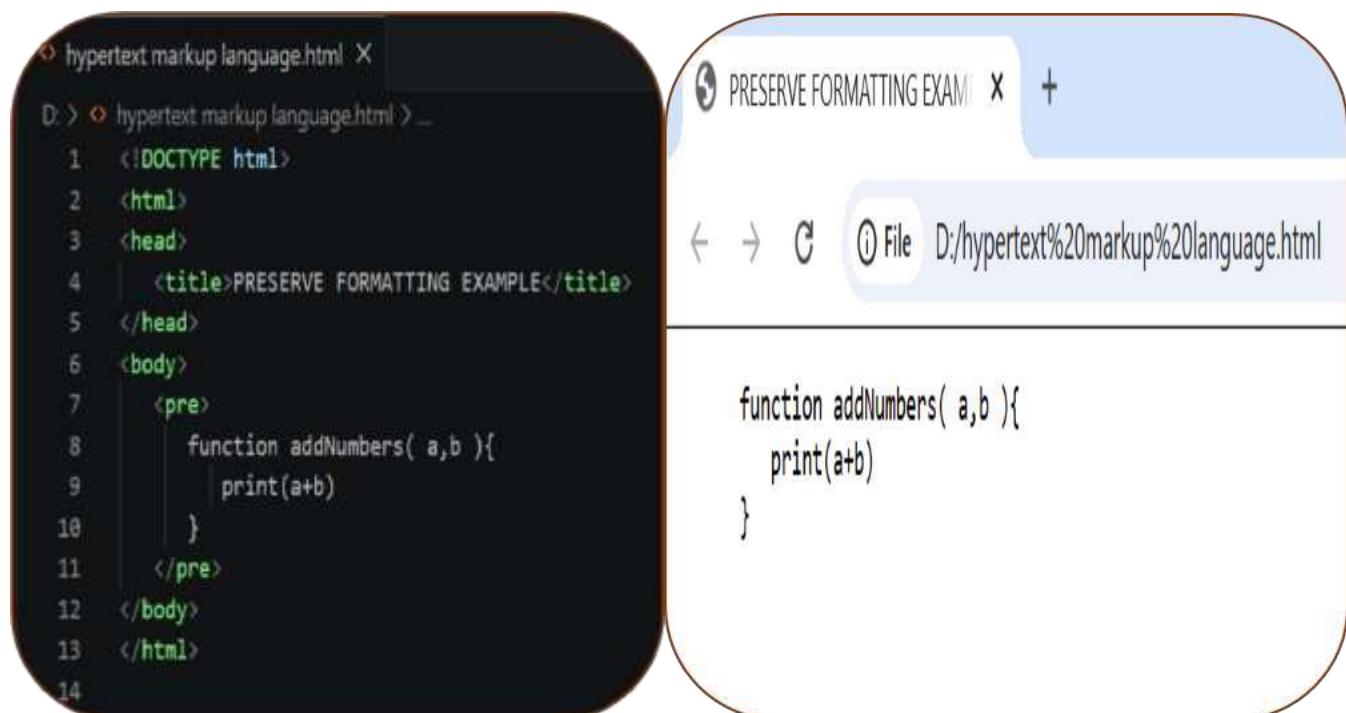


```
<!DOCTYPE html>
<html>
<head>
  <title>Nonbreaking Spaces Example</title>
</head>
<body>
  <p>This is Rama "12 years old."</p>
  <p>This is Rama "12    years old."</p>
</body>
</html>
```

D. >  hypertext markup language.html > _

[illegible]

← → ↺ ⓘ File D:/hypertext%20

This is Rama "12 years old."



,,(LIST TAGS) EXAMPLE:

```
<!DOCTYPE html>
<html>
<head>
  <title>LIST TAGS EXAMPLE</title>
</head>
<body>
  <h2>Unordered list</h2>
  <ul>
    <li>1ST TAG</li>
    <li>2ND TAG</li>
    <li>3RD TAG</li>
  </ul>
  <h2>Ordered list</h2>
  <ul>
    <li>1ST TAG</li>
    <li>2ND TAG</li>
    <li>3RD TAG</li>
  </ul>
  <h2>Definition list</h2>
  <dl>TAGS LIST</dl>
  <dt>TAGS</dt>
  <dd>1ST TAG</dd>
  <dd>2ND TAG</dd>
  <dd>3RD TAG</dd>
</body>
</html>
```

```
hypertext markup language.html X
D > < hypertext markup language.html > html > body
1  <!DOCTYPE html>
2  <html>
3  <head>
4    <title>LIST TAGS EXAMPLE</title>
5  </head>
6  <body>
7    <h2>Unordered list</h2>
8    <ul>
9      <li>1ST TAG</li>
10     <li>2ND TAG</li>
11     <li>3RD TAG</li>
12   </ul>
13   <h2>Ordered list</h2>
14   <ul>
15     <li>1ST TAG</li>
16     <li>2ND TAG</li>
17     <li>3RD TAG</li>
18   </ul>
19   <h2>Definition list</h2>
20   <dl>TAGS LIST</dl>
21   <dt>TAGS</dt>
22   <dd>1ST TAG</dd>
23   <dd>2ND TAG</dd>
24   <dd>3RD TAG</dd>
25 </body>
26 </html>
```

LIST TAGS EXAMPLE

File: D:/hypertext%20markup%20language.html

Unordered list

- 1ST TAG
- 2ND TAG
- 3RD TAG

Ordered list

- 1ST TAG
- 2ND TAG
- 3RD TAG

Definition list

TAGS LIST

TAGS

- 1ST TAG
- 2ND TAG
- 3RD TAG



<https://elevatme.netlify.app/>



<https://yaganti-spandana.netlify.app/>

HTML



</>