

OpenClaw Quick Start Guide

OpenClaw Quick Start Guide

1. Quick Configuration Scripts
 1. Online Configuration
 2. Local Configuration
2. Launching OpenClaw
4. Common Commands
5. Useful Resources

The disk image we provide comes pre-configured with OpenClaw, as well as the Deepseek online model and the Ollama local model. You can follow this tutorial to quickly launch OpenClaw and start exploring its features.

Note: Both the online and local configuration scripts will back up your original `.openc1aw` configuration folder to the `.openc1aw_bak` directory, and then clear the original configuration settings.


1. Quick Configuration Scripts

The Jetson AGX Orin supports utilizing local models via Ollama. The quick configuration scripts offer two options—online configuration and local configuration—of which you need to select only one.

1. Online Configuration

Run the one-click configuration script and enter `y` to confirm the reconfiguration.

```
~/ .openc1aw_bak/setup_online.sh
```

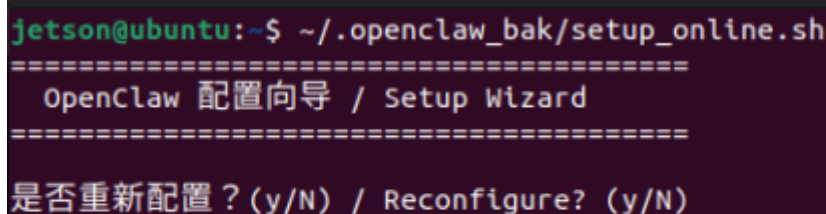

```
jetson@ubuntu:~$ ~/ .openc1aw_bak/setup_online.sh
=====
OpenClaw 配置向导 / Setup Wizard
=====
是否重新配置? (y/N) / Reconfigure? (y/N)
```

Follow the prompts to enter your Deepseek API Key.

Note: For this Quick Start Guide, the default built-in API is Deepseek's. If you wish to use a different API, please refer to the Deployment Guide for instructions on how to reconfigure the settings.

Get an API Key: https://platform.deepseek.com/sign_in

```
jetson@ubuntu:~$ ~/.openclaw_bak/setup_online.sh
=====
OpenClaw 配置向导 / Setup Wizard
=====

是否重新配置？(y/N) / Reconfigure? (y/N) y
请输入Deepseek API Key：
(获取地址：https://platform.deepseek.com/sign_in)

Please enter Deepseek API Key:
(Get it from: https://platform.deepseek.com/sign_in)

API_KEY: █
```

Configuration update complete.

```
✓ 已更新 openclaw.json 中的APIKEY配置
✓ Updated APIKEY configuration in openclaw.json

=====
配置完成！ / Configuration Complete!
=====

👉 OpenClaw 2026.3.13 (61d171a)
I'll refactor your busywork like it owes me money.

21:08:53 [plugins] plugins.allow is empty; discovered non-bundled plugins may au
to-load: openclaw-qqbot (/home/jetson/.openclaw/extensions/openclaw-qqbot/preloa
d.cjs). Set plugins.allow to explicit trusted ids.
[qqbot-channel-api] No QQBot accounts configured, skipping
[qqbot-remind] Registered QQBot remind tool
21:08:56 [plugins] openclaw-qqbot: loaded without install/load-path provenance;
treat as untracked local code and pin trust via plugins.allow or install records
(/home/jetson/.openclaw/extensions/openclaw-qqbot/preload.cjs)
Restarted systemd service: openclaw-gateway.service

现在可以开始使用 OpenClaw 了！
Now you can start using OpenClaw!
```

2. Local Configuration

Run the one-click configuration script. Since local configuration does not require an API Key, simply enter **y** to proceed with the reconfiguration.

```
~/.openclaw_bak/setup_local.sh
```

```
jetson@ubuntu:~$ ~/.openclaw_bak/setup_local.sh
=====
  OpenClaw 配置向导 / Setup Wizard
=====

是否重新配置? (y/N) / Reconfigure? (y/N) y

=====
  配置完成! / Configuration Complete!
=====

🦊 OpenClaw 2026.3.13 (61d171a)
  Somewhere between 'hello world' and 'oh god what have I built.'
```

21:15:35 [plugins] plugins.allow is empty; discovered non-bundled plugins may au
to-load: openclaw-qqbot (/home/jetson/.openclaw/extensions/openclaw-qqbot/preloa
d.cjs). Set plugins.allow to explicit trusted ids.
[qqbot-channel-api] Registered QQ channel API proxy tool
[qqbot-remind] Registered QQBot remind tool
Restarted systemd service: openclaw-gateway.service

现在可以开始使用 OpenClaw 了!
Now you can start using OpenClaw!

2. Launching OpenClaw

Use the TUI interface in a separate terminal:

```
openclaw tui
```

```
jetson@ubuntu:~$ openclaw tui

🦊 OpenClaw 2026.3.13 (61d171a)
  I speak fluent bash, mild sarcasm, and aggressive tab-completion energy.
```

openclaw tui - ws://127.0.0.1:18789 - agent main - session main
connecting | idle
agent main | session main | unknown | tokens ?

21:11:16 [plugins] plugins.allow is empty; discovered non-bundled plugins may au
to-load: openclaw-qqbot (/home/jetson/.openclaw/extensions/openclaw-qqbot/preloa
d.cjs). Set plugins.allow to explicit trusted ids.
[qqbot-channel-api] No QQBot accounts configured, skipping
[qqbot-remind] Registered QQBot remind tool

session agent:main:main

Wake up, my friend!

4. Common Commands

```
# Start OpenClaw
openclaw

# TUI Interface
openclaw tui

# Check Status
openclaw status
```

Configuration Wizard

openclaw wizard

List Skills

openclaw skills list

Help

openclaw --help

5. Useful Resources

- OpenClaw Documentation: <https://docs.openclaw.ai>
- Community: <https://discord.com/invite/clawd>
- Skill Marketplace: <https://clawhub.com>