

Manage JupyterLab Service

The JupyterLab service in our VM environment starts automatically on boot. To access the JupyterLab interface:

Enter the VM's IP address in the browser. Assuming the VM's IP address is 192.168.1.23, enter in the browser:

192.168.1.23:**8888**, then press Enter to enter the JupyterLab interface. On first entry, you need to enter the password: yahboom, then press Enter.

To disable auto-start service:


```
sudo systemctl disable jupyterlab.service
```

To restore auto-start service:

```
sudo systemctl enable jupyterlab.service
```

Check if enabled successfully:

```
sudo systemctl is-enabled jupyterlab.service
```

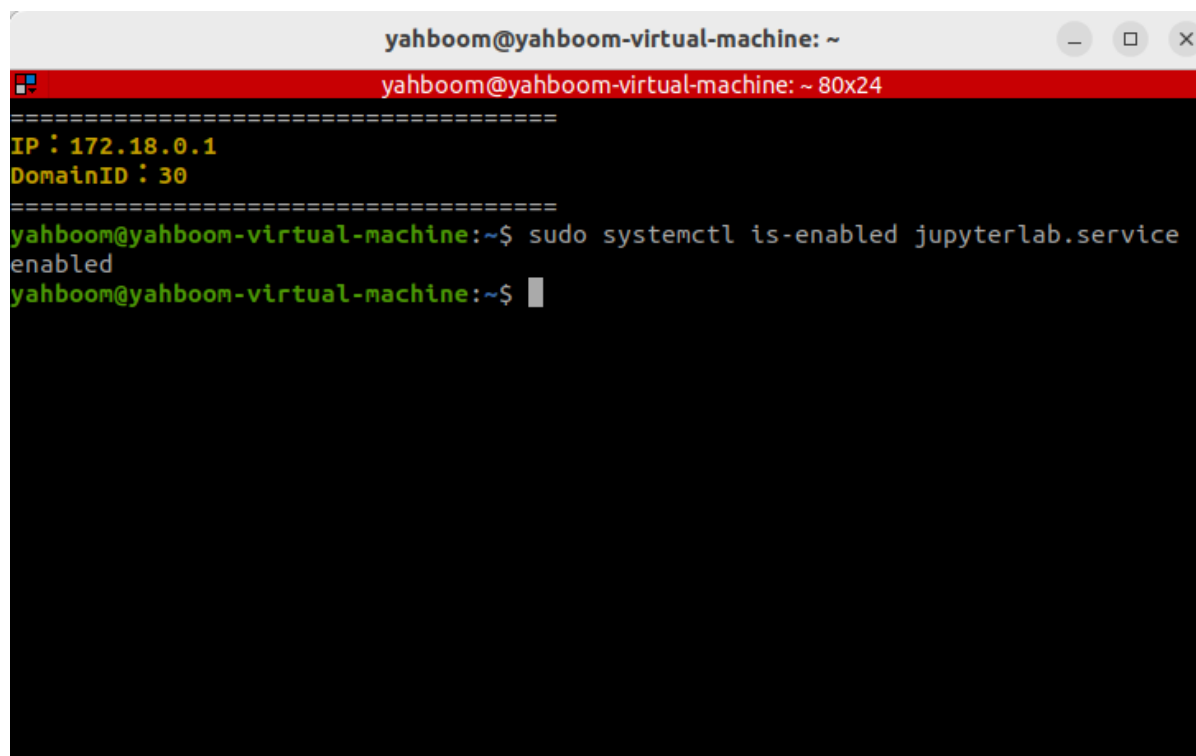

```
yahboom@yahboom-virtual-machine: ~  
=====  
IP : 172.18.0.1  
DomainID : 30  
=====  
yahboom@yahboom-virtual-machine:~$ sudo systemctl is-enabled jupyterlab.service  
enabled  
yahboom@yahboom-virtual-machine:~$
```