

Palm Target Positioning

1. Introduction

MediaPipe is a machine learning application development framework for data stream processing, developed and open-sourced by Google. It is a graph-based data processing pipeline used to build applications that utilize various forms of data sources such as video, audio, sensor data, and any time series data.

MediaPipe is cross-platform and can run on embedded platforms (Jetson Nano, etc.), mobile devices (iOS and Android), workstations and servers, and supports mobile GPU acceleration. MediaPipe provides cross-platform, customizable ML solutions for real-time and streaming media.

The core framework of MediaPipe is implemented in C++ and provides support for Java and Objective C. The main concepts of MediaPipe include Packet, Stream, Calculator, Graph, and Subgraph.


MediaPipe features:

- End-to-end acceleration: Built-in fast ML inference and processing accelerate even on ordinary hardware.
- Build once, deploy anywhere: Unified solution works on Android, iOS, desktop/cloud, web, and IoT.
- Ready-to-use solutions: Cutting-edge ML solutions that demonstrate all the capabilities of the framework.
- Free and open source: Framework and solutions under Apache 2.0, fully extensible and customizable.

2. Startup

2.1. Program Description

After the program runs, the camera captures image frames, the program detects the palm, and prints the palm center coordinates to the terminal.

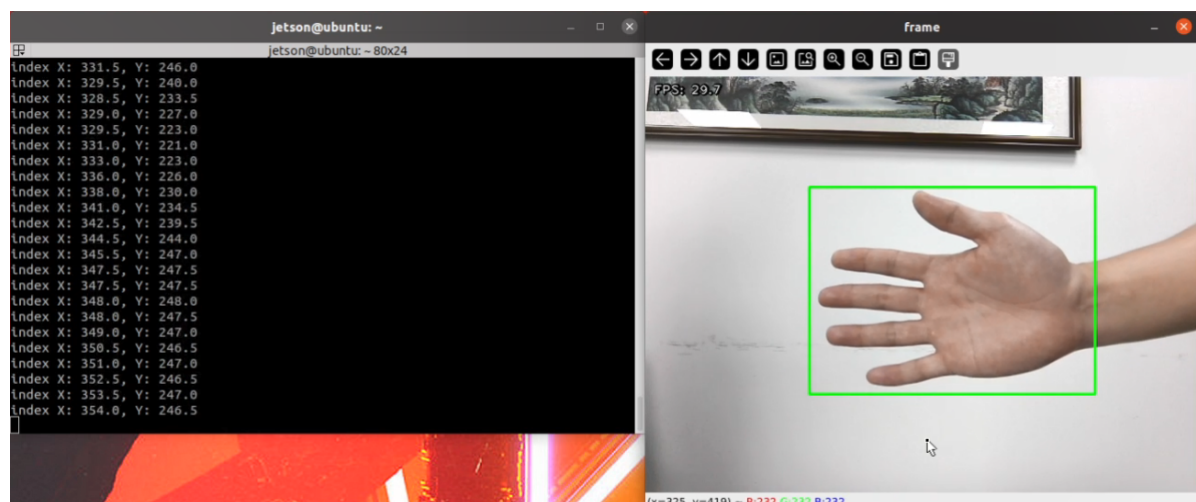

2.2. Program Startup

- Enter the following command to start the program

```
ros2 run dofbot_mediapipe 13_FindHand
```

Press Ctrl+c in the terminal to exit the program.

2.3. Source Code

Code path:

```
/home/yahboom/dofbot_ws/src/dofbot_mediapipe/dofbot_mediapipe/13_FindHand.py
```

```
#!/usr/bin/env python3
# encoding: utf-8
import threading
import numpy as np
import time
import os
import sys
import cv2 as cv
from dofbot_utils.robot_controller import Robot_Controller
from dofbot_utils.fps import FPS
import rclpy
from rclpy.node import Node
from sensor_msgs.msg import Image
from std_msgs.msg import Bool
from geometry_msgs.msg import Twist
from cv_bridge import CvBridge

sys.path.append('/home/yahboom/dofbot_ws/src/dofbot_mediapipe/dofbot_mediapipe')
from media_library import *

class HandCtrlArmNode(Node):
    def __init__(self):
        super().__init__('hand_ctrl_arm_node')

        self.hand_detector = HandDetector()
        self.arm_status = True
        self.locking = True
        self.init = True
        self.pTime = 0
        self.add_lock = self.remove_lock = 0

        self.event = threading.Event()
        self.event.set()

        self.robot = Robot_Controller()
        self.robot.move_init_pose()

        self.bridge = CvBridge()
        self.publisher_ = self.create_publisher(Image, 'processed_image', 10)

        self.capture = cv.VideoCapture(0, cv.CAP_V4L2)
        self.capture.set(cv.CAP_PROP_FRAME_WIDTH, 640)
```

```

        self.capture.set(cv.CAP_PROP_FRAME_HEIGHT, 480)
        self.get_logger().info(f"Camera FPS:
{self.capture.get(cv.CAP_PROP_FPS)}")

        self.timer = self.create_timer(0.1, self.timer_callback)

    def process(self, frame):
        frame, lmList, bbox = self.hand_detector.findHands(frame)
        if len(lmList) != 0:
            threading.Thread(target=self.find_hand_threading, args=(lmList,
bbox)).start()
        return frame

    def find_hand_threading(self, lmList, bbox):
        fingers = self.hand_detector.fingersUp(lmList)
        angle = self.hand_detector.ThumbTOforefinger(lmList)
        value = np.interp(angle, [0, 70], [185, 20])
        indexX = (bbox[0] + bbox[2]) / 2
        indexY = (bbox[1] + bbox[3]) / 2
        print("index X: %.1f, Y: %.1f" % (indexX, indexY))

    def timer_callback(self):
        ret, frame = self.capture.read()
        if ret:
            frame = self.process(frame)
            processed_image_msg = self.bridge.cv2_to_imgmsg(frame, "bgr8")
            self.publisher_.publish(processed_image_msg)
            cv.imshow('frame', frame)
            if cv.waitKey(1) & 0xFF == ord('q'):
                self.capture.release()
                cv.destroyAllWindows()
                rclpy.shutdown()

    def main(args=None):
        rclpy.init(args=args)
        hand_ctrl_arm_node = HandCtrlArmNode()
        rclpy.spin(hand_ctrl_arm_node)
        hand_ctrl_arm_node.destroy_node()
        rclpy.shutdown()

if __name__ == '__main__':
    main()

```