

7.3D object recognition


1. 3D Object Recognition

3D object recognition: recognizable objects include: ['Shoe ', 'Chair ', 'Cup ', 'Camera '], totaling 4 categories; Click the 'f' button to switch to recognizing objects.

2. Start

Input following command:

```
cd /home/yahboom/orbbec_ws/src/yahboomcar_mediapipe/scripts
python3 08_Objectron.py
```

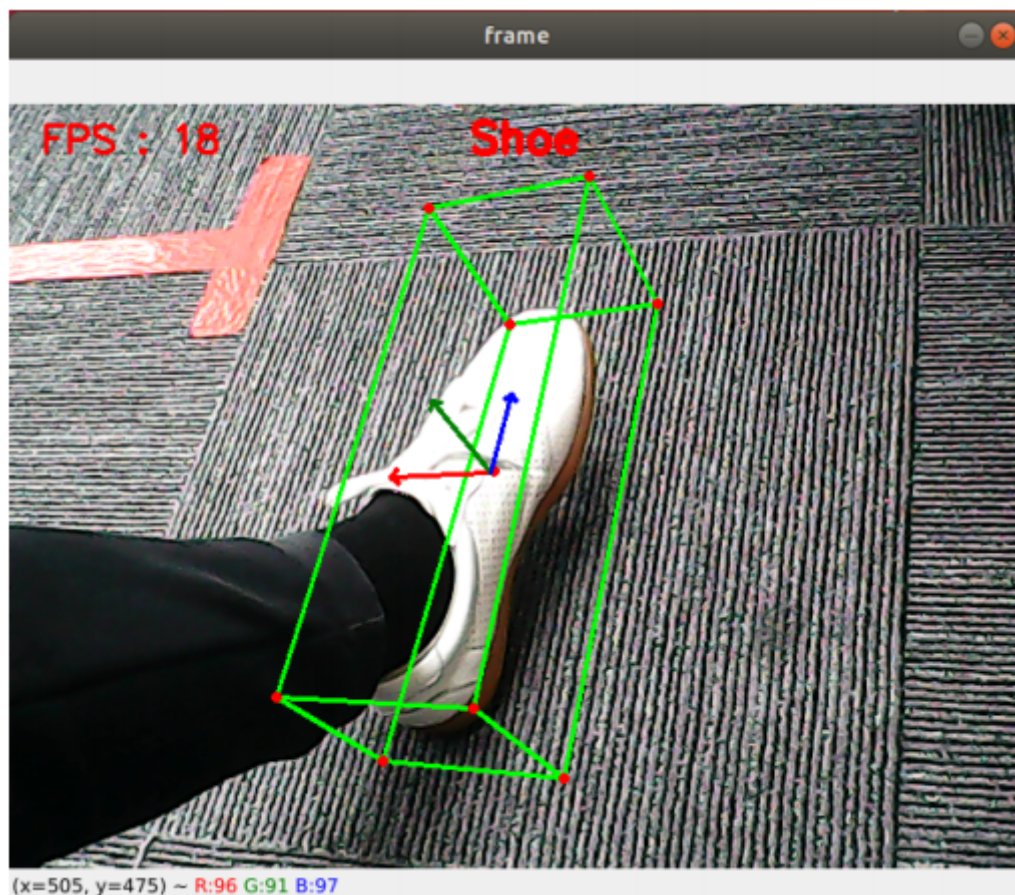

3. Code

Code path: /home/yahboom/orbbec_ws/src/yahboomcar_mediapipe/scripts/08_Objectron.py

```
#!/usr/bin/env python3
# encoding: utf-8
import mediapipe as mp
import cv2 as cv
import time

class FaceDetector:
    def __init__(self, minDetectionCon=0.5):
```

```

self.mpFaceDetection = mp.solutions.face_detection
self.mpDraw = mp.solutions.drawing_utils
self.facedetection =
self.mpFaceDetection.FaceDetection(min_detection_confidence=minDetectionCon)

def findFaces(self, frame):
    img_RGB = cv.cvtColor(frame, cv.COLOR_BGR2RGB)
    self.results = self.facedetection.process(img_RGB)
    bboxes = []
    if self.results.detections:
        for id, detection in enumerate(self.results.detections):
            bboxC = detection.location_data.relative_bounding_box
            ih, iw, ic = frame.shape
            bbox = int(bboxC.xmin * iw), int(bboxC.ymin * ih), \
                int(bboxC.width * iw), int(bboxC.height * ih)
            bboxes.append([id, bbox, detection.score])
            frame = self.fancyDraw(frame, bbox)
            cv.putText(frame, f'{int(detection.score[0] * 100)}%',
                (bbox[0], bbox[1] - 20), cv.FONT_HERSHEY_PLAIN,
                3, (255, 0, 255), 2)

    return frame, bboxes

def fancyDraw(self, frame, bbox, l=30, t=10):
    x, y, w, h = bbox
    x1, y1 = x + w, y + h
    cv.rectangle(frame, (x, y), (x + w, y + h), (255, 0, 255), 2)
    # Top left x,y
    cv.line(frame, (x, y), (x + l, y), (255, 0, 255), t)
    cv.line(frame, (x, y), (x, y + l), (255, 0, 255), t)
    # Top right x1,y
    cv.line(frame, (x1, y), (x1 - l, y), (255, 0, 255), t)
    cv.line(frame, (x1, y), (x1, y + l), (255, 0, 255), t)
    # Bottom left x1,y1
    cv.line(frame, (x, y1), (x + l, y1), (255, 0, 255), t)
    cv.line(frame, (x, y1), (x, y1 - l), (255, 0, 255), t)
    # Bottom right x1,y1
    cv.line(frame, (x1, y1), (x1 - l, y1), (255, 0, 255), t)
    cv.line(frame, (x1, y1), (x1, y1 - l), (255, 0, 255), t)
    return frame

if __name__ == '__main__':
    capture = cv.VideoCapture(0)
    capture.set(6, cv.VideoWriter_fourcc('M', 'J', 'P', 'G'))
    capture.set(cv.CAP_PROP_FRAME_WIDTH, 640)
    capture.set(cv.CAP_PROP_FRAME_HEIGHT, 480)
    print("capture get FPS : ", capture.get(cv.CAP_PROP_FPS))
    pTime, cTime = 0, 0
    face_detector = FaceDetector(0.75)
    while capture.isOpened():
        ret, frame = capture.read()
        # frame = cv.flip(frame, 1)
        frame,_ = face_detector.findFaces(frame)
        if cv.waitKey(1) & 0xFF == ord('q'): break
        cTime = time.time()

```

```
fps = 1 / (cTime - pTime)
pTime = cTime
text = "FPS : " + str(int(fps))
cv.putText(frame, text, (20, 30), cv.FONT_HERSHEY_SIMPLEX, 0.9, (0, 0,
255), 1)
cv.imshow('frame', frame)
capture.release()
cv.destroyAllWindows()
```