OpenClaw Installation

OpenClaw Installation
1. Install Node.js
2. Install Openclaw

1. Install Node.js

Since OpenClaw requires Node.js v22, and the system's default Node.js version is relatively low, you need to add the Node.js v22 repository first, and then install Node.js.

Open the system terminal, add the nodejs-v22 repository, and you will see green information indicating that the addition is complete.

```
curl -fsSL https://deb.nodesource.com/setup_22.x | sudo -E bash -
```

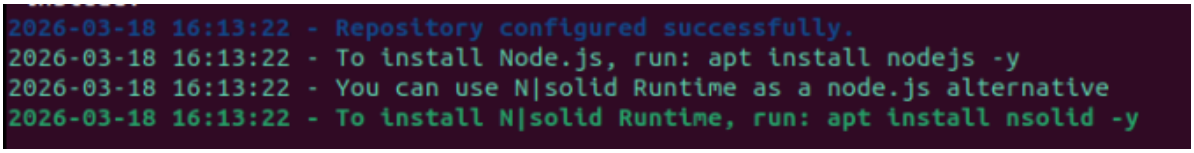

Execute the Node.js installation command

```
sudo apt update
sudo apt install -y nodejs
```

Execute the version check command; if you see v22.xx.xx, the installation is successful.

```
node -v
```

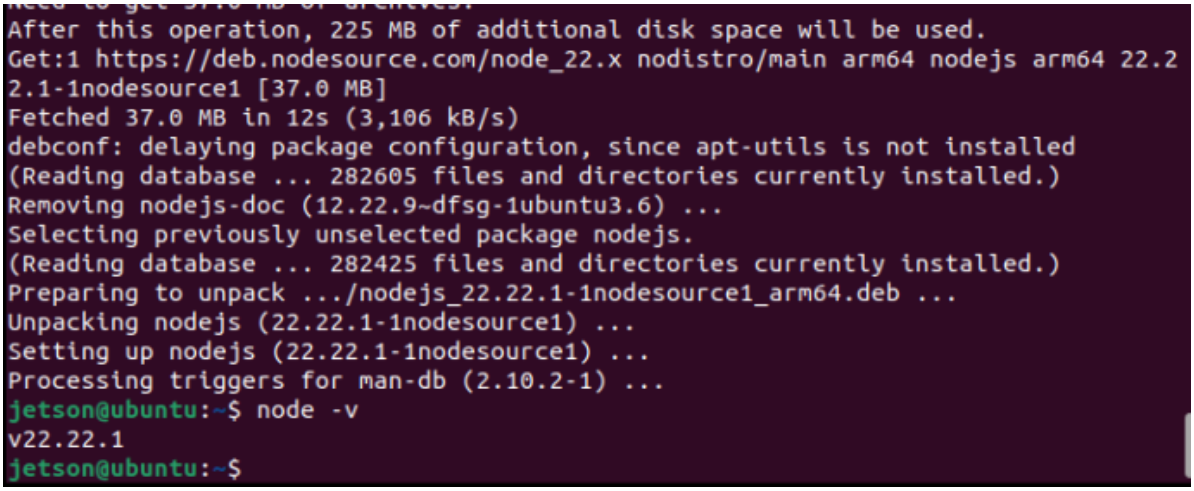

2. Install Openclaw

Execute the installation script in the terminal. The script will automatically download the environment-related components. Please wait for it to complete.

```
curl -fsSL https://openclaw.ai/install.sh | bash
```

```
Install plan
OS: linux
Install method: npm
Requested version: latest

[1/3] Preparing environment
✓ Node.js v22.22.1 found
· Active Node.js: v22.22.1 (/usr/bin/node)
· Active npm: 10.9.4 (/usr/bin/npm)

[2/3] Installing OpenClaw
✓ Git already installed
· Configuring npm for user-local installs
✓ npm configured for user installs
· Installing OpenClaw v2026.3.13
! npm install failed for openclaw@latest
  Command: env SHARP_IGNORE_GLOBAL_LIBVIPS=1 npm --loglevel error --silent --no-
fund --no-audit install -g openclaw@latest
  Installer log: /tmp/tmp.fVnoUs7ya2
! npm install failed; showing last log lines
! npm install failed; retrying
✓ OpenClaw npm package installed
✓ OpenClaw installed
```

If you see the Yes/No screen, it means Openclaw has been installed successfully. Select No and press Enter to exit the installation process.

```
  Recommended baseline:
  - Pairing/allowlists + mention gating.
  - Multi-user/shared inbox: split trust boundaries (separate
    gateway/credentials, ideally separate OS users/hosts).
  - Sandbox + least-privilege tools.
  - Shared inboxes: isolate DM sessions (`session.dmScope:
    per-channel-peer`) and keep tool access minimal.
  - Keep secrets out of the agent's reachable filesystem.
  - Use the strongest available model for any bot with tools or
    untrusted inboxes.

  Run regularly:
  openclaw security audit --deep
  openclaw security audit --fix

  Must read: https://docs.openclaw.ai/gateway/security

◆  I understand this is personal-by-default and shared/multi-user use requires
lock-down. Continue?
  ○ Yes / ● No
```

Execute the version check command. Because OpenClaw updates and iterates rapidly, the printed version number may differ.

```
openclaw --version
```

```
jetson@ubuntu:~$ openclaw --version
OpenClaw 2026.3.13 (61d171a)
jetson@ubuntu:~$
```