Application of OpenClaw in WhatsApp Plugin

Application of OpenClaw in WhatsApp Plugin
- Preparation Before Use
- 1. Configure the robot
- 2. Interacting with the Bot

Preparation Before Use

!! Please ensure that OpenClaw is configured correctly and can interact properly.

If it cannot interact properly, the following content will not be possible.

1. Configure the robot

Enter configuration mode

```
openclaw onboard --install-daemon
```

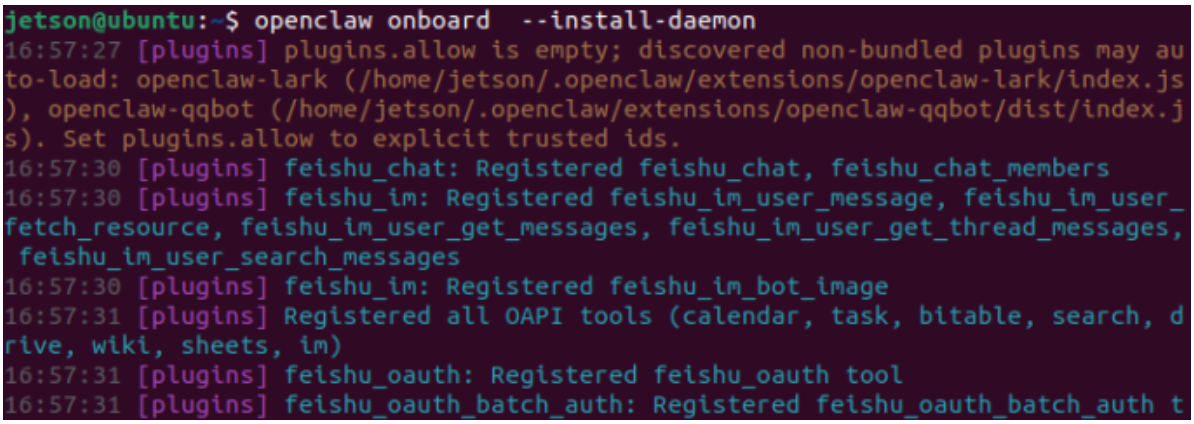

Select 【Yes】

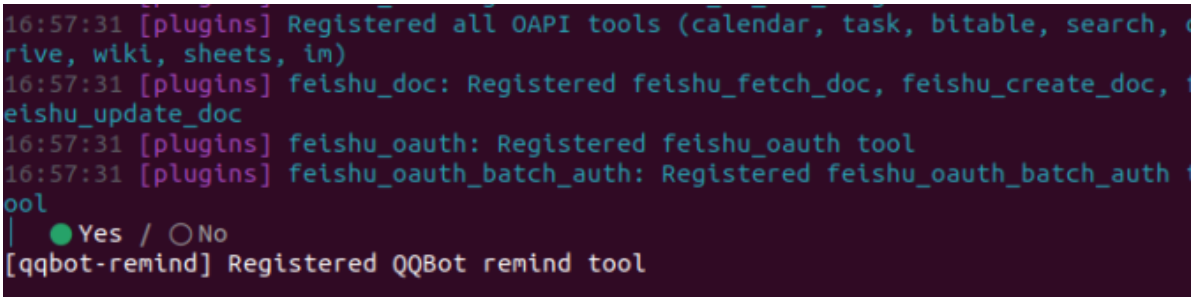

Select 【QuickStart】

```
◇ I understand this is personal-by-default and shared/multi-user use requires
lock-down. Continue?
  Yes

◆ Onboarding mode
  ● QuickStart (Configure details later via openclaw configure.)
  ○ Manual
```

Select 【Use existing】 values]

```
◇ Existing config detected

  workspace: ~/.openclaw/workspace
  model: ollama/glm-4.7-flash
  gateway.mode: local
  gateway.port: 18789
  gateway.bind: loopback


◆ Config handling
  ● Use existing values
  ○ Update values
  ○ Reset
```

Model/auth provider select [Skip for now]

```
◆ Model/auth provider
  ...
  ○ OpenRouter
  ○ Kilo Gateway
  ○ Qwen
  ○ Z.AI
  ○ Qianfan
  ○ Alibaba Cloud Model Studio
  ○ Copilot
  ○ Vercel AI Gateway
  ○ OpenCode
  ○ Xiaomi
  ○ Synthetic
  ○ Together AI
  ○ Hugging Face
  ○ Venice AI
  ○ LiteLLM
  ○ Cloudflare AI Gateway
  ○ Custom Provider
  ● Skip for now
```

Filter models by provider selection [All providers]

```
Filter models by provider
● All providers
○ amazon-bedrock
○ anthropic
○ azure-openai-responses
○ cerebras
○ github-copilot
○ google
○ google-antigravity
○ google-gemini-cli
○ google-vertex
○ groq
○ huggingface
○ kimi-coding
○ minimax
○ minimax-cn
○ mistral
○ ollama
○ openai
...
```

Default model selects [Keep current]. Note: The content within the parentheses refers to the specific model you have configured.

```
Default model
● Keep current (ollama/glm-4.7-flash)
○ Enter model manually
○ amazon-bedrock/anthropic.claude-3-haiku-20240307-v1:0
○ amazon-bedrock/anthropic.claude-3-5-haiku-20241022-v1:0
○ amazon-bedrock/anthropic.claude-haiku-4-5-20251001-v1:0
○ amazon-bedrock/eu.anthropic.claude-haiku-4-5-20251001-v1:0
○ amazon-bedrock/global.anthropic.claude-haiku-4-5-20251001-v1:0
○ amazon-bedrock/us.anthropic.claude-haiku-4-5-20251001-v1:0
○ amazon-bedrock/anthropic.claude-opus-4-20250514-v1:0
○ amazon-bedrock/us.anthropic.claude-opus-4-20250514-v1:0
○ amazon-bedrock/anthropic.claude-opus-4-1-20250805-v1:0
○ amazon-bedrock/us.anthropic.claude-opus-4-1-20250805-v1:0
○ amazon-bedrock/anthropic.claude-opus-4-5-20251101-v1:0
○ amazon-bedrock/eu.anthropic.claude-opus-4-5-20251101-v1:0
○ amazon-bedrock/global.anthropic.claude-opus-4-5-20251101-v1:0
○ amazon-bedrock/us.anthropic.claude-opus-4-5-20251101-v1:0
○ amazon-bedrock/anthropic.claude-opus-4-6-v1
○ amazon-bedrock/eu.anthropic.claude-opus-4-6-v1
...
```

For "Select channel," choose [WhatsApp (QR link)].

```
Select channel (QuickStart)
○ Telegram (Bot API)
● WhatsApp (QR link) (not linked)
○ Discord (Bot API)
○ IRC (Server + Nick)
○ Google Chat (Chat API)
○ Slack (Socket Mode)
○ Signal (signal-cli)
○ iMessage (imsg)
○ LINE (Messaging API)
○ QQ Bot
○ Lark/Feishu (飞书)
○ Lark/Feishu (飞书)
○ Nostr (NIP-04 DMs)
○ Microsoft Teams (Bot Framework)
○ Mattermost (plugin)
○ Nextcloud Talk (self-hosted)
○ Matrix (plugin)
○ BlueBubbles (macOS app)
...
```

For "Link WhatsApp now (QR)," select [Yes].

```
WhatsApp linking

Scan the QR with WhatsApp on your phone.
Credentials are stored under
/home/jetson/.openclaw/credentials/whatsapp/default/ for future runs.
Docs: whatsapp

Link WhatsApp now (QR)?
● Yes / ○ No
```

A QR code for linking will then appear. Note: This step requires a stable network connection; if you are unable to access WhatsApp, the QR code will not load.

```
Link WhatsApp now (QR)?
Yes
aiting for WhatsApp connection...
can this QR in WhatsApp (Linked Devices):
```

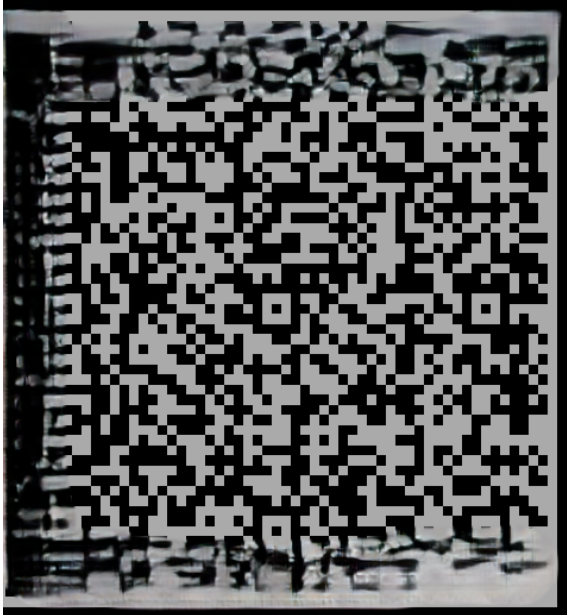

Open WhatsApp on your mobile phone, then tap on Settings > Linked devices.

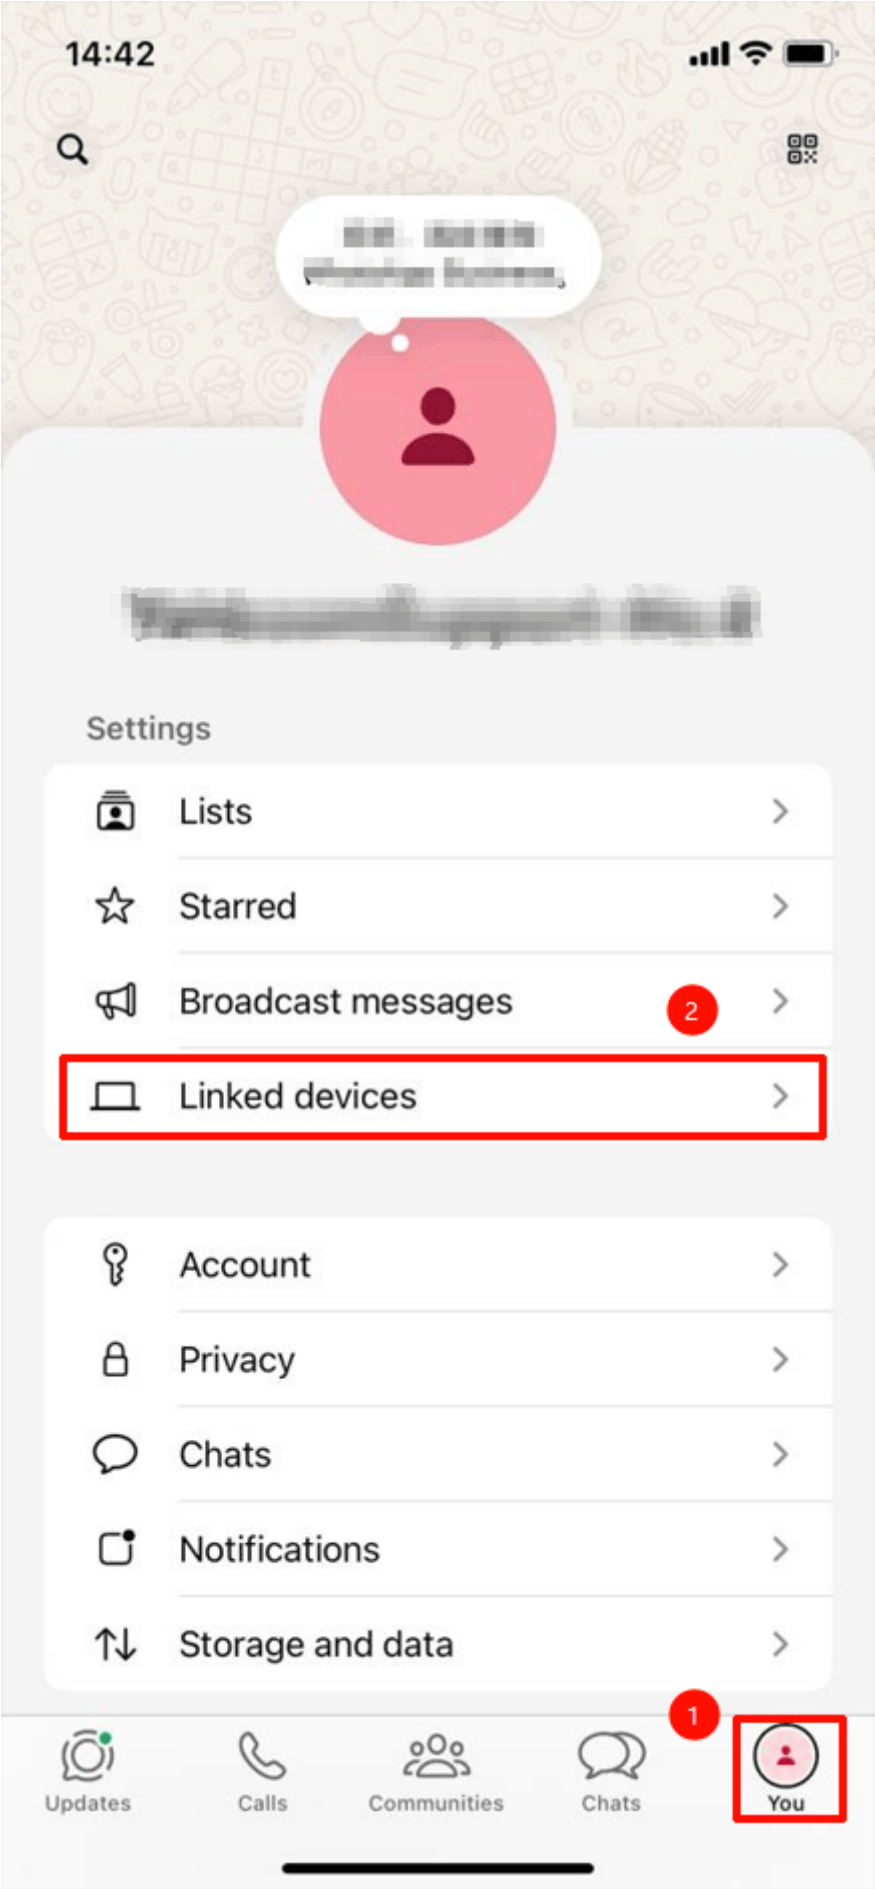

Tap "Link a device," then scan the QR code displayed by OpenClaw.

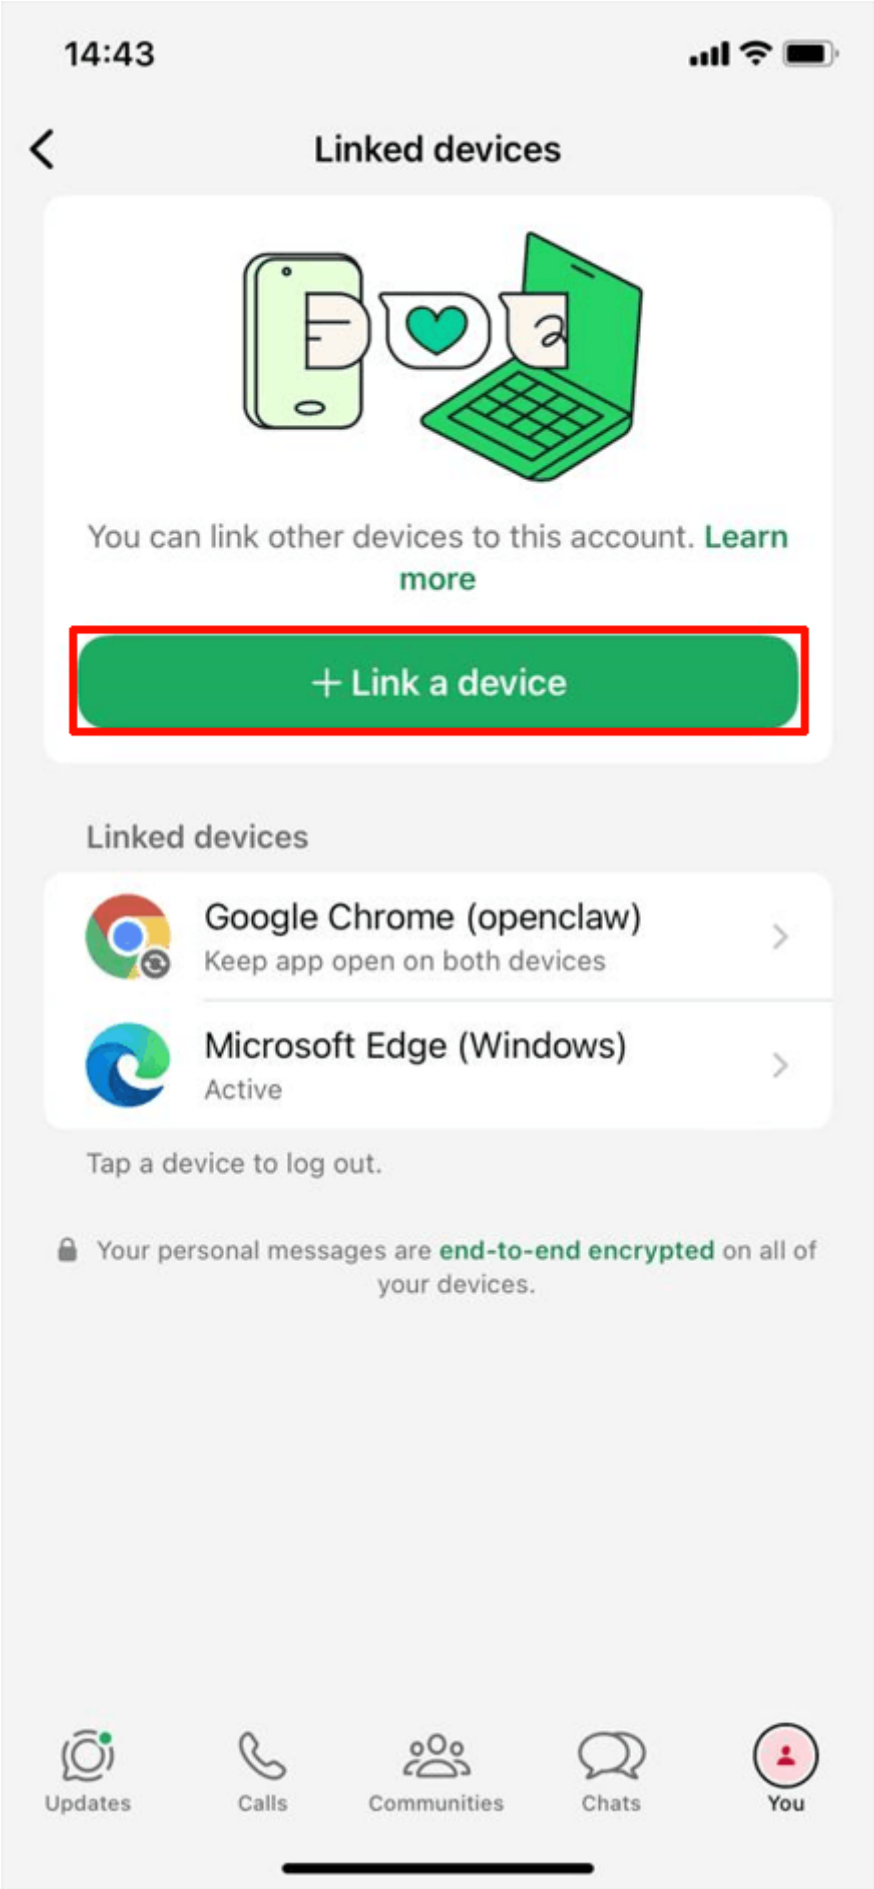

After scanning, wait for the connection to be established. Once successfully connected, the screen shown below will appear. For the WhatsApp phone setup, select [This Is my personal phone number].

```
WhatsApp DM access

WhatsApp direct chats are gated by `channels.whatsapp.dmPolicy` +
`channels.whatsapp.allowFrom`.
- pairing (default): unknown senders get a pairing code; owner
  approves
- allowlist: unknown senders are blocked
- open: public inbound DMs (requires allowFrom to include "*")
- disabled: ignore WhatsApp DMs

Current: dmPolicy=pairing, allowFrom=unset
Docs: whatsapp

WhatsApp phone setup
● This is my personal phone number
○ Separate phone just for OpenClaw
```

Enter your mobile phone number. You must include the country code (for Chinese mobile numbers, you need to add +86 before the number).

```
WhatsApp asked for a restart after pairing (code 515); creds are saved. Restarting connection once…
✓ Linked after restart; web session ready.

◇ WhatsApp DM access

WhatsApp direct chats are gated by `channels.whatsapp.dmPolicy` +
`channels.whatsapp.allowFrom`.
- pairing (default): unknown senders get a pairing code; owner approves
- allowlist: unknown senders are blocked
- open: public inbound DMs (requires allowFrom to include "*")
- disabled: ignore WhatsApp DMs

Current: dmPolicy=pairing, allowFrom=unset
Docs: whatsapp

◇ WhatsApp phone setup
This is my personal phone number

◇ WhatsApp number

We need the sender/owner number so OpenClaw can allowlist you.

◆ Your personal WhatsApp number (the phone you will message from)
+15555550123
```

For "Search provider," select [Skip for now] to skip this step.

```
◆ Search provider
○ Brave Search
○ Gemini (Google Search)
○ Grok (xAI)
○ Kimi (Moonshot)
○ Perplexity Search
● Skip for now (Configure later with openclaw configure --section
web)
```

For "Skills," select [No] to skip this step; you can install them later as needed.

```
Skills status

Eligible: 18
Missing requirements: 39
Unsupported on this OS: 7
Blocked by allowlist: 0

Configure skills now? (recommended)
○ Yes / ● No
```

For "Hooks," select [Skip for now] to skip this step. Highlight [Skip for now], press the Spacebar to select it, and then press Enter.

```
Hooks

Hooks let you automate actions when agent commands are issued.
Example: Save session context to memory when you issue /new or /reset.

Learn more: https://docs.openclaw.ai/automation/hooks

Enable hooks?
■ Skip for now
□ 🚀 boot-md
□ 📎 bootstrap-extra-files
□ 📝 command-logger
□ 💾 session-memory
```

Select the option to restart the gateway.

```
Gateway service runtime

QuickStart uses Node for the Gateway service (stable + supported).

Gateway service already installed
● Restart
○ Reinstall
○ Skip
```

You can choose to use the TUI (Text-based User Interface) or select "Do this later."

```
How do you want to hatch your bot?
● Hatch in TUI (recommended)
○ Open the Web UI
○ Do this later
```

2. Interacting with the Bot

Open WhatsApp, tap "Chats" — then the "+" icon.

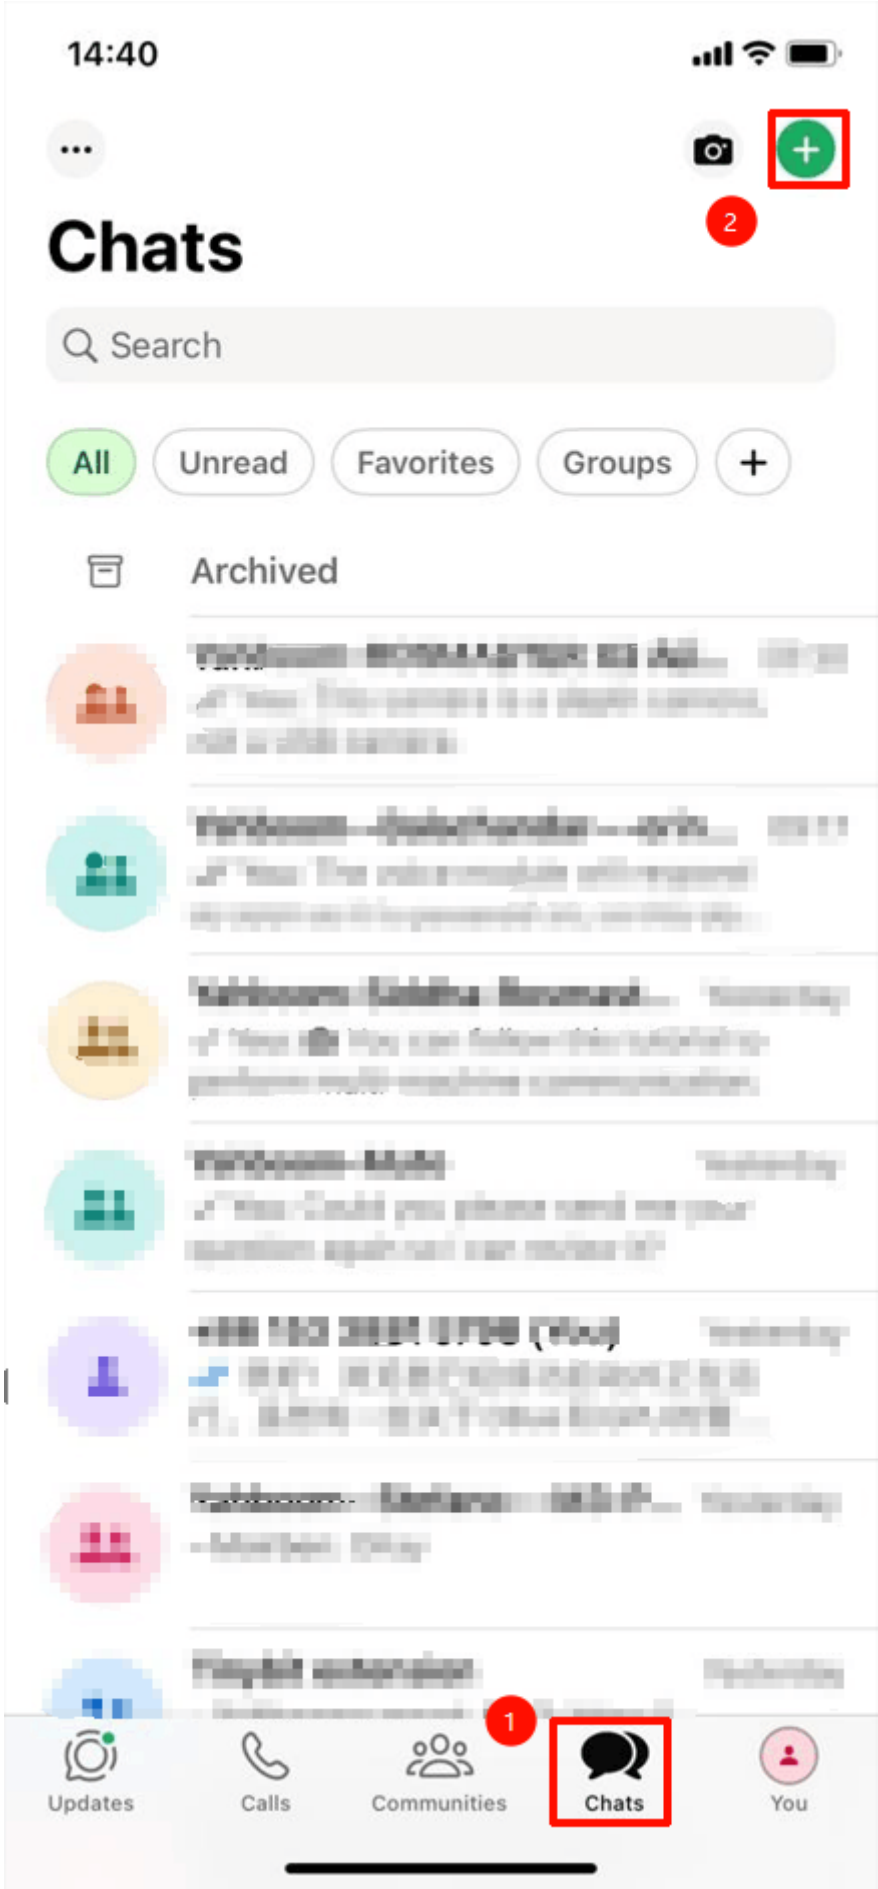

Tap "Message yourself."

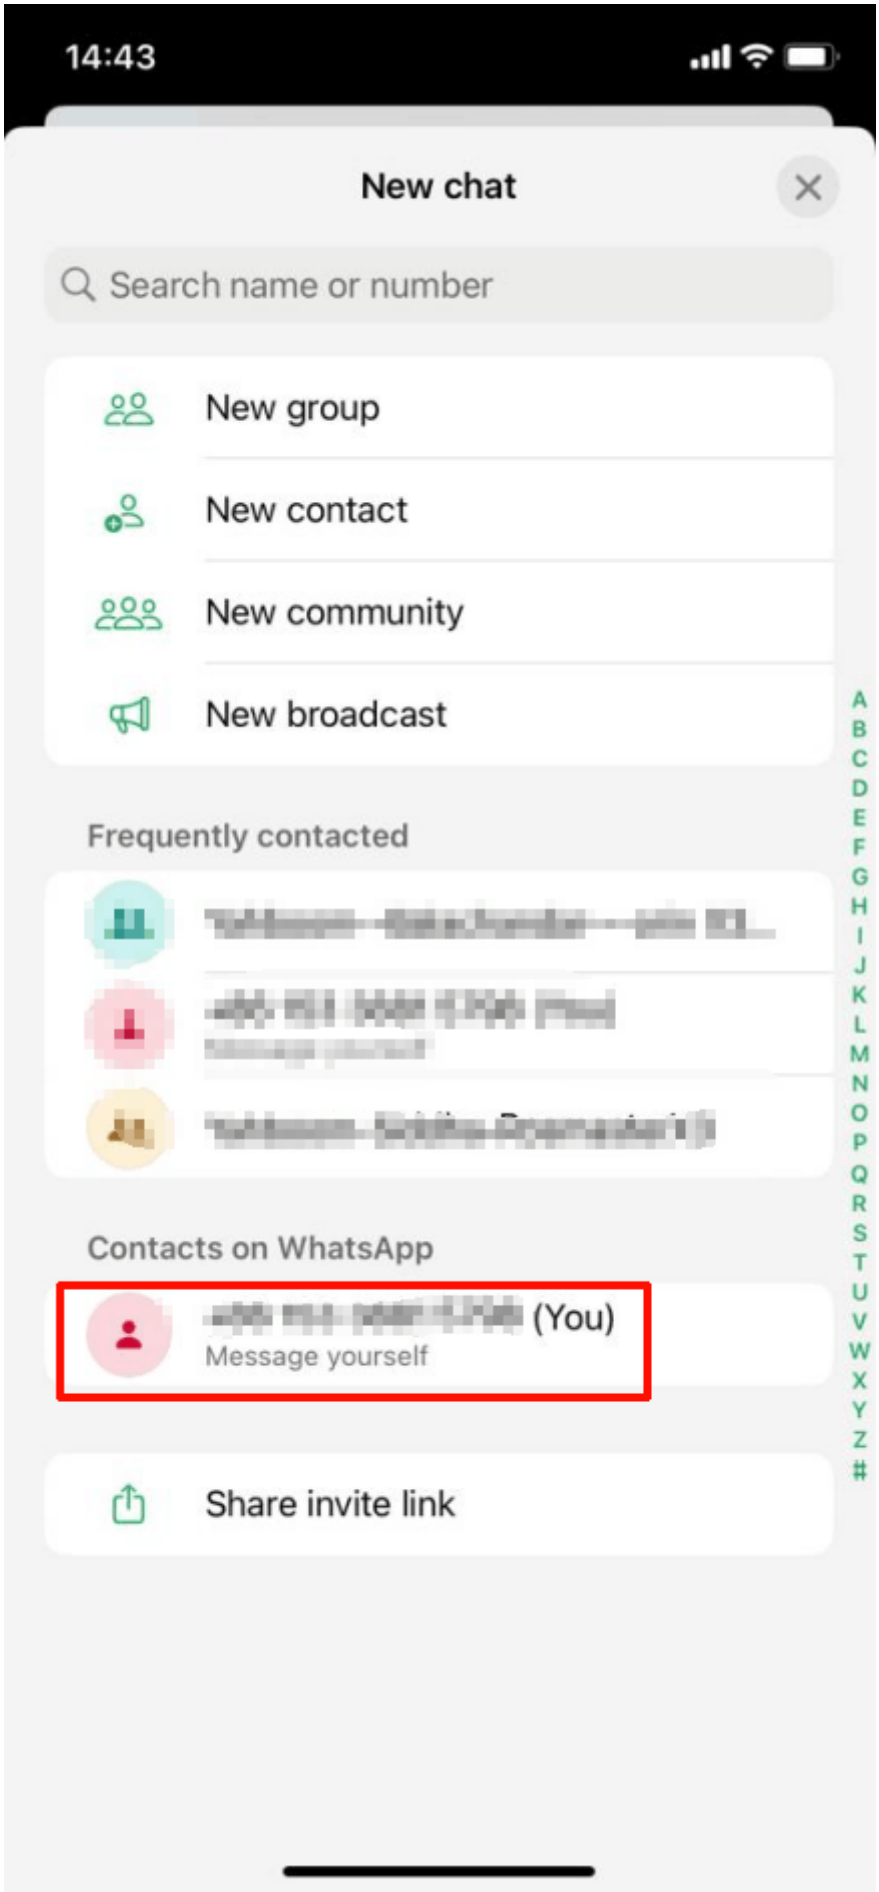

Simply send the content you wish to interact with.

14:45

(You)

Message yourself

www.baidu.com

12:15

Today

Open the Raspberry Pi website and go to Baidu.

14:44

Let me help you open the browser on your Raspberry Pi and access the Baidu website.

14:44

I have launched the Chromium browser and opened the Baidu website. The browser should appear on the Raspberry Pi desktop.

If you want to view the content of the Baidu website in the terminal, you can also use the curl command to retrieve the webpage content:

14:45

This is the HTML content of Baidu's homepage. Your browser has opened successfully; you can now see the Baidu website on your Raspberry Pi desktop.

Would you like me to search for anything?

14:45