Open WebUI

Open WebUI
- 1. Environment Requirements
- 2. Docker Setup
  - 2.1 Official Docker Installation
  - 2.2 Installing Docker on Alibaba Cloud
  - 2.3. Granting Access Permissions
- 3. Open WebUI Installation
- 4. Running Open WebUI
  - 4.1. Administrator Account
  - 4.2. Registration and Login
  - 4.3. User Interface
- 5. Model Conversation
  - 5.1. Switching Models
  - 5.2. Demo: LLaVA
- 6. Frequently Asked Questions
  - 6.1. Shutting Down Open WebUI
  - 6.2. Common Errors
    - Unable to Start Open WebUI
    - Service Connection Timeout

Open WebUI is an open-source project designed to provide a simple and easy-to-use user interface (UI) for managing and monitoring open-source software and services.

```
When using Open WebUI, there's a high probability of encountering unresponsive or
timeout issues. Try restarting Open WebUI or using the Ollam tool to run the
model!
```

1. Environment Requirements

Installing Open WebUI on the host machine and Conda: Requires Node.js >= 20.10, Python = 3.11:

Environment Setup Method	Difficulty (relatively speaking)
Host	High
Conda	Medium
Docker	Low

This tutorial demonstrates installing Open WebUI using Docker.

2. Docker Setup

2.1 Official Docker Installation

If Docker is not installed, you can use a script to install it with one click.

Domestic users may not be able to install Docker through official methods. We recommend using Alibaba Cloud to install Docker or directly using our image.

- Update local package list

```
sudo apt update
```

- Download and run script

Download the get-docker.sh file and save it in the current directory.

```
sudo apt install curl
```

```
curl -fsSL https://get.docker.com -o get-docker.sh
```

Run the get-docker.sh script file with sudo privileges.

```
sudo sh get-docker.sh
```

2.2 Installing Docker on Alibaba Cloud

If you cannot install it yourself, please use the image we provide.

- Update the local package list

```
sudo apt update
```

- Install prerequisites

```
sudo apt install apt-transport-https ca-certificates curl gnupg2 lsb-release
software-properties-common
```

- Add the GPG key for the software repository

```
curl -fsSL https://mirrors.aliyun.com/docker-ce/linux/ubuntu/gpg | sudo gpg --
dearmor -o /usr/share/keyrings/docker-archive-keyring.gpg
```

- Add the Alibaba Cloud mirror repository

```
echo "deb [arch=arm64 signed-by=/usr/share/keyrings/docker-archive-keyring.gpg]
https://mirrors.aliyun.com/docker-ce/linux/ubuntu bionic stable" | sudo tee
/etc/apt/sources.list.d/docker.list > /dev/null
```

- Install Docker

```
sudo apt update
sudo apt install docker-ce docker-ce-cli containerd.io docker-compose-plugin
```

2.3. Granting Access Permissions

Grant the current system user access to the Docker daemon: this allows you to execute Docker commands without needing to use the `sudo` command.

```
sudo usermod -aG docker $USER
newgrp docker
```

3. Open WebUI Installation

For systems that already have Docker installed, you can simply enter the following command in the terminal. (The image below shows the result after the Docker image has been successfully pulled.)

```
docker pull ghcr.io/open-webui/open-webui:main
```

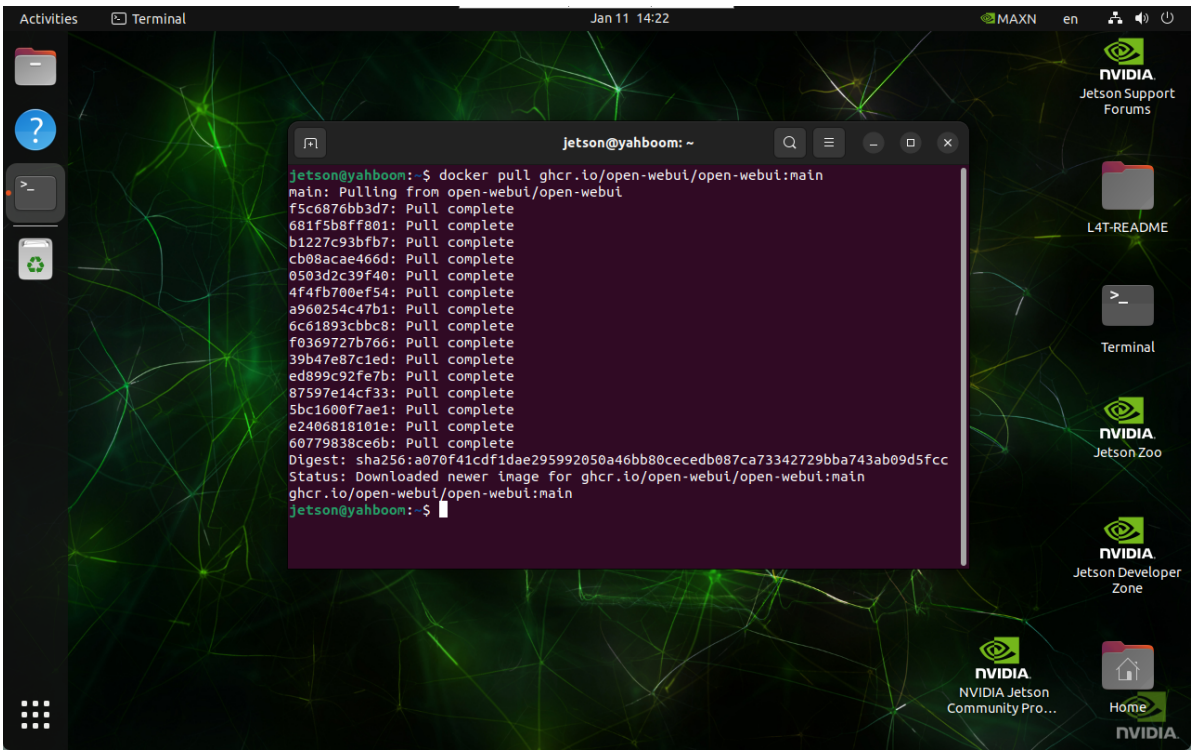

4. Running Open WebUI

Enter the following command in the terminal to launch the specified Docker container:

```
docker run --network=host -v open-webui:/app/backend/data -e
OLLAMA_BASE_URL=http://127.0.0.1:11434 --name open-webui --restart always
ghcr.io/open-webui/open-webui:main
```

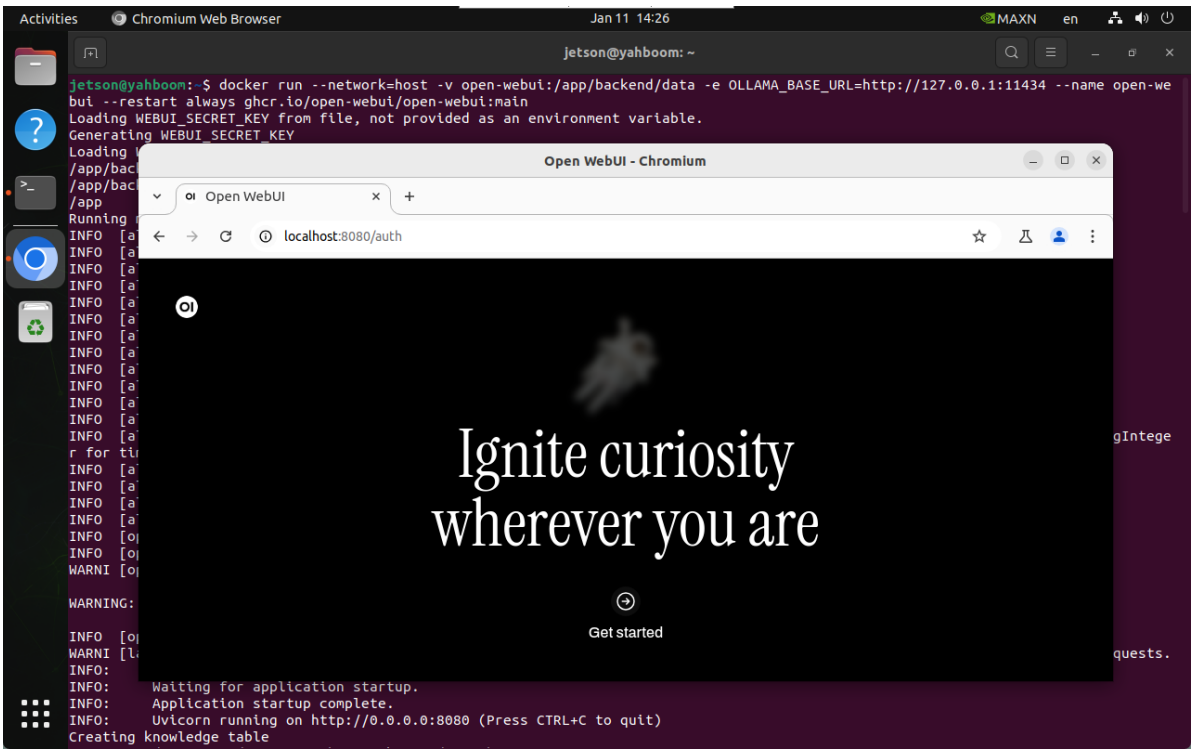

Once successfully launched, access the interface via your browser using the following URL:

```
http://localhost:8080/
```

Within the same local area network (LAN), you can access the service using the mainboard's IP address followed by `:8080`:

```
Assuming the mainboard's IP address is 192.168.2.105, you can access it via
192.168.2.105:8080.
```

4.1. Administrator Account

For first-time use, you are required to register an account. This account will serve as the administrator account; please fill in the required information as prompted.

```
Since all content within our provided Docker image has been pre-configured and
tested, users can simply log in directly using the following pre-registered
account:
Username: yahboom
Email: yahboom@163.com
Password: yahboom
```

4.2. Registration and Login

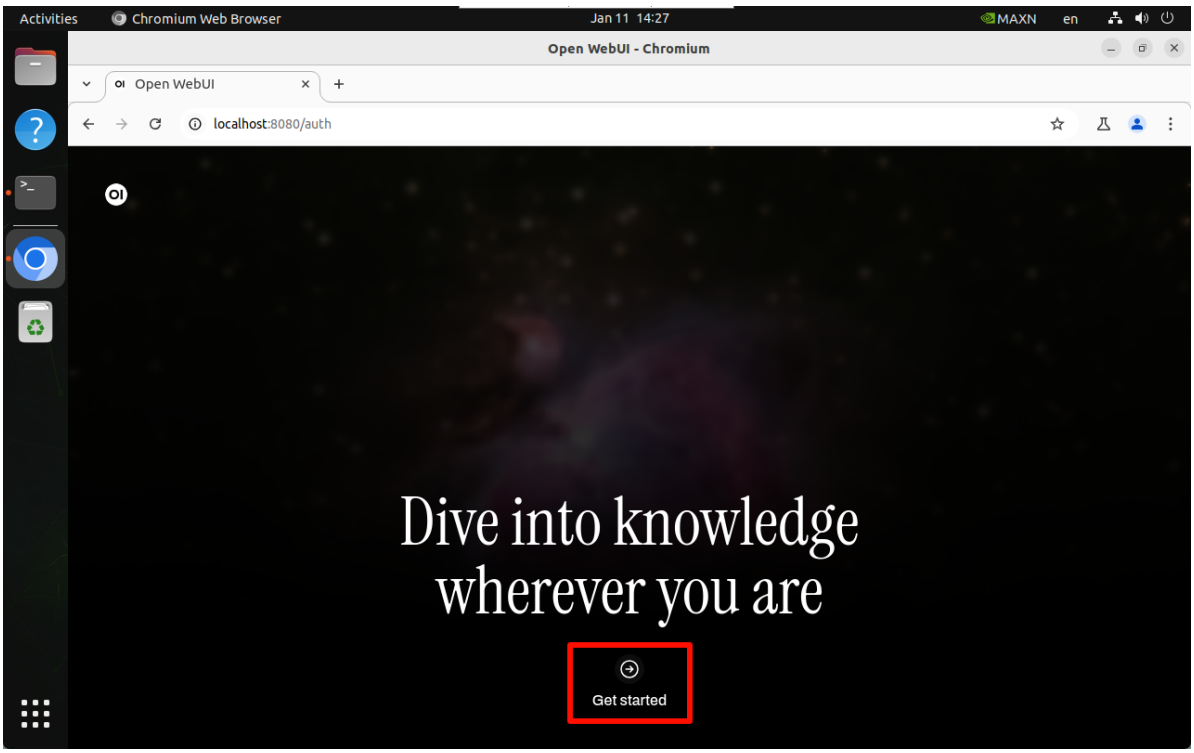
Activities
Chromium Web Browser
Jan 11 14:27
MAXN
en
Open WebUI - Chromium
Open WebUI
localhost:8080/auth
Dive into knowledge
wherever you are
Get started

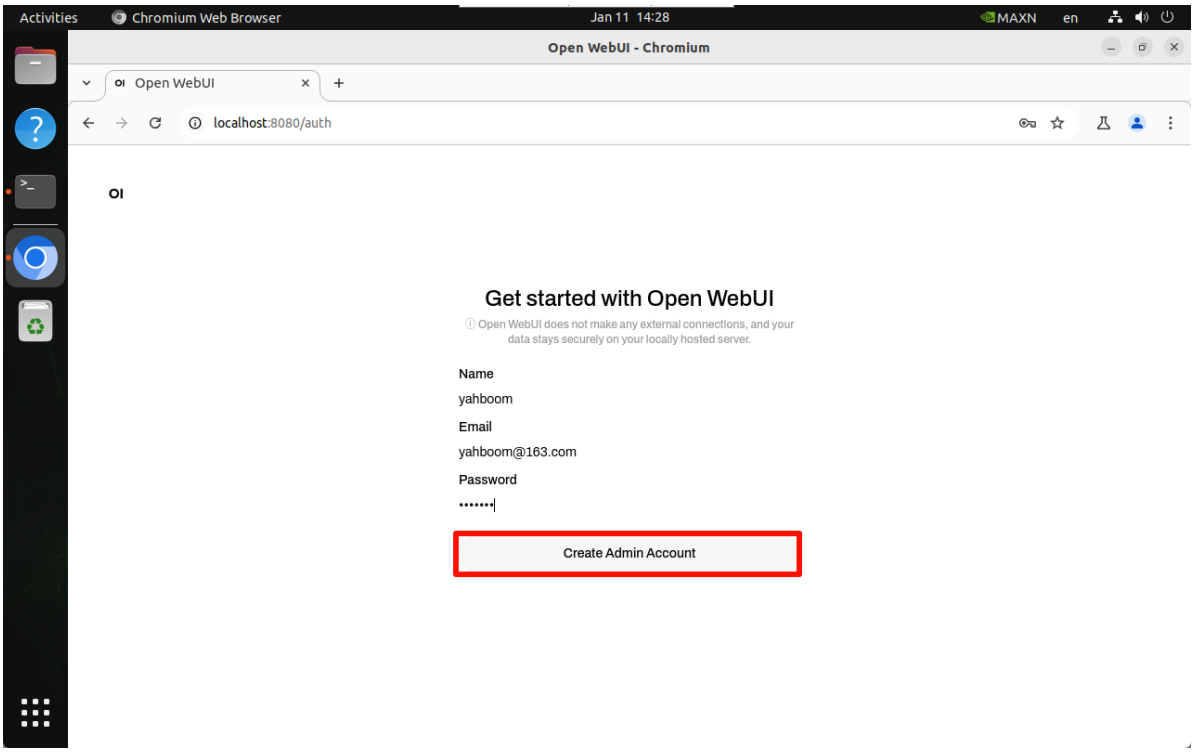
Activities
Chromium Web Browser
Jan 11 14:28
MAXN
en
Open WebUI - Chromium
Open WebUI
localhost:8080/auth
Get started with Open WebUI
Open WebUI does not make any external connections, and your data stays securely on your locally hosted server.
Name
yahboom
Email
yahboom@163.com
Password
Create Admin Account

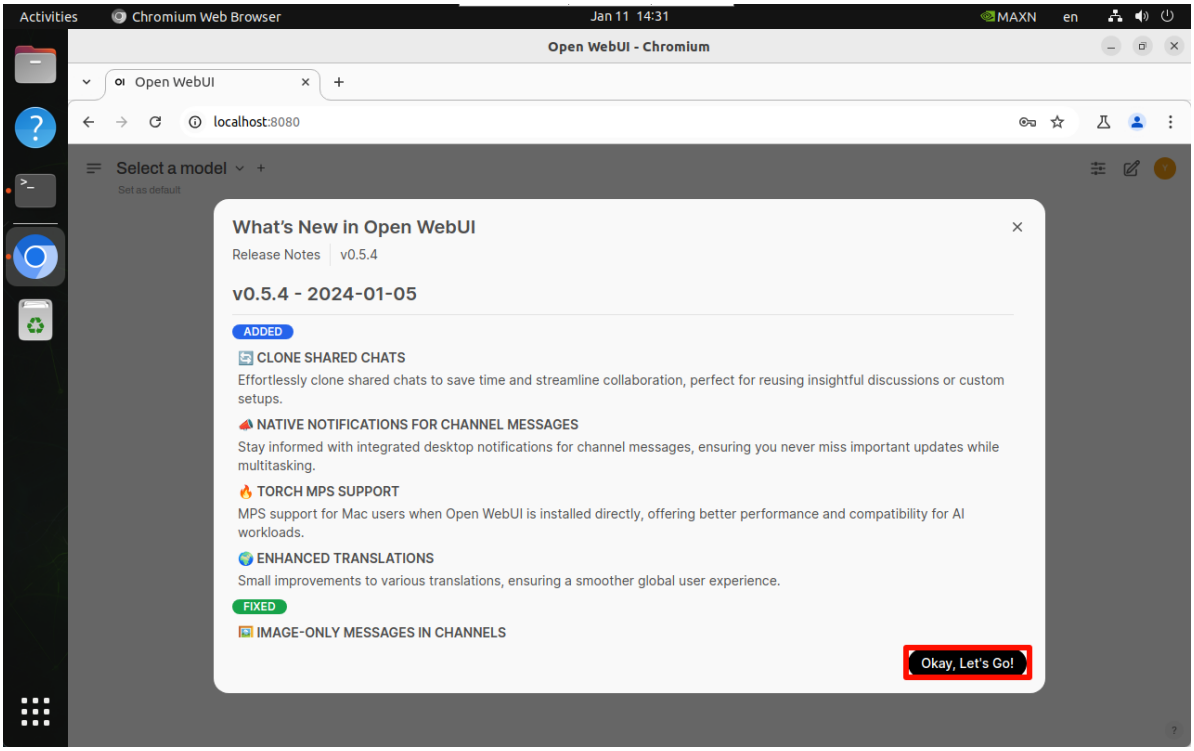

4.3. User Interface

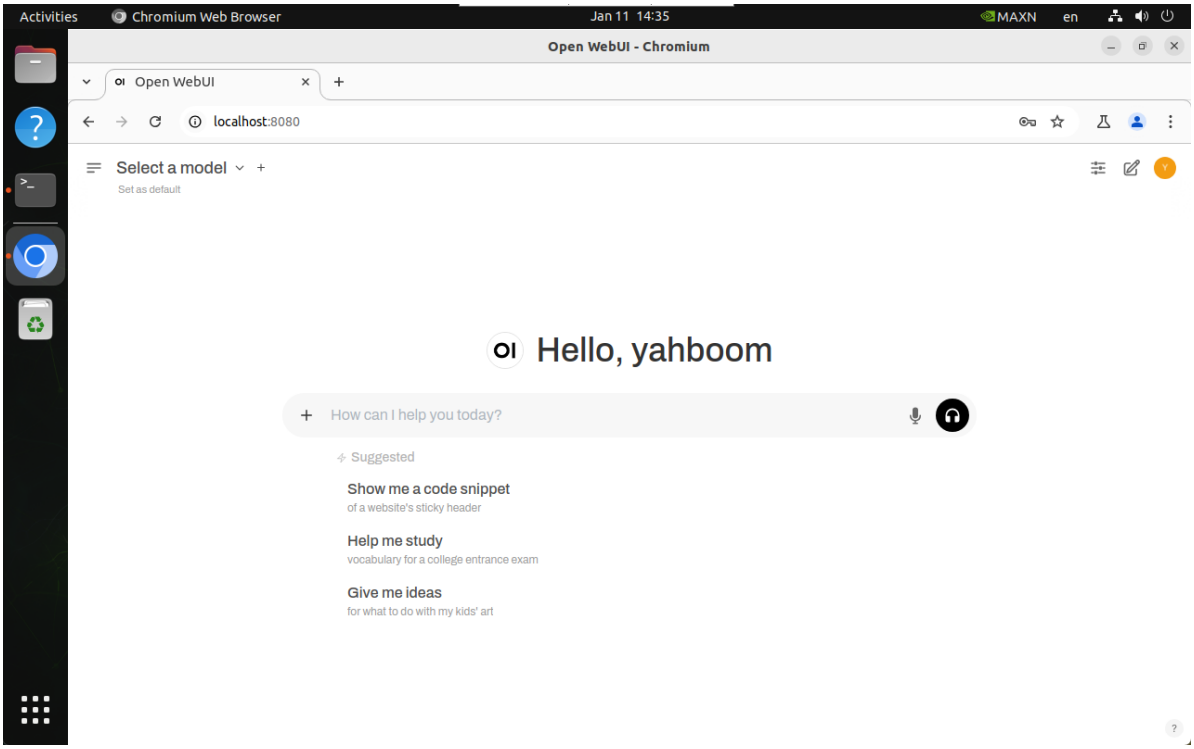

5. Model Conversation

Engaging in conversations via Open WebUI is slower than running directly through the Ollama tool; you may even encounter connection timeouts or service failures. This is directly related to the memory limitations of the Jetson board and is unavoidable.

```
Users who wish to avoid this issue may consider switching to a different Linux
environment to set up Ollama and Open WebUI for their conversations.
```

5.1. Switching Models

Click `Select a model` to choose a specific model for your conversation.

```
Models pulled using Ollama are automatically added to the Open WebUI model
selection list; simply refresh the webpage to see the newly added models!
```

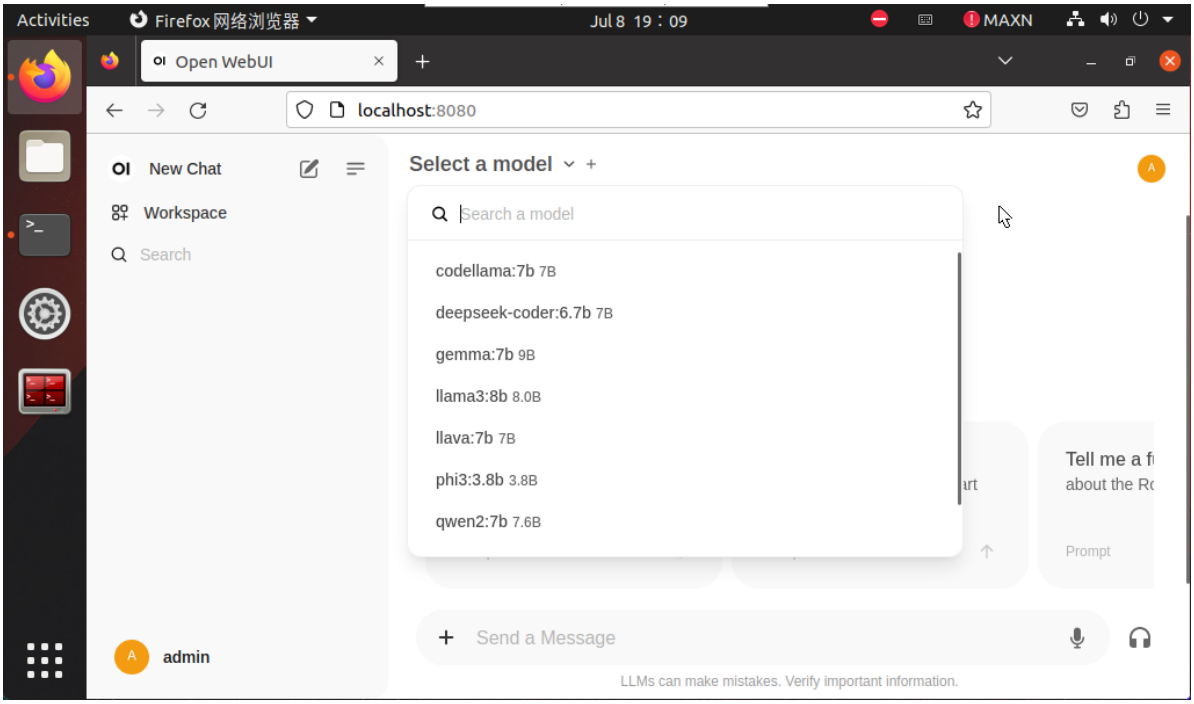

5.2. Demo: LLaVA

The LLaVA demonstration case requires at least 8GB of memory (or more) to run; users may use other cases to test the conversational features of Open WebUI!

```
What's in this image?
```

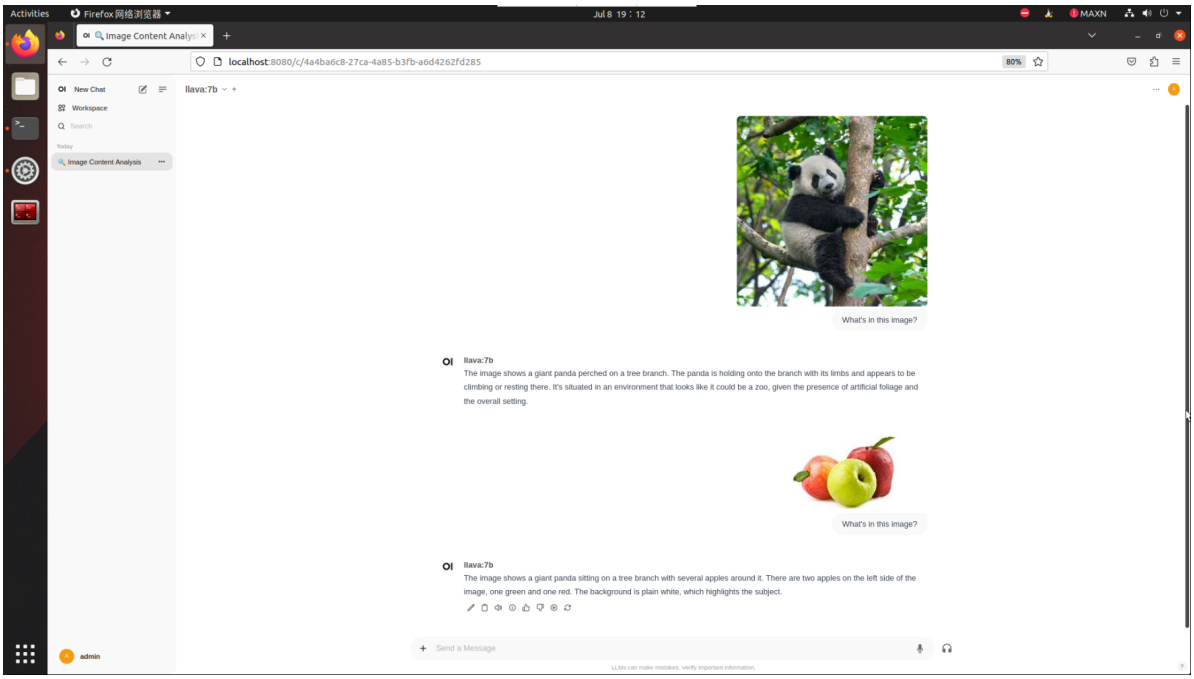

6. Frequently Asked Questions

6.1. Shutting Down Open WebUI

Disabling the auto-starting Open WebUI service. - View running Docker containers

```
docker ps
```

- Stop a running Docker container

```
docker stop [CONTAINER ID]  # Example: docker stop 5f42ee9cf784
```

- View stopped containers

```
docker ps -a
```

- Clean up stopped containers

```
docker rm [CONTAINER ID]    # Example: docker rm 5f42ee9cf784
```

Clean up all stopped containers:

```
docker container prune
```

6.2. Common Errors

Unable to Start Open WebUI

- docker: Error response from daemon: Conflict. The container name "/open-webui" is already in use by container "cfc05c84f8e38b290337e7178c76fd1c49076f94b11ed3d49d9448be72b7f20f". You have to remove (or rename) that container to be able to reuse that name.

Solution: Stop Open WebUI once and then restart it!

Service Connection Timeout

- Open WebUI: Server Connection Error

Stop Open WebUI once and then restart it; then, try submitting your query again, or switch to using the Ollama tool directly to run the model and submit your query there!