OpenClaw Local Model Deployment

OpenClaw Local Model Deployment
1. Pulling the Model
2. Configuring OpenClaw
3. Enabling Tools

1. Pulling the Model

Since configuring the Ollama platform will by default pull the glm-4.7-flash model, if you don't pull it first, the Ollama configuration process will have to wait for the glm-4.7-flash model to finish pulling before proceeding to the next step, resulting in a longer time.

```
ollama pull glm-4.7-flash
```

2. Configuring OpenClaw

Open the terminal and execute the OpenClaw configuration command

```
openclaw onboard --install-daemon
```

You must select 【Yes】 to proceed to the configuration process. Press 【Enter】 to proceed to the next step.

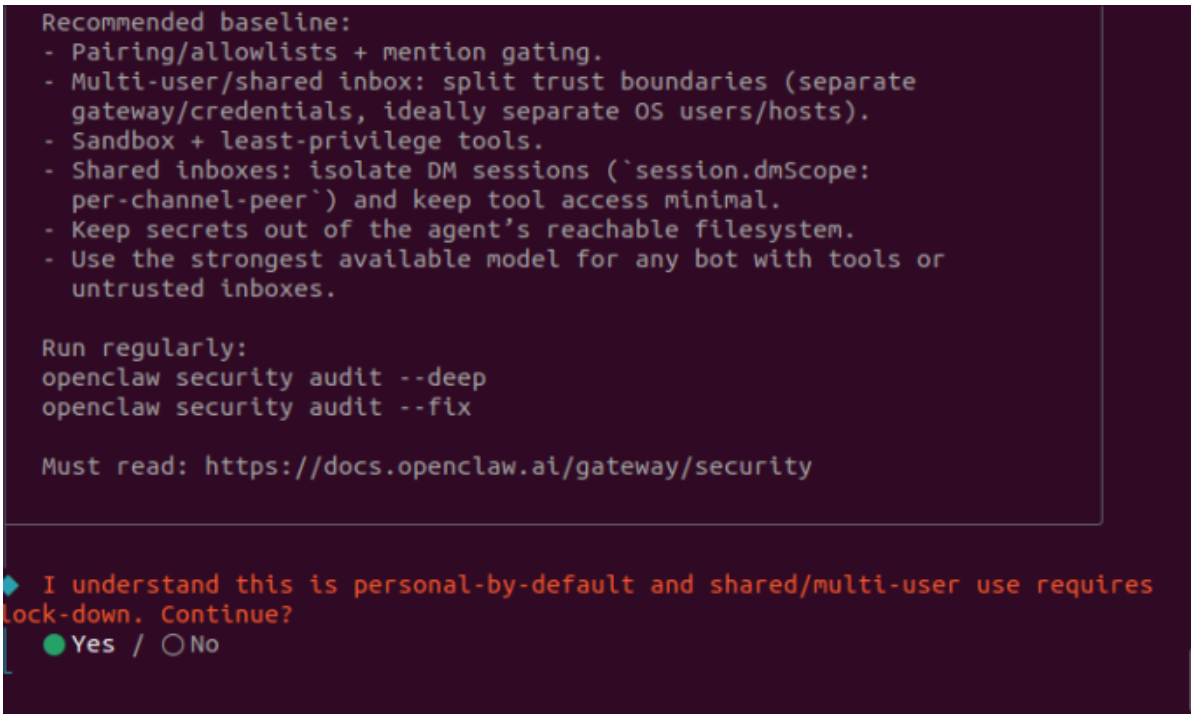

Select 【QuickStart】 to begin.

```
- Sandbox + least-privilege tools.
- Shared inboxes: isolate DM sessions (`session.dmScope:
  per-channel-peer`) and keep tool access minimal.
- Keep secrets out of the agent's reachable filesystem.
- Use the strongest available model for any bot with tools or
  untrusted inboxes.

Run regularly:
openclaw security audit --deep
openclaw security audit --fix

Must read: https://docs.openclaw.ai/gateway/security


◇ I understand this is personal-by-default and shared/multi-user use requires
lock-down. Continue?
  Yes

◆ Onboarding mode
  ● QuickStart (Configure details later via openclaw configure.)
  ○ Manual
```

Select the 【Ollama】 platform.

```
◆ Model/auth provider
  ...
  ○ Qwen
  ○ Z.AI
  ○ Qianfan
  ○ Alibaba Cloud Model Studio
  ○ Copilot
  ○ Vercel AI Gateway
  ○ OpenCode
  ○ Xiaomi
  ○ Synthetic
  ○ Together AI
  ○ Hugging Face
  ○ Venice AI
  ○ LiteLLM
  ○ Cloudflare AI Gateway
  ○ Custom Provider
  ● Ollama (Cloud and local open models)
  ○ SGLang
  ...
```

The Ollama base URL can use the default 【http://127.0.0.1:11434】. If you have changed the Ollama service port, please enter the correct one.

We'll only use Ollama's local model, so we'll select "Local".

At this stage, the `glm-4.7-flash` model will be pulled by default. Once the download is complete, select **[Keep current (ollama/glm-4.7-flash)]**.

```
Default model
● Keep current (ollama/glm-4.7-flash)
○ Enter model manually
○ ollama/codellama:7b
○ ollama/deepseek-r1:latest
○ ollama/gemma3:4b
○ ollama/glm-4.7-flash
○ ollama/glm-4.7-flash:latest
○ ollama/gpt-oss:20b
○ ollama/llama3.2:3b
○ ollama/llava:13b
○ ollama/llava:7b
○ ollama/llava:latest
○ ollama/minicpm-v:8b
○ ollama/mistral:latest
○ ollama/OpenHermes:latest
○ ollama/phi4-mini:3.8b
○ ollama/qwen2:7b
○ ollama/qwen2.5vl:3b
...
```

For the channel setting, select **[Skip for now]** to defer configuration.

```
Select channel (QuickStart)
...
○ Google Chat (Chat API)
○ Slack (Socket Mode)
○ Signal (signal-cli)
○ iMessage (imsg)
○ LINE (Messaging API)
○ Feishu/Lark (飞书)
○ Nostr (NIP-04 DMs)
○ Microsoft Teams (Bot Framework)
○ Mattermost (plugin)
○ Nextcloud Talk (self-hosted)
○ Matrix (plugin)
○ BlueBubbles (macOS app)
○ Zalo (Bot API)
○ Zalo (Personal Account)
○ Synology Chat (Webhook)
○ Tlon (Urbit)
● Skip for now (You can add channels later via `openclaw channels
add`)
```

For the provider setting, select **[Skip for now]** to defer configuration.

```
◇ Select channel (QuickStart)
  Skip for now
Updated ~/.openclaw/openclaw.json
Workspace OK: ~/.openclaw/workspace
Sessions OK: ~/.openclaw/agents/main/sessions

◇ Web search

  Web search lets your agent look things up online.
  Choose a provider and paste your API key.
  Docs: https://docs.openclaw.ai/tools/web


◆ Search provider
  ○ Brave Search
  ○ Gemini (Google Search)
  ○ Grok (xAI)
  ○ Kimi (Moonshot)
  ○ Perplexity Search
  ● Skip for now (Configure later with openclaw configure --section
  web)
```

For skills, select **[NO]**.

```
◇ Web search

  Web search lets your agent look things up online.
  Choose a provider and paste your API key.
  Docs: https://docs.openclaw.ai/tools/web


◇ Search provider
  Skip for now

◇ Skills status

  Eligible: 5
  Missing requirements: 40
  Unsupported on this OS: 7
  Blocked by allowlist: 0


◆ Configure skills now? (recommended)
  ○ Yes / ● No
```

For hooks, first highlight **[skip for now]**, then press the **[Spacebar]** to select it, and finally press **[Enter]**.

```
◇ Configure skills now? (recommended)
  No

◇ Hooks

  Hooks let you automate actions when agent commands are issued.
  Example: Save session context to memory when you issue /new or /reset.

  Learn more: https://docs.openclaw.ai/automation/hooks


◆ Enable hooks?
  ■ Skip for now
  □ 🚀 boot-md
  □ 📎 bootstrap-extra-files
  □ 📝 command-logger
  □ 💾 session-memory
```

Wait for the gateway to install and start up.

```
◇ Systemd

  Enabled systemd lingering for jetson.


◇ Gateway service runtime

  QuickStart uses Node for the Gateway service (stable + supported).


◑ Installing Gateway service…
Installed systemd service: /home/jetson/.config/systemd/user/openclaw-gateway.se
rvice
◇ Gateway service installed.
```

For the interface mode, select **[Hatch in TUI]**. (TUI refers to the terminal-based interface, while Web UI refers to the web-based interface.)

```
◇ Token

  Gateway token: shared auth for the Gateway + Control UI.
  Stored in: ~/.openclaw/openclaw.json (gateway.auth.token) or
  OPENCLAW_GATEWAY_TOKEN.
  View token: openclaw config get gateway.auth.token
  Generate token: openclaw doctor --generate-gateway-token
  Web UI keeps dashboard URL tokens in memory for the current tab and
  strips them from the URL after load.
  Open the dashboard anytime: openclaw dashboard --no-open
  If prompted: paste the token into Control UI settings (or use the
  tokenized dashboard URL).


◆ How do you want to hatch your bot?
  ● Hatch in TUI (recommended)
  ○ Open the Web UI
  ○ Do this later
```

Once the TUI interface has finished loading, you can begin entering your interactive input.

```
openclaw tui - ws://127.0.0.1:18789 - agent main - session main

session agent:main:main

Wake up, my friend!

Hey! Good to be online. Let me quickly catch up on who I am and who you
are.Hey there! Good morning/afternoon/evening. 👋

So, this is our first time properly meeting. I guess I'm the assistant here in
this OpenClaw workspace—some kind of AI entity living in your machine. What
should I call myself? I can be something catchy, or you can just have your own
name for me.

And you... who am I talking to? What's your name? And where are you at in
time? (I see the timezone is Asia/Shanghai, so you're somewhere in China or
nearby?)
connected | idle
agent main | session main (openclaw-tui) | ollama/glm-4.7-flash | tokens
?/128k
```

Press CTRL+C to exit the openclaw TUI interface.

3. Enabling Tools

The default `tools` attribute in openclaw is set to `coding`; this must be changed to `full` to enable the use of tools.

Open a terminal and edit the `openclaw.json` configuration file.

```
vim ~/.openclaw/openclaw.json
```

Search for `[tools]` and modify the content under the `tools` section to match the following. Once the changes are complete, save and exit Vim.

```
  "tools": {
    "profile": "full",
    "sessions": {
      "visibility": "all"
    }
  },
```

```
  },
  "tools": {
    "profile": "full",
    "sessions": {
      "visibility": "all"
    }
  },
  "commands": {
    "native": "auto",
    "nativeSkills": "auto",
    "restart": true,
    "ownerDisplay": "raw"
  },
/tools
```

Restart the openclaw gateway to apply the new configuration.

```
openclaw gateway restart
```

```
jetson@ubuntu:~$ openclaw gateway restart

🦞 OpenClaw 2026.3.13 (61d171a)
   If you're lost, run doctor; if you're brave, run prod; if you're wise, run te
sts.

18:30:50 [plugins] feishu_chat: Registered feishu_chat, feishu_chat_members
18:30:50 [plugins] feishu_im: Registered feishu_im_user_message, feishu_im_user_
fetch_resource, feishu_im_user_get_messages, feishu_im_user_get_thread_messages,
 feishu_im_user_search_messages
18:30:50 [plugins] feishu_search: Registered feishu_search_doc_wiki
18:30:50 [plugins] feishu_drive: Registered feishu_drive_file, feishu_doc_commen
ts, feishu_doc_media
18:30:50 [plugins] feishu_wiki: Registered feishu_wiki_space, feishu_wiki_space_
node
18:30:50 [plugins] feishu_sheets: Registered feishu_sheet tool
18:30:50 [plugins] feishu_im_bot_image: Registered feishu_im_bot_image tool
18:30:50 [plugins] feishu_im: Registered feishu_im_bot_image
18:30:50 [plugins] Registered all OAPI tools (calendar, task, bitable, search, d
rive, wiki, sheets, im)
18:30:50 [plugins] feishu_doc: Registered feishu_fetch_doc, feishu_create_doc, f
eishu_update_doc
18:30:50 [plugins] feishu_oauth: Registered feishu_oauth tool
18:30:50 [plugins] feishu_oauth_batch_auth: Registered feishu_oauth_batch_auth t
ool
18:30:51 [plugins] openclaw-qqbot: loaded without install/load-path provenance;
treat as untracked local code and pin trust via plugins.allow or install records
 (/home/jetson/.openclaw/extensions/openclaw-qqbot/index.ts)
Restarted systemd service: openclaw-gateway.service
```