QR code

QR code

- 1. Introduction to QR Code
- 2. The structure of QR code
 - 2.1. Features of QR Code
 - 2.2. QR code creation and recognition

1. Introduction to QR Code

QR code is a type of two-dimensional barcode. QR comes from the abbreviation of "Quick Response" in English, which means quick response. It comes from the inventor's hope that QR code can allow its content to be decoded quickly. QR code not only has large information capacity, high reliability, and low cost, but also can represent a variety of text information such as Chinese characters and images. It has strong confidentiality and anti-counterfeiting properties and is very convenient to use. More importantly, the QR code technology is open source.

2. The structure of QR code

Image	Analysis
	Positioning markings Indicates the orientation of the QR code.
	Alignment markings If the QR code is large, these additional elements help with positioning.
	Timing pattern Through these lines, the scanner can identify how big the matrix is.
	Version information This specifies the version number of the QR code being used. There are currently 40 different versions of QR codes. Version numbers used in the sales industry are usually 1-7.
	Format information The format mode contains information about error tolerance and data mask modes and makes scanning the code easier.
60 - 60 2505 80 46	Data and error correction keys These modes hold the actual data.
	Quiet zone This area is very important for the scanner, its function is to separate itself from the surroundings.

2.1. Features of QR Code

The data value in QR code contains repeated information (redundant value). Therefore, even if up to 30% of the QR code structure is destroyed, it will not affect the readability of the QR code. The storage space of QR code is up to 7089 bits or 4296 characters, including punctuation and special characters, which can be written into the QR code. In addition to numbers and characters, words and phrases (such as URLs) can also be encoded. As more data is added to the QR code, the code size increases and the code structure becomes more complex.

2.2. QR code creation and recognition

Source code path: ~/yahboomcar_ws/src/yahboomcar_visual/simple_qrcode

Installation

```
python3 -m pip install qrcode pyzbar
sudo apt-get install libzbar-dev
```

create

Create a grcode object

```
1.1.1
Parameter meaning:
version: An integer with a value of 1 to 40, which controls the size of the QR
code (the minimum value is 1, which is a 12×12 matrix).
If you want the program to determine it automatically, set the value to None and
use the fit parameter.
error_correction: Controls the error correction function of the QR code. The
following 4 constants can be taken as values.
ERROR_CORRECT_L: About 7% or less errors can be corrected.
ERROR_CORRECT_M (default): About 15% or less errors can be corrected.
ROR_CORRECT_H: About 30% or less errors can be corrected.
box_size: Controls the number of pixels contained in each small grid in the QR
code.
border: Controls the number of grids contained in the border (the distance
between the QR code and the image boundary) (the default is 4, which is the
minimum value specified by the relevant standards)
    qr = qrcode.QRCode( version=1,
error_correction=qrcode.constants.ERROR_CORRECT_H, box_size=5, border=4,)
```


QR code to add logo

```
# If the logo address exists, add the logo image
my_file = Path(logo_path)
if my_file.is_file(): img = add_logo(img, logo_path)
```

Note: When using Chinese, you need to add Chinese characters

Enter Docker:


```
sh ~/ros_melodic.sh
```

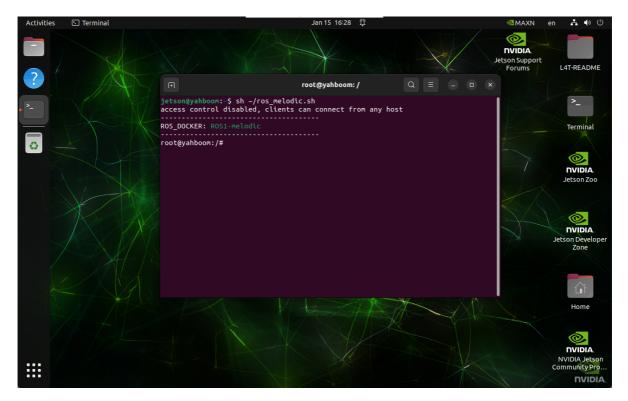

Start the program:

cd ~/yahboomcar_ws/src/yahboomcar_visual/simple_qrcode
python3 QRcode_Create.py

🔞 🖨 📵 Figure 1

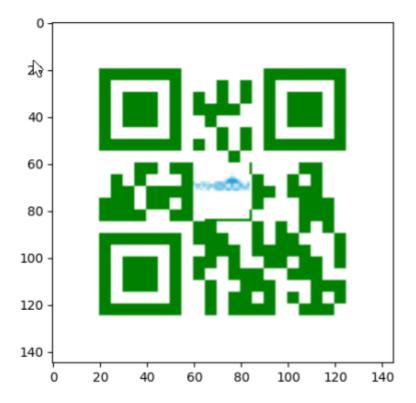



• Identification

```
def decodeDisplay(image, font_path):
   gray = cv.cvtColor(image, cv.COLOR_BGR2GRAY)
   #You need to convert the output Chinese characters into Unicode encoding
   barcodes = pyzbar.decode(gray)
   for barcode in barcodes:
       # Extract the position of the bounding box of the QR code
        (x, y, w, h) = barcode.rect
       # Draw the bounding box of the barcode in the image
       cv.rectangle(image, (x, y), (x + w, y + h), (225, 0, 0), 5)
       encoding = 'UTF-8'
       # To draw it, you need to convert it into a string first
       barcodeData = barcode.data.decode(encoding)
       barcodeType = barcode.type
       #Plot data and types on the image
       pilimg = Image.fromarray(image)
       # Create a brush
       draw = ImageDraw.Draw(pilimg)
       # Parameter 1: font file path, parameter 2: font size
       fontStyle = ImageFont.truetype(font_path, size=12, encoding=encoding)
       # Parameter 1: print coordinates, parameter 2: text, parameter 3: font
color, parameter 4: font
       draw.text((x, y - 25), str(barcode.data, encoding), fill=(255, 0, 0),
font=fontStyle)
       # PIL image to cv2 image
       image = cv.cvtColor(np.array(pilimg), cv.COLOR_RGB2BGR)
       # Print barcode data and barcode type to the terminal
       print("[INFO] Found {} barcode: {}".format(barcodeType, barcodeData))
   return image
```

• Effect Demonstration

You need to enter the Docker startup program:

python3 QRcode_Parsing.py

