

OpenClaw Three Chat Modes Configuration Testing

OpenClaw Three Chat Modes Configuration Testing

1. Course Overview
2. Introduction to Three Chat Modes
 - 2.1 whatsapp Mode
 - 2.2 TUI Mode
 - 2.3 Voice Interaction Mode
3. whatsapp Chat Configuration and Testing
 - 3.1 Install whatsapp Plugin
 - 3.2 Testing Method
 - 3.3 Common Issues
4. TUI Chat Configuration and Testing
 - 4.1 Startup Method
 - 4.2 Testing Method
5. AI Voice Interaction Configuration and Testing
 - 5.1 Pre-startup Preparation
 - 5.2 Startup Method
 - 5.3 Testing Method
 - 5.4 Judgment Criteria
 - 5.5 Common Issues
6. Comparison of Three Modes
7. Recommended Testing Order

1. Course Overview

This course will introduce three commonly used chat modes in OpenClaw, and provides configuration and testing methods for each:

- WhatsApp chat
- Local TUI chat
- AI voice interaction chat

After completing this course, you will be able to choose the most suitable chat mode for your scenario and complete basic verification.

Note: WhatsApp bot and AI voice interaction use the default model. If you need to change the default large model, see [03. OpenClaw Switching Models]

2. Introduction to Three Chat Modes

2.1 whatsapp Mode

Suitable scenarios:

- Remote control via phone
- Let multiple people experience OpenClaw together

Features:

- No need to stay next to the device at all times

- Suitable for demonstrating "remote natural language control"

2.2 TUI Mode

Suitable scenarios:

- Local debugging
- Quick testing
- Troubleshooting model and skill invocation issues

Features:

- Most direct method
- Easiest way to view commands and results

2.3 Voice Interaction Mode

Suitable scenarios:

- Complete AI interaction experience
- Voice wake and voice control
- Desktop assistant experience

Features:

- Most immersive interaction experience

3. whatsapp Chat Configuration and Testing

If the AI voice module + speaker is an optional add-on, Feishu chat, TUI, and WhatsApp chat need to play back OpenClaw's replies. You can run the following program in the terminal. AI voice module chat does not need to run it again.

- Modify the broadcast parameter

```
/home/jetson/voice_to_openclaw/.env
```

```
# Option A: Domestic Version (Bailian)
ENABLE_TTS=true
TTS_ENGINE=cosyvoice_http
TTS_API_URL=https://dashscope.aliyuncs.com/api/v1/services/audio/tts/SpeechSynthesizer
TTS_MODEL=cosyvoice-v3-flash
TTS_VOICE=longanhuan
TTS_FORMAT=wav
TTS_SAMPLE_RATE=24000
TTS_VOLUME=50
TTS_SPEECH_RATE=1.0
TTS_PITCH_RATE=1.0
TTS_TIMEOUT=60
WAKE_ACK_TEXT=I'm here.
TTS_MAX_CHARS=200
TTS_TRUNCATE_MODE=smart


# Option B: Overseas Version (iFlytek International)
ENABLE_TTS=true
TTS_ENGINE=xunfei_ws
TTS_API_URL=wss://tts-api.xfyun.cn/v2/tts
```

```
TTS_VOICE=x4_xiaoyan
TTS_SAMPLE_RATE=16000
TTS_VOLUME=50
TTS_TIMEOUT=60
XUNFEI_TTS_SPEED=50
XUNFEI_TTS_PITCH=50
XUNFEI_TTS_TEXT_ENCODING=UTF8
XUNFEI_TTS_SIGN_HOST=ws-api.xfyun.cn
WAKE_ACK_TEXT=I am here.
TTS_MAX_CHARS=200
TTS_TRUNCATE_MODE=smart
TTS_LOCK_PATH=/tmp/voice_to_openclaw_tts.lock
# Terminal log language: zh / en
UI_LANGUAGE=zh
```

ENABLE_TTS=true # This parameter controls whether to broadcast. After modification, save and run the following program in the terminal

- Enter the following in the terminal

```
cd ~/voice_to_openclaw
source .venv/bin/activate
python -m src.openclaw_session_tts
```




```
(.venv) jetson@yahboom:~/voice_to_openclaw$ python -m src.openclaw_session_tts
[系统] OpenClaw 会话播报器已启动
[系统] 监听目录=/home/jetson/.openclaw/agents/main/sessions
[系统] 监听渠道=feishu,tui,whatsapp
```

3.1 Install whatsapp Plugin

Enter in terminal:

```
openclaw channels login --channel whatsapp
```


After execution, a QR code usually appears.

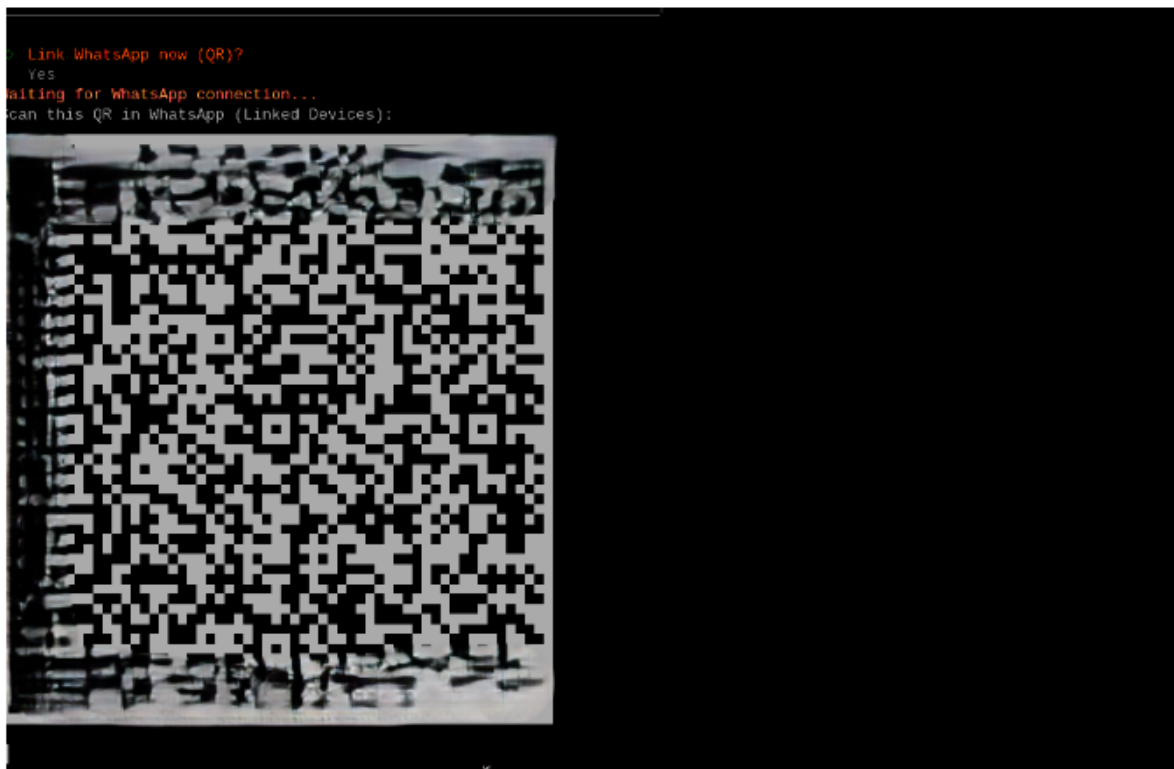

- Scan the QR code on the mobile phone to connect. "Linked after restart" appears, proving the connection is successful

```
WhatsApp asked for a restart after pairing (code 515); creds are saved. Restarting connection once...  
✔ Linked after restart; web session ready.
```

- Open the newly created conversation to see the conversation ID

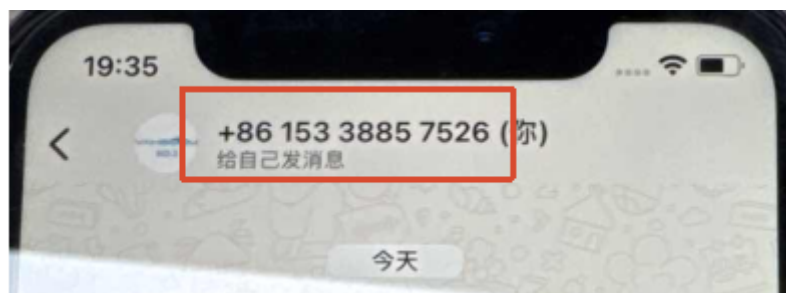

- Fill this into "allowFrom" in the openclaw.json file:

```
nano /home/jetson/.openclaw/openclaw.json
```

```
{} openclaw.json X
.openclaw > {} openclaw.json > {} channels > {} feishu > abc chat_id
144     "commands": {
145         "native": "auto",
146         "nativeSkills": "auto",
147         "restart": true,
148         "ownerDisplay": "raw"
149     },
150     "session": {
151         "dmScope": "per-channel-peer"
152     },
153     "channels": {
154         "whatsapp": {
155             "enabled": true,
156             "dmPolicy": "allowlist",
157             "selfChatMode": true,
158             "allowFrom": [
159                 "+8615338857526"
160             ],
161             "groupPolicy": "allowlist",
162             "debounceMs": 0,
163             "mediaMaxMb": 50
164         },
165     },
166 }
```

- Restart OpenClaw gateway

```
openclaw gateway restart
```

3.2 Testing Method

After creation is complete, you can directly send test messages in WhatsApp, for example:

- Tell me a joke



3.3 Common Issues

- Cannot create bot after scanning QR code: Check network first
- Creation succeeds but no reply: Check if the OpenClaw gateway has restarted

4. TUI Chat Configuration and Testing

4.1 Startup Method

Enter in terminal:

```
openclaw tui
```

If startup is successful, you will enter the local terminal chat interface.

```
jetson@yahboom:~$ openclaw tui
19:04:55 [plugins] feishu_oauth_batch_auth: Registered feishu_oauth_batch_auth tool
19:04:56 [plugins] reply-bridge: Plugin registered (hooks: before_message_write, message_sending)
19:04:56 [plugins] board-control: loaded without install/load-path provenance; treat as untracked local code and pin trust via plugins.all
or install records (/home/jetson/.openclaw/extensions/board-control/index.ts)
19:04:56 [plugins] reply-bridge: loaded without install/load-path provenance; treat as untracked local code and pin trust via plugins.all
gateway disconnected: closed | idle

session agent:main:main

what do you see

I see you sitting at a desk with a colorful mechanical keyboard – purple, teal, and white keycaps. You're wearing a dark shirt. In the
background there are some boxes and what looks like a monitor or TV. The lighting is a bit dim.
gateway reconnected | idle
agent main | session main (openclaw-tui) | bailian/mimo-v2.5 | tokens 40k/1.0m (4%)
```

4.2 Testing Method

It is recommended to first try the simplest chat messages:

- Tell me a joke
- Introduce yourself

If basic chat is normal, then test a hardware-related command, for example:

- Change the RGB light to red
- Display hello on the OLED
- Read the current temperature and humidity

```
File Edit Tabs Help

Tell me a joke.

Why don't robots ever get lost?

Because they always follow their GPS... and also because they can just ask the
internet for directions! 🤖📶

Want to hear another one, or is there something I can help you with?

Read Current Temperature and Humidity

Current environmental readings from your DHT11 sensor:

- Temperature: 30.1°C (86.2°F)
- Humidity: 49%

The sensor is working properly! Is there anything else you'd like me to monitor
or control? 🤖📶
connected | idle
agent main | session main (openclaw-tui) | bailian/gwen3.5-plus | tokens
```

5. AI Voice Interaction Configuration and Testing

5.1 Pre-startup Preparation

- Requires optional AI voice interaction module + speaker

5.2 Startup Method

```
cd /home/jetson/voice_to_openclaw
source .venv/bin/activate
python -m src.main
```

5.3 Testing Method

If using serial wake mode, first trigger wake with "Hi, yahboom".

Then you can try saying:

- Tell me a joke
- Turn on the RGB light
- Display Welcome to OpenClaw on the OLED

```
(.venv) pi@raspberrypi:~/voice_to_openclaw $ python -m src.main
2026-05-13 20:00:29 [INFO] voice_to_openclaw:run:26 - voice_to_openclaw starting
[系统] voice_to_openclaw 已启动
[系统] ASR=xunfei_ws/iat/en_us | 发布=gateway_chat | TTS=开/xunfei_ws | 唤醒=串口
[系统] 串口唤醒已启用: /dev/ttyUSB0@115200
[提示] 说“清空上下文”可以重置当前会话
[唤醒] 检测到串口信号, 开始新一轮对话
[听取] 请开始说话
[听取] 正在收音
[识别] 已捕获 2820 ms 语音, 正在转写

[你] Tell me a joke.
[发送] 正在交给 OpenClaw
[完成] OpenClaw 返回 200

[OpenClaw] why did the robot go to therapy?
Because it had too many *bugs* in
its code! 🐛

...Don't worry, I'm working through my issues one debug
at a time. 😊
[信息] 回复已裁剪为播报文本: 149 -> 90 字
```

5.4 Judgment Criteria

If the voice method can complete recognition and receive an OpenClaw reply, the following are most likely working correctly:

- Microphone capture is normal
- ASR is normal
- OpenClaw publishing pipeline is normal
- [Optional] TTS is normal

5.5 Common Issues

- No response after wake: Check serial wake configuration first
- Can wake but cannot recognize: Check ASR and API-KEY
- Can recognize but does not execute: Check OpenClaw gateway configuration
- Recognition works but no voice broadcast: Check TTS switch and speaker

6. Comparison of Three Modes

Mode	Suitable Scenarios	Advantages	Recommended Positioning
WhatsApp	Remote control, classroom demo	Convenient for mobile and multi-person experience	Demonstrate "remote natural language control"
TUI	Local debugging, command verification	Most direct, easiest to troubleshoot	Preferred basic debugging mode
Voice Interaction	Voice wake, complete experience	Most immersive interaction experience	Final demonstration mode

7. Recommended Testing Order

It is recommended to complete the three chat mode tests in the following order:

1. First test `openc1aw tui`
2. Then test the WhatsApp bot
3. Finally test AI voice interaction