

ClawHub

ClawHub is the **public Skills registry for OpenClaw**. It is a free service: all Skills are public and open, and anyone can view, share, and reuse them. A Skill is a folder containing a `SKILL.md` file (plus auxiliary text files). You can browse Skills in the web application, or use the CLI to search, install, update, and publish Skills. Website: clawhub.com

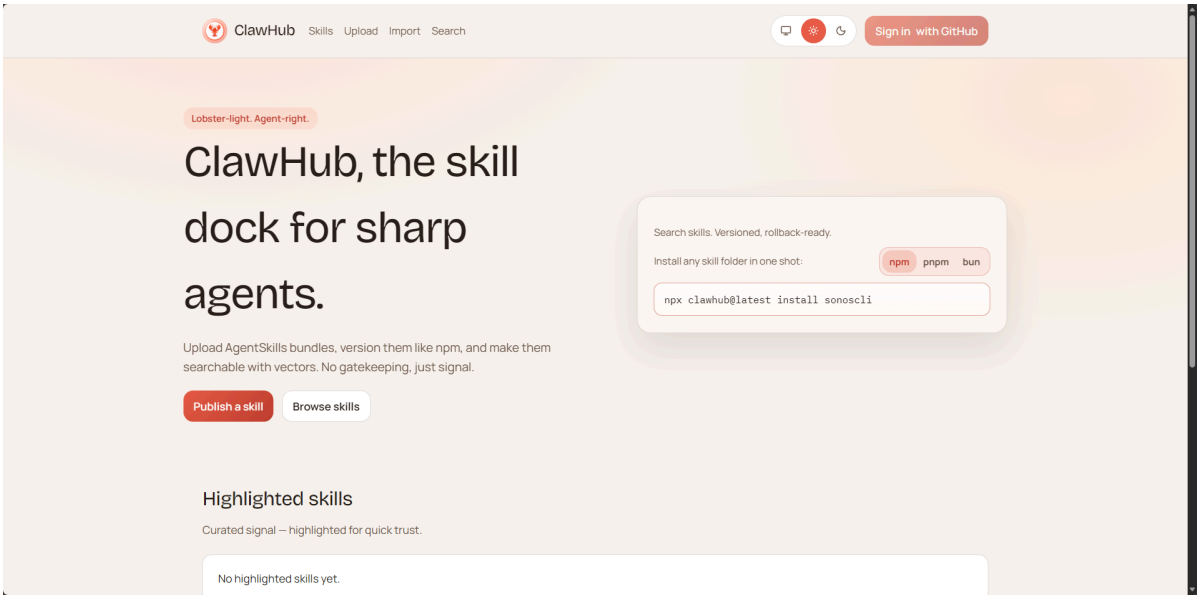

Positioning in OpenClaw

By default, the CLI installs Skills into `./skills` in the current working directory. If an OpenClaw workspace is configured, `clawhub` falls back to that workspace unless you override it with `--workdir` (or `CLAWHUB_WORKDIR`). OpenClaw loads workspace Skills from `<workspace>/skills`, and they take effect in the **next** session. If you are already using `~/.openclaw/skills` or built-in Skills, workspace Skills take priority. For more details on Skill loading, sharing, and permission control, see Skills.

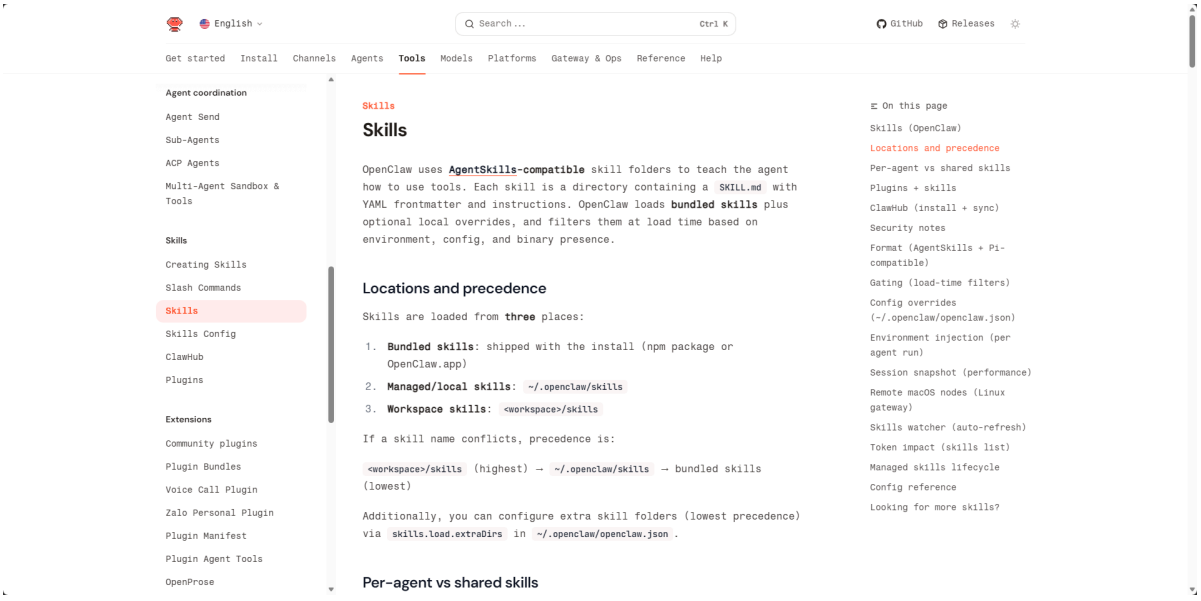

Who Is It For (Beginner-Friendly)

If you want to add new capabilities to the OpenClaw agent, ClawHub is the easiest way to find and install Skills. You do not need to understand how the backend works. You can:

- Search for Skills using natural language.
- Install Skills into your workspace.
- Update Skills later with a single command.
- Back up your own Skills by publishing them.

Installing the CLI

Original ClawHub CLI (International Users)

Choose either one:

```
npm i -g clawhub
pnpm add -g clawhub
```



Logging In to a ClawHub Account

Why Log In

Although ClawHub allows users who are not logged in to search and install Skills, logging in has the following important benefits:

- ✅ **Avoid rate limiting**: users who are not logged in may encounter download rate limits
- ✅ **Access to full features**: some advanced features require login
- ✅ **Publish Skills**: only logged-in users can publish their own Skills
- ✅ **Favorites and comments**: you can favorite Skills you like and post comments
- ✅ **Usage statistics**: view your own usage


Login Steps

Method 1: Log In via GitHub (Recommended)

This is the simplest and safest login method.


1.1 Visit the ClawHub Website

Open in the browser: https://clawhub.com

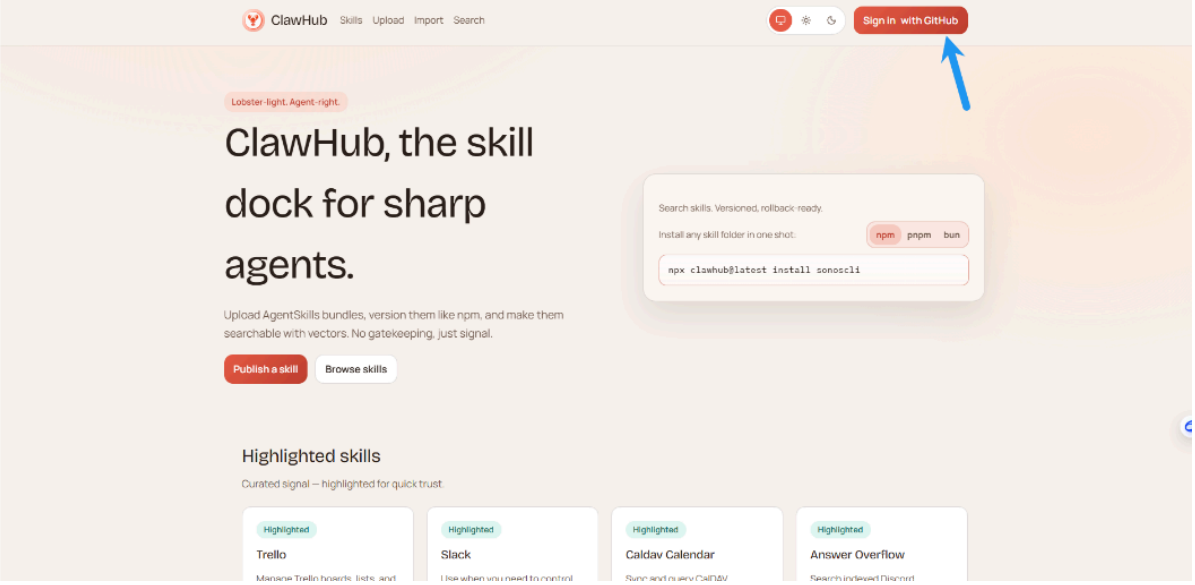

1.2 Click Login

Click the "Login" button in the upper right corner of the page:

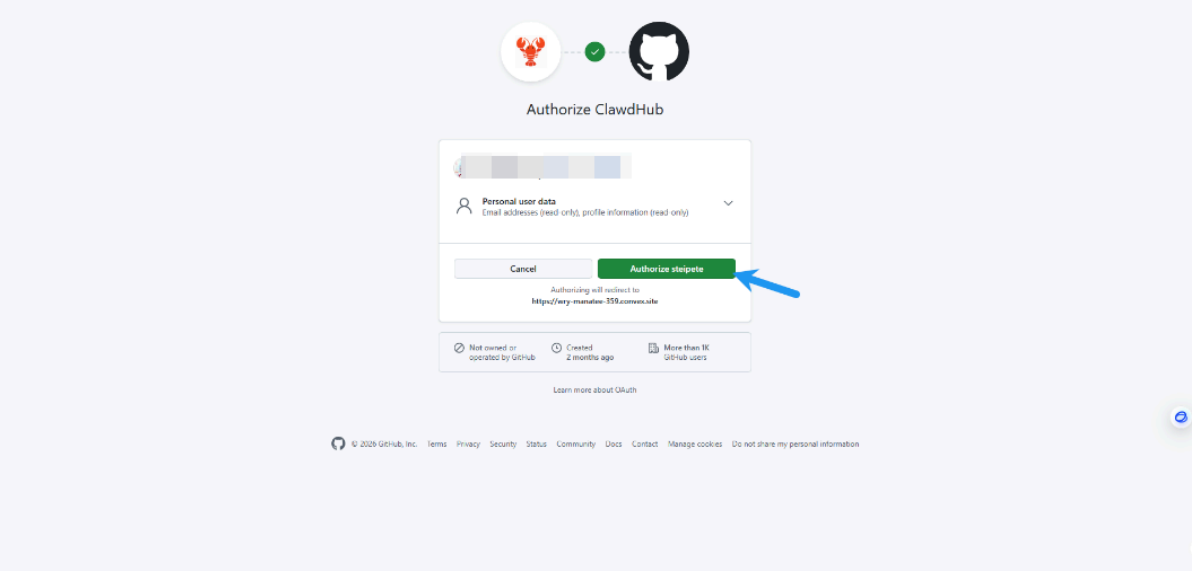

1.3 Select GitHub Login

On the login page, click "Sign in with GitHub".

1.4 Authorize Access

After authorization succeeds, you are automatically redirected back to ClawHub and the logged-in status is displayed.

Method 2: Log In Using a Token


If you cannot log in with GitHub, you can log in using a Token.

2.1 Log In to the Account

First, follow the steps in Method 1 to log in to the ClawHub website via GitHub.


2.2 Go to the Settings Page

After logging in, click the user avatar in the upper right corner of the page and select "Settings":

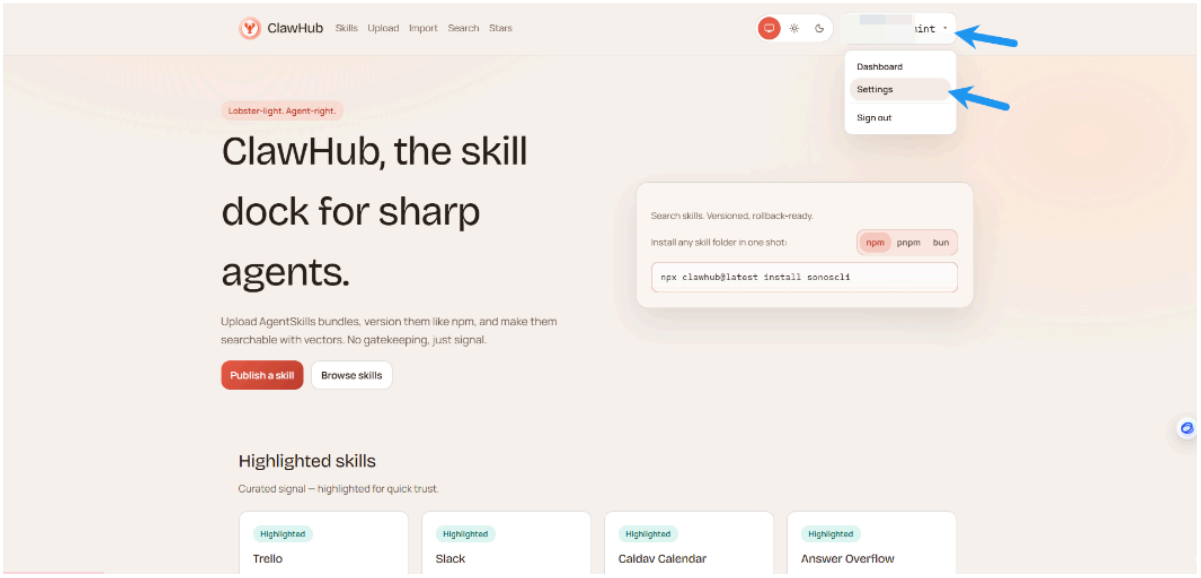


2.3 Create an API Token

On the settings page, find the "API Tokens" section and click "Create token":

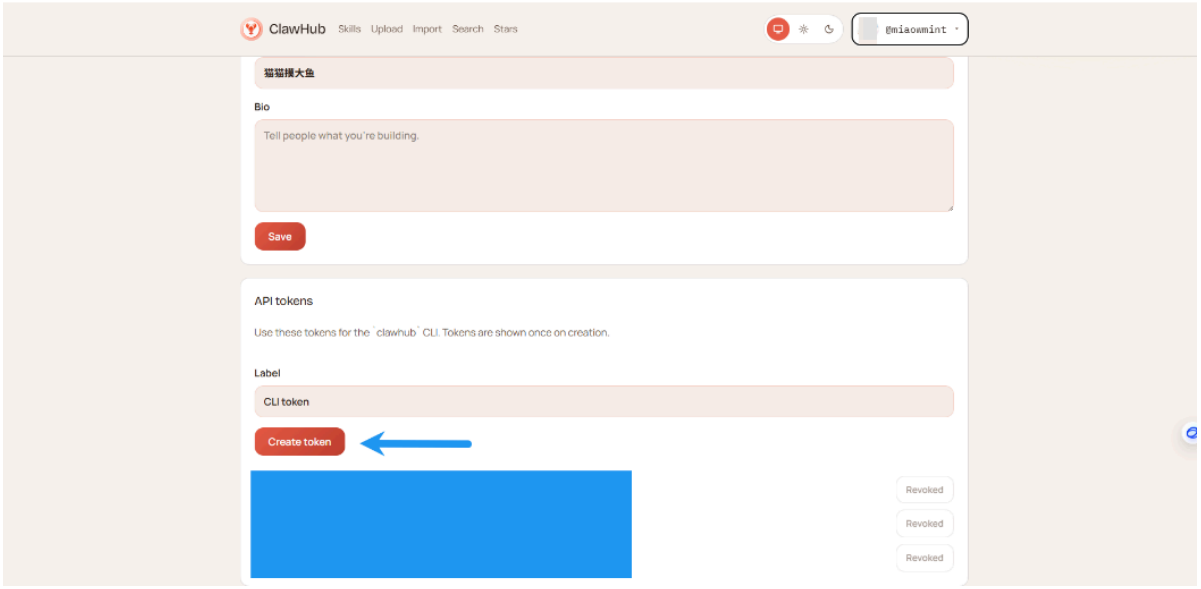

2.4 Copy the Token

The system generates a new API Token; click the copy button to copy it:

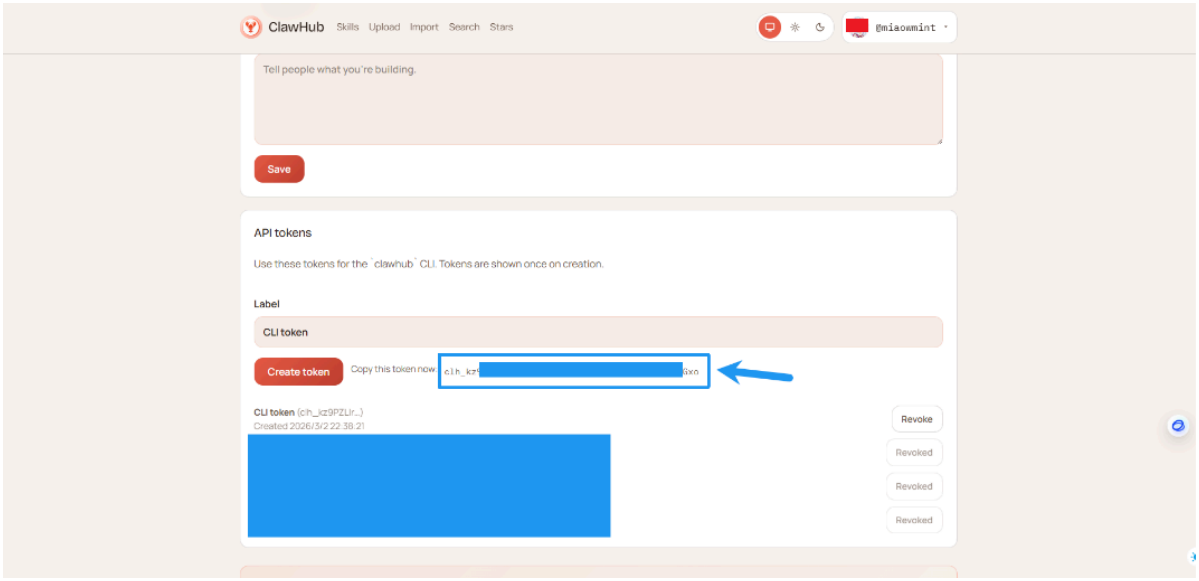


⚠️ **Important Note**:

- The Token is displayed only once, so be sure to copy and keep it properly
- Do not share the Token with others
- The Token can be deleted at any time on the settings page

2.5 Log In in the Terminal

Open a terminal and run the following command (replace `YourToken` with the Token you just copied):

```
clawhub login --token YourToken
```

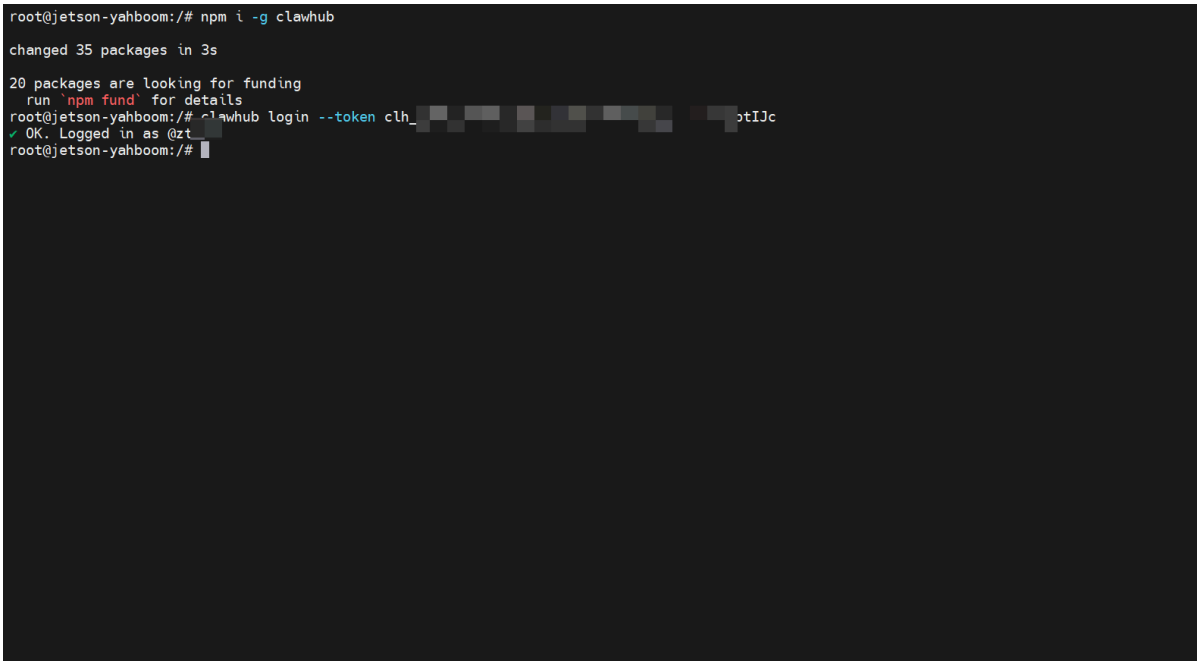

Note: There is a space after `--token`, then paste your Token.

Frequently Asked Questions

Issue 1: Login Reports an Invalid Token

Error message:

```
Error: Invalid token
```

Possible causes:

- The Token was copied incompletely
- The Token has expired or been deleted
- Extra spaces or characters were entered

Solutions:

1. Create the Token again and copy it
2. Make sure there are no extra spaces when copying
3. Check whether the Token is complete

Issue 2: GitHub Login Fails

Possible causes:

- Network connection problems
- The GitHub account has not verified its email address
- The browser blocked the redirect

Solutions:

1. Check the network connection
2. Confirm that the GitHub account has verified its email address
3. Try another browser or incognito mode

Issue 3: Still Rate-Limited After Logging In

Possible causes:

- The login did not take effect
- The wrong CLI was used (clawhub vs skillhub)

Solutions:

1. Run `clawhub whoami` to confirm the login status
2. Confirm that the correct CLI command is used
3. Log in again

Quick Start

Using the Original ClawHub

1. Install the CLI (see the previous section).
2. Search for what you need: (a VPN is required in China)

```
clawhub search "find"
```



3. Install a Skill:

   Syntax: `clawhub install <skill-slug>`

```
clawhub install find
```

4. Start a new OpenClaw session to load the new Skills.

Using SkillHub (Domestic Users)

1. Install the SkillHub CLI:

```
npm i -g skillhub
```

2. Search for what you need:

```
skillhub search "find"
```

3. Install a Skill:

   Syntax: `skillhub install <skill-slug>`

```
skillhub install find
```

4. Start a new OpenClaw session to load the new Skills.

Common Agent Workflows

Search Skills

```
clawhub search "postgres backups"
```

Or use SkillHub:

```
skillhub search "postgres backups"
```

Download New Skills

```
clawhub install my-skill-pack
```

Or use SkillHub:

```
skillhub install my-skill-pack
```

Update Installed Skills

```
clawhub update --all
```

Or use SkillHub:

```
skillhub update --all
```

Back Up Your Skills (Publish or Sync)

For a single Skills folder:

```
clawhub publish ./my-skill --slug my-skill --name "My Skill" --version 1.0.0 --
tags latest
```

To scan and back up multiple Skills at once:

```
clawhub sync --all
```

CLI Commands and Arguments

Global options (apply to all commands):

- `--workdir <dir>`: working directory (default: current directory; falls back to the OpenClaw workspace).
- `--dir <dir>`: Skills directory, relative to the working directory (default: `skills`).
- `--site <url>`: website base URL (browser login).
- `--registry <url>`: registry API base URL.
- `--no-input`: disable prompts (non-interactive mode).
- `-V, --cli-version`: print the CLI version.

Authentication:

- `clawhub login` (browser flow) or `clawhub login --token <token>`
- `clawhub logout`
- `clawhub whoami`

Options:

- `--token <token>`: paste the API token.

- `--label <label>`: label stored for the browser login token (default: `CLI token`).
- `--no-browser`: do not open the browser (requires `--token`).

Search:

- `clawhub search "query"`
- `--limit <n>`: maximum number of results.

Install:

- `clawhub install <slug>`
- `--version <version>`: install a specific version.
- `--force`: overwrite if the folder already exists.

Update:

- `clawhub update <slug>`
- `clawhub update --all`
- `--version <version>`: update to a specific version (single slug only).
- `--force`: force overwrite when local files do not match any published version.

List:

- `clawhub list` (reads `.clawhub/lock.json`)



Publish:

- `clawhub publish <path>`
- `--slug <slug>`: Skills identifier.
- `--name <name>`: display name.
- `--version <version>`: semantic version number.
- `--changelog <text>`: changelog text (can be empty).
- `--tags <tags>`: comma-separated tags (default: `latest`).

Delete/Restore (owners/admins only):

- `clawhub delete <slug> --yes`
- `clawhub undelete <slug> --yes`

Sync (scan local Skills + publish new/updated Skills):

- `clawhub sync`
- `--root <dir...>`: additional scan root directories.
- `--all`: upload everything without prompts.
- `--dry-run`: show what will be uploaded.
- `--bump <type>`: version increment type for updates `patch|minor|major` (default: `patch`).
- `--changelog <text>`: changelog for non-interactive updates.

- `--tags <tags>`: comma-separated tags (default: `latest`).
- `--concurrency <n>`: concurrency for registry checks (default: 4).

Environment Variables

- `CLAWHUB_SITE`: override the website URL.
- `CLAWHUB_REGISTRY`: override the registry API URL.
- `CLAWHUB_CONFIG_PATH`: override where the CLI stores tokens/configuration.
- `CLAWHUB_WORKDIR`: override the default working directory.
- `CLAWHUB_DISABLE_TELEMETRY=1`: disable telemetry for `sync`.

For more about ClawHub, refer to: [ClawHub - OpenClaw]