Open WebUI

Open WebUI

1. Environmental Requirements
2. Docker Setup
    2.1. Official Docker Installation
    2.2. Installing Docker from Alibaba Cloud
    2.3. Adding Access Permissions
3. Open WebUI Installation
4. Running Open WebUI
    4.1. Administrator Account
    4.2. Registering and Logging In
    4.3. User Interface
5. Model Conversation
    5.1. Switching Models
    5.2. Demonstration: LLaVA
6. Common Problems
    6.1. Closing Open WebUI
    6.2. Common Errors
        Unable to Start Open WebUI
        Service Connection Timeout

> Open WebUI is an open source project that aims to provide a simple and easy-to-use user interface (UI) for managing and monitoring open source software and services.

```
When using Open WebUI, there is a high probability that the conversation will be unresponsive or timeout. You can try restarting Open WebUI or switching to the Ollama tool to run the model!
```

1. Environmental Requirements

To install Open WebUI on the host with Conda, you need Node.js >= 20.10 and Python 3.11:

Environment setup method	Difficulty (relatively)
Host	High
Conda	Medium
Docker	Low

Note: Open WebUI is already set up on the factory system. If you need to set it up yourself, you can refer to the steps for installing Open WebUI through Docker below.

2. Docker Setup

2.1. Official Docker Installation

If Docker is not installed, you can use a script to install Docker with one click.

```
Users in China may not be able to install Docker in the official way. We recommend
installing Docker from Alibaba Cloud or using our image directly.
```

- Update the local package list

```
sudo apt update
```

- Upgrade the installed packages

```
sudo apt upgrade
```

- Download and run the script

Download the get-docker.sh file and save it in the current directory.

```
sudo apt install curl
```

```
curl -fsSL https://get.docker.com -o get-docker.sh
```

Run the get-docker.sh script file with sudo privileges.

```
sudo sh get-docker.sh
```

2.2. Installing Docker from Alibaba Cloud

If you cannot install it yourself, please use the image we provide.

- Update the local package list

```
sudo apt update
```

- Install the required software

```
sudo apt install apt-transport-https ca-certificates curl gnupg2 lsb-release software-
properties-common
```

- Add the GPG key of the software source

```
curl -fsSL https://mirrors.aliyun.com/docker-ce/linux/ubuntu/gpg | sudo gpg --dearmor -o
/usr/share/keyrings/docker-archive-keyring.gpg
```

- Add the Alibaba Cloud mirror software source

```
echo "deb [arch=arm64 signed-by=/usr/share/keyrings/docker-archive-keyring.gpg]
https://mirrors.aliyun.com/docker-ce/linux/ubuntu noble stable" | sudo tee
/etc/apt/sources.list.d/docker.list > /dev/null
```

- Install Docker

```
sudo apt update
sudo apt install docker-ce docker-ce-cli containerd.io docker-compose-plugin
```

2.3. Adding Access Permissions


Add access permissions for the current system user to the Docker daemon: the Docker command can be used without the sudo command

```
sudo usermod -aG docker $USER
newgrp docker
```

3. Open WebUI Installation

For a system with Docker installed, you can directly enter the following command in the terminal: the image shows the result after pulling


```
docker pull ghcr.io/open-webui/open-webui:main
```

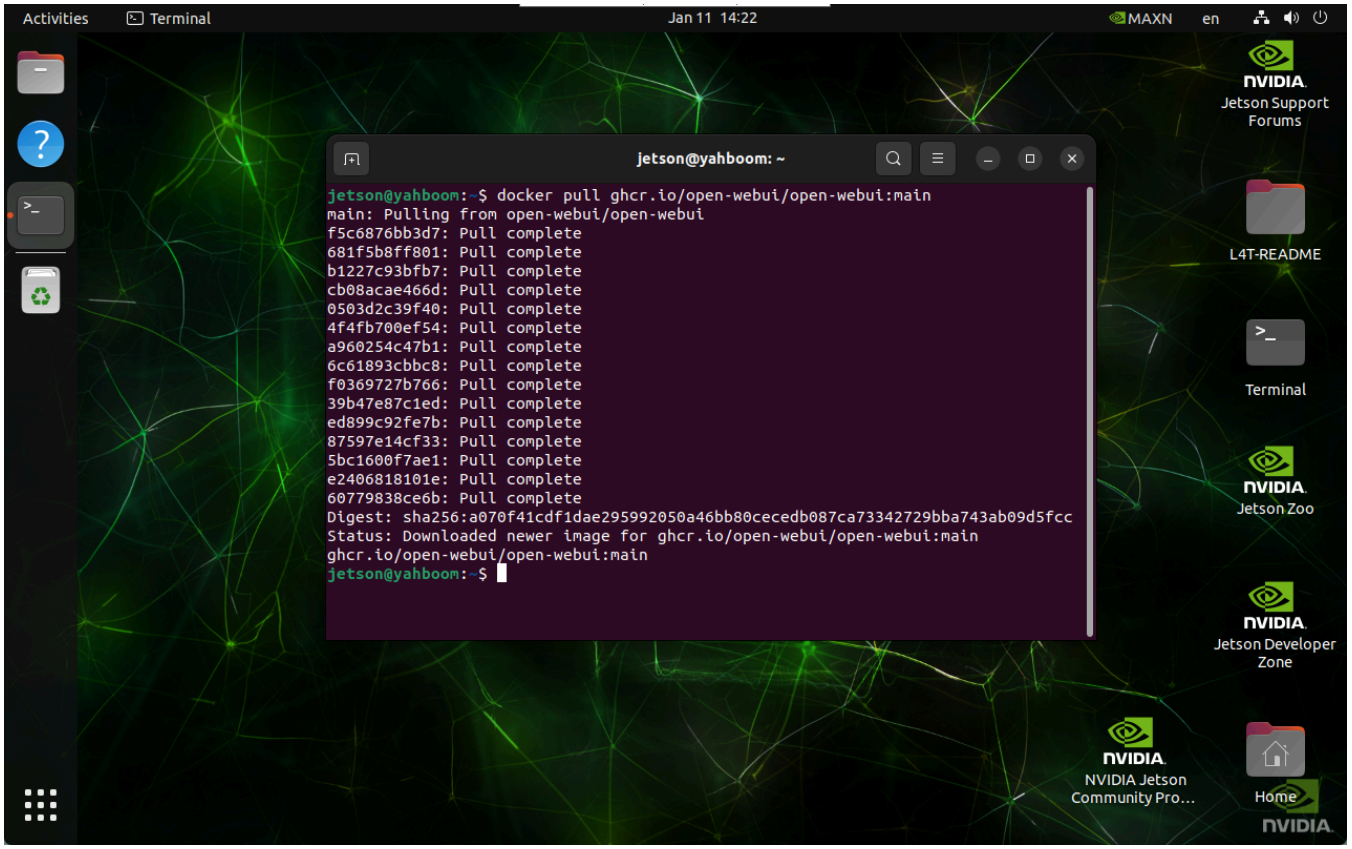

4. Running Open WebUI

The factory setting is to start it automatically at boot, so you can access it directly with a browser. If you finish the deployment inside your own system, enter the following command in the terminal to start the specified Docker:

```
docker run --network=host -v open-webui:/app/backend/data -e
OLLAMA_BASE_URL=http://127.0.0.1:11434 --name open-webui --restart always ghcr.io/open-
webui/open-webui:main
```

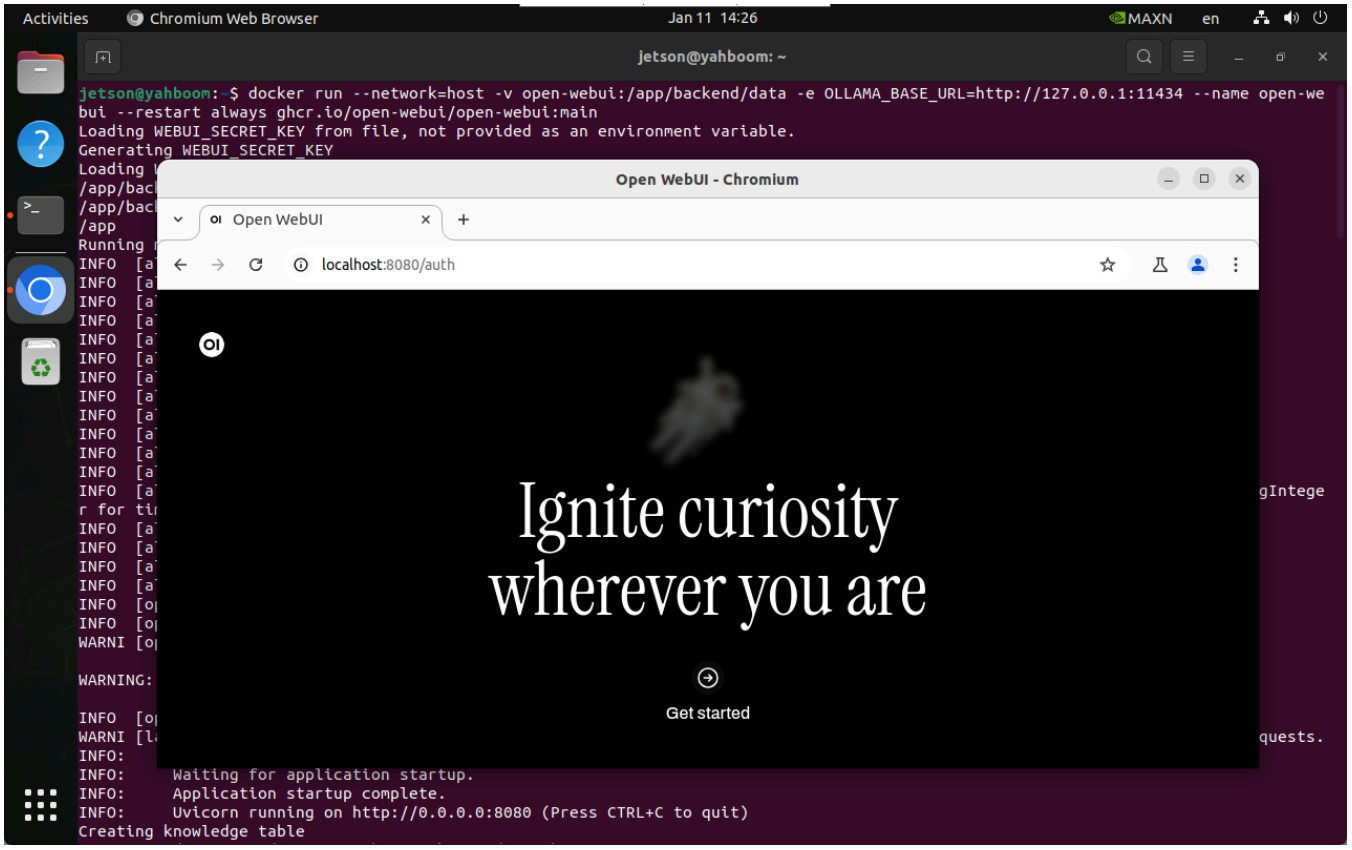

After a successful startup, access it in the browser with the following URL:

```
http://localhost:8080/
```

The same LAN can use the mainboard IP:8080 to access:


```
Assume the mainboard IP is 192.168.2.105, we can access it through 192.168.2.105:8080
```


4.1. Administrator Account


For first-time use you need to register an account yourself. This account is an administrator account, and the information can be filled in as required!

```
Since all the contents of our image have been set up and tested, users can directly log in with our registered account:
Username: yahboom
Email: yahboom@163.com
Password: yahboom
```


4.2. Registering and Logging In

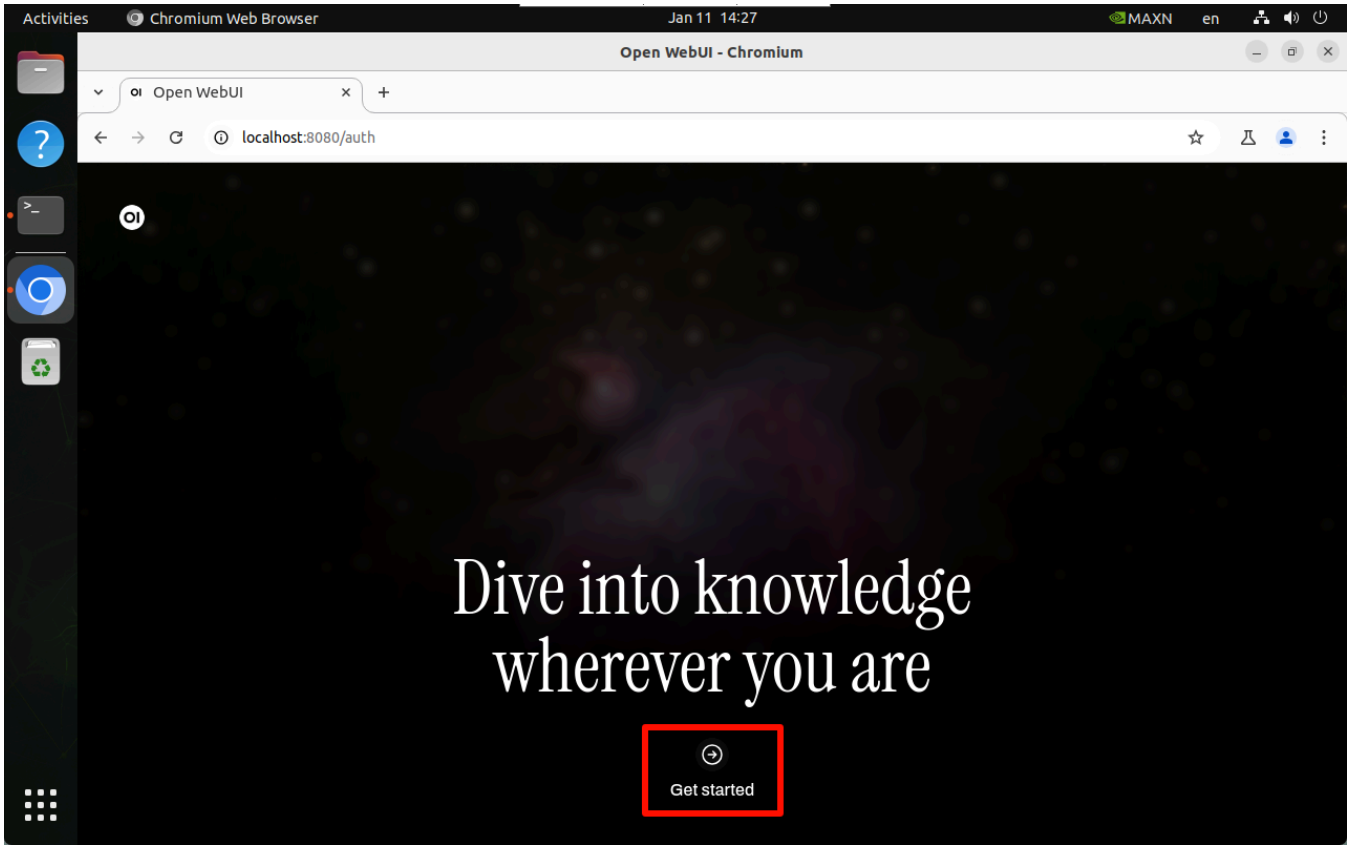

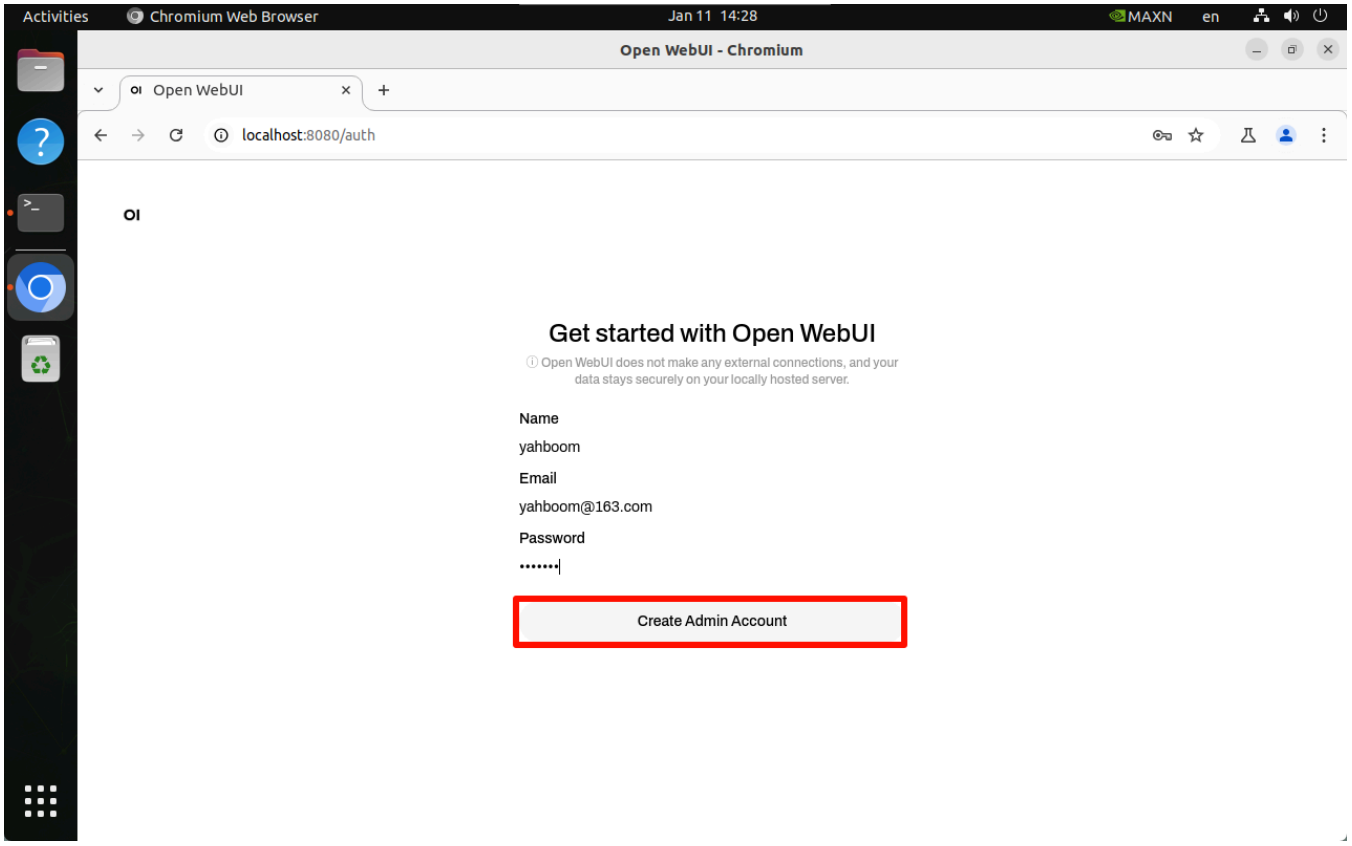
Activities
Chromium Web Browser
Jan 11 14:28
MAXN
en
Open WebUI - Chromium
Open WebUI
localhost:8080/auth
Get started with Open WebUI
Open WebUI does not make any external connections, and your data stays securely on your locally hosted server.
Name
yahboom
Email
yahboom@163.com
Password
Create Admin Account

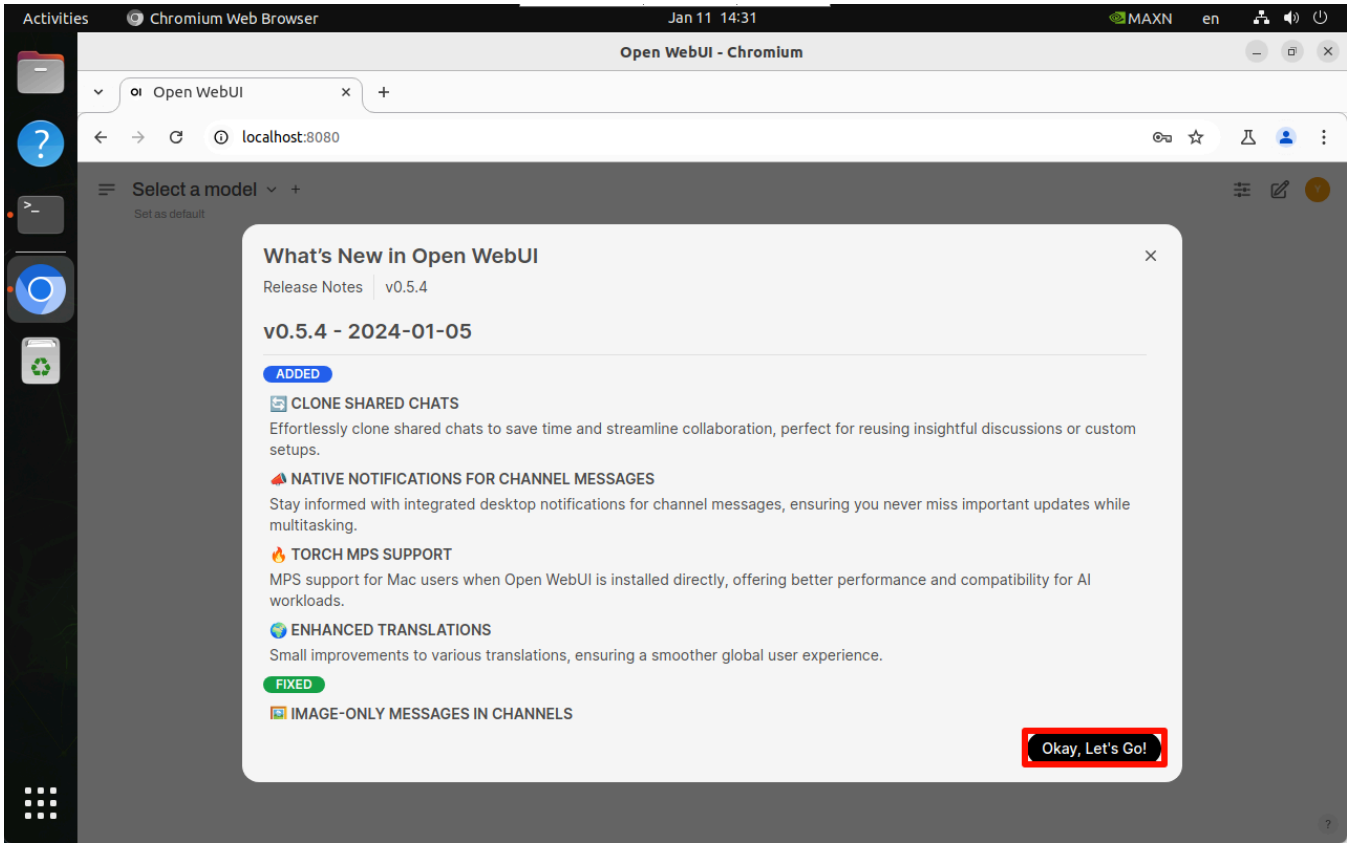
Activities
Chromium Web Browser
Jan 11 14:31
MAXN
en
Open WebUI - Chromium
Open WebUI
localhost:8080
Select a model
Set as default
What's New in Open WebUI
Release Notes
v0.5.4
v0.5.4 - 2024-01-05
ADDED
CLONE SHARED CHATS
Effortlessly clone shared chats to save time and streamline collaboration, perfect for reusing insightful discussions or custom setups.
NATIVE NOTIFICATIONS FOR CHANNEL MESSAGES
Stay informed with integrated desktop notifications for channel messages, ensuring you never miss important updates while multitasking.
TORCH MPS SUPPORT
MPS support for Mac users when Open WebUI is installed directly, offering better performance and compatibility for AI workloads.
ENHANCED TRANSLATIONS
Small improvements to various translations, ensuring a smoother global user experience.
FIXED
IMAGE-ONLY MESSAGES IN CHANNELS
Okay, Let's Go!

4.3. User Interface

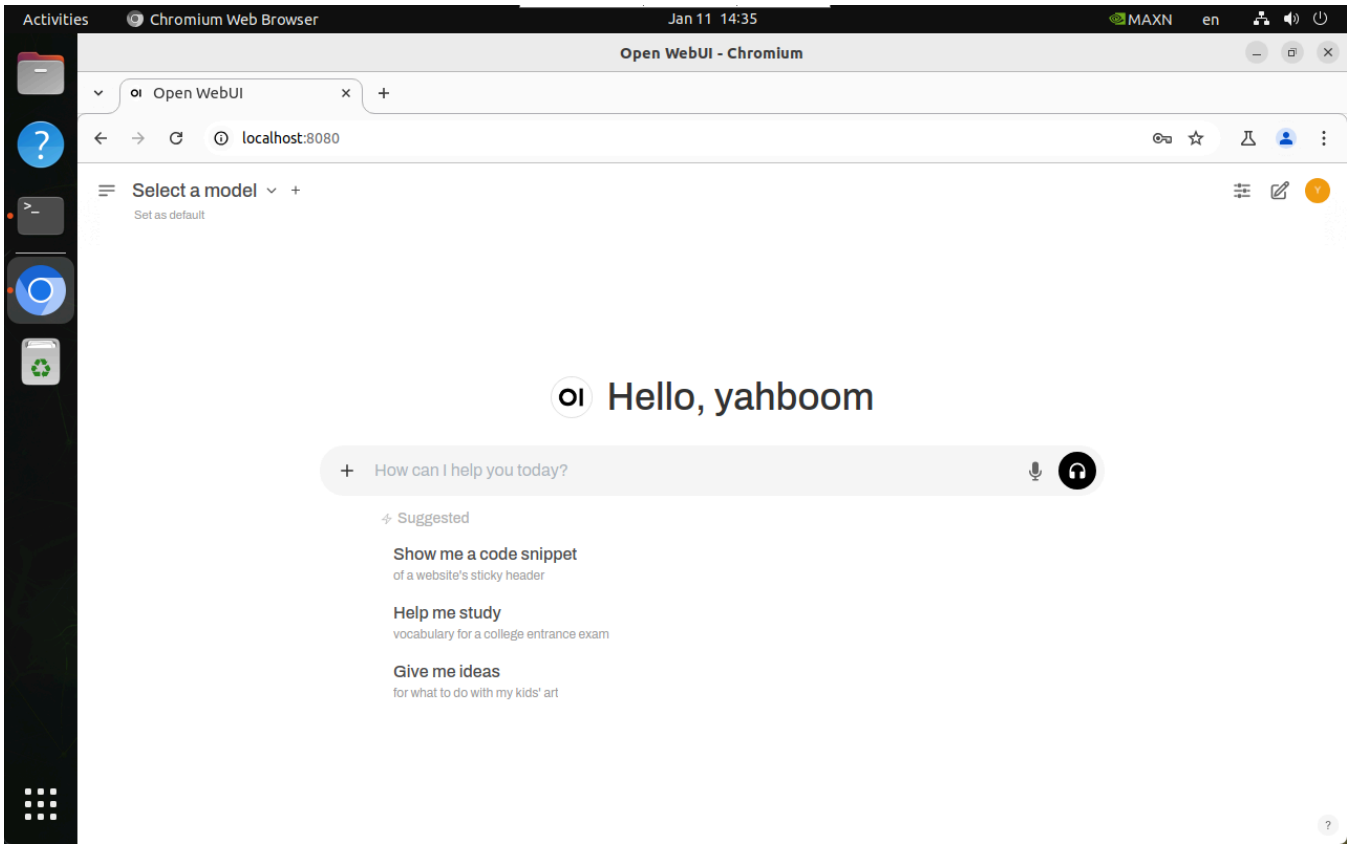

5. Model Conversation


Using Open WebUI for conversation is slower than directly running the model with the Ollama tool, and may even cause service connection timeout failures. This is related to the memory of the Jetson mainboard and cannot be avoided!

```
Users who have ideas can switch to another Linux environment to set up the Ollama tool and the Open WebUI tool for conversation
```

5.1. Switching Models

Click `Select a model` to select the specified model for conversation.


```
The model pulled by ollama will be automatically added to the Open WebUI model options. Refresh the web page and the new model will appear!
```

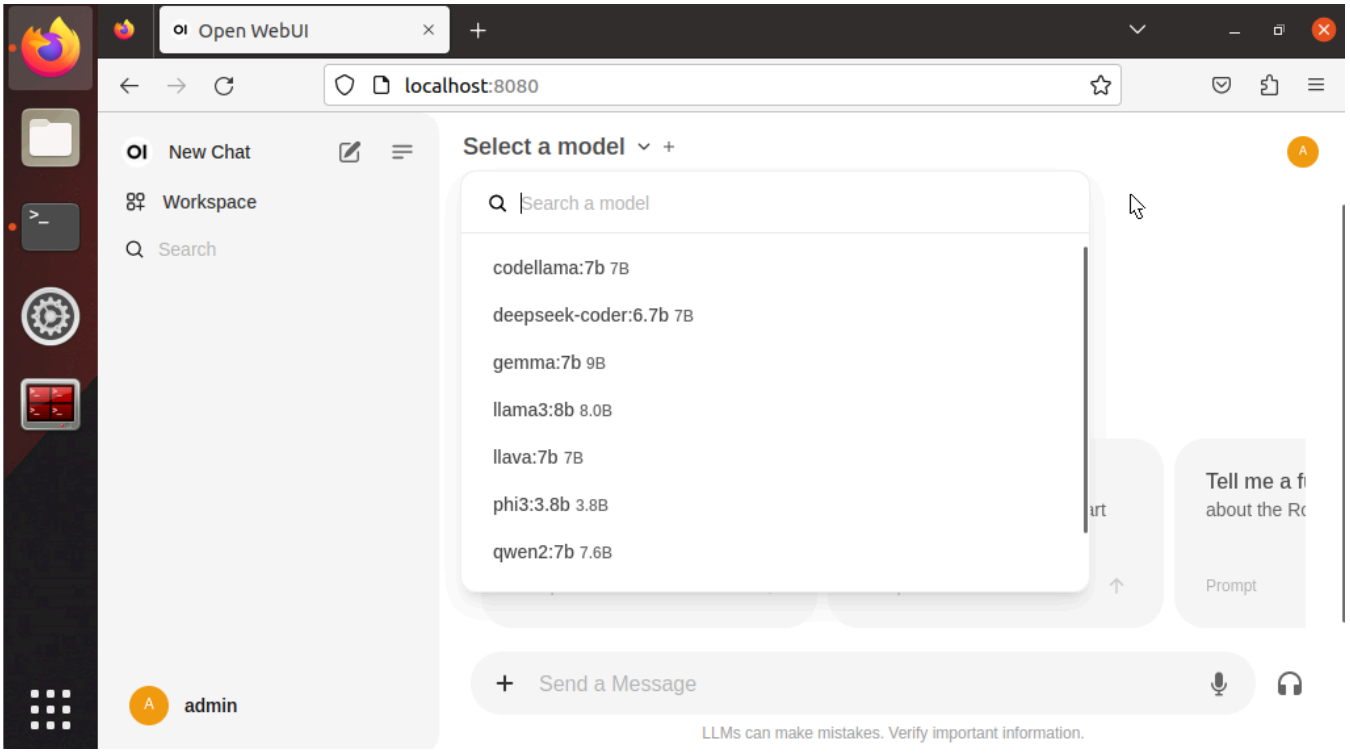

5.2. Demonstration: LLaVA

The LLaVA case demonstrated requires 8G or even more than 8G to run. Users can use other cases to test the Open WebUI conversation function!

```
What's in this image?
```

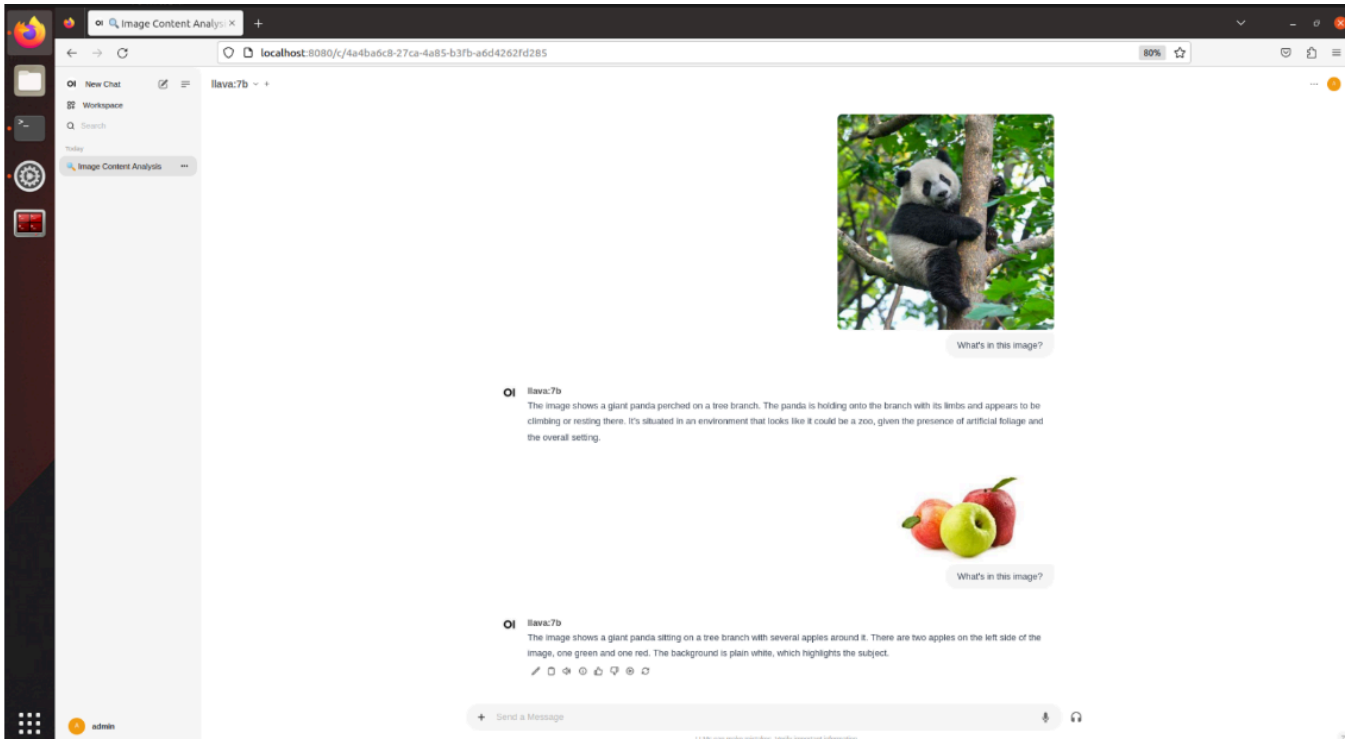

6. Common Problems

6.1. Closing Open WebUI

Close the automatically started Open WebUI.

- View the running Docker

```
docker ps
```

- Close the running Docker

```
docker stop [CONTAINER ID]  # Example docker stop 5f42ee9cf784
```

- View the stopped container

```
docker ps -a
```

- Clean up the stopped container

```
docker rm [CONTAINER ID]    # Example docker rm 5f42ee9cf784
```

Clean up all stopped containers:

```
docker container prune
```

6.2. Common Errors

Unable to Start Open WebUI

- docker: Error response from daemon: Conflict. The container name "/open-webui" is already in use by container "cfc05c84f8e38b290337e7178c76fd1c49076f94b11ed3d49d9448be72b7f20f". You have to remove (or rename) that container to be able to reuse that name.

Solution: close Open WebUI once and restart it!

Service Connection Timeout

- Open WebUI: Server Connection Error

Close Open WebUI once and restart it, then ask again or switch to the Ollama tool to run the model and ask questions!