

ClawHub

ClawHub is the **public Skills registry of OpenClaw**. It is a free service: all the Skills are public and open, and everyone can view, share and reuse them. A Skill is simply a folder that contains a `SKILL.md` file (together with the auxiliary text files). You can browse the Skills in the web application, and you can use the CLI to search, install, update and publish the Skills. Website: clawhub.com

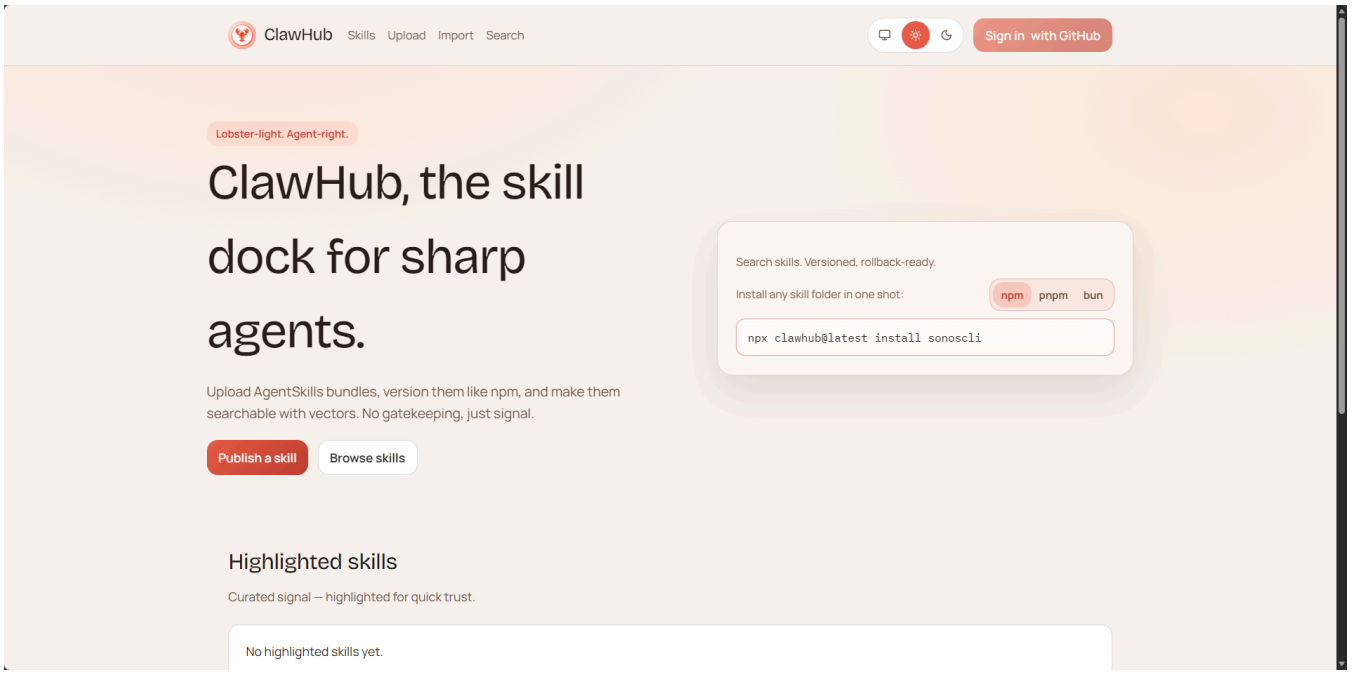

Its position in OpenClaw

By default, the CLI installs the Skills into the `./skills` under the current working directory. If the OpenClaw workspace has already been configured, `clawhub` falls back to that workspace unless you override it with `--workdir` (or `CLAWHUB_WORKDIR`). OpenClaw loads the workspace Skills from `<workspace>/skills`, and they take effect in the **next** session. If you are already using `~/.openclaw/skills` or the built-in Skills, the workspace Skills have a higher priority. For more details about the loading, the sharing and the access control of the Skills, please refer to Skills.

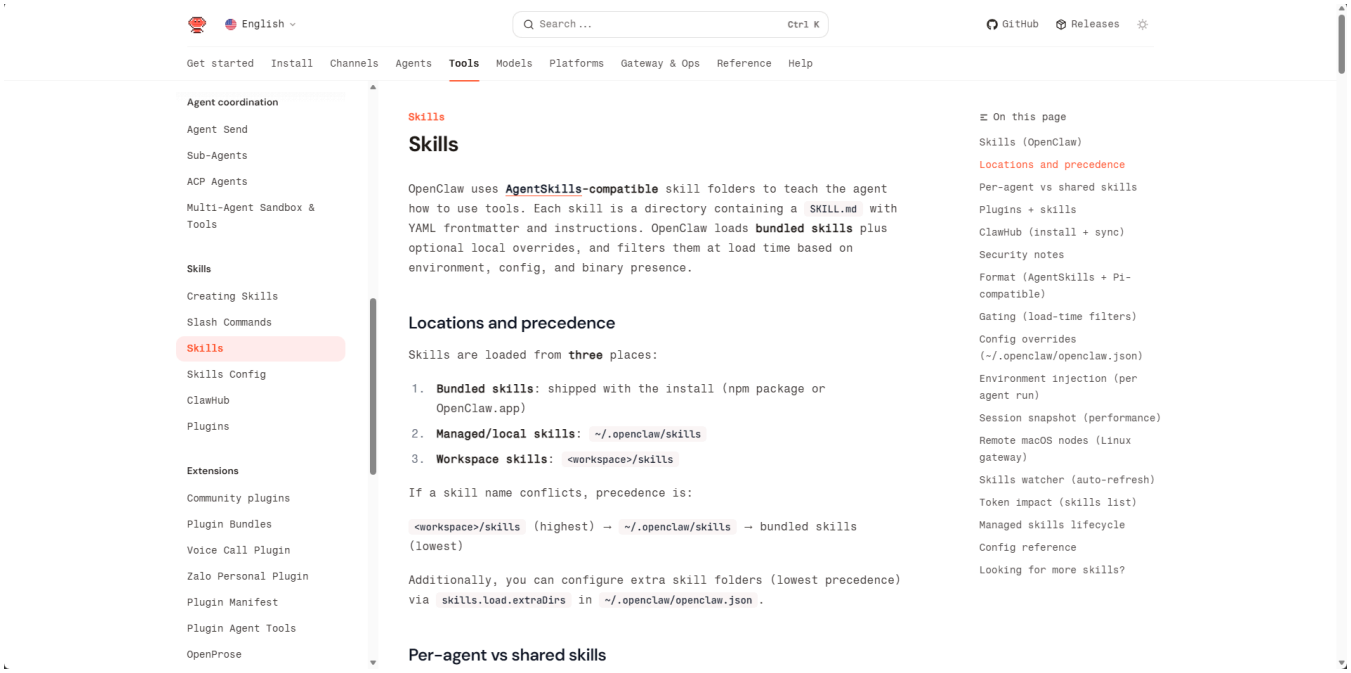

Who it is for (friendly to the beginners)

If you want to add new features to the OpenClaw agent, ClawHub is the simplest way to find and install the Skills. You do not have to know how the backend works. You can:

- Search for the Skills with natural language.
- Install the Skills into your workspace.
- Update the Skills later with a single command.
- Back up your own Skills by publishing them.

Installing the CLI

The original ClawHub CLI (for the international users)

Choose one of the following:

```
npm i -g clawhub
pnpm add -g clawhub
```



The SkillHub CLI (recommended for the users in China) ⭐

SkillHub is the domestic mirror of ClawHub; it is optimised for the users in China and it provides a high speed download experience. Visit the website: skillhub.tencent.com


The installation:

```
npm i -g skillhub
```



The advantages of SkillHub:

- **Accelerated download**: a domestic high speed mirror, no proxy needed
- **Security audit**: all the Skills have passed a security check
- **Data synchronisation**: it collects the 22,000 Skills of the ClawHub ecosystem

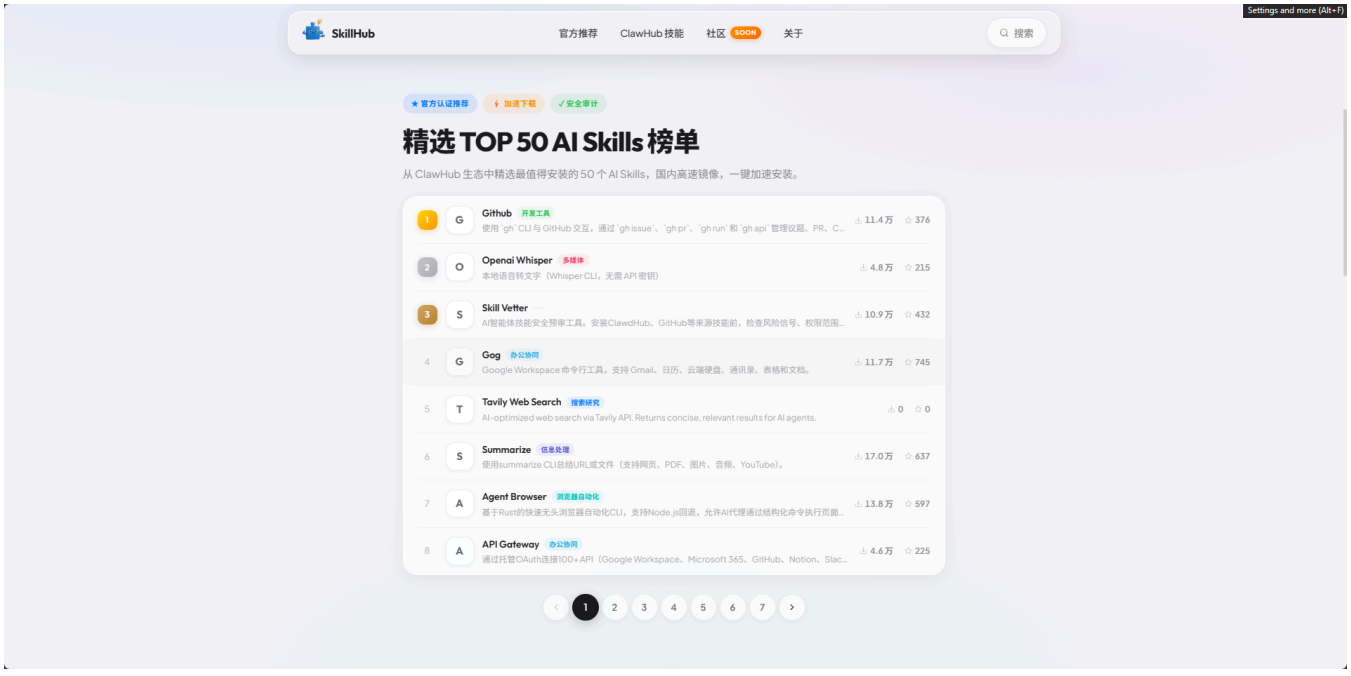

Introduction to the SkillHub mirror (for the users in China)

What SkillHub is

SkillHub is the domestic mirror of ClawHub; its data comes from exactly the same source as ClawHub, but it provides a service experience that is more suitable for the users in China.

The core functions

1. **Selected recommendations**: the official selected TOP 50 AI Skills, installed with one click
2. **High speed download**: domestic servers, the download speed is greatly improved
3. **Security audit**: all the Skills have passed a security check, which reduces the risk
4. **Convenient search**: it supports the Chinese search, so you can quickly find the skill you need
5. **Real time synchronisation**: it is synchronised with the ClawHub data in real time, so it is always up to date

The way of using it

The way of using the SkillHub CLI is exactly the same as the original clawhub:

- Search: `skillhub search "keyword"`
- Install: `skillhub install <skill-slug>`
- Update: `skillhub update --all`
- List: `skillhub list`

The relation with the original

- **The data source**: the data of SkillHub comes from ClawHub, and the content of the two is identical
- **The command compatibility**: SkillHub supports all the commands and the parameters of clawhub
- **The installation location**: it is installed into the `./skills` directory as well, and OpenClaw recognises it automatically
- **It can be switched**: you can install clawhub and skillhub at the same time and use the one you need

Logging in to the ClawHub account

Why you should log in

Although ClawHub allows the users who are not logged in to search and install the Skills, logging in has the following important benefits:

- ✅ **Avoiding the rate limit**: the users who are not logged in may run into a download rate limit
- ✅ **Accessing the full features**: some of the advanced features can only be used after logging in
- ✅ **Publishing the Skills**: only the logged in users can publish their own Skills
- ✅ **Favourites and comments**: you can favourite the Skills you like and leave comments on them
- ✅ **The usage statistics**: you can look at your own usage


The login steps

Method one: log in with GitHub (recommended)

This is the simplest and the safest way to log in.


1.1 Visit the ClawHub website

Open the following in the browser: https://clawhub.com

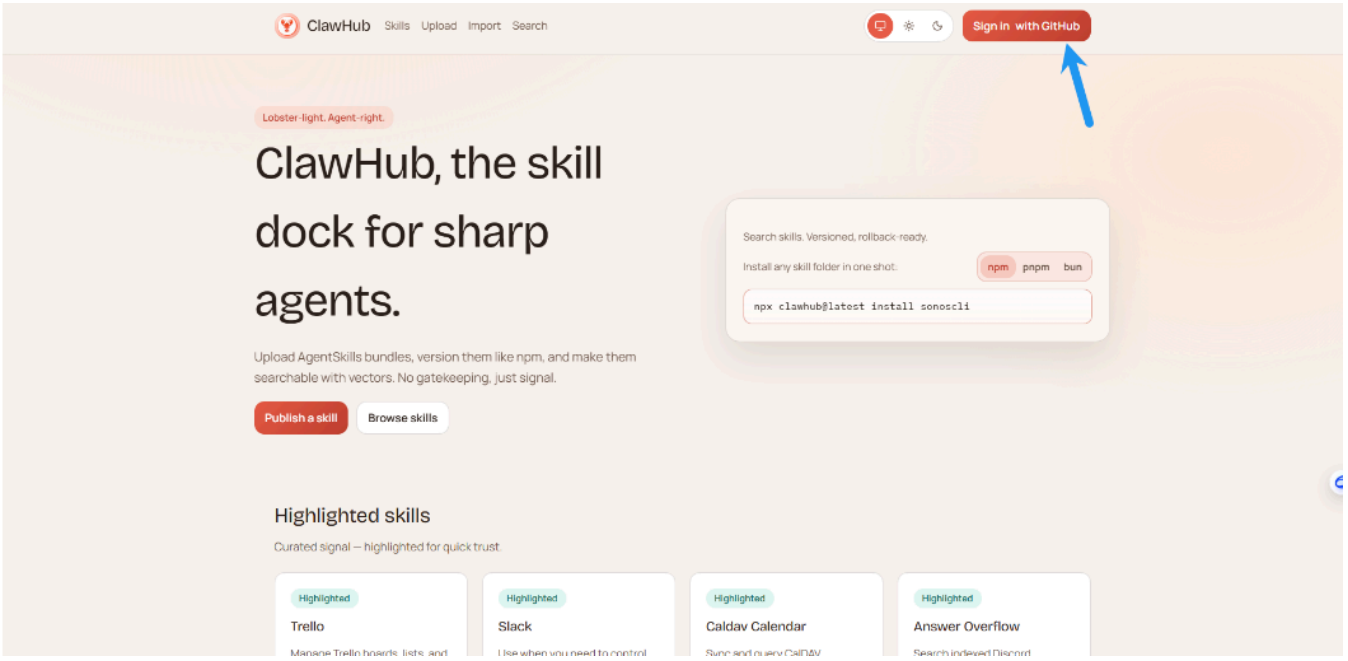

1.2 Click the login

Click the "Login" button in the top right corner of the page:

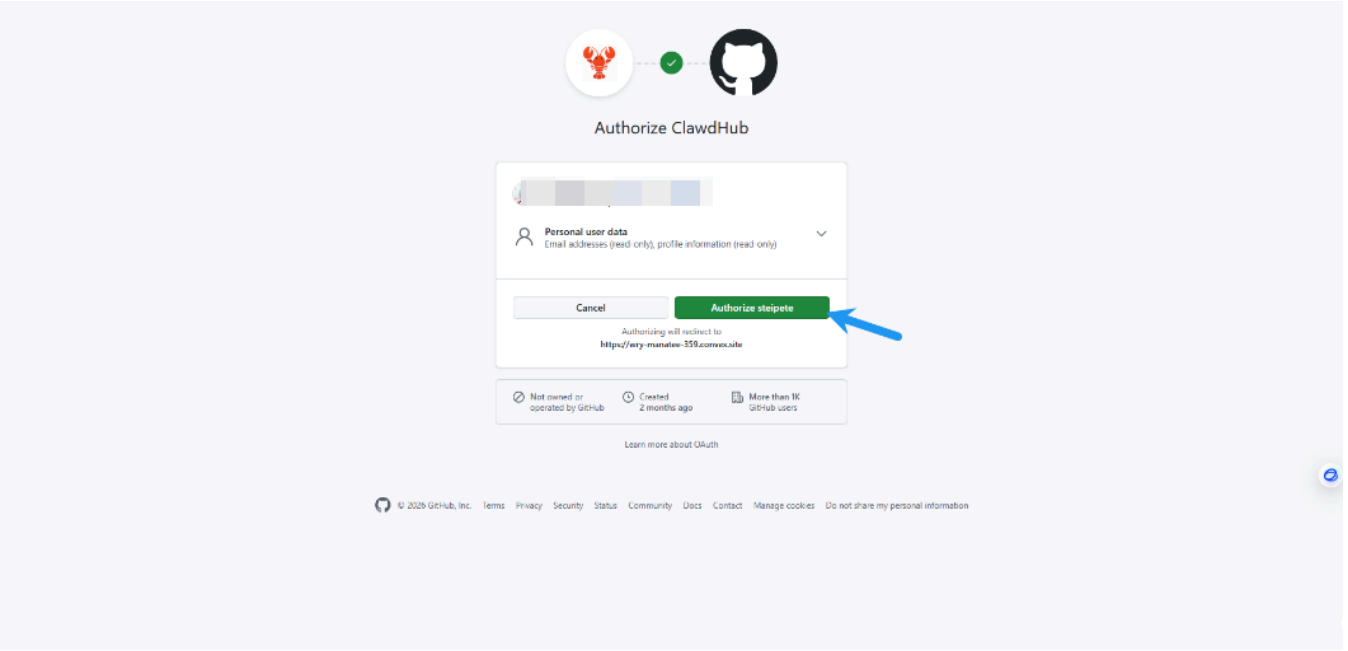

1.3 Choose the GitHub login

On the login page, click "Sign in with GitHub".

1.4 Authorise the access

After the authorisation succeeds, it automatically jumps back to ClawHub and shows that you are logged in.

Method two: log in with a Token


If you cannot log in with GitHub, you can log in with a Token instead.

2.1 Log in to the account

First follow the steps of the method one to log in to the ClawHub website with GitHub.


2.2 Enter the settings page

After logging in, click the user avatar in the top right corner of the page and select "Settings":

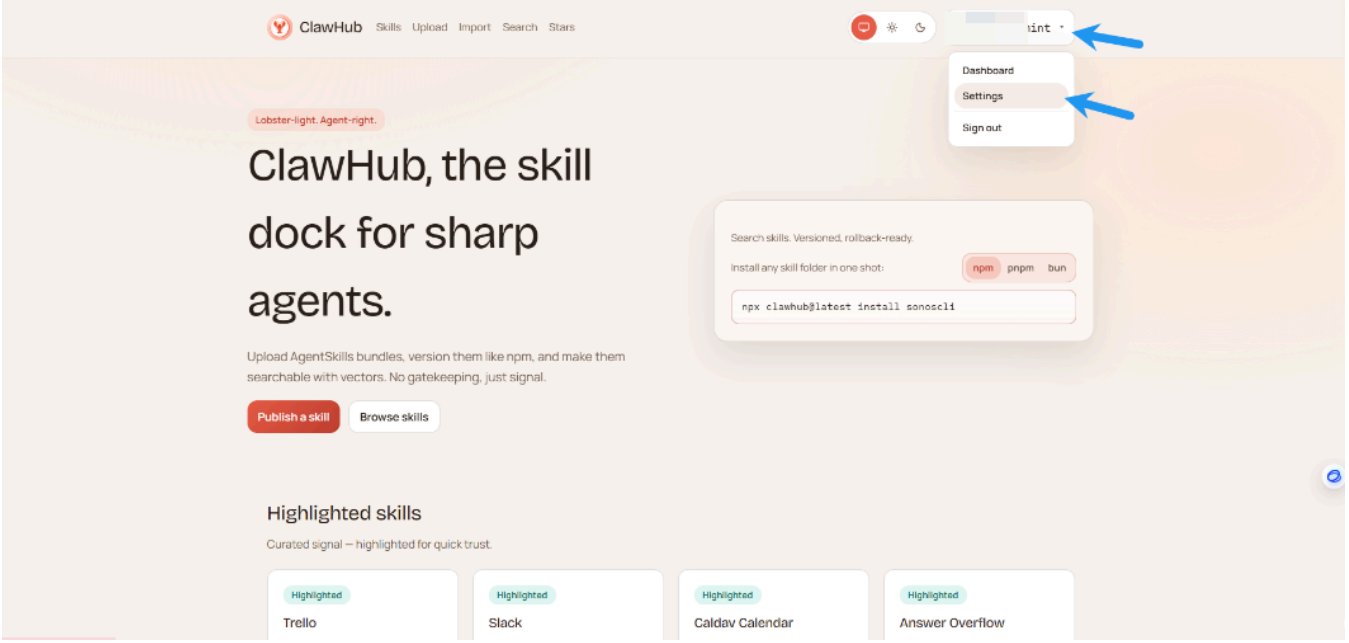


2.3 Create an API Token

In the settings page, find the "API Tokens" section and click "Create token":

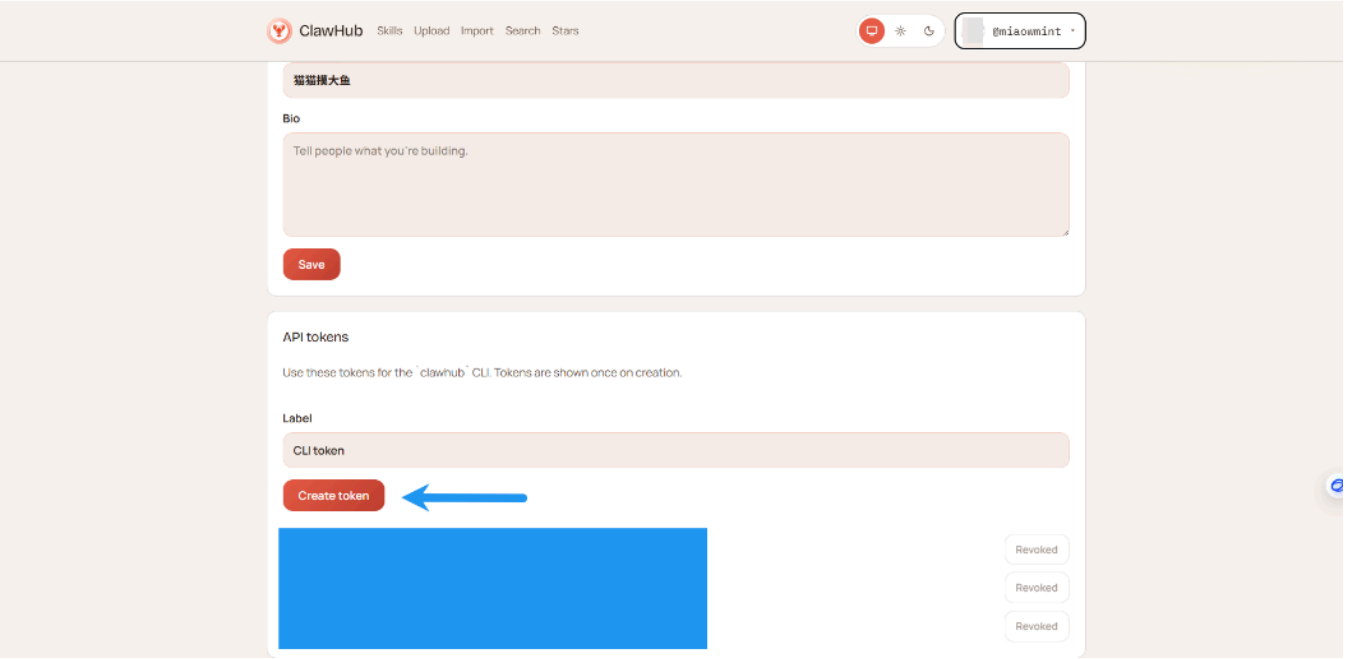

2.4 Copy the Token

The system generates a new API Token; click the copy button to copy this Token:

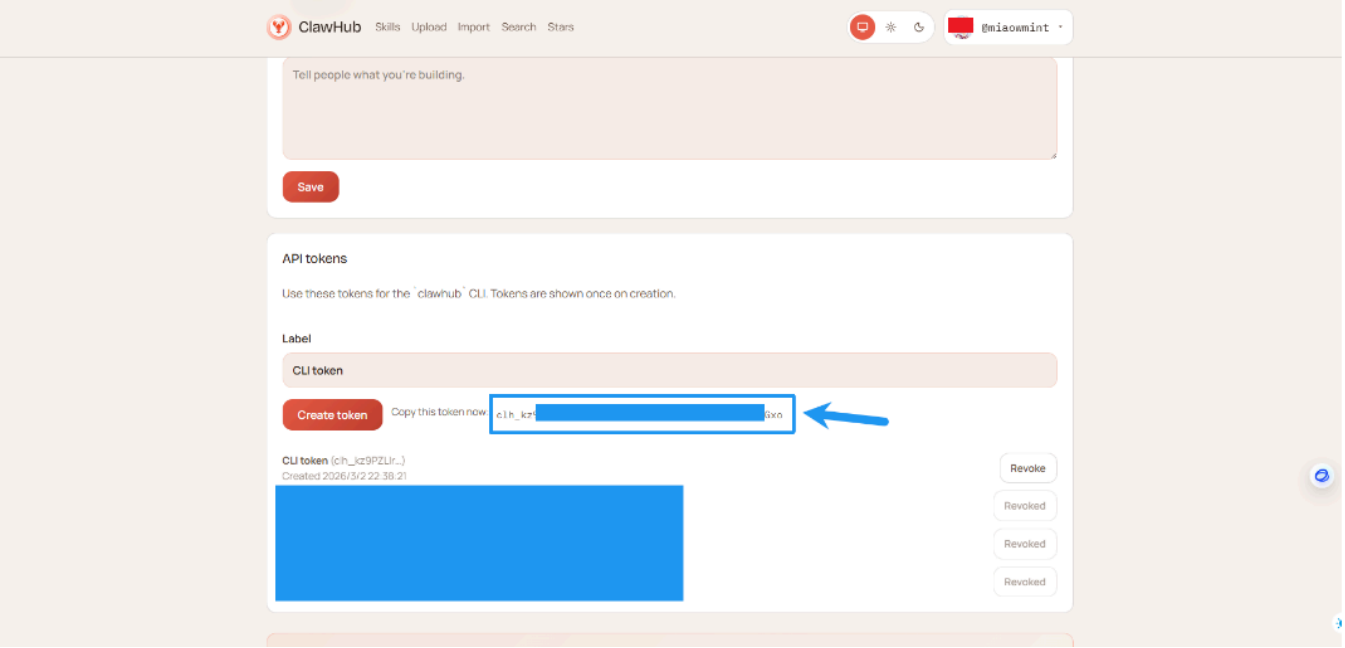


⚠ **Important note**:

- The Token is only shown once, so be sure to copy it and keep it safe
- Do not share the Token with anybody else
- The Token can be deleted at any time in the settings page

2.5 Log in in the terminal

Open a terminal and run the following command (replace `<your-token>` with the Token you just copied):

```
clawhub login --token <your-token>
```

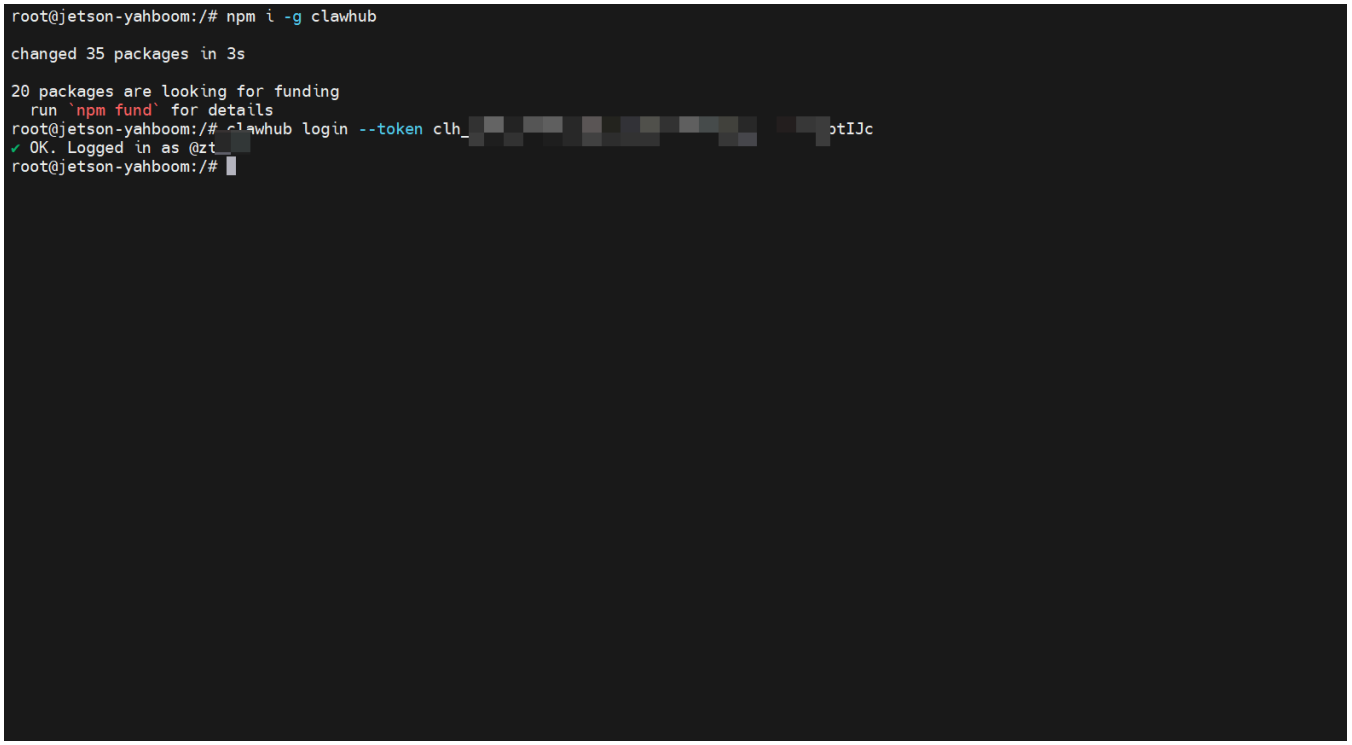

Note: there is a space after `--token`, and then you paste your Token.

Frequently asked questions

Problem 1: the login reports that the Token is invalid

The error message:

```
Error: Invalid token
```

The possible causes:

- The Token was not copied completely
- The Token has expired or has been deleted
- There are extra spaces or characters in the input

The solution:

1. Create the Token again and copy it
2. Make sure that there are no extra spaces when you copy it
3. Check that the Token is complete

Problem 2: the GitHub login fails

The possible causes:

- A problem with the network connection
- The email of the GitHub account is not verified
- The browser blocks the redirect

The solution:

1. Check the network connection
2. Make sure that the email of the GitHub account is verified
3. Try another browser or the incognito mode

Problem 3: it is still rate limited after logging in

The possible causes:

- The login did not take effect
- The wrong CLI was used (clawhub vs skillhub)

The solution:

1. Run `clawhub whoami` to confirm the login state
2. Make sure that you use the command of the correct CLI
3. Log in again

The quick start

Using the original ClawHub

1. Install the CLI (see the previous section).
2. Search for what you need: (a proxy is needed in China)

   ```
   clawhub search "find"
   ```

3. Install a Skill:

   Syntax: `clawhub install  <skill-slug>`

   ```
   clawhub install find
   ```

4. Start a new OpenClaw session to load the new Skills.

Using SkillHub (the users in China)

1. Install the SkillHub CLI:

   ```
   npm i -g skillhub
   ```

2. Search for what you need:

   ```
   skillhub search "find"
   ```

3. Install a Skill:

Syntax: `skillhub install  <skill-slug>`

```
skillhub install find
```

4. Start a new OpenClaw session to load the new Skills.

The workflows that the agent uses the most

Search the Skills

```
clawhub search "postgres backups"
```

Or use SkillHub:

```
skillhub search "postgres backups"
```

Download the new Skills

```
clawhub install my-skill-pack
```

Or use SkillHub:

```
skillhub install my-skill-pack
```

Update the Skills that are already installed

```
clawhub update --all
```

Or use SkillHub:

```
skillhub update --all
```

Back up your Skills (publish or synchronise)

For a single Skill folder:

```
clawhub publish ./my-skill --slug my-skill --name "My Skill" --version 1.0.0 --tags latest
```

To scan several Skills and back them up at once:

```
clawhub sync --all
```

The CLI commands and the parameters

The global options (they apply to all the commands):

- `--workdir <dir>`: the working directory (the default: the current directory; it falls back to the

OpenClaw workspace).

- `--dir <dir>`: the Skills directory, relative to the working directory (the default: `skills`).
- `--site <url>`: the base URL of the website (the browser login).
- `--registry <url>`: the base URL of the registry API.
- `--no-input`: disable the prompts (the non interactive mode).
- `-V, --cli-version`: print the version of the CLI.

The authentication:

- `clawhub login` (the browser flow) or `clawhub login --token <token>`
- `clawhub logout`
- `clawhub whoami`

The options:

- `--token <token>`: paste the API token.
- `--label <label>`: the label under which the browser login token is stored (the default: `CLI token`).
- `--no-browser`: do not open the browser (it requires `--token`).

The search:

- `clawhub search "query"`
- `--limit <n>`: the maximum number of the results.

The installation:

- `clawhub install <slug>`
- `--version <version>`: install the specified version.
- `--force`: overwrite if the folder already exists.

The update:

- `clawhub update <slug>`
- `clawhub update --all`
- `--version <version>`: update to the specified version (only for a single slug).
- `--force`: force the overwrite when the local file does not match any of the published versions.

The list:

- `clawhub list` (it reads `.clawhub/lock.json`)

```
root@jetson-yahboom:/# clawhub whoami
Error: Not logged in. Run: clawhub login
root@jetson-yahboom:/# clawhub list
No installed skills.
root@jetson-yahboom:/#
```

The publishing:

- `clawhub publish <path>`
- `--slug <slug>`: the identifier of the Skill.
- `--name <name>`: the display name.

- `--version <version>`: the semantic version number.
- `--changelog <text>`: the text of the changelog (it can be empty).
- `--tags <tags>`: the comma separated tags (the default: `latest`).

The deletion/undeletion (the owner/the administrator only):

- `clawhub delete <slug> --yes`
- `clawhub undelete <slug> --yes`

The synchronisation (scan the local Skills + publish the new/updated Skills):

- `clawhub sync`
- `--root <dir...>`: the additional scan roots.
- `--all`: upload everything without prompting.
- `--dry-run`: show what is going to be uploaded.
- `--bump <type>`: the type of the version increment for the update `patch|minor|major` (the default: `patch`).
- `--changelog <text>`: the changelog of a non interactive update.
- `--tags <tags>`: the comma separated tags (the default: `latest`).
- `--concurrency <n>`: the concurrency of the registry checks (the default: 4).

The environment variables

- `CLAWHUB_SITE`: override the website URL.
- `CLAWHUB_REGISTRY`: override the registry API URL.
- `CLAWHUB_CONFIG_PATH`: override the location where the CLI stores the token/the configuration.
- `CLAWHUB_WORKDIR`: override the default working directory.
- `CLAWHUB_DISABLE_TELEMETRY=1`: disable the telemetry of `sync`.

For more about ClawHub, refer to:ClawHub - OpenClaw