# Open WebUI

**Open WebUI**

1. Environmental requirements
2. Docker construction
    2.1. Official installation of Docker
    2.2. Installing Docker with Alibaba Cloud
    2.3. Adding the access permissions
3. Open WebUI installation
4. Open WebUI running
    4.1. Administrator account
    4.2. Register and log in
    4.3. Using the interface
5. Model dialogue
    5.1. Switching the model
    5.2. Demonstration: LLaVA
6. Common problems
    6.1. Closing Open WebUI
    6.2. Common errors
        Unable to start Open WebUI
        Service connection timeout

> Open WebUI is an open source project that aims to provide a simple and easy-to-use user interface (UI) for managing and monitoring open source software and services.

```
When using Open WebUI, there is a high probability that the dialogue will be unresponsive or timeout. You can try restarting Open WebUI or using the Ollama tool to run the model!
```

# 1. Environmental requirements

Installing Open WebUI on the host machine and with Conda: Node.js >= 20.10, Python = 3.11:

| Environment construction method | Difficulty (relatively) |
| --- | --- |
| Host | High |
| Conda | Medium |
| Docker | Low |

**Note: Open WebUI is already set up on the factory system. If you need to build it yourself, you can refer to the steps of installing Open WebUI with Docker below.**

# 2. Docker construction

## 2.1. Official installation of Docker

If Docker is not installed, you can use the script to install Docker in one click.

```
Users in China may not be able to install Docker with the official method. We recommend
installing Docker with Alibaba Cloud or directly using our mirror image.
```

- Update the local package lists

```
sudo apt update
```

- Upgrade the installed packages

```
sudo apt upgrade
```

- Download and run the script

Download the get-docker.sh file and save it in the current directory.

```
sudo apt install curl
```

```
curl -fsSL https://get.docker.com -o get-docker.sh
```

Run the get-docker.sh script file with sudo privileges.

```
sudo sh get-docker.sh
```

## 2.2. Installing Docker with Alibaba Cloud

If you cannot install it yourself, please use the mirror image we provide.

- Update the local package lists

```
sudo apt update
```

- Install the required software

```
sudo apt install apt-transport-https ca-certificates curl gnupg2 lsb-release software-
properties-common
```

- Add the GPG key of the software source

```
curl -fsSL https://mirrors.aliyun.com/docker-ce/linux/ubuntu/gpg | sudo gpg --dearmor -o
/usr/share/keyrings/docker-archive-keyring.gpg
```

- Add the Alibaba Cloud mirror software source

```
echo "deb [arch=arm64 signed-by=/usr/share/keyrings/docker-archive-keyring.gpg]
https://mirrors.aliyun.com/docker-ce/linux/ubuntu bionic stable" | sudo tee
/etc/apt/sources.list.d/docker.list > /dev/null
```

- Install Docker

```
sudo apt update
sudo apt install docker-ce docker-ce-cli containerd.io docker-compose-plugin
```

## 2.3. Adding the access permissions


Add the access permission of the current system user to the Docker daemon: you can use the Docker commands without the sudo command

```
sudo usermod -aG docker $USER
newgrp docker
```

# 3. Open WebUI installation

For systems with Docker installed, you can directly enter the following command in the terminal: the image is the result of the pull


```
docker pull ghcr.io/open-webui/open-webui:main
```

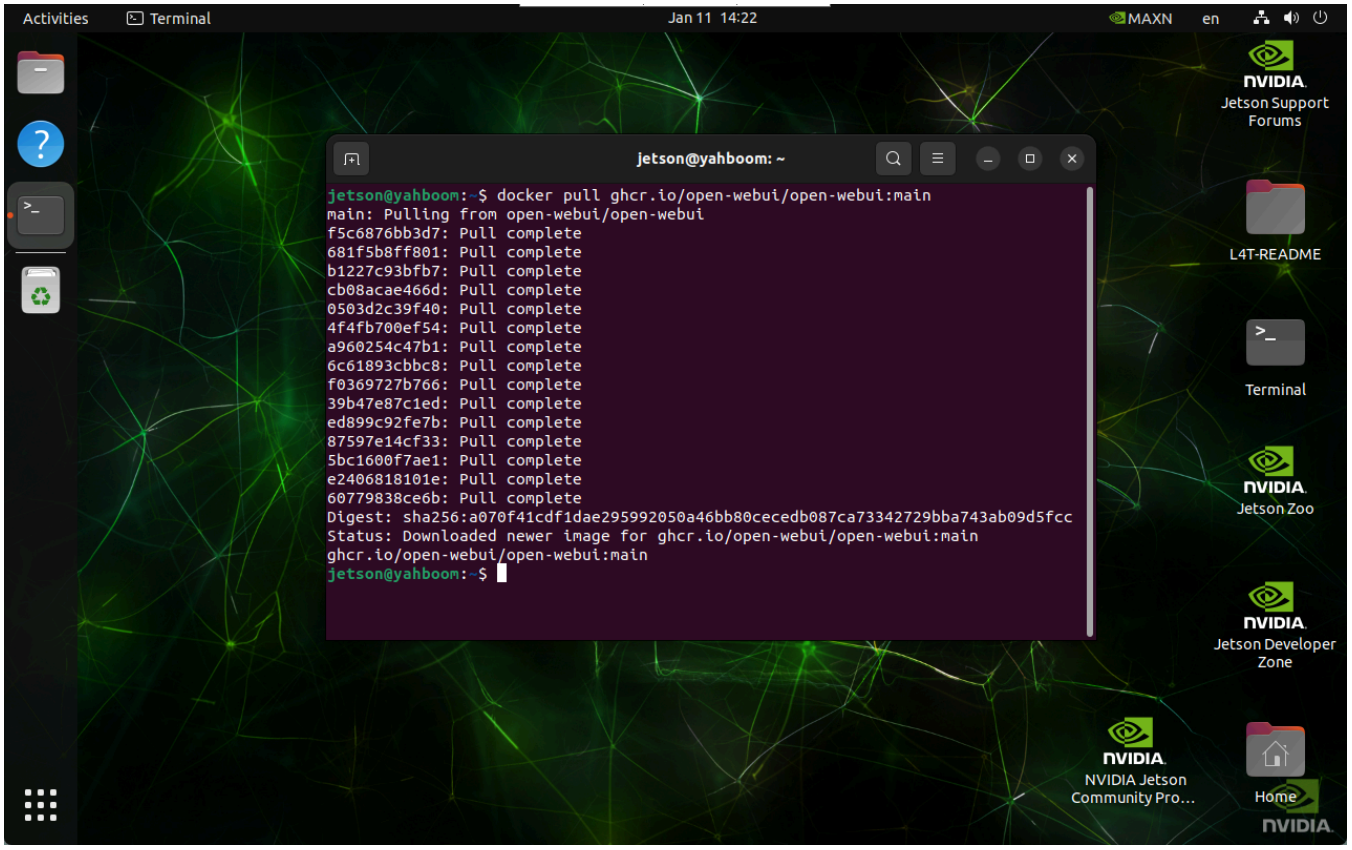

# 4. Open WebUI running

The factory setting is to start automatically when the machine boots, so you can access it directly with the browser. If you deploy it inside your own system, enter the following command in the terminal to start the specified Docker:

```
docker run --network=host -v open-webui:/app/backend/data -e
OLLAMA_BASE_URL=http://127.0.0.1:11434 --name open-webui --restart always ghcr.io/open-
webui/open-webui:main
```

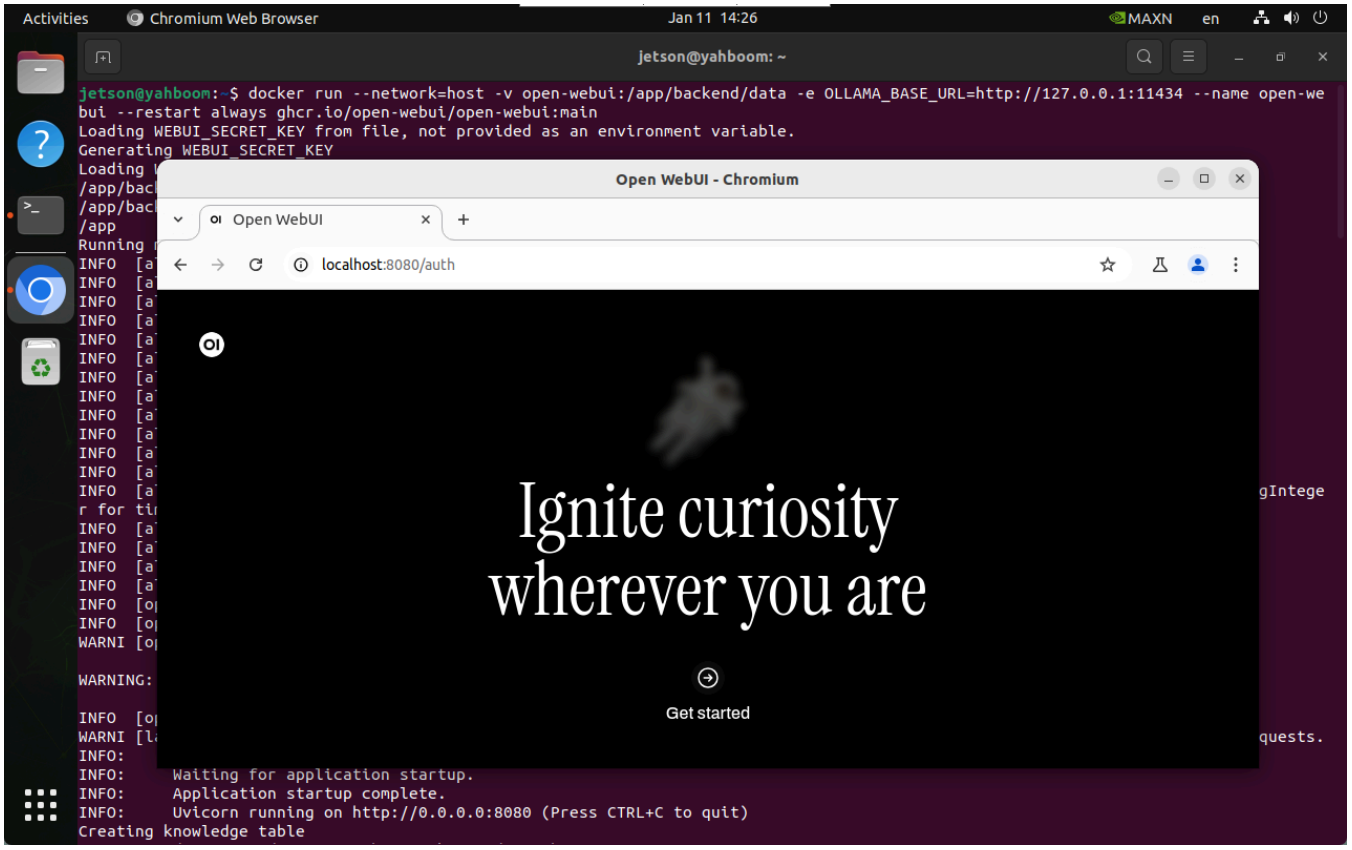


After a successful startup, access it in the browser with the following URL:

```
http://localhost:8080/
```

The same LAN can access it with the mainboard IP:8080:


```
Assuming the mainboard IP: 192.168.2.105, we can access it through 192.168.2.105:8080
```


## 4.1. Administrator account


You need to register an account yourself when you use it for the first time. This account is the administrator account, and the information can be filled in as required!

```
Since all the contents of our mirror image have been set up and tested, users can directly log in with our registered account:
Username: yahboom
Email: yahboom@163.com
Password: yahboom
```


## 4.2. Register and log in

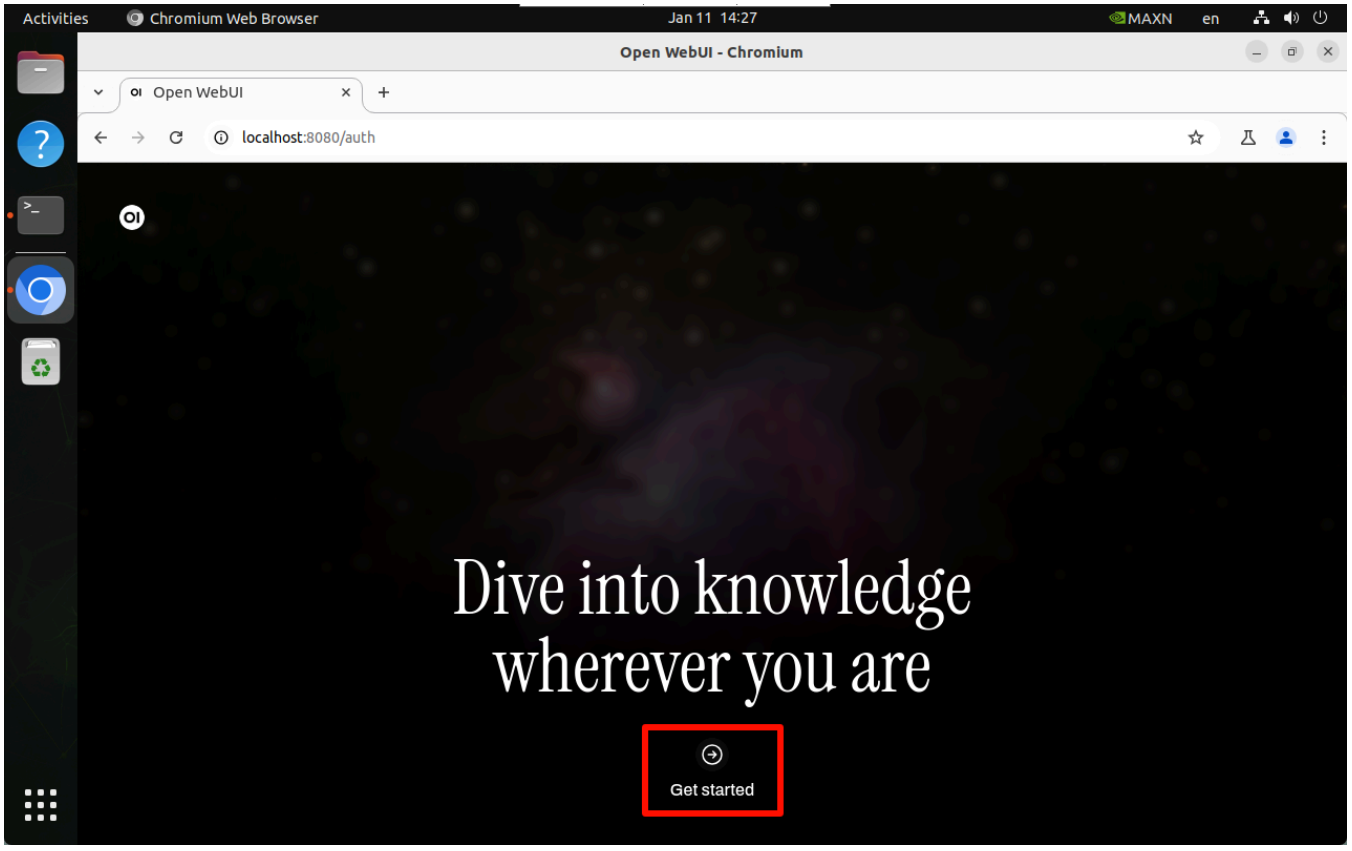

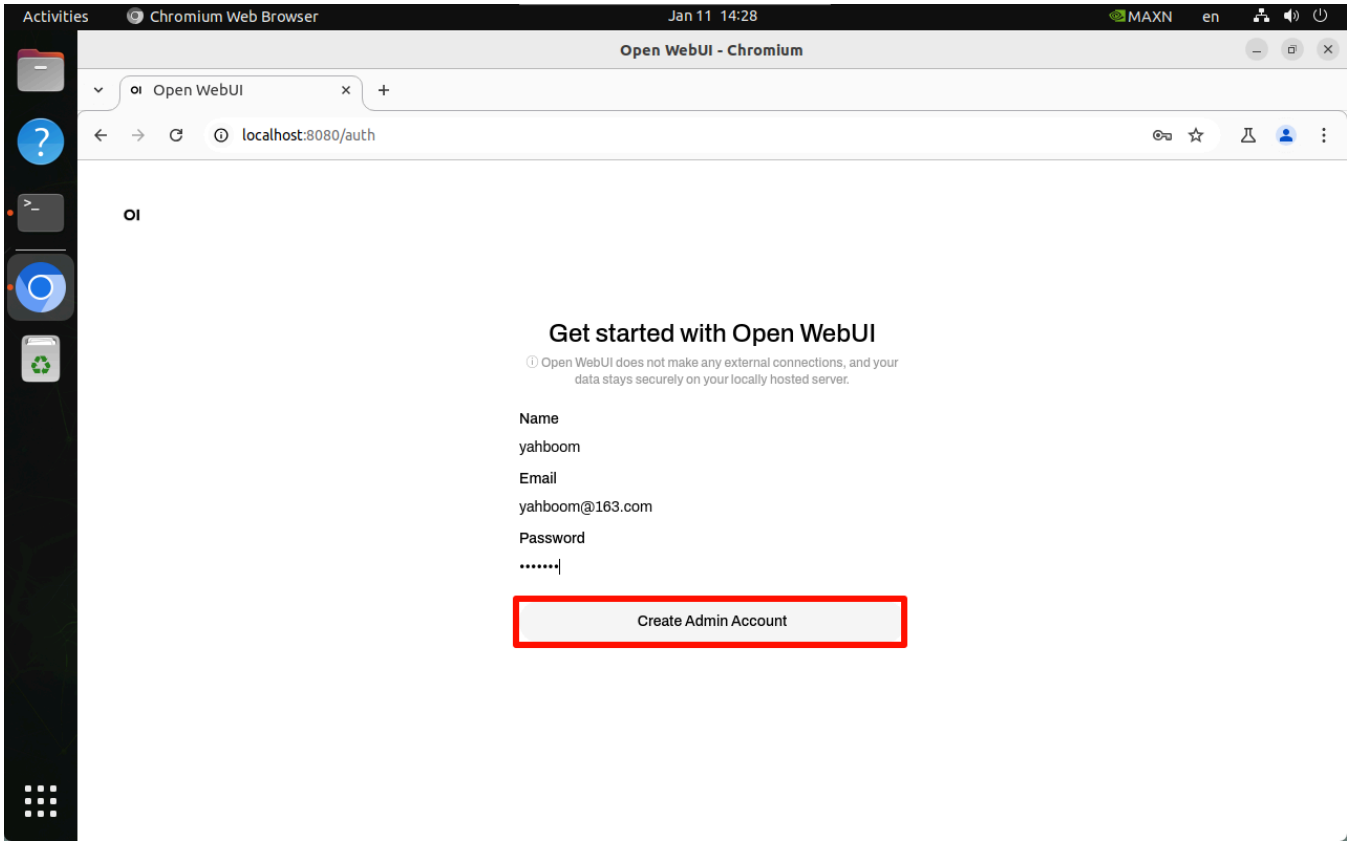
Activities
Chromium Web Browser
Jan 11 14:28
MAXN
en
Open WebUI - Chromium
Open WebUI
localhost:8080/auth
Get started with Open WebUI
Open WebUI does not make any external connections, and your data stays securely on your locally hosted server.
Name
yahboom
Email
yahboom@163.com
Password
Create Admin Account

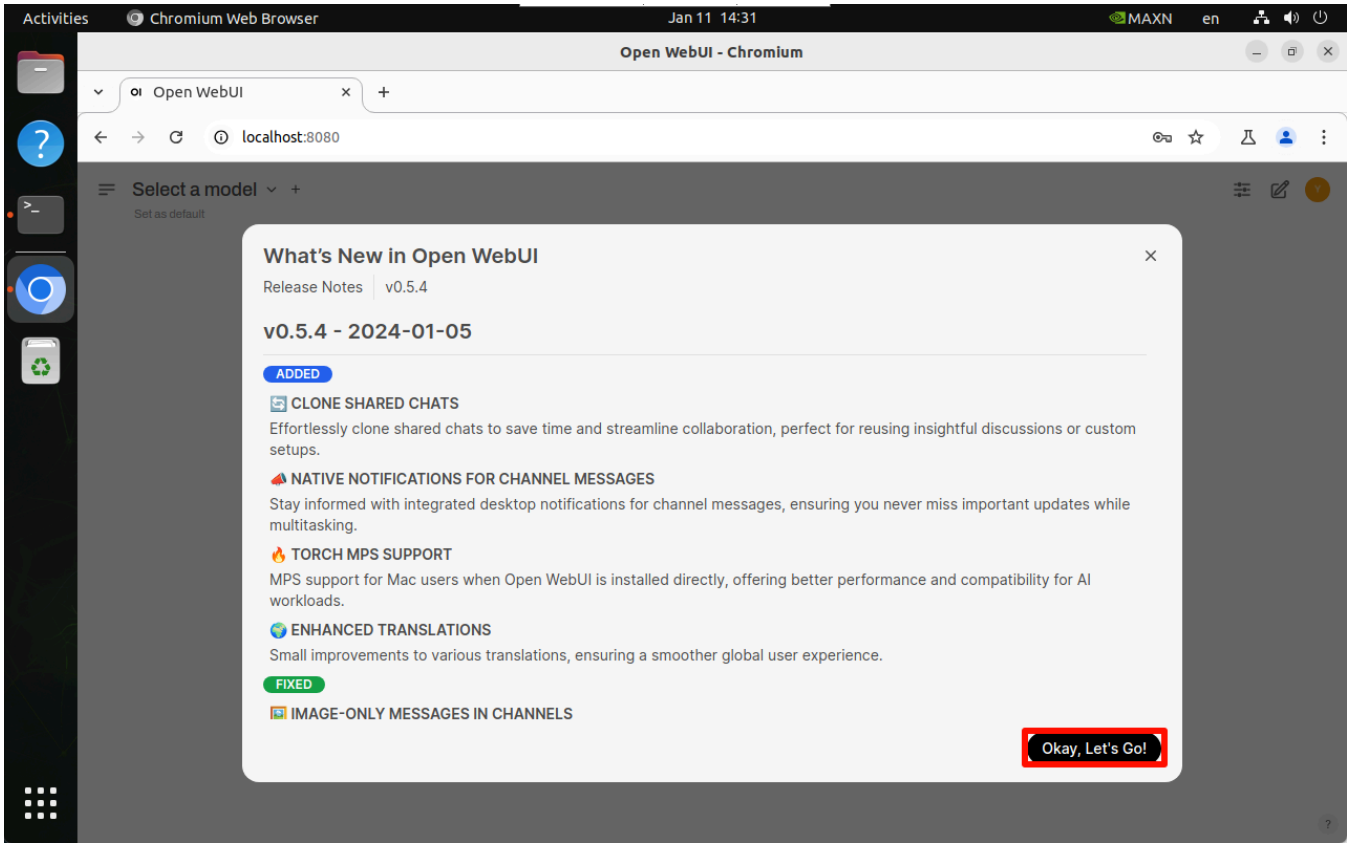
Activities
Chromium Web Browser
Jan 11 14:31
MAXN
en
Open WebUI - Chromium
Open WebUI
localhost:8080
Select a model
Set as default
What's New in Open WebUI
Release Notes
v0.5.4
v0.5.4 - 2024-01-05
ADDED
CLONE SHARED CHATS
Effortlessly clone shared chats to save time and streamline collaboration, perfect for reusing insightful discussions or custom setups.
NATIVE NOTIFICATIONS FOR CHANNEL MESSAGES
Stay informed with integrated desktop notifications for channel messages, ensuring you never miss important updates while multitasking.
TORCH MPS SUPPORT
MPS support for Mac users when Open WebUI is installed directly, offering better performance and compatibility for AI workloads.
ENHANCED TRANSLATIONS
Small improvements to various translations, ensuring a smoother global user experience.
FIXED
IMAGE-ONLY MESSAGES IN CHANNELS
Okay, Let's Go!

## 4.3. Using the interface

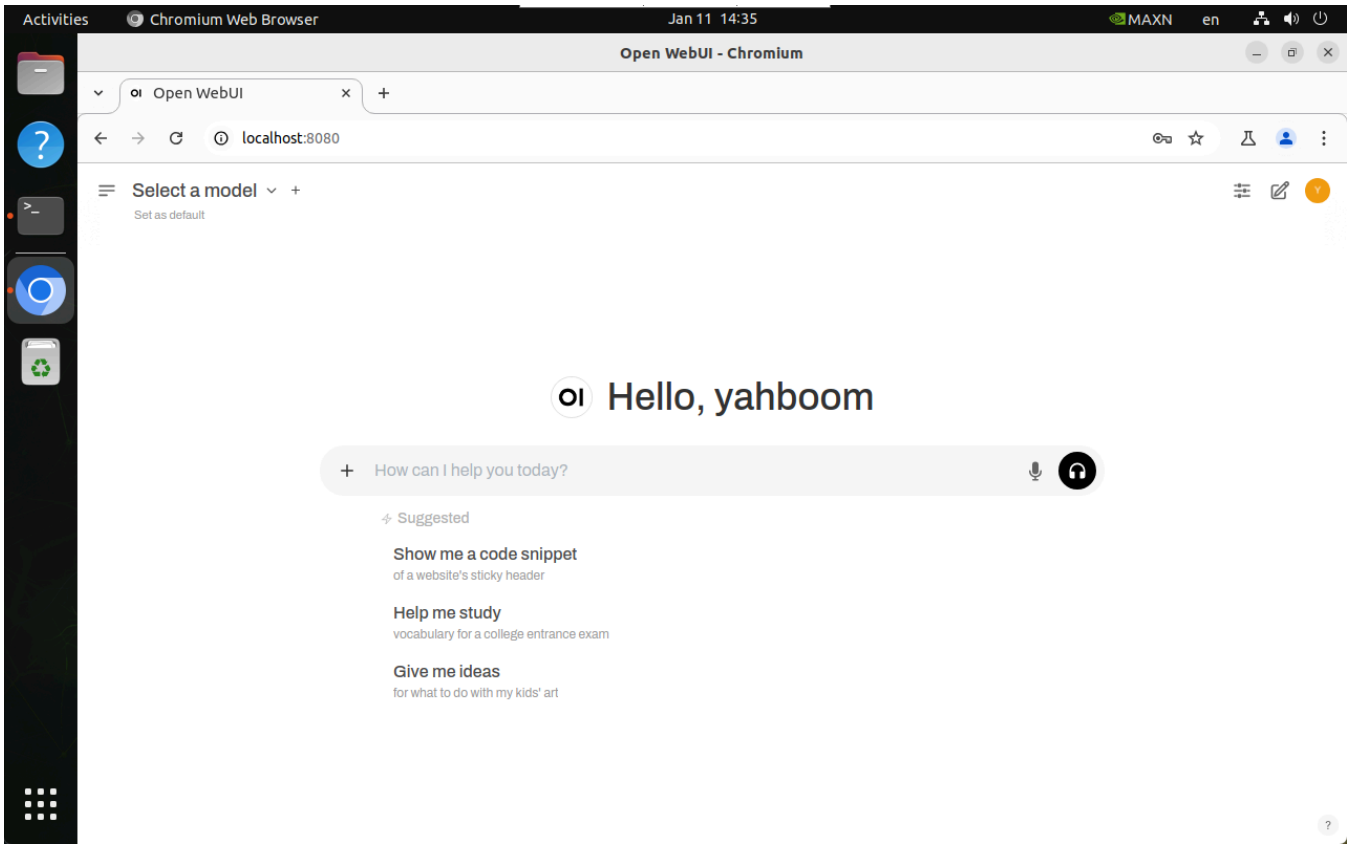


# 5. Model dialogue


Using Open WebUI for the dialogue will be slower than running the model directly with the Ollama tool, and it may even cause a service connection timeout failure. This is related to the memory of the Jetson mainboard and cannot be avoided!

```
Users who have ideas can switch to another Linux environment to build the Ollama tool and the Open WebUI tool for the dialogue
```

## 5.1. Switching the model

Click `Select a model` to select the specified model for the dialogue.


```
The model pulled with ollama will be automatically added to the Open WebUI model options. Refresh the web page and the new model will appear!
```

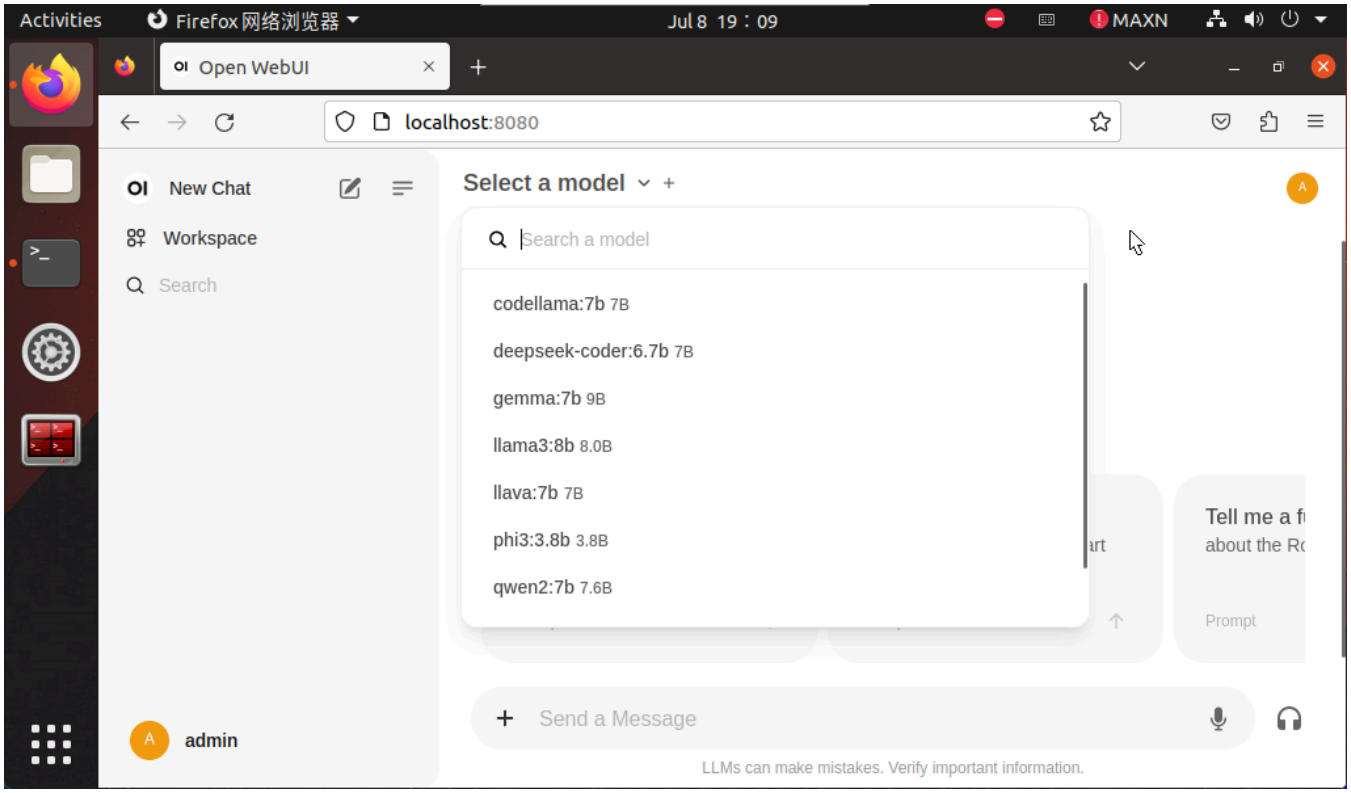


## 5.2. Demonstration: LLaVA

The demonstrated LLaVA case requires 8G or even more than 8G to run. Users can use other cases to test the Open WebUI dialogue function!

```
What's in this image?
```

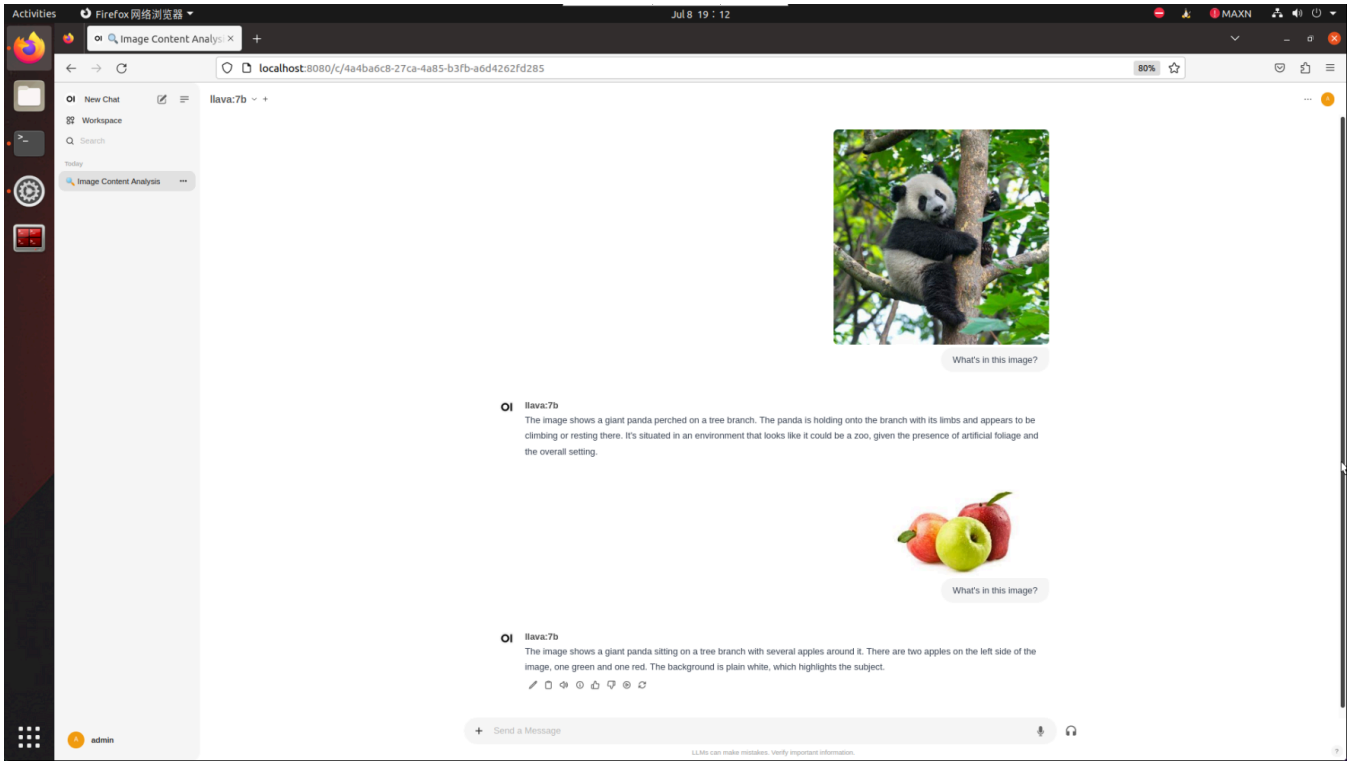

# 6. Common problems

## 6.1. Closing Open WebUI

Close the automatically started Open WebUI.

- View the running Docker

```
docker ps
```

- Stop the running Docker

```
docker stop [CONTAINER ID]  # Example docker stop 5f42ee9cf784
```

- View the stopped container

```
docker ps -a
```

- Clean up the stopped container

```
docker rm [CONTAINER ID]    # Example docker rm 5f42ee9cf784
```

Clean up all the stopped containers:

```
docker container prune
```

## 6.2. Common errors

### Unable to start Open WebUI

- docker: Error response from daemon: Conflict. The container name "/open-webui" is already in use by container "cfc05c84f8e38b290337e7178c76fd1c49076f94b11ed3d49d9448be72b7f20f". You have to remove (or rename) that container to be able to reuse that name.

Solution: close Open WebUI once and restart it!

### Service connection timeout

- Open WebUI: Server Connection Error

Close Open WebUI once and restart it, then ask the question again or run the model with the Ollama tool to ask questions!