Docker command

Docker command


1. View detailed information
2. View the version number
3. Pull the image
4. Run the container
    4.1. View the running containers
    4.2. View all containers (including the stopped ones)
5. Clean up the stopped containers
6. View the local images
7. Delete the image
8. Commit the image
9. Stop the container
10. Multiple terminals enter the same container

The Docker Engine includes the Docker CLI, which provides a command-line tool to interact with the Docker daemon. This tutorial introduces the usage of the common Docker commands.

1. View detailed information

> **docker info**


```
docker info
```

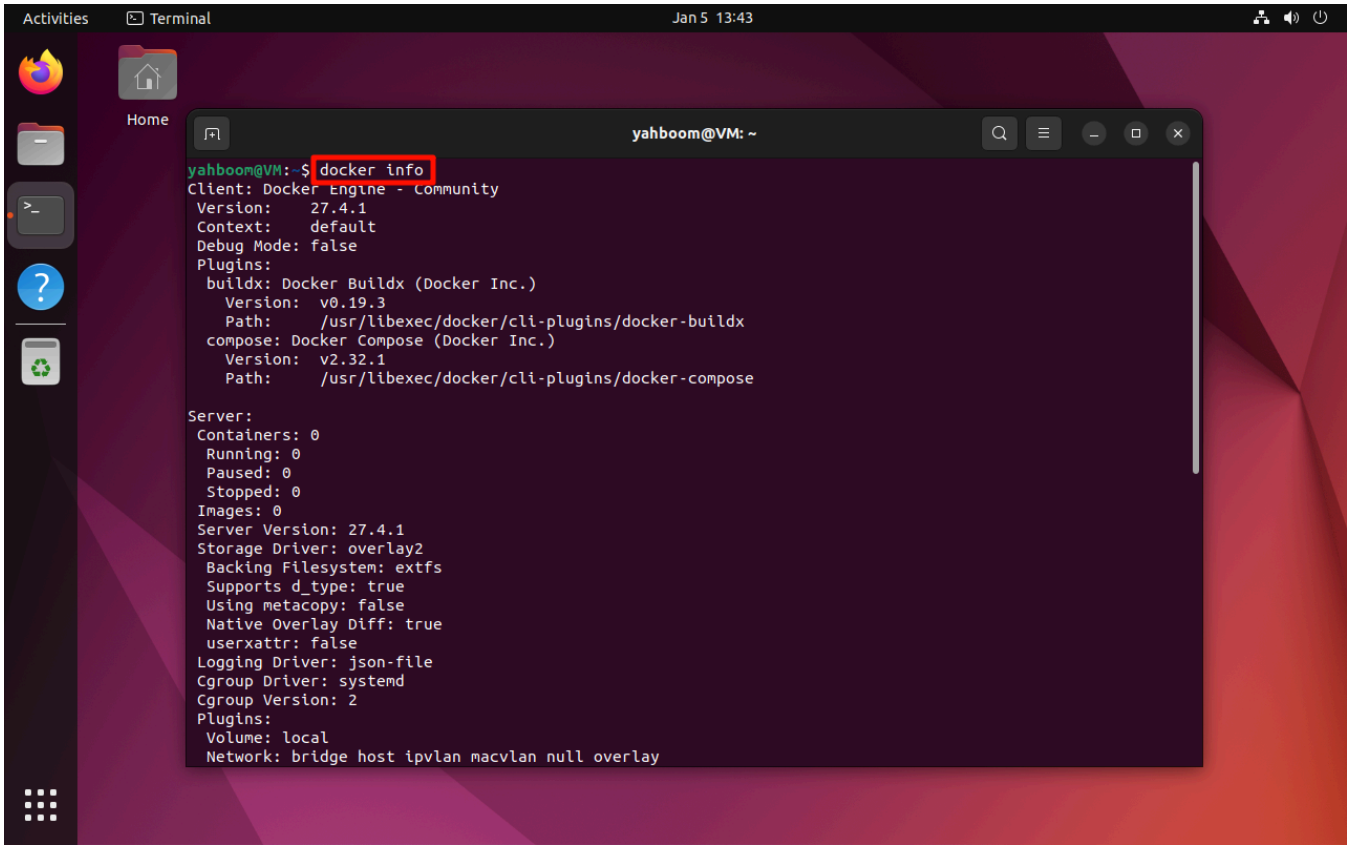

2. View the version number

> **docker --version**

```
docker --version
```

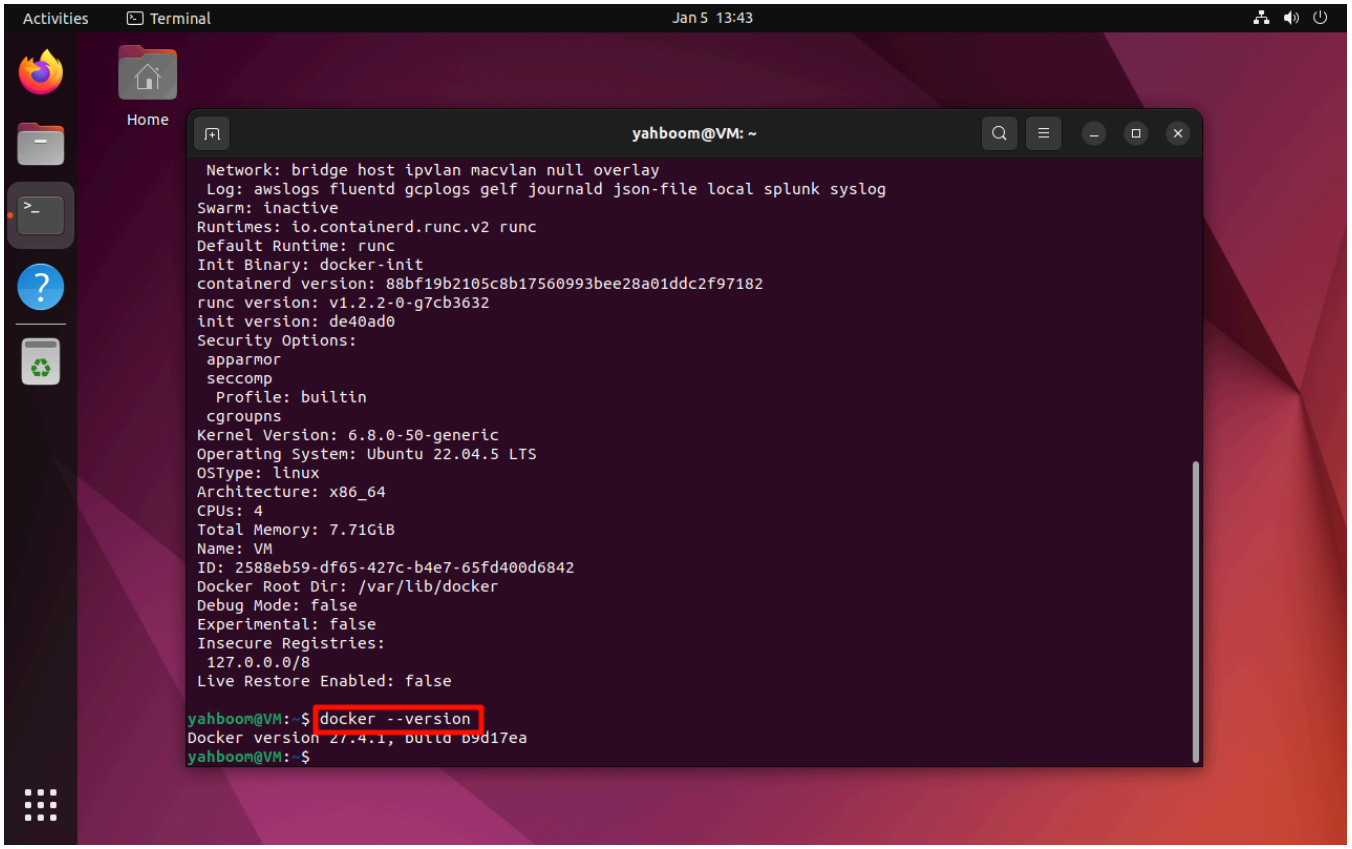

3. Pull the image


> **docker pull <image_name>**

If no tag is specified, the image with the `latest` tag will be pulled by default.

```
docker pull hello-world
```

> **docker pull <image_name>:**

```
docker pull ubuntu:18.04
```

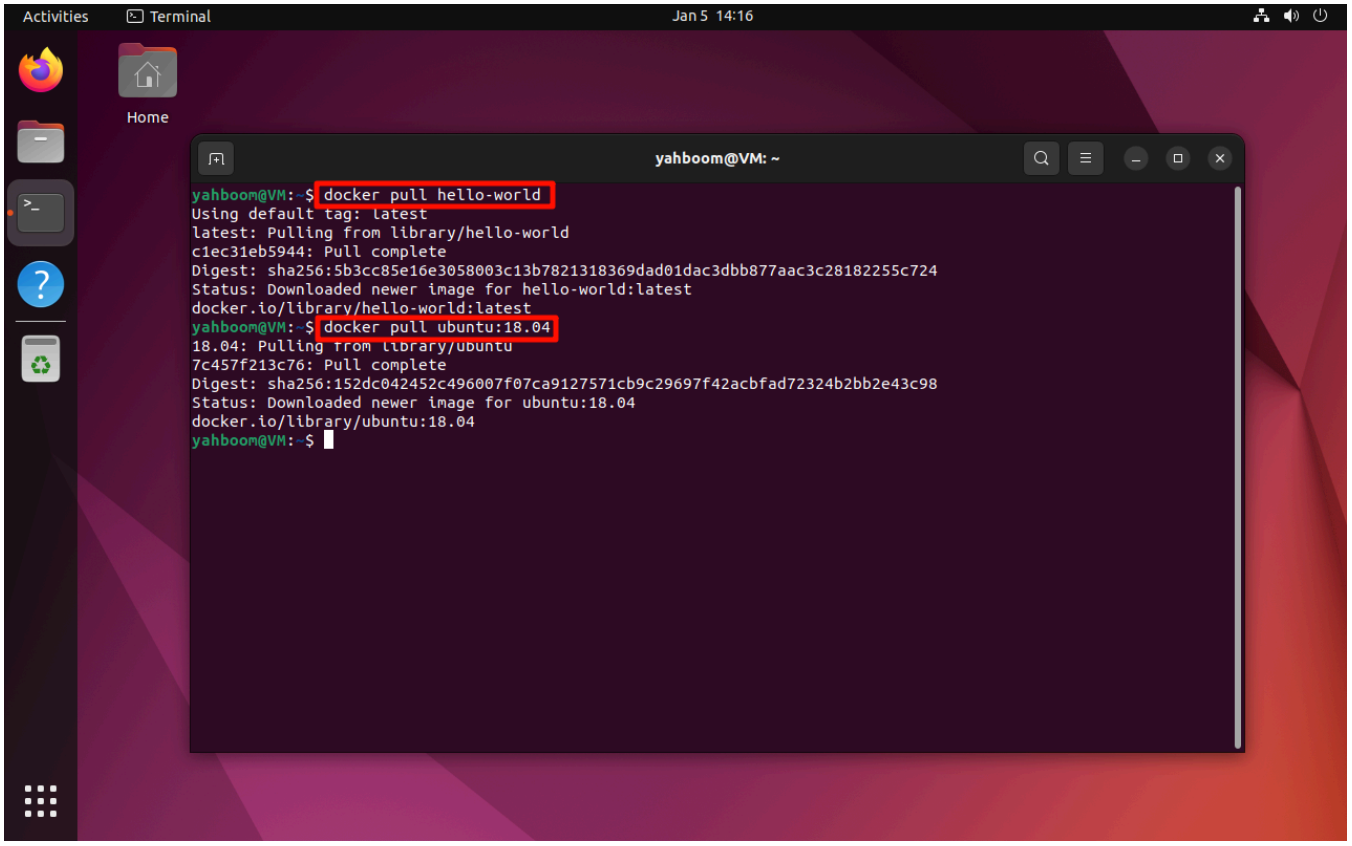

4. Run the container

If the image to be run is not available locally, docker will automatically pull the corresponding image.

> **docker run <image_name>**

```
docker run hello-world
```


> **docker run <image_name>:**

Start the specified container and exit:

```
docker run ubuntu:18.04
```

Start the specified container in interactive mode: enter `exit` to quit

```
docker run -it ubuntu:18.04 /bin/bash
```

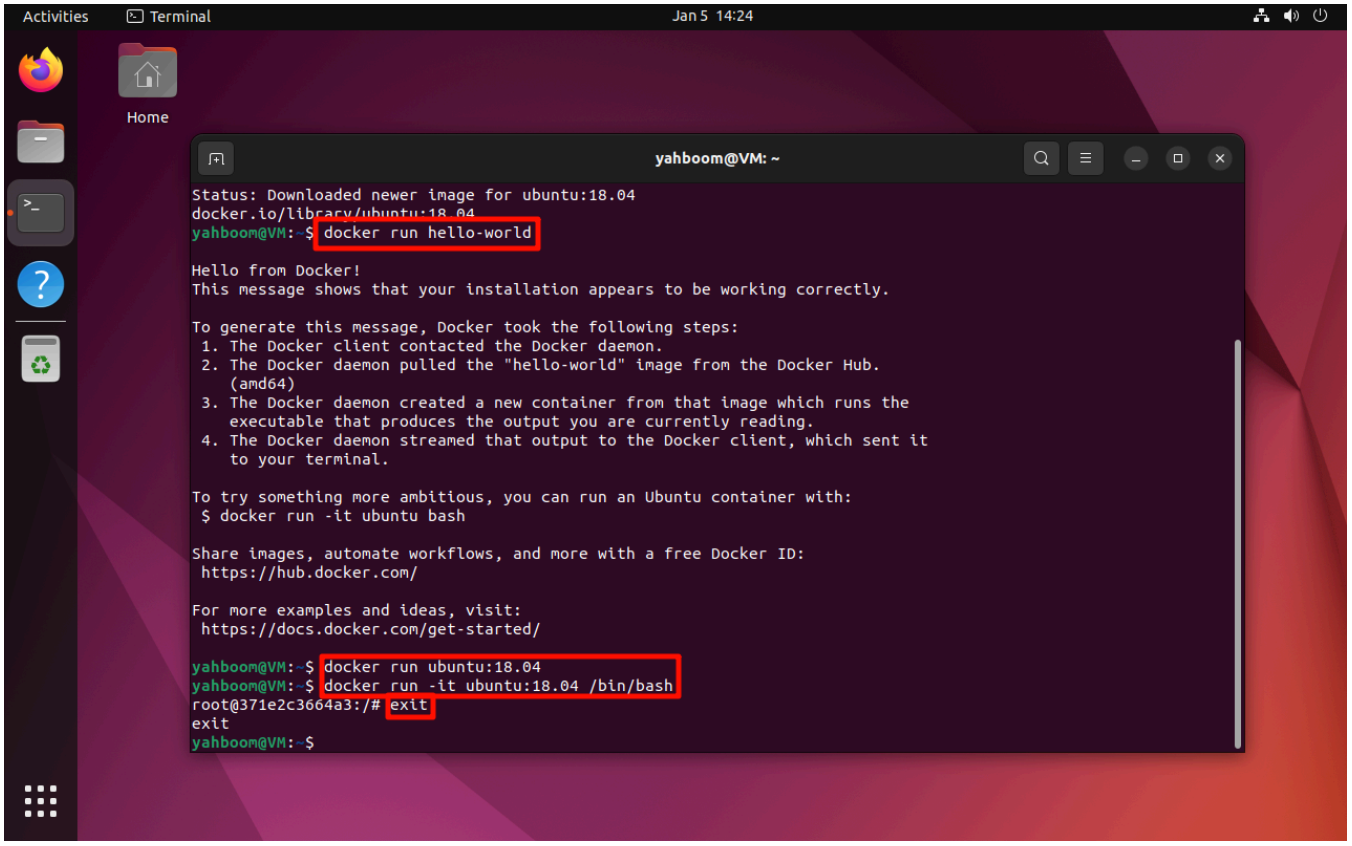


4.1. View the running containers

> docker ps

```
docker ps
```

4.2. View all containers (including the stopped ones)

```
docker ps -a
```

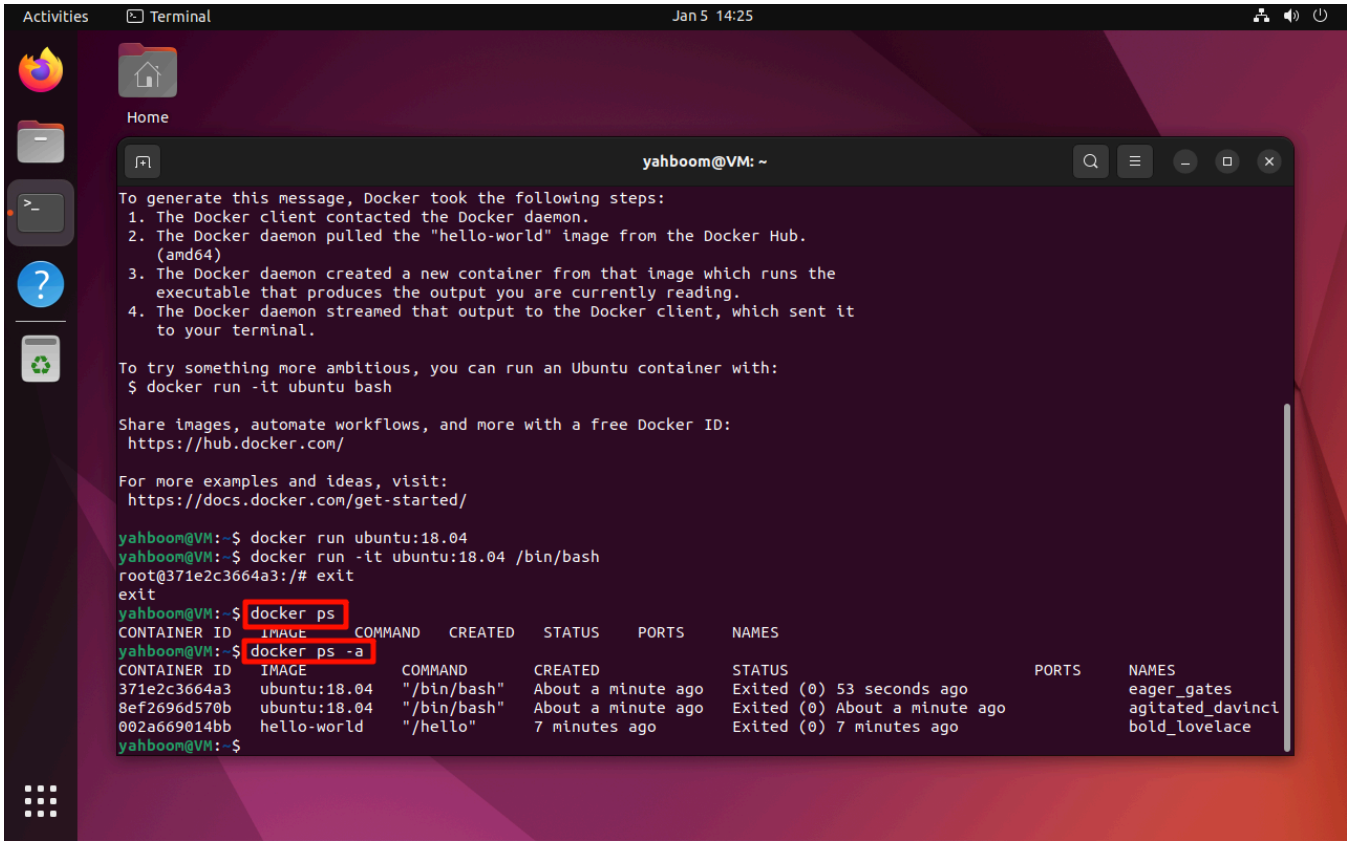


5. Clean up the stopped containers

This command deletes all the stopped containers on the local machine, but it does not delete images. Before running it, make sure that none of these containers holds data you need to keep; Docker will ask for confirmation again when it runs.

> **docker container prune**


```
docker container prune
```

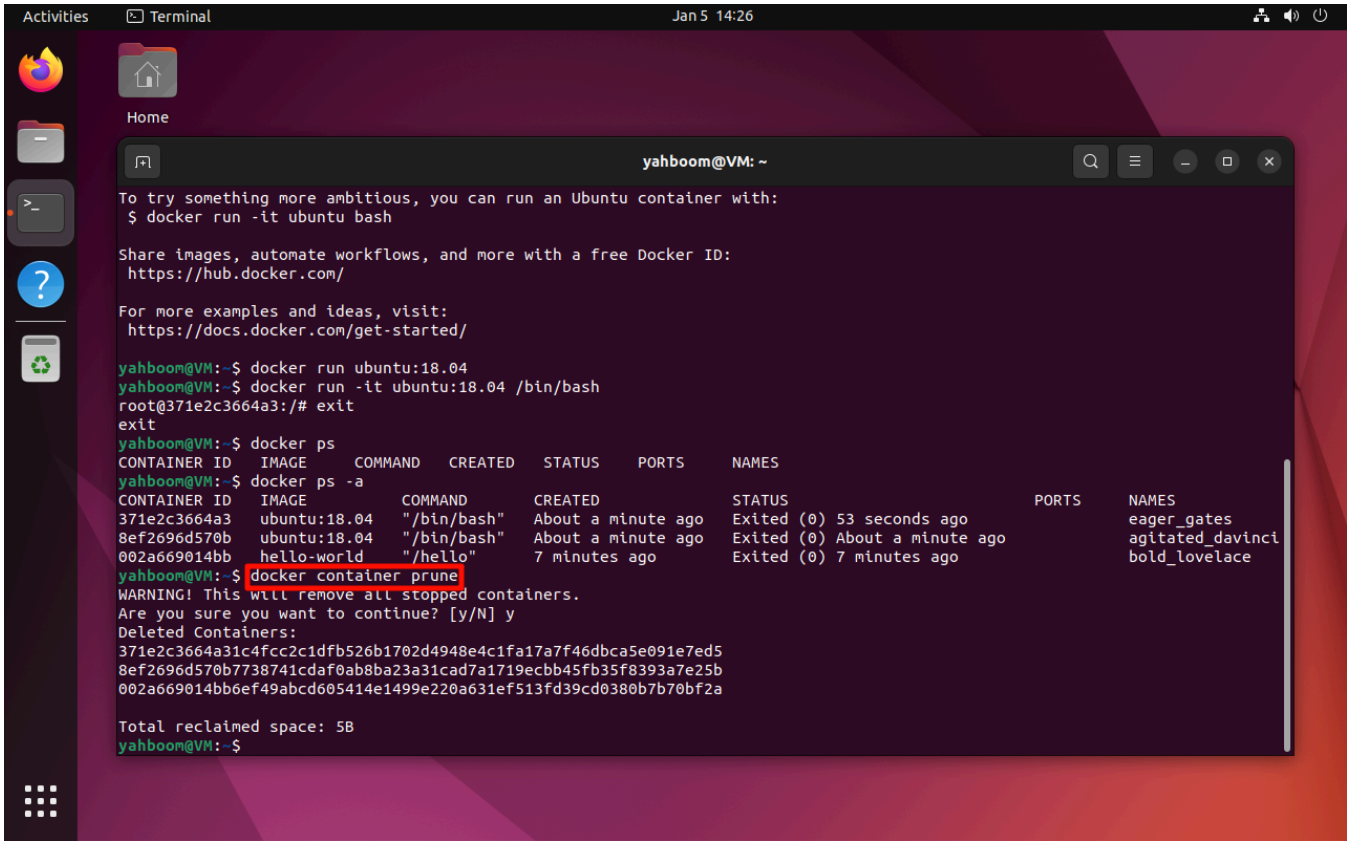

6. View the local images

> docker images

```
docker images
```

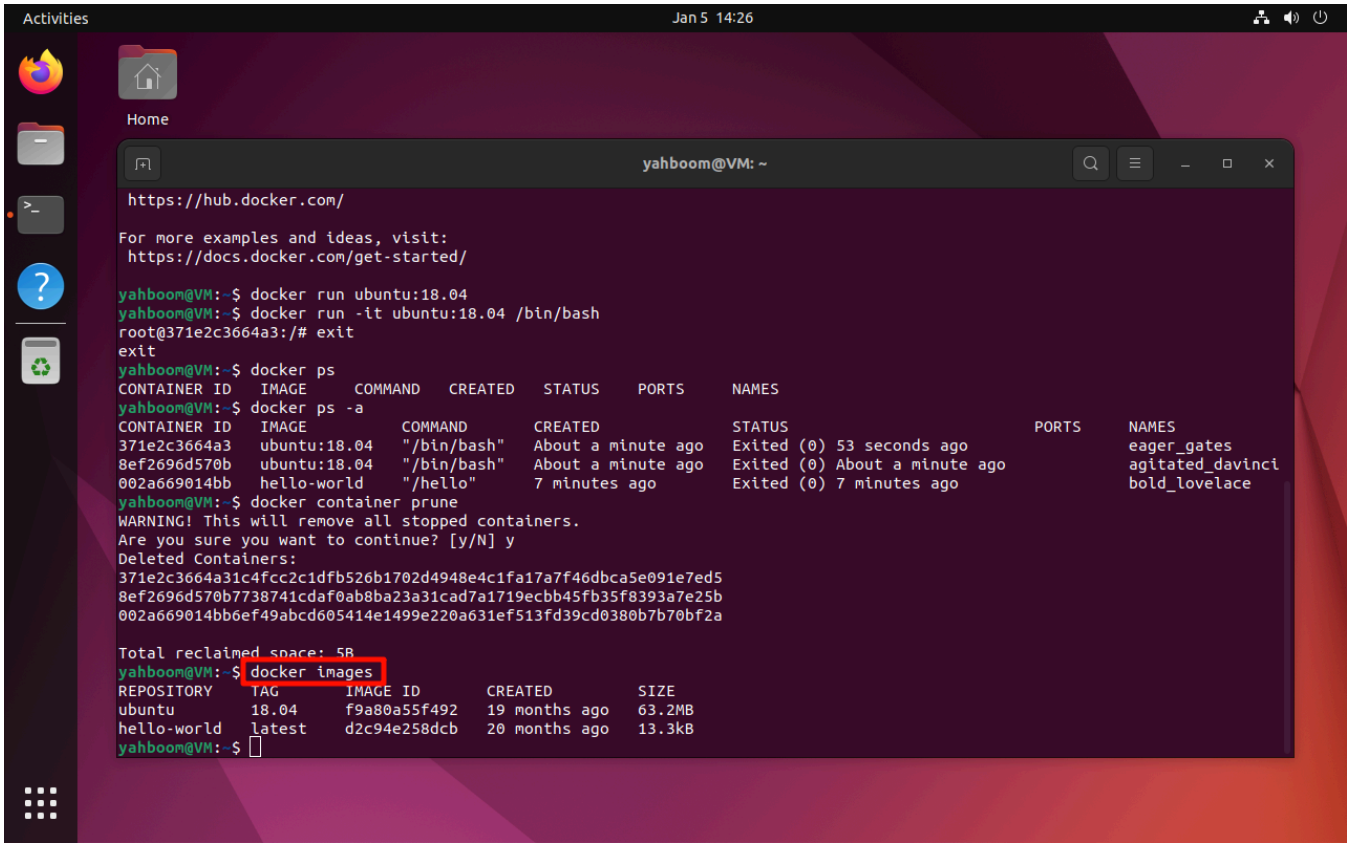

7. Delete the image


Note: If a container is still using the image, you need to stop and remove the corresponding container first, and only then can the image be deleted.

> **docker rmi <image_name>**

```
docker rmi hello-world
```

> **docker rmi <image_name>:**

```
docker rmi ubuntu:18.04
```

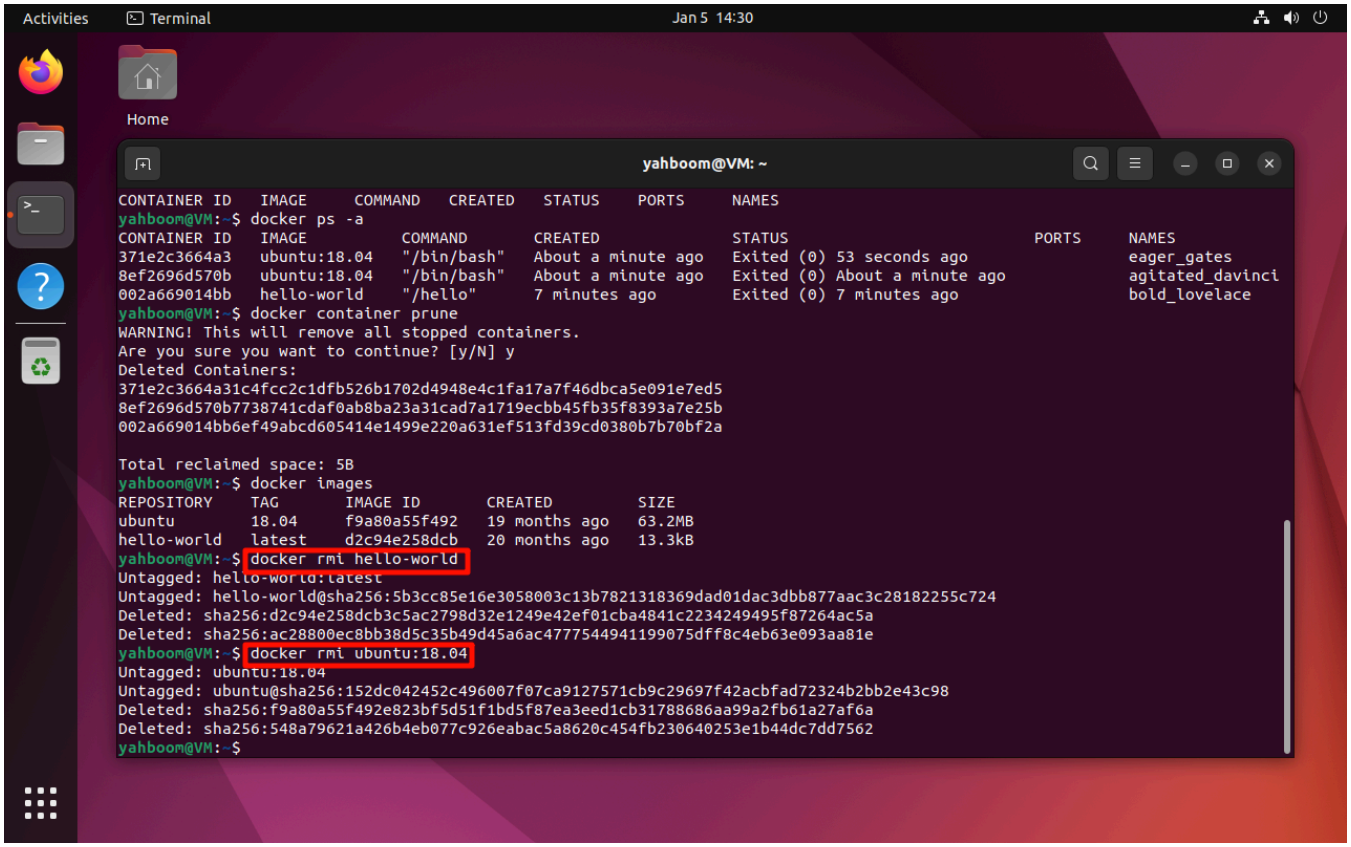

8. Commit the image


Pull and run the ubuntu:18.04 image in interactive mode

```
docker run -it ubuntu:18.04 /bin/bash
```

> **docker commit <image_name>:**

Note: Modify according to the actual `CONTAINER ID`

```
docker commit 2efca1aa1bb1 ubuntu_18.04:1.0.0
```

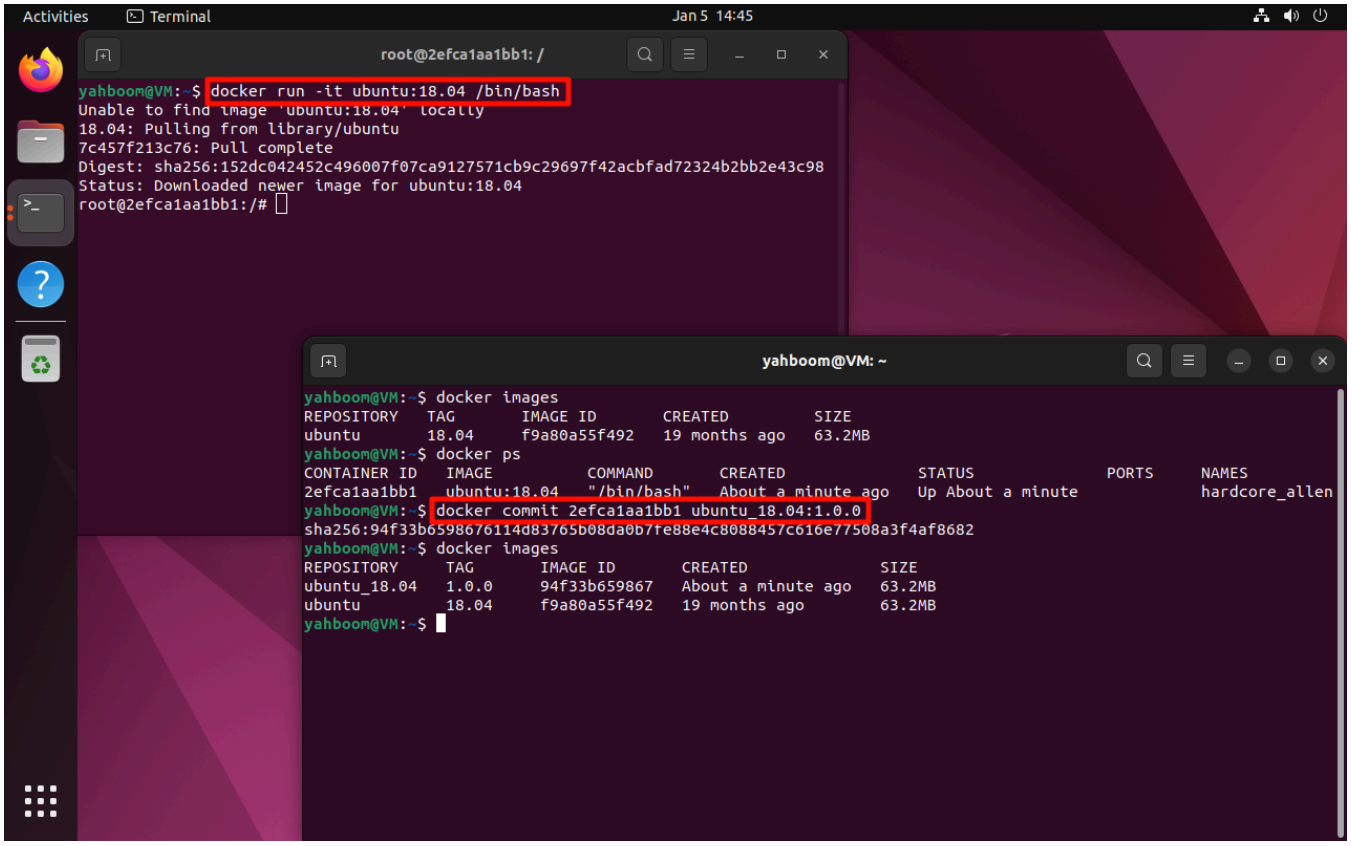

9. Stop the container


If the container is run in interactive mode and the terminal has entered the container, you can enter `exit` inside the container to stop the container;

If you close the container from the outside, you can use the `docker stop` command.

> **docker stop**

Note: Modify according to the actual `CONTAINER ID`

```
docker stop 2efca1aa1bb1
```

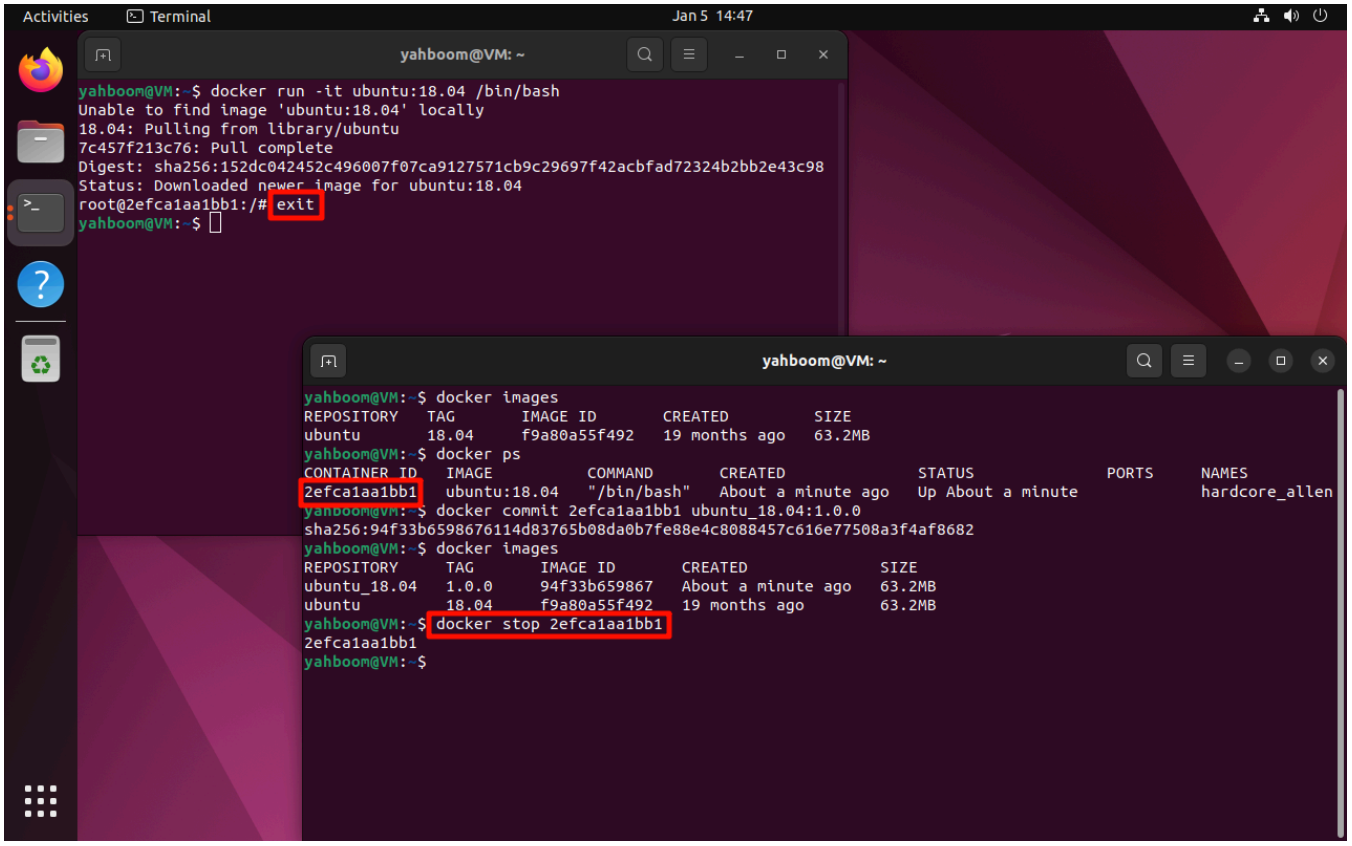

10. Multiple terminals enter the same container

Containers are isolated from each other. Every time `docker run` is executed, a new container is created and started; if you need to perform operations in the same container, you should use `docker exec` to enter that container.

Start a container based on the `ubuntu:18.04` image in interactive mode:

```
docker run -it ubuntu:18.04 /bin/bash
```


View the running containers:

```
docker ps
```

> **docker exec**

Enter the running container in interactive mode: modify according to the actual `CONTAINER ID`

```
docker exec -it bc4fcf3ef267 /bin/bash
```

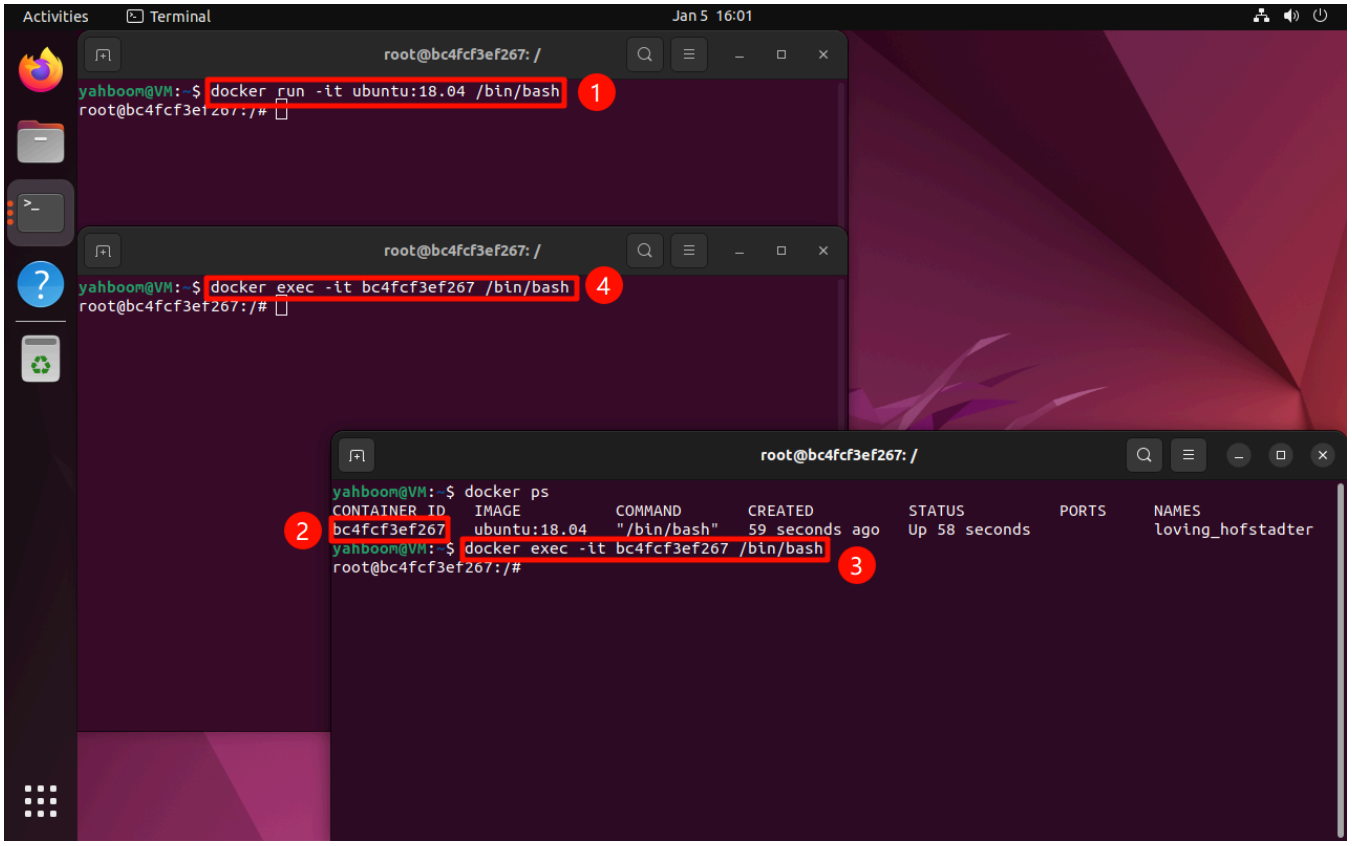
Activities
Terminal
Jan 5 16:01
root@bc4fcf3ef267: /
yahboom@VM:~$ docker run -it ubuntu:18.04 /bin/bash
root@bc4fcf3ef267:/#
1
root@bc4fcf3ef267: /
yahboom@VM:~$ docker exec -it bc4fcf3ef267 /bin/bash
root@bc4fcf3ef267:/#
4
root@bc4fcf3ef267: /
yahboom@VM:~$ docker ps
CONTAINER ID IMAGE COMMAND CREATED STATUS PORTS NAMES
bc4fcf3ef267 ubuntu:18.04 "/bin/bash" 59 seconds ago Up 58 seconds loving_hofstadter
2
yahboom@VM:~$ docker exec -it bc4fcf3ef267 /bin/bash
root@bc4fcf3ef267:/#
3