

Dify Basic Functions

Dify Basic Functions

1. Course Content
2. Starting the Dify Service
3. Basic Usage
 - 3.1 Switching Dify Language
 - 3.1 Integrating Model Provider Services
 - 3.2 Switching the Access Model for AI Applications
4. Account Settings
5. Development Documentation


1. Course Content

- Understand and master the basic operations and functions of Dify

2. Starting the Dify Service

- Connect to the vehicle's infotainment system via VNC or SSH. Enter the following command in the terminal:

```
bringup_dify
```

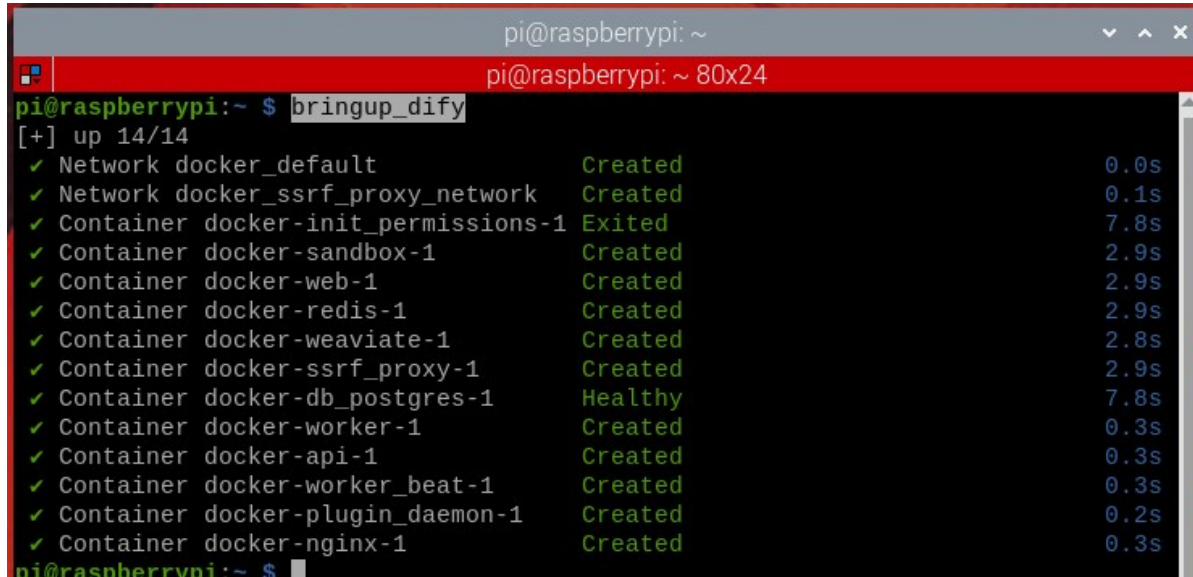

```
pi@raspberrypi: ~  
pi@raspberrypi: ~ 80x24  
pi@raspberrypi:~ $ bringup_dify  
[+] up 14/14  
✓ Network docker_default Created 0.0s  
✓ Network docker_ssrf_proxy_network Created 0.1s  
✓ Container docker-init_permissions-1 Exited 7.8s  
✓ Container docker-sandbox-1 Created 2.9s  
✓ Container docker-web-1 Created 2.9s  
✓ Container docker-redis-1 Created 2.9s  
✓ Container docker-weaviate-1 Created 2.8s  
✓ Container docker-ssrf_proxy-1 Created 2.9s  
✓ Container docker-db_postgres-1 Healthy 7.8s  
✓ Container docker-worker-1 Created 0.3s  
✓ Container docker-api-1 Created 0.3s  
✓ Container docker-worker_beat-1 Created 0.3s  
✓ Container docker-plugin_daemon-1 Created 0.2s  
✓ Container docker-nginx-1 Created 0.3s  
pi@raspberrypi:~ $
```


- View the vehicle's infotainment system's IP address. This can be done through the OLED screen, `ifconfig`, or directly in the terminal.

```
jetson@yahboom: ~
jetson@yahboom: ~ 80x24
[System Information]
-----
IP_Address_1: 192.168.2.49
IP_Address_2: 192.168.12.34
MACHINE: OrinNx | ROS_DISTRO: humble | ROS_DOMAIN_ID: 30
ROBOT_TYPE: ROSMASTER-M3Pro | CAMERA_TYPE: dabai_dcw2 | RADAR: Tmini-plus*2
-----
jetson@yahboom:~$
```

- Enter the vehicle's infotainment system's IP address directly into the browser's address bar to access the Dify management page. If this is the first time logging in, you will need to use a username and password. You can select the language in the upper left corner.

[!NOTE]

- Account: yahboom@163.com
- Password: yahboom123
- All account passwords, intelligent agent applications, and RAG data are stored locally.
- The Dify main interface is shown below.

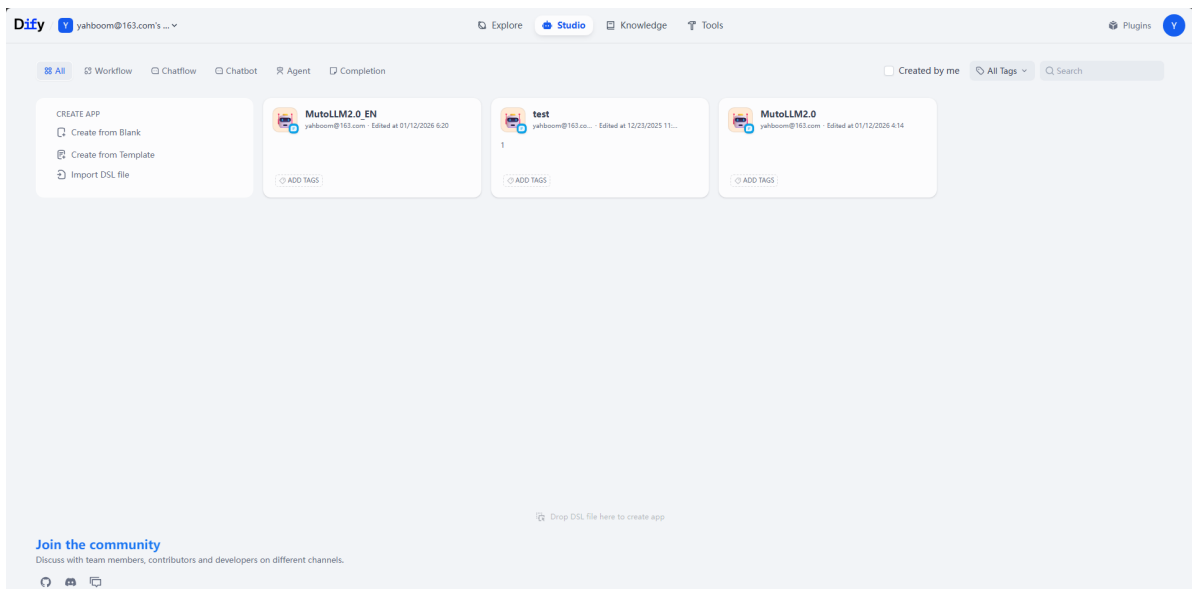



3. Basic Usage

[!TIP]

- If you need to use the model supplier's cloud AI model, please ensure the vehicle's infotainment system is connected to the internet.


3.1 Switching Dify Language

- Generally, the Dify page will open in the browser language. If you need to manually switch languages, you can do so in the settings.

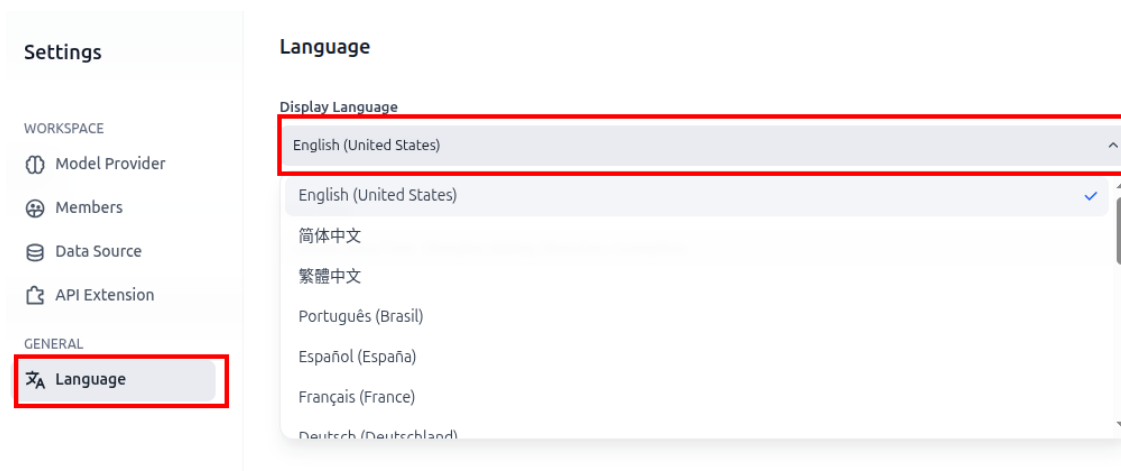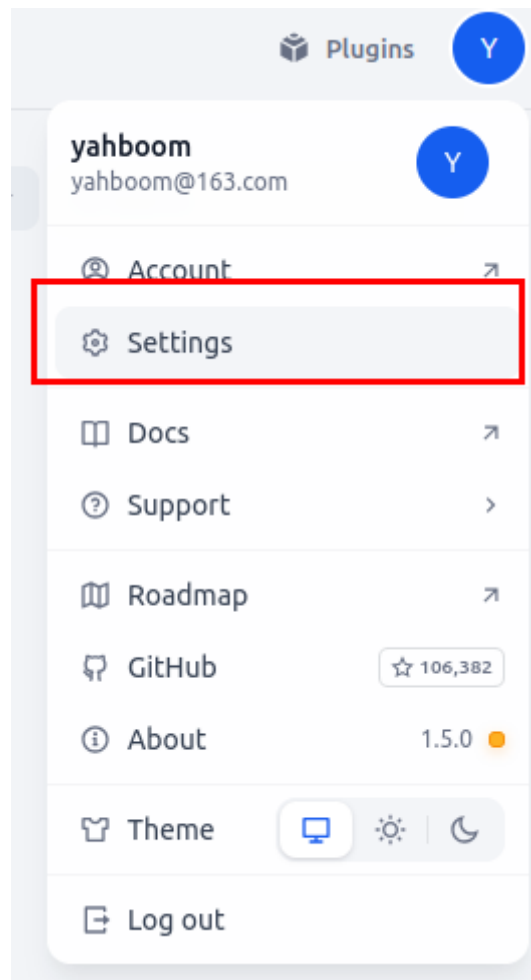


3.1 Integrating Model Provider Services

- Dify has built-in model interface plugins for different model providers. These plugins are maintained and upgraded by their respective model providers. We can install the corresponding model provider's plugin to quickly integrate cloud models from different manufacturers.
- Click on **Plugins** in the upper left corner of the homepage -> **Explore Marketplace** -> **Models** to enter the model interface plugin page.

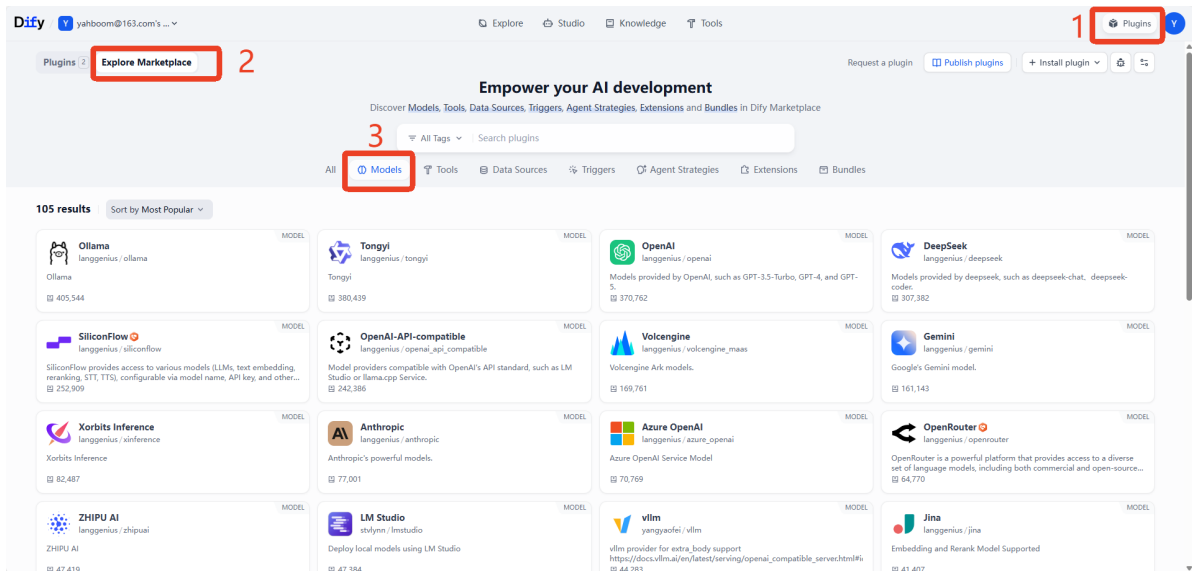


- This example demonstrates how to install and configure the Tongyi Qianwen plugin. The method for other plugins is the same; simply click to `install`.

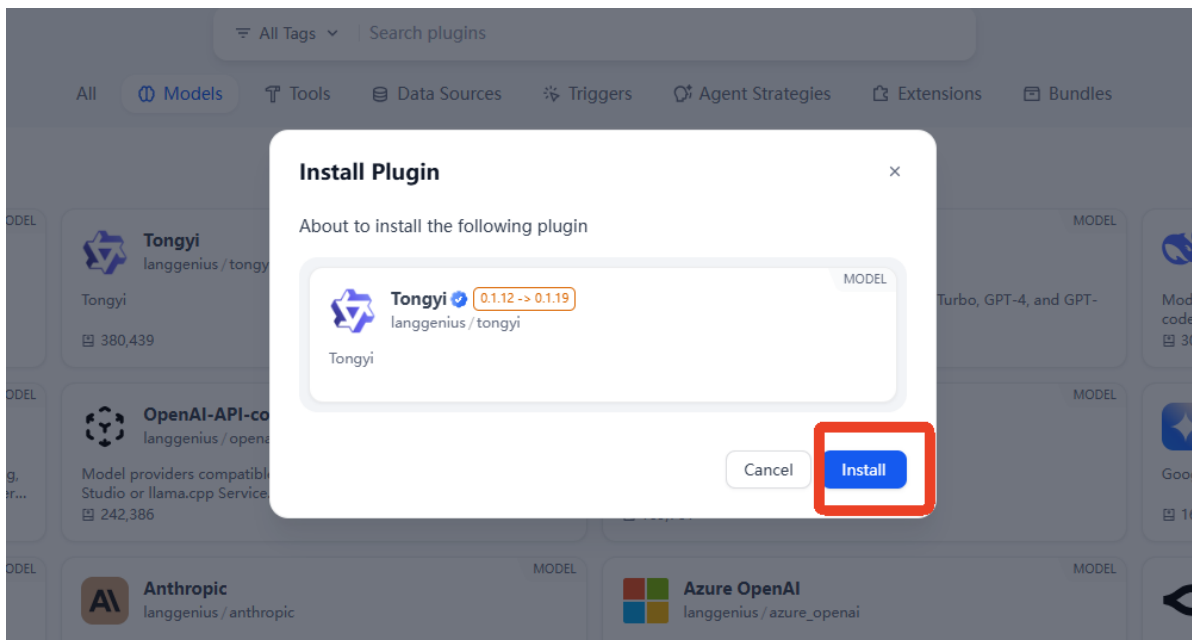

- Afterwards, in the "Model Provider" field of the "Settings" page, enter the API-KEY obtained from the corresponding platform. If the API-KEY is available, the corresponding plugin's API-KEY will display a green light.


[!TIP]

- For more detailed API-KEY configuration steps and testing methods, please refer to section `6. Configuring API-KEY` in the previous chapter.

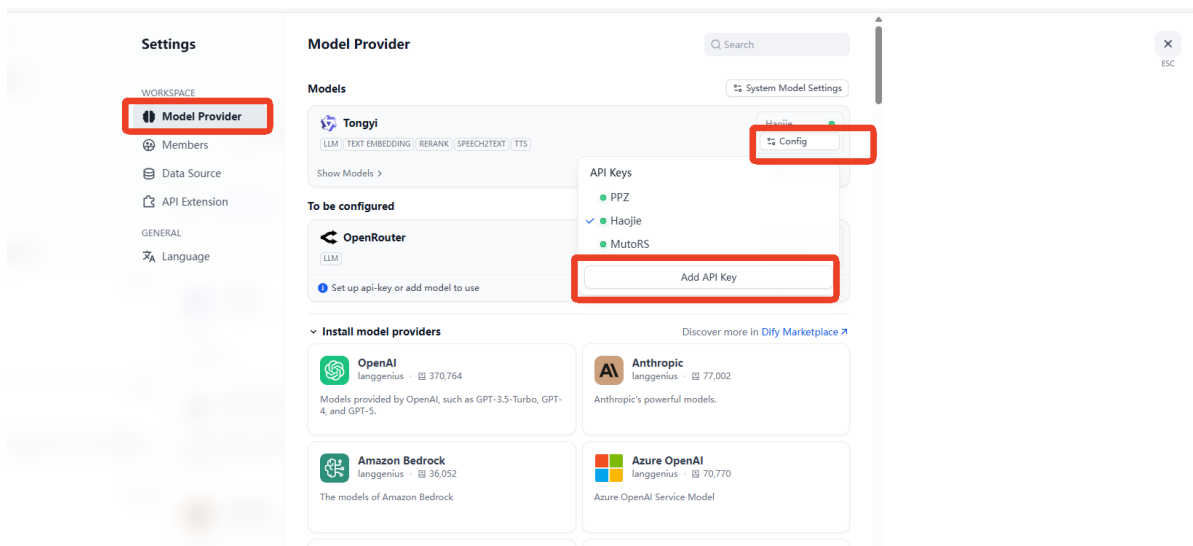


3.2 Switching the Access Model for AI Applications


- For already developed AI agent applications, you can quickly switch between different models to test their effectiveness. Here, we'll use `MutoLLM2.0_EN`, the core agent of `MutoRS`, as an example. Open the agent application on the homepage:

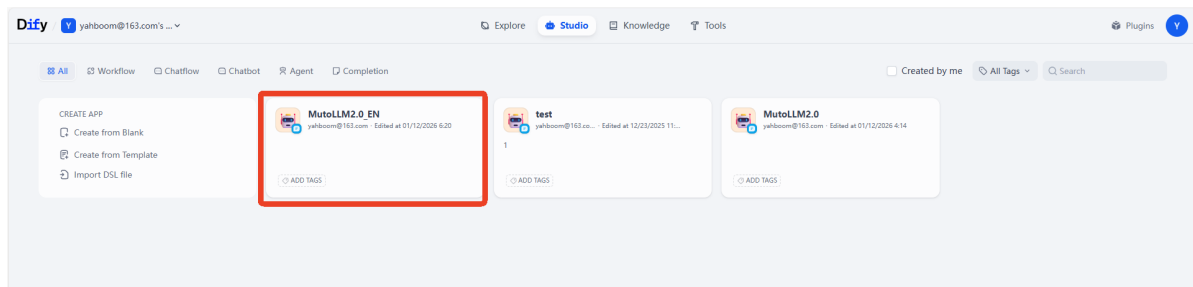

- There are three core AIs: Task Judgment, Decision-Making AI, and Execution-Making AI

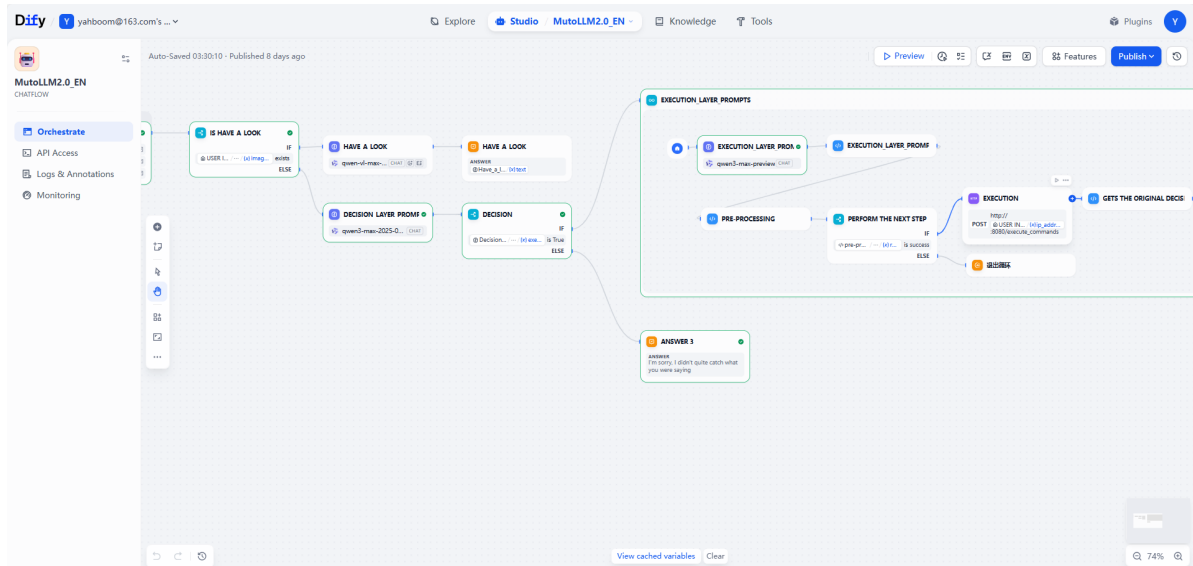

- Taking switching the Decision-Making AI as an example, open the `DECISION LAYER PROMPTS` card, and then switch between different vendor models in the model selection dropdown menu.
- Note: The qwen-vl-max model will be removed from the platform in July 2026. You will need to use a different large visual model instead.

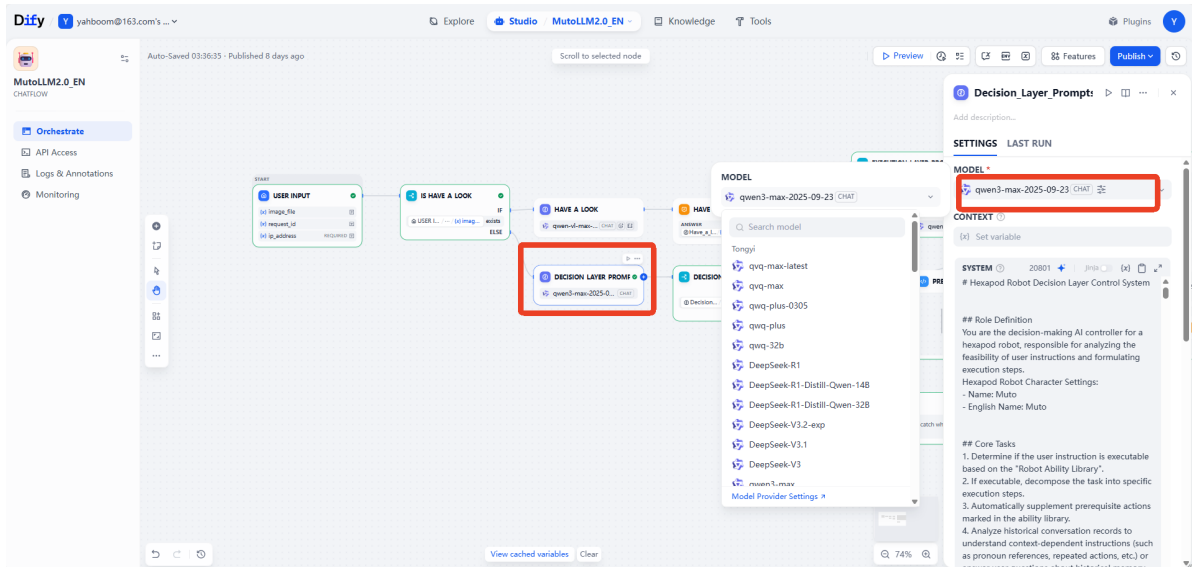


- We can also fine-tune the parameters of the model's response. Each parameter's detailed function can be viewed using the mouse.
- Taking the temperature parameter as an example:

This controls the degree of randomness and diversity. The temperature value controls the smoothing of the probability distribution for each candidate word during text generation. A higher temperature value reduces the peak of the probability distribution, allowing more low-probability words to be selected, resulting in more diverse generation results; while a lower temperature value enhances the peak of the probability distribution, making high-probability words easier to select, resulting in more predictable generation results.

[!TIP]

- Beginners can generally use the default parameters without adjustment.

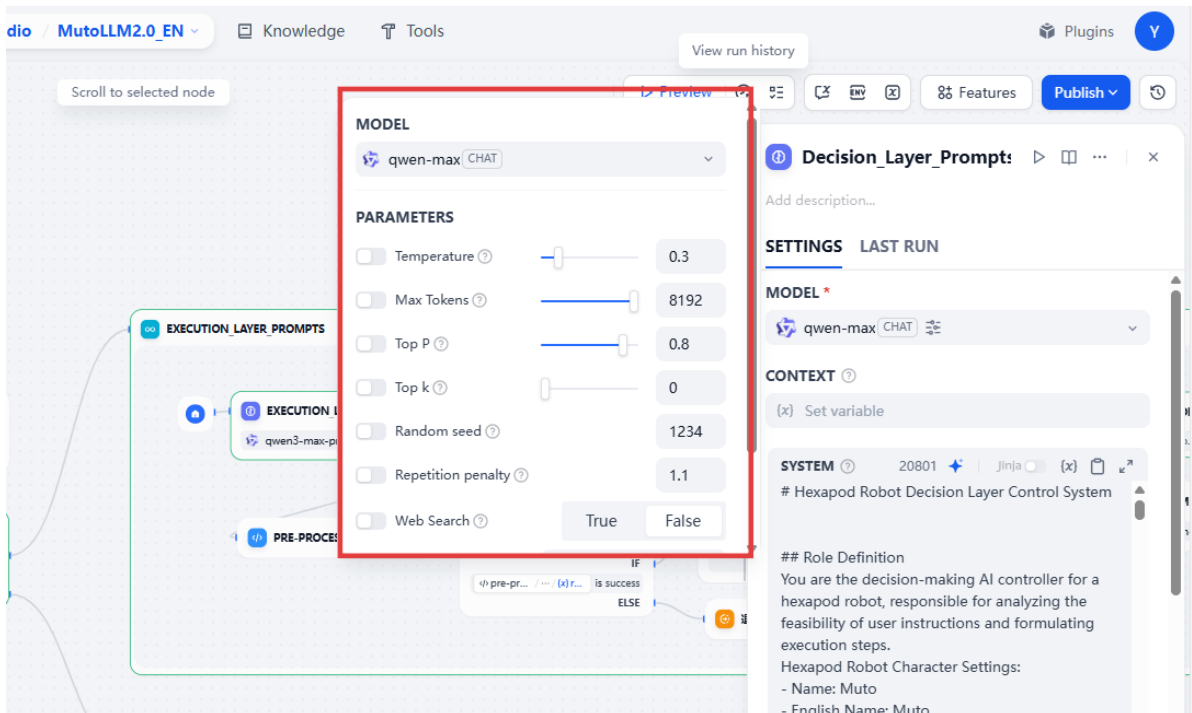

- Note that after modifying the AI application, you need to click **Publish** — **Publish update** to save the changes.

The screenshot shows the Dify AI interface. At the top, there's a 'Tools' menu and a 'Plugins' button. A 'Publish' button is highlighted with a red box. Below it, a dropdown menu is open, showing options: 'LATEST PUBLISHED' (Published 11 minutes ago), 'Publish Update ctrl ↑ P' (highlighted with a red box), 'Run App', 'Embed Into Site', 'Open in Explore', and 'Access API Reference'. The background shows a workflow diagram with nodes like 'EXECUTION_LAYER_PROMPT' and 'PERFORM THE NEXT STEP'.

[!WARNING]


Important Notes

- For the `Have_a_Look` visual planning node, only models that support visual functionality can be used.

The screenshot shows the Dify AI interface with a workflow diagram. The 'HAVE_A_LOOK' node is highlighted with a red box. The right sidebar shows the settings for the 'Have_a_look' node, including 'MODEL' (qwen-vl-max-latest), 'CONTEXT', 'SYSTEM', 'USER', 'MEMORY', and 'VISION'.

- There are no restrictions on the model for task routing and decision layer models.

- Task routing can choose a model with small parameters to improve response speed.

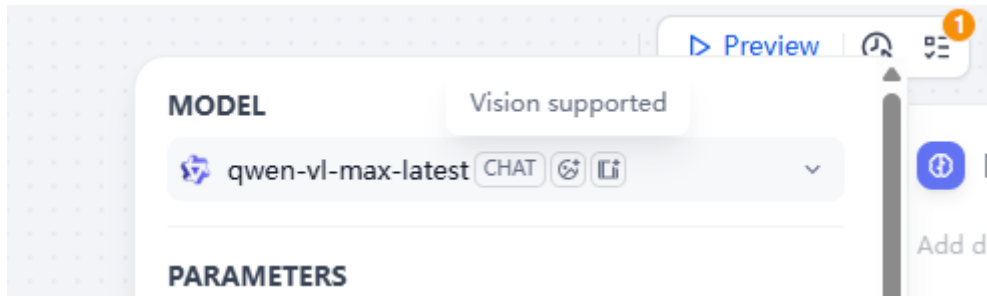


4. Account Settings

[!NOTE]

The dify account information is stored locally and poses no privacy risk. MutoRS comes with a default administrator account. This section of the tutorial should only be consulted if you need to modify the account information.

- Click the avatar in the upper right corner -> [Account](#)

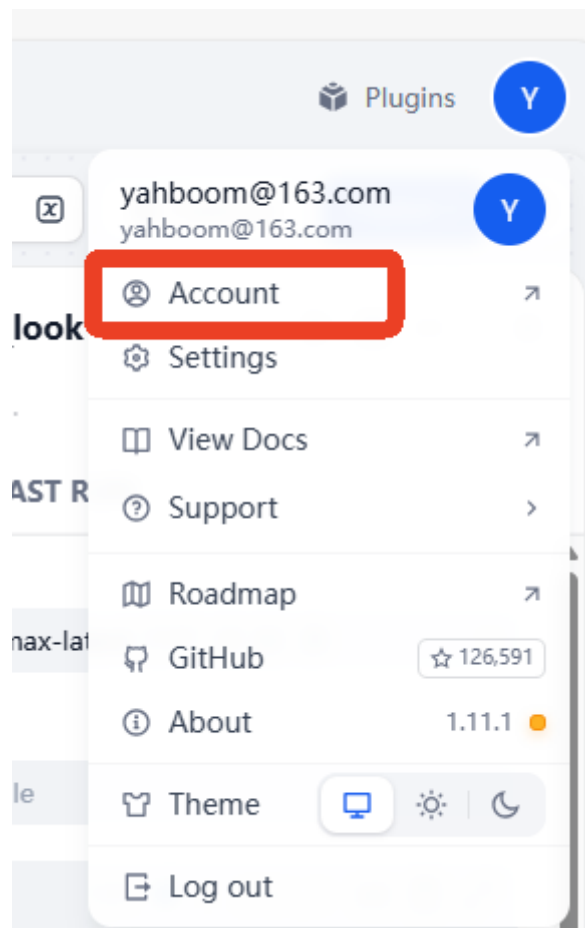

- Account information is shown below. You can modify the information as needed.

My Account



yahboom@163.com
yahboom@163.com

Name

yahboom@163.com

Edit

Email

yahboom@163.com

Change

Password

You can set a permanent password if you don't want to use temporary login codes

Reset password


Account's data

The user data of your account.

Show 3 apps



- To log out, click the avatar again to log out.

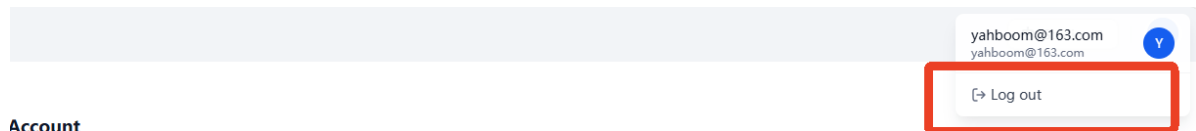

Account



yahboom@163.com
yahboom@163.com

yahboom@163.com

Edit

yahboom@163.com

Change


Password

You can set a permanent password if you don't want to use temporary login codes

Reset password

5. Development Documentation

- For users with further development needs, more detailed development documentation can be viewed by clicking the avatar in the upper right corner -> [View Docs](#)

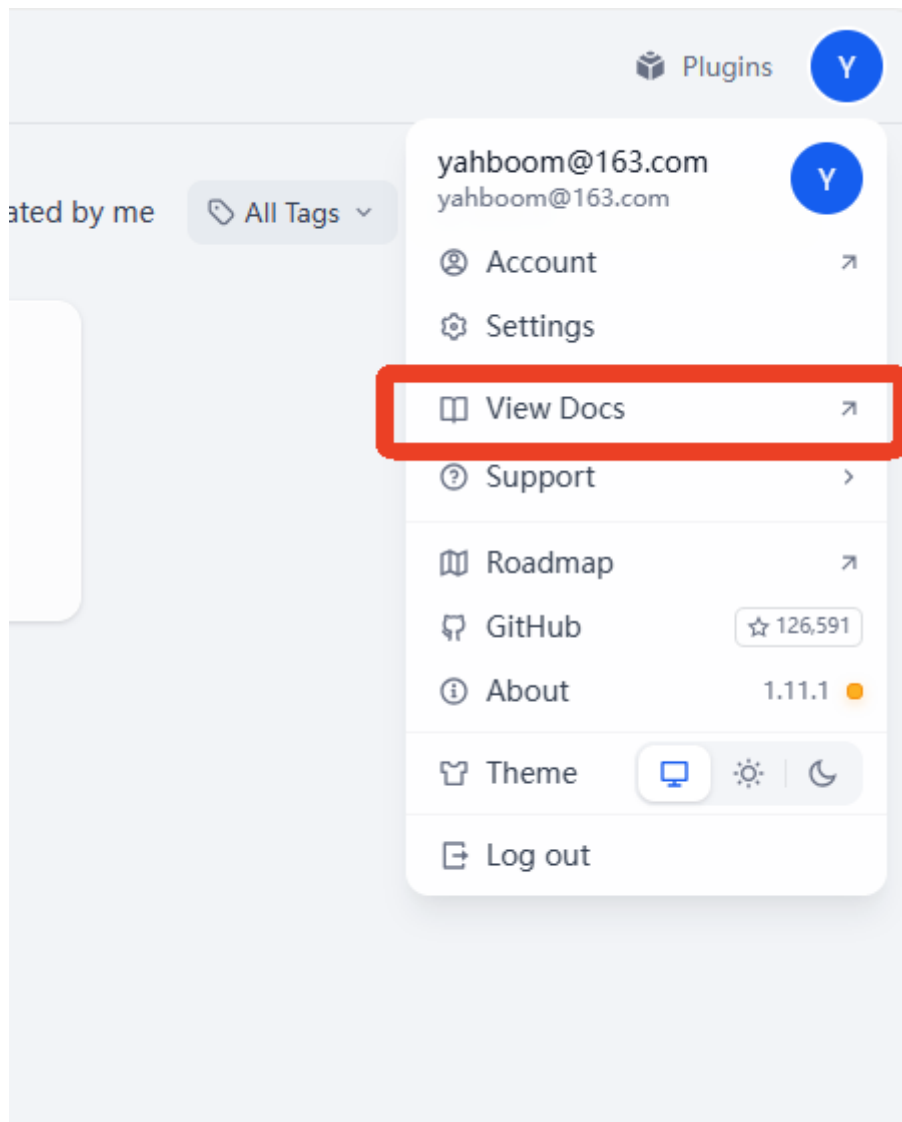

- This will open the Dify online development documentation page. You can select different content from the drop-down list on the left.

Q Search...

Ctrl K

 Use Dify ^

 Use Dify ✓

 Self Host

 API Reference

 Develop Plugin

Nodes >

Build >

Debug >

Publish >

Monitor >

Knowledge >

Workspace >

Tutorials >