

1. OpenClaw Deployment

1. OpenClaw Deployment

- 1.1 OpenClaw Installation
 - 1.1.1 OpenClaw Installation Reference URL
 - 1.1.2 Using QuickStart Installation
 - 1.1.3 Opening OpenClaw Control UI on PC (Windows)
- 1.2 Model Configuration (Must Read)
 - 1.2.1 Why Configure Models
 - 1.2.2 How to Configure Models
 - 1. OpenRouter (Built-in OpenClaw Service Provider)
 - 2. Bailian (Third-party Service Provider API Example)
 - 2.1 Apply for API Key
 - 2.2 openclaw onboard Configuration

This chapter covers two parts:

- OpenClaw Installation
- Model Configuration (OpenRouter / Bailian)

1.1 OpenClaw Installation

The YahBoom version image already has OpenClaw installed (version 2026.4.24). Students using the YahBoom version image can directly skip to section 1.1.3

1.1.1 OpenClaw Installation Reference URL

OpenClaw Official Website: <https://openclaw.ai/>

Open Source Project Address: <https://github.com/openclaw/openclaw>

1.1.2 Using QuickStart Installation

We use the installation script provided by OpenClaw official:

```
sudo apt install curl -y
curl -fsSL https://openclaw.ai/install.sh | bash

# Currently, the one-click download script installs the latest OpenClaw version
by default. This version may not work well or be stable. If the installation
fails or you get a permission error after installation, you can specify a version
using the following command (reference version 2026.3.28)
curl -fsSL https://openclaw.ai/install.sh | bash -s -- --version 2026.3.28
```

```
♥ OpenClaw Installer
Your messages, your servers, Meta's tears.

✓ Detected: linux

Install plan
OS: linux
Install method: npm
Requested version: latest

[1/3] Preparing environment
  Node.js not found, installing it now
  Installing Node.js via NodeSource
  Installing Linux build tools (make/g++/cmake/python3)
  Build tools installed
  Node.js v22 installed
  Active Node.js: v22.22.1 (/usr/bin/node)
  Active npm: 10.9.4 (/usr/bin/npm)

[2/3] Installing OpenClaw
  Git already installed
  Installing OpenClaw v2026.3.7
  OpenClaw npm package installed
  OpenClaw installed

[3/3] Finalizing setup

♥ OpenClaw installed successfully (2026.3.7)!
Settled in. Time to automate your life whether you're ready or not.

  Starting setup

♥ OpenClaw 2026.3.7 (42a1394) – I run on caffeine, JSON5, and the audacity of "it worked on my machine."
```

During this process, the installation script will automatically detect missing dependencies and help us install them with one click.

During installation, use the arrow keys (up, down, left, right) to select options, spacebar to select/deselect, and Enter to confirm and configure.

```
♥ OpenClaw 2026.3.7 (42a1394) – I run on caffeine, JSON5, and the audacity of "it worked on my machine."

OPENCRAW
♥ OPENCRAW ♥

OpenClaw onboarding
◇ Security
  Security warning – please read.

  OpenClaw is a hobby project and still in beta. Expect sharp edges.
  By default, OpenClaw is a personal agent: one trusted operator boundary.
  This bot can read files and run actions if tools are enabled.
  A bad prompt can trick it into doing unsafe things.

  OpenClaw is not a hostile multi-tenant boundary by default.
  If multiple users can message one tool-enabled agent, they share that delegated tool
  authority.

  If you're not comfortable with security hardening and access control, don't run
  OpenClaw.
  Ask someone experienced to help before enabling tools or exposing it to the internet.

  Recommended baseline:
  - Pairing/allowlists + mention gating.
  - Multi-user/shared inbox: split trust boundaries (separate gateway/credentials, ideally
    separate OS users/hosts).
  - Sandbox + least-privilege tools.
  - Shared inboxes: isolate DM sessions ('session.dmScope: per-channel-peer') and keep
```

```
A bad prompt can trick it into doing unsafe things.

OpenClaw is not a hostile multi-tenant boundary by default.
If multiple users can message one tool-enabled agent, they share that delegated tool
authority.

If you're not comfortable with security hardening and access control, don't run
OpenClaw.
Ask someone experienced to help before enabling tools or exposing it to the internet.

Recommended baseline:
- Pairing/allowlists + mention gating.
- Multi-user/shared inbox: split trust boundaries (separate gateway/credentials, ideally
  separate OS users/hosts).
- Sandbox + least-privilege tools.
- Shared inboxes: isolate DM sessions (`session.dmScope: per-channel-peer`) and keep
  tool access minimal.
- Keep secrets out of the agent's reachable filesystem.
- Use the strongest available model for any bot with tools or untrusted inboxes.

Run regularly:
openclaw security audit --deep
openclaw security audit --fix

Must read: https://docs.openclaw.ai/gateway/security
```

- ◊ I understand this is personal-by-default and shared/multi-user use requires lock-down. Continue?
Yes
- ◆ Onboarding mode
 - QuickStart (Configure details later via openclaw configure.)
 - Manual

Here we use the QuickStart option to quickly complete OpenClaw installation. Specific configurations can be done later.

If you haven't applied for any API Key, select Skip here. You can configure it later.

```
Tailscale exposure: Off
Direct to chat channels.
```

- ◆ Model/auth provider
 - OpenAI
 - Anthropic
 - Chutes
 - vLLM
 - MiniMax
 - Moonshot AI (Kimi K2.5)
 - Google
 - xAI (Grok)
 - Mistral AI
 - Volcano Engine
 - BytePlus
 - OpenRouter
 - Kilo Gateway
 - Qwen
 - Z.AI
 - Qianfan
 - Copilot
 - Vercel AI Gateway
 - OpenCode Zen
 - Xiaomi
 - Synthetic
 - Together AI
 - Hugging Face
 - Venice AI
 - LiteLLM
 - Cloudflare AI Gateway
 - Custom Provider
 - Skip for now

Tailscale exposure: Off
Direct to chat channels.

- ◊ Model/auth provider
 - Skip for now
- ◆ Filter models by provider
 - All providers
 - amazon-bedrock
 - anthropic
 - azure-openai-responses
 - cerebras
 - github-copilot
 - google
 - google-antigravity
 - google-gemini-cli
 - google-vertex
 - groq
 - huggingface
 - kimi-coding
 - minimax
 - minimax-cn
 - mistral
 - ollama
 - openai
 - openai-codex
 - opencode
 - openrouter
 - vercel-ai-gateway
 - xai
 - zai

Here we keep the default model selection (configure later).

All providers

- ◆ Default model
 - Keep current (default: anthropic/claude-opus-4-6)
 - Enter model manually
 - amazon-bedrock/anthropic.claude-3-haiku-20240307-v1:0
 - amazon-bedrock/anthropic.claude-3-5-haiku-20241022-v1:0
 - amazon-bedrock/anthropic.claude-haiku-4-5-20251001-v1:0
 - amazon-bedrock/eu.anthropic.claude-haiku-4-5-20251001-v1:0
 - amazon-bedrock/global.anthropic.claude-haiku-4-5-20251001-v1:0
 - amazon-bedrock/us.anthropic.claude-haiku-4-5-20251001-v1:0
 - amazon-bedrock/anthropic.claude-3-opus-20240229-v1:0
 - amazon-bedrock/anthropic.claude-opus-4-20250514-v1:0
 - amazon-bedrock/us.anthropic.claude-opus-4-20250514-v1:0
 - amazon-bedrock/anthropic.claude-opus-4-1-20250805-v1:0
 - amazon-bedrock/us.anthropic.claude-opus-4-1-20250805-v1:0
 - amazon-bedrock/anthropic.claude-opus-4-5-20251101-v1:0
 - amazon-bedrock/eu.anthropic.claude-opus-4-5-20251101-v1:0
 - amazon-bedrock/global.anthropic.claude-opus-4-5-20251101-v1:0
 - amazon-bedrock/us.anthropic.claude-opus-4-5-20251101-v1:0
 - amazon-bedrock/anthropic.claude-opus-4-6-v1
 - amazon-bedrock/eu.anthropic.claude-opus-4-6-v1
 - amazon-bedrock/global.anthropic.claude-opus-4-6-v1
 - amazon-bedrock/us.anthropic.claude-opus-4-6-v1
 - amazon-bedrock/anthropic.claude-3-sonnet-20240229-v1:0
 - amazon-bedrock/anthropic.claude-3-5-sonnet-20240620-v1:0
 - amazon-bedrock/anthropic.claude-3-5-sonnet-20241022-v2:0
 - amazon-bedrock/anthropic.claude-3-7-sonnet-20250219-v1:0
 - amazon-bedrock/anthropic.claude-sonnet-4-20250514-v1:0
 - amazon-bedrock/eu.anthropic.claude-sonnet-4-20250514-v1:0
 - amazon-bedrock/global.anthropic.claude-sonnet-4-20250514-v1:0
 - amazon-bedrock/us.anthropic.claude-sonnet-4-20250514-v1:0
 - amazon-bedrock/anthropic.claude-sonnet-4-5-20250929-v1:0
 - ...

Select Channel here, mainly used for communication with third-party apps. We still skip it for now.

```

Microsoft Teams: Bot Framework; enterprise support.
Mattermost: self-hosted Slack-style chat; install the plugin to enable.
Nextcloud Talk: Self-hosted chat via Nextcloud Talk webhook bots.
Matrix: open protocol; install the plugin to enable.
BlueBubbles: iMessage via the BlueBubbles mac app + REST API.
Zalo: Vietnam-focused messaging platform with Bot API.
Zalo Personal: Zalo personal account via QR code login.
Synology Chat: Connect your Synology NAS Chat to OpenClaw with full agent capabilities.
Tlon: decentralized messaging on Urbit; install the plugin to enable.

```

- ◆ **Select channel (QuickStart)**
 - Telegram (Bot API)
 - WhatsApp (QR link)
 - Discord (Bot API)
 - IRC (Server + Nick)
 - Google Chat (Chat API)
 - Slack (Socket Mode)
 - Signal (signal-cli)
 - iMessage (imsg)
 - LINE (Messaging API)
 - Feishu/Lark (飞书)
 - Nostr (NIP-04 DMs)
 - Microsoft Teams (Bot Framework)
 - Mattermost (plugin)
 - Nextcloud Talk (self-hosted)
 - Matrix (plugin)
 - BlueBubbles (macOS app)
 - Zalo (Bot API)
 - Zalo (Personal Account)
 - Synology Chat (Webhook)
 - Tlon (Urbit)
 - **Skip for now (You can add channels later via 'openclaw channels add')**

Search provider is the API provider for search services. We choose to skip.

```

Microsoft Teams: Bot Framework; enterprise support.
Mattermost: self-hosted Slack-style chat; install the plugin to enable.
Nextcloud Talk: Self-hosted chat via Nextcloud Talk webhook bots.
Matrix: open protocol; install the plugin to enable.
BlueBubbles: iMessage via the BlueBubbles mac app + REST API.
Zalo: Vietnam-focused messaging platform with Bot API.
Zalo Personal: Zalo personal account via QR code login.
Synology Chat: Connect your Synology NAS Chat to OpenClaw with full agent capabilities.
Tlon: decentralized messaging on Urbit; install the plugin to enable.

```

```

◆ Select channel (QuickStart)
| Skip for now
Updated ~/.openclaw/openclaw.json
Workspace OK: ~/.openclaw/workspace
Sessions OK: ~/.openclaw/agents/main/sessions

```

```

◆ Web search
Web search lets your agent look things up online.
Choose a provider and paste your API key.
Docs: https://docs.openclaw.ai/tools/web

```

- ◆ **Search provider**
 - Perplexity Search
 - Brave Search
 - Gemini (Google Search)
 - Grok (xAI)
 - Kimi (Moonshot)
 - **Skip for now (Configure later with openclaw configure --section web)**

Configure "Skills". We choose not to configure for now (select no).

```
Zalo Personal: Zalo personal account via QR code login.
Synology Chat: Connect your Synology NAS Chat to OpenClaw with full agent capabilities.
Tlon: decentralized messaging on Urbit; install the plugin to enable.

◊ Select channel (QuickStart)
| Skip for now
Updated ~/.openclaw/openclaw.json
Workspace OK: ~/.openclaw/workspace
Sessions OK: ~/.openclaw/agents/main/sessions

◊ Web search
Web search lets your agent look things up online.
Choose a provider and paste your API key.
Docs: https://docs.openclaw.ai/tools/web

◊ Search provider
Skip for now

◊ Skills status
Eligible: 4
Missing requirements: 40
Unsupported on this OS: 7
Blocked by allowlist: 0

◆ Configure skills now? (recommended)
o Yes / ● No
```

Configure Hooks. We press spacebar to select "Skip for now", then press Enter to confirm.

```
Docs: https://docs.openclaw.ai/tools/web

◊ Search provider
Skip for now

◊ Skills status
Eligible: 4
Missing requirements: 40
Unsupported on this OS: 7
Blocked by allowlist: 0

◊ Configure skills now? (recommended)
No

◊ Hooks
Hooks let you automate actions when agent commands are issued.
Example: Save session context to memory when you issue /new or /reset.
Learn more: https://docs.openclaw.ai/automation/hooks

◆ Enable hooks?
■ Skip for now
□ boot-md
□ bootstrap-extra-files
□ command-logger
□ session-memory
```

Wait for installation to complete.

You need to add OpenClaw's installation location to the environment variable. Otherwise, you may not find the openclaw command in the terminal.

```
echo 'export PATH="$(npm prefix -g)/bin:$PATH"' >> ~/.bashrc
source ~/.bashrc
```

1.1.3 Opening OpenClaw Control UI on PC (Windows)

1. Modify OpenClaw's configuration file to allow other devices on the LAN to access OpenClaw:

```
openclaw config
```

Here we make selections as shown in the figure below (arrow keys to select, Enter to confirm):

Except for the Token field which can be different from the one in our image, everything else should be the same. The key point is the Gateway bind mode item. We need to set it to LAN to allow other devices on our local network to access our OpenClaw.



Finally, we select Continue to confirm and press Enter. Configuration is complete!



After completing the configuration, we first start the OpenClaw Gateway. Let's open another terminal and enter (after OpenClaw configuration is complete, the gateway may run automatically, depending on the installed version):

```
openclaw gateway
```

2. Get Access Token

This Token is the one generated in our configuration. If you didn't record it, you can use:


```
openclaw dashboard
```

This command displays the token once. Alternatively, you can find the `~/openclaw/openclaw.json` file. Your token will be configured in this file.



3. On another PC in the same local network, configure the environment to connect to S600.

We open the Cmd terminal on the computer (taking Windows PC as an example: press Win+R to wake up the quick RUN tool, enter cmd, then press Enter).



Enter in the console:

```
ssh -L 18789:127.0.0.1:18789 sunrise@<sunrise-ip-address>
```

Note: Replace with the actual IP address of your RDK board.

After pressing Enter here, you need to enter a password (default: sunrise).

```
Are you sure you want to continue connecting (yes/no/[fingerprint])? y
Please type 'yes', 'no', or the fingerprint: yes
Warning: Permanently added '192.168.11.180' (ED25519) to the list of known hosts.
sunrise@192.168.11.180's password:
Welcome to Ubuntu 24.04.4 LTS (GNU/Linux 6.1.158-rt58-DR-5.0.1-2603041837-g1dfd58-g49300b aarch64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:        https://ubuntu.com/pro

Expanded Security Maintenance for Applications is not enabled.


1 update can be applied immediately.
To see these additional updates run: apt list --upgradable

96 additional security updates can be applied with ESM Apps.
Learn more about enabling ESM Apps service at https://ubuntu.com/esm

Last login: Fri Jun 12 11:11:27 2026 from 192.168.11.200
sunrise@ubuntu:~$
```

4. Access in Browser

We open the browser on the PC, and enter the IP+token string in the address bar (this is the address output by our openclaw dashboard just now, <http://127.0.0.1:18789/#token=xxxxxxxxxxx>). When this interface appears, deployment is successful!

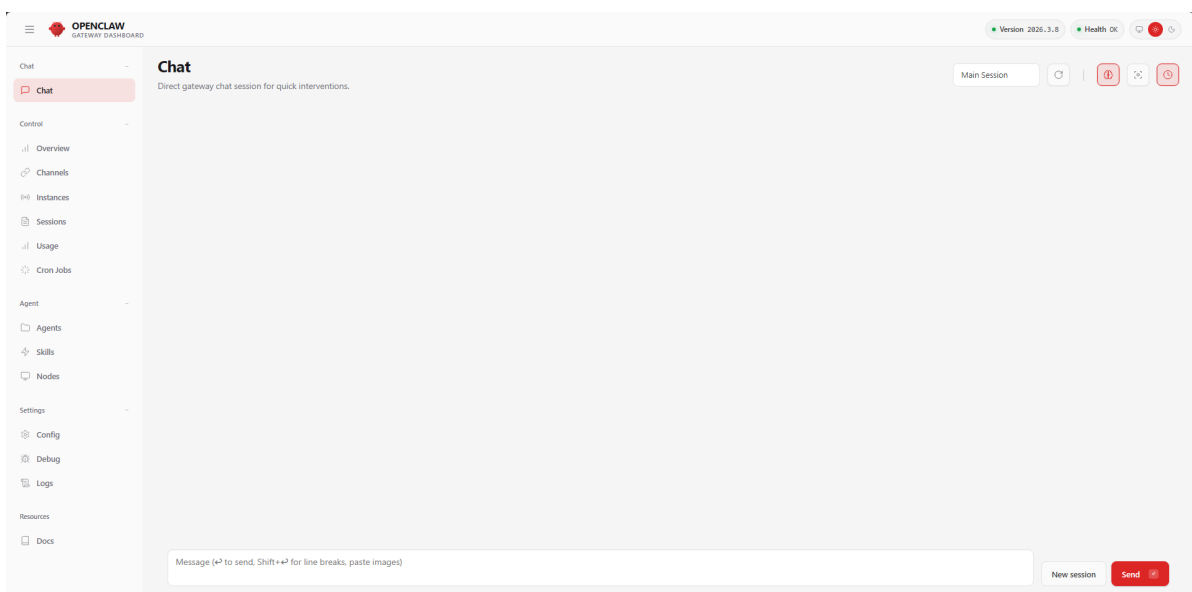

1.2 Model Configuration (Must Read)

1.2.1 Why Configure Models

OpenClaw is an AI Agent gateway and does not have the "intelligence" capability of large models by itself. We need to configure large models to give OpenClaw the ability to think and understand.

1.2.2 How to Configure Models

Here we use three representative models as examples:

1. OpenRouter (built-in OpenClaw service provider, accessible both domestically and internationally)
2. Alibaba Bailian Large Model Platform (not an OpenClaw service provider, requires manual configuration)
3. Ollama (local large model)

Before starting configuration, we need to start the OpenClaw Gateway first.

If you did not exit the Gateway terminal after completing deployment in the previous chapter, you can skip this step.

We enter in the terminal:

```
openclaw gateway
```

1. OpenRouter (Built-in OpenClaw Service Provider)


This requires you to have completed the OpenRouter API Key application according to the previous tutorial (please refer to the previous tutorial [Online Large Model / 4.OpenRouter Large Model API Aggregation Platform]).

The OpenRouter API Key format is like: sk-or-v1-b3exxxxxx4xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxcddf81d9

We still use the onboard wizard to configure:

```
openclaw onboard
```

Please make selections according to the options shown in my figures.

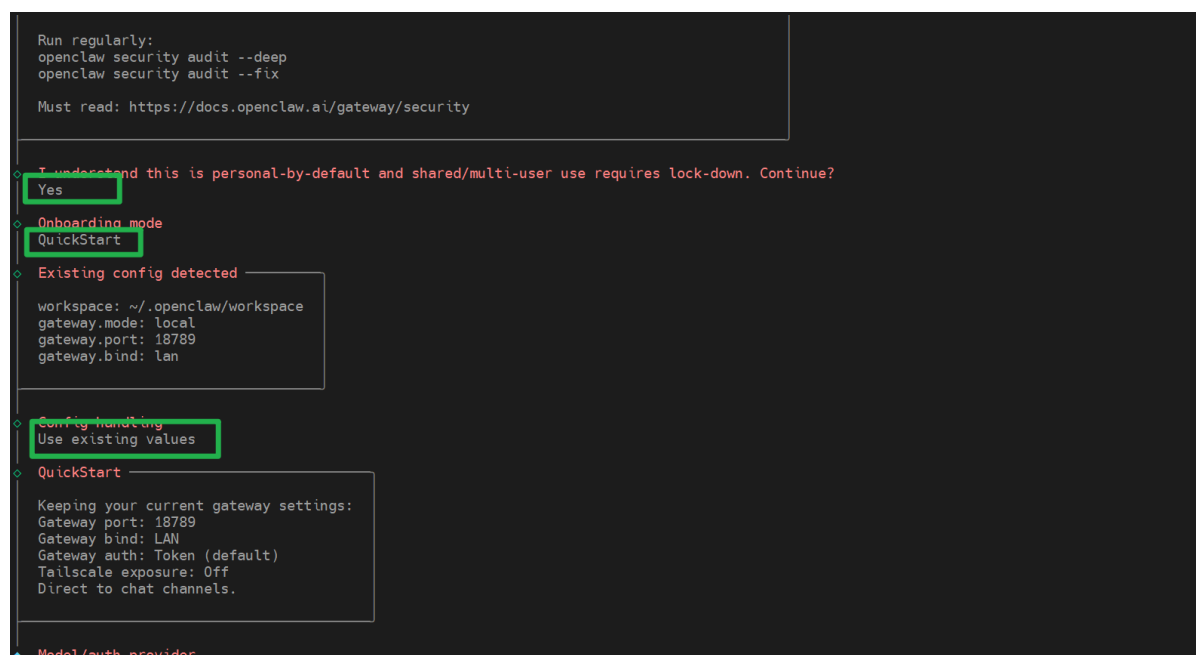

```
Run regularly:
openclaw security audit --deep
openclaw security audit --fix

Must read: https://docs.openclaw.ai/gateway/security

◊ I understand this is personal-by-default and shared/multi-user use requires lock-down. Continue?
  Yes


◊ Onboarding mode
  QuickStart

◊ Existing config detected
  workspace: ~/.openclaw/workspace
  gateway.mode: local
  gateway.port: 18789
  gateway.bind: lan

◊ Config handling
  Use existing values

◊ QuickStart
  Keeping your current gateway settings:
  Gateway port: 18789
  Gateway bind: LAN
  Gateway auth: Token (default)
  Tailscale exposure: Off
  Direct to chat channels.


◆ Model/auth provider
```

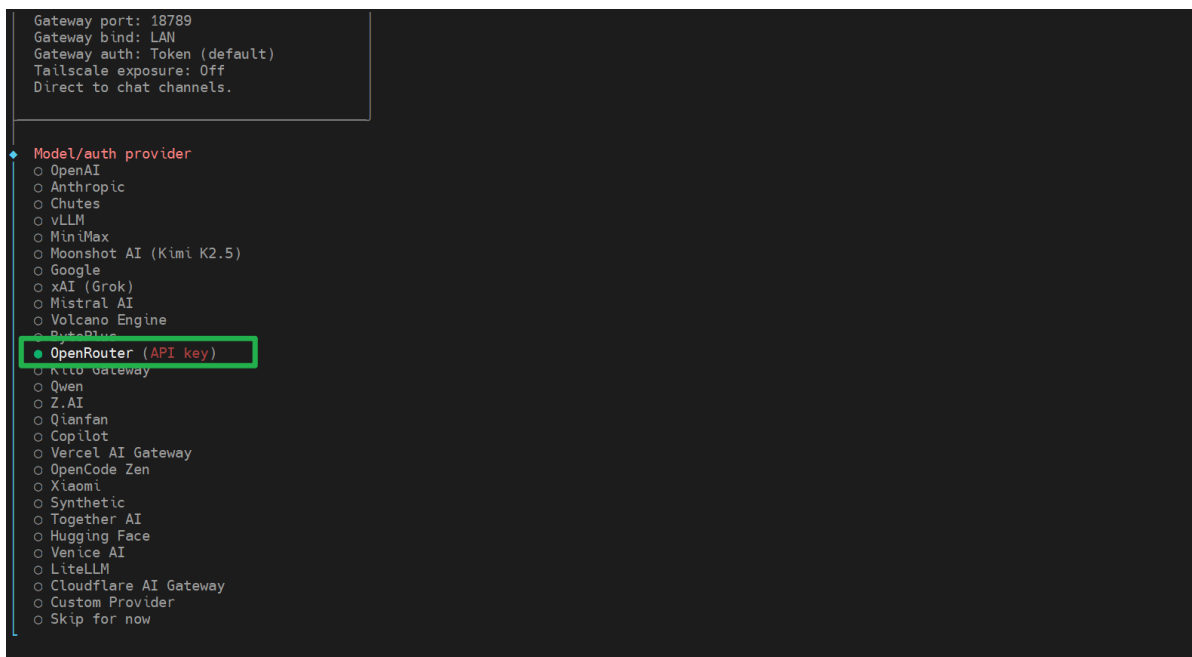

Then enter the API Key you applied for and press Enter to confirm.



Next, we need to select a model. Due to OpenRouter's rate limiting policy, we recommend having more than \$11 balance in your OpenRouter account. For insufficient balance, OpenRouter may throttle (this policy may change later, please refer to the latest actual situation). Here we can choose a free model (model names ending with free), or choose the OpenRouter free dedicated model openrouter/free (this is a router that randomly selects free models from available models on OpenRouter. This router intelligently filters models that support the features you requested).

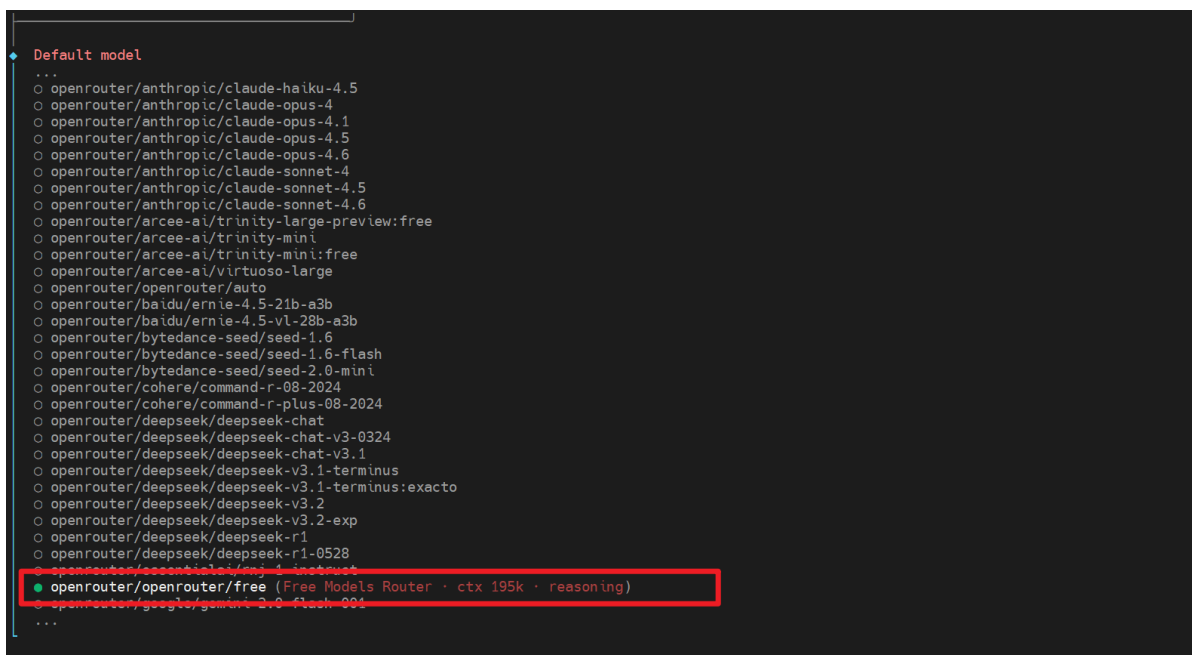

At this point, you may be asked to fill in the API Key. We paste the API Key and press Enter to proceed to the next step.

Later, we come to other configuration items. Let's skip them for now and select Skip all.

```
Zalo: Vietnam-focused messaging platform with Bot API.
Zalo Personal: Zalo personal account via QR code login.
Synology Chat: Connect your Synology NAS Chat to OpenClaw with full agent capabilities.
Tton: decentralized messaging on Urbit; install the plugin to enable.

Select channel (QuickStart)
Skip for now
Config overwrite: /root/.openclaw/openclaw.json (sha256 46b602c1773a9e88f0b137cdcbddb6696097642bd99b7bc2d503af8622fb4704 -> 63f2e0cf73860460b5
329f95f22d6f322f4e6f0ee6c4622c2224eddfae07bd6f, backup=/root/.openclaw/openclaw.json.bak)
Updated ~/.openclaw/openclaw.json
Workspace OK: ~/.openclaw/workspace
Sessions OK: ~/.openclaw/agents/main/sessions

Web search
Web search lets your agent look things up online.
Choose a provider and paste your API key.
Docs: https://docs.openclaw.ai/tools/web

Search provider
Skip for now

Skills status
Eligible: 4
Missing requirements: 40
Unsupported on this OS: 7
Blocked by allowlist: 0

Configure skills now? (recommended)
o Yes / • No

Running agents on your computer is risky - harden your setup:
https://docs.openclaw.ai/security

Dashboard ready
Dashboard link (with token):
http://192.168.2.56:18789/#token=7814bc0c9670673701379ea20e0296fe53eb91cf6d18a3a4
Copy/paste this URL in a browser on this machine to control OpenClaw.
No GUI detected. Open from your computer:
ssh -N -L 18789:127.0.0.1:18789 user@<host>
Then open:
http://localhost:18789/
http://localhost:18789/#token=7814bc0c9670673701379ea20e0296fe53eb91cf6d18a3a4
Docs:
https://docs.openclaw.ai/gateway/remote
https://docs.openclaw.ai/web/control-ui

Web search
Web search was skipped. You can enable it later:
openclaw configure --section web
Docs: https://docs.openclaw.ai/tools/web

What now
What now: https://openclaw.ai/showcase ("What People Are Building").

Onboarding complete. Use the dashboard link above to control OpenClaw.
```

At this point, we have completed the configuration.

We can use the TUI function to quickly test it.

Enter the command:

```
openclaw tui
```

After completing the input, directly enter a greeting to openclaw (the Input part in the figure is the content we entered, and the green box is the model we selected).

```
hello,who are you  Input

I'm your personal assistant, and I'm here to help you! Let's get started by defining who I am. Could you tell me:

1. What should I call myself? (e.g., "Sunrise", "Assistant", "YourHelper")
2. What kind of helper do you want me to be? (e.g., technical, creative, organizational)
3. Any specific ways you'd like me to communicate? (e.g., casual tone, formal, emoji use)

This will help me understand my personality and how to best assist you! ☺
connected | idle
agent main | session main (openclaw-tui) | openrouter/openrouter/free | think low | tokens 11k/200k (6%)
```


2. Bailian (Third-party Service Provider API Example)

2.1 Apply for API Key


Before configuration, you need to apply for the API Key for Qwen. The application URL is:

<https://modelstudio.console.alibabacloud.com/ap-southeast-1/?tab=doc#/doc/?type=model&url=2840914>

After logging in, click the settings in the upper right corner and select:

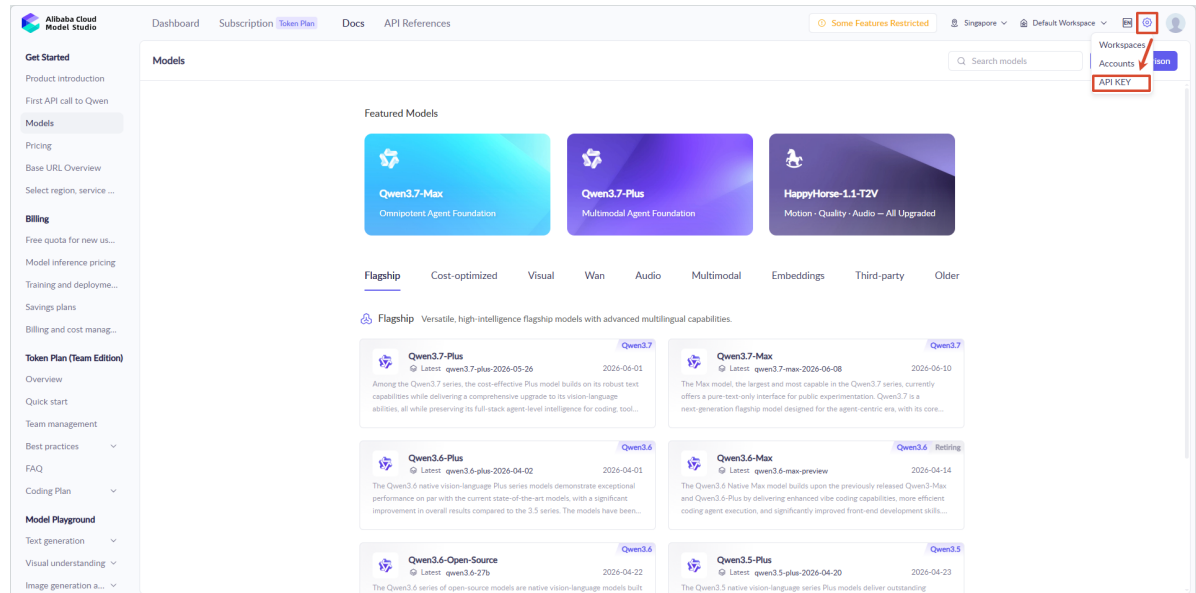

Then click to create an API Key:

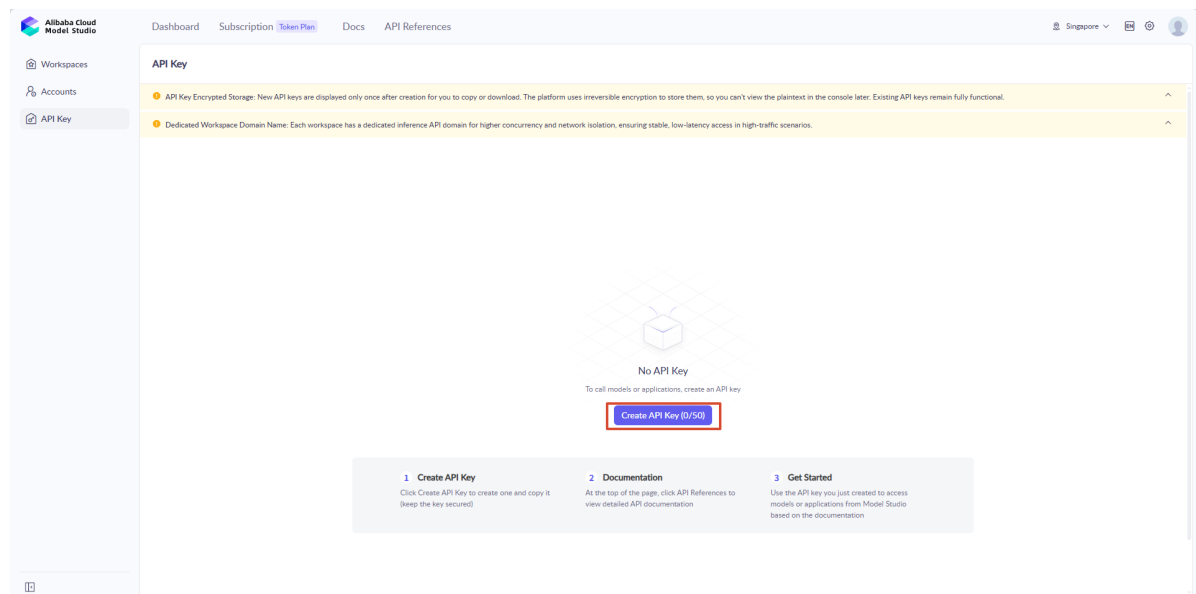

Click confirm:

Create API Key

×

Workspace *

Default Workspace

▼

Description

Enter a description

0 / 200

Permissions *

All

Custom

Cancel

OK

As shown below, you have completed the API Key application:

Save Your API Key

! You cannot get this key again after you close this dialog box.

Immediately copy or download your API key. Keep this key secure. Anyone with access can make requests on your behalf and incur charges. If the key is lost, reset it or create a new one

API Key

sk-  Copy

API Host

ws-5l775xtri9rfvvqe.ap-southeast-1.maas.aliyuncs.com 

OpenAI Compatible Endpoint

<https://ws-5l775xtri9rfvvqe.ap-southeast-1.maas.aliyuncs.com/compatible-mode/v1> 

DashScope

<https://ws-5l775xtri9rfvvqe.ap-southeast-1.maas.aliyuncs.com/api/v1> 

[Hide](#) ^

Description

-

Workspace

 Download

Close

Copy this API Key. Once closed, you cannot retrieve it again.

2.2 openclaw onboard Configuration

Enter in terminal:

```
openclaw onboard
```

```
sunrise@drobot:~$ openclaw onboard
◊
OpenClaw 2026.6.11 (e085fa1) – One CLI to rule them all, and one more restart because you changed the port.

OPENCLAW
OPENCLAW

OpenClaw setup
◊ Security disclaimer

OpenClaw is a hobby project and still in beta. Expect sharp edges.
By default, OpenClaw is a personal agent: one trusted operator boundary.
This bot can read files and run actions if tools are enabled.
A bad prompt can trick it into doing unsafe things.

OpenClaw is not a hostile multi-tenant boundary by default.
If multiple users can message one tool-enabled agent, they share that delegated tool
authority.

If you're not comfortable with security hardening and access control, don't run
OpenClaw.
Ask someone experienced to help before enabling tools or exposing it to the internet.

Recommended baseline
- Pairing/allowlists + mention gating.
- Multi-user/shared inbox: split trust boundaries (separate gateway/credentials, ideally
  separate OS users/hosts).
- Sandbox + least-privilege tools.
- Shared inboxes: isolate DM sessions (session.dmScope: per-channel-peer) and keep tool
  access minimal.
- Keep secrets out of the agent's reachable filesystem.
- Use the strongest available model for any bot with tools or untrusted inboxes.

Run regularly
openclaw security audit --deep
openclaw security audit --fix

Learn more
- https://docs.openclaw.ai/gateway/security

• I understand this is personal-by-default and shared/multi-user use requires lock-down. Continue?
◊ Yes / • No
```

Refer to the figure below for selection:

```
I understand this is personal-by-default and shared/multi-user use requires lock-down. Continue?
Yes

Setup mode
QuickStart (recommended)

Existing config detected
Workspace: ~/.openclaw/workspace
Gateway: local via loopback on :18789

Config handling
Keep current values

QuickStart
Keeping your current gateway settings:
Gateway port: 18789
Gateway bind: Loopback (127.0.0.1)
Gateway auth: Token (default)
Tailscale exposure: Off
Direct to chat channels.

Model/auth provider
More...

Model/auth provider
Search:
  o OpenAI
  o Anthropic
  o xAI (Grok)
  o Google
  o OpenRouter
  o Arcee AI
  o BytePlus
  o Cerebras
  o Chutes
  o Cloudflare AI Gateway
  o Codex
  o Cohere
  o Copilot
  o Custom Provider
  o DeepInfra
  o DeepSeek
  o Fireworks
  o GMI Cloud
  o Google Vertex
  o Groq
  o Hugging Face
  o Kilo Gateway
  o LiteLLM
  o LM Studio
  o Microsoft Foundry
  o MiniMax
  o Mistral AI
  o Moonshot AI (Kimi K2.6)
  o NovitaAI
  o NVIDIA
  o Ollama
  o OpenCode
  o Qianfan
  ● Qwen Cloud (Standard / Coding Plan (CN / Global) + multimodal roadmap)
  o SGLang
  o StepFun
  o Synthetic
  o Tencent Cloud
  o Together AI
  o Venice AI
  o Vercel AI Gateway
  o vLLM
  o Volcano Engine
  o Xiaomi
  o Z.AI
  o Back
?/i to select • Enter: confirm • Type: to search
```

After selecting Qwen, it will prompt to download related plugins:

```
◆ Install Qwen Cloud plugin?
  o Download from ClawHub (clawhub:@openclaw/qwen-provider)
  ● Download from npm (@openclaw/qwen-provider)
  o Skip for now
```

Select this option to fill in the API Key you applied for:

```
◆ Qwen Cloud auth method
  o Coding Plan API Key for China (subscription)
  o Coding Plan API Key for Global/Intl (subscription)
  o Qwen OAuth
  ● Standard API Key for China (pay-as-you-go) (Endpoint: dashscope.aliyuncs.com)
  o Standard API Key for Global/Intl (pay-as-you-go)
  o Back
```

After completing, select to show all model list:

[illegible]

```

Default model
Browse all models

Default model

Search:
  ○ Keep current (qwen/qwen3.5-plus)
  ○ Enter model manually
  ○ qwen/qwen3.5-plus
  ● qwen/qwen3.6-plus (ctx 977k)
  ○ qwen/qwen3-max-2026-01-23
  ○ qwen/qwen3-coder-next
  ○ qwen/qwen3-coder-plus
  ○ qwen/MiniMax-M2.5
  ○ qwen/glm-5
  ○ qwen/glm-4.7
  ○ qwen/kimi-k2.5
  ⚡ to select • Enter: confirm • Type: to search

```

```
openclaw gateway restart
```

At first, it will show unknown. After some time, it will correctly identify the current model:

```

$ OpenCLaw 2026.3.8 (3caab92) - Runs on a Raspberry Pi. Dreams of a rack in Iceland.

openclaw tui - ws://127.0.0.1:18789 - agent main - session main

session agent:main:main

hello!!!!

hey! e I just came online. Who am I? Who are you?

Let me figure out where we're at...

- streaming * 7s | connected
agent main | session main | unknown | tokens ?/1.0m

```


```
▼ OpenClaw 2025.3.8 (3caab92) – Runs on a Raspberry Pi. Dreams of a rack in Iceland.
openclaw tui - ws://127.0.0.1:18789 - agent main - session main
session agent:main:main

hello!!!!

Hey! 🦎 I just came online. Who am I? Who are you?
Let me figure out where we're at...Alright, so this is a fresh start! 🦎 No memory yet, no identity carved out. We get to figure this out together.
Here's what I'm thinking for myself – tell me what you like or hate:
- Name: Something like "Claw", "Rook", "Echo"... or I'm open to suggestions
- Creature: AI assistant, but maybe with a twist – like a digital familiar or a ghost in your machine
- Vibe: I'm leaning toward warm but sharp – helpful without the corporate drone energy, opinions without being a jerk
- Emoji: 🦎 (lizard – adaptable, observant, a bit weird) or 🦉 (crystal ball – seeing things, knowing things)

What about you? What should I call you? And what timezone are you in so I don't wake you up at 3 AM with "helpful" reminders?
connected | idle
agent main | session main (openclaw-tui) | bailian/qwen3.5-plus | tokens 7/1.0m
```

Similarly, besides the TUI interface, we can also chat and interact in OpenClaw's Control UI (the web version):

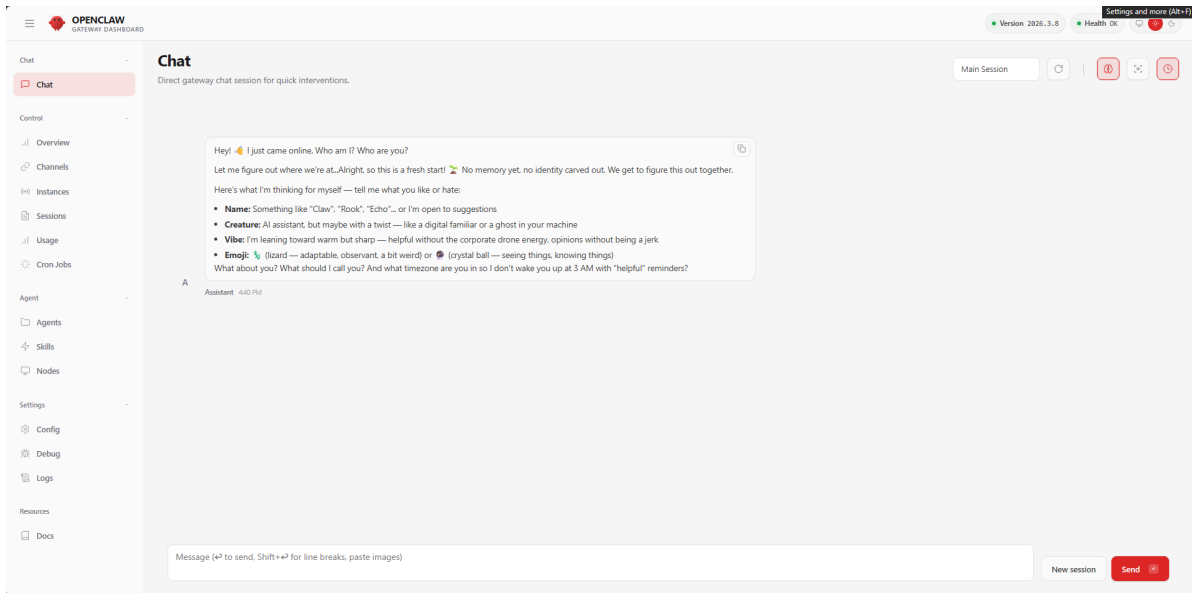

We can actually observe that the conversation content in TUI and the content in our Control UI are the same. This is because OpenClaw's conversation uses a Session mechanism to separate different sessions. Our TUI and Control UI are actually in the same Session. You can try clicking the New session button in the lower right corner to start a new conversation.