

Open WebUI

Open WebUI

- Environmental requirements
- Docker setup
 - Official installation of Docker
 - Alibaba Cloud installation of Docker
- Open WebUI installation
- Open WebUI operation
 - Administrator account
 - Register and log in
 - Use interface
- Model dialogue
 - Switch model
- Common Problems
 - Close Open WebUI
 - Common Errors
 - Unable to start Open WebUI
 - Service connection timed out

Users who use the AI large model image have already set up the environment, and all the setup-related operations in the tutorial do not need to be performed. You can jump directly to running.

Demonstration Environment

Development Board: RDK X5

SD (TF) Card: 64G

RDK X5 (8G RAM): Runs models with 8B and below parameters
RDK X5 (4G RAM): Runs models with 3B and below parameters

Open WebUI is an open source project that aims to provide a simple and easy-to-use user interface (UI) for managing and monitoring open source software and services.

There is a high probability that there will be no response or timeout in the dialogue when using Open WebUI. You can try to restart Open WebUI or use the Ollama tool to run the model instead!

Environmental requirements

Host and Conda installation of Open WebUI: requires Node.js >= 20.10, Python = 3.11:

Environment Setup Method	Difficulty (relative)
Host	High
Conda	Medium
Docker	Low

The tutorial demonstrates the installation of Open WebUI with Docker.

Docker setup

Official installation of Docker

If Docker is not installed, you can use a script to install Docker with one click.

The image we provide has Docker installed, so you don't need to install it yourself!
Domestic users may not be able to install Docker through the official method. We recommend using Alibaba Cloud to install Docker or using our image directly.

- Update the local package list

```
sudo apt update
```

- Download and run the script

Download the get-docker.sh file and save it in the current directory.

```
sudo apt install curl
```

```
curl -fsSL https://get.docker.com -o get-docker.sh
```

Run the get-docker.sh script file with sudo permission.

```
sudo sh get-docker.sh
```

Alibaba Cloud installation of Docker

If you cannot install it yourself, please use the image we provide.

- Update the local package list

```
sudo apt update
```

- Install necessary software

```
sudo apt install apt-transport-https ca-certificates curl gnupg2 lsb-release  
software-properties-common
```

- Add the GPG key for the software source

```
curl -fsSL https://mirrors.aliyun.com/docker-ce/linux/debian/gpg | sudo gpg --  
dearmor -o /usr/share/keyrings/docker-archive-keyring.gpg
```

- Add Alibaba Cloud mirror software source

```
echo "deb [arch=arm64 signed-by=/usr/share/keyrings/docker-archive-keyring.gpg]  
https://mirrors.aliyun.com/docker-ce/linux/debian bookworm stable" | sudo tee  
/etc/apt/sources.list.d/docker.list > /dev/null
```


- Install Docker

```
sudo apt update
sudo apt install docker-ce docker-ce-cli containerd.io docker-compose-plugin
```

Open WebUI installation

For systems with Docker installed, you can directly enter the following command in the terminal:

```
sudo docker pull ghcr.io/open-webui/open-webui:main
```

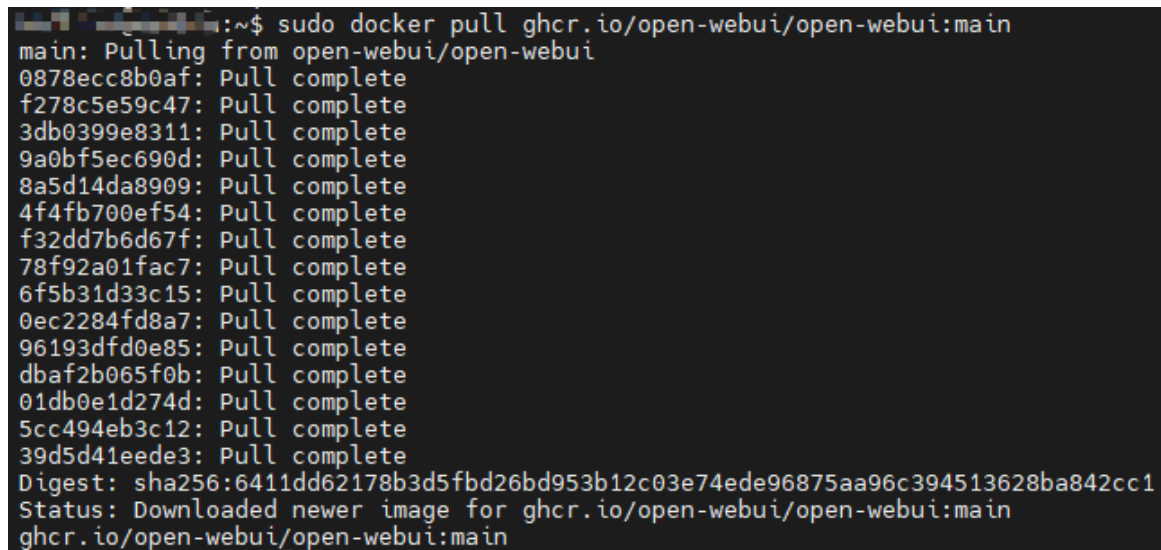

```
root@kali:~# sudo docker pull ghcr.io/open-webui/open-webui:main
main: Pulling from open-webui/open-webui
0878ecc8b0af: Pull complete
f278c5e59c47: Pull complete
3db0399e8311: Pull complete
9a0bf5ec690d: Pull complete
8a5d14da8909: Pull complete
4f4fb700ef54: Pull complete
f32dd7b6d67f: Pull complete
78f92a01fac7: Pull complete
6f5b31d33c15: Pull complete
0ec2284fd8a7: Pull complete
96193dfd0e85: Pull complete
dbaf2b065f0b: Pull complete
01db0e1d274d: Pull complete
5cc494eb3c12: Pull complete
39d5d41eede3: Pull complete
Digest: sha256:6411dd62178b3d5fbd26bd953b12c03e74ede96875aa96c394513628ba842cc1
Status: Downloaded newer image for ghcr.io/open-webui/open-webui:main
ghcr.io/open-webui/open-webui:main
```

Open WebUI operation

Enter the following command in the terminal to start the specified Docker:

```
sudo docker run --network=host -v open-webui:/app/backend/data -e
OLLAMA_BASE_URL=http://127.0.0.1:11434 --name open-webui --restart always
ghcr.io/open-webui/open-webui:main
```

```

INFO [alembic.runtime.migration] Running upgrade d31026856c01 -> 018012973d35, Add indexes
INFO [alembic.runtime.migration] Running upgrade 018012973d35 -> 3af16a1c9fb6, update user table
INFO [alembic.runtime.migration] Running upgrade 3af16a1c9fb6 -> 38d63c18f30f, Add oauth_session table
WARNI [open_webui.env]

WARNING: CORS_ALLOW_ORIGIN IS SET TO '*' - NOT RECOMMENDED FOR PRODUCTION DEPLOYMENTS.

INFO [open_webui.env] VECTOR_DB: chroma
INFO [open_webui.env] Embedding model set: sentence-transformers/all-MiniLM-L6-v2
WARNI [langchain_community.utils.user_agent] USER_AGENT environment variable not set, consider setting it to identify your requests.
INFO: Started server process [1]
INFO: Waiting for application startup.
Creating knowledge table
Migrating data from document table to knowledge table
Converting 'chat' column to JSON
Renaming 'chat' column to 'old_chat'
Adding new 'chat' column of type JSON
Dropping 'old_chat' column
Primary Key: {'name': None, 'constrained_columns': []}
Unique Constraints: [{'name': 'uq_id_user_id', 'column_names': ['id', 'user_id']}]
Indexes: [{'name': 'tag_id', 'column_names': ['id'], 'Unique': 1, 'dialect_options': {}}]
Creating new primary key with 'id' and 'user_id'.
Dropping unique constraint: uq_id_user_id
Dropping unique index: tag_id

OPEN WEBUI

v0.6.30 - building the best AI user interface.

https://github.com/open-webui/open-webui

2025-09-19 09:40:24.707 | INFO | open_webui.utils.logger:start_logger:162 - GLOBAL_LOG_LEVEL: INFO
2025-09-19 09:40:24.709 | INFO | open_webui.main:lifespan:541 - Installing external dependencies of functions and tools...
2025-09-19 09:40:24.775 | INFO | open_webui.utils.plugin:install_frontmatter_requirements:241 - No requirements found in frontmatter.

```

After successful startup, use the following URL in your browser to access it:

```
http://localhost:8080/
```

Or use the motherboard IP:8080

Administrator account


When you use it for the first time, you need to register an account yourself. This account is an administrator account, and the information can be filled in as required!

```

Since all the content of our image has been set up and tested, users can log in
directly with the account we registered:
Username: yahboom
Email: yahboom@163.com
Password: yahboom

```

Register and log in

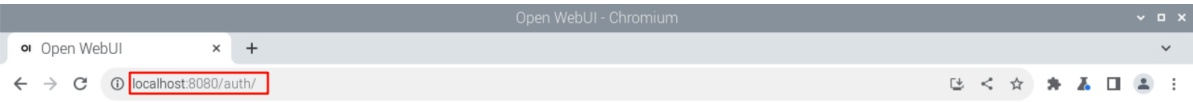

Sign in to Open WebUI

Email

Password

Sign in

Don't have an account? [Sign up](#)

Get started with Open WebUI

① Open WebUI does not make any external connections, and your data stays securely on your locally hosted server.

Name

yahboom


Email

yahboom@163.com


Password

.....

Create Admin Account

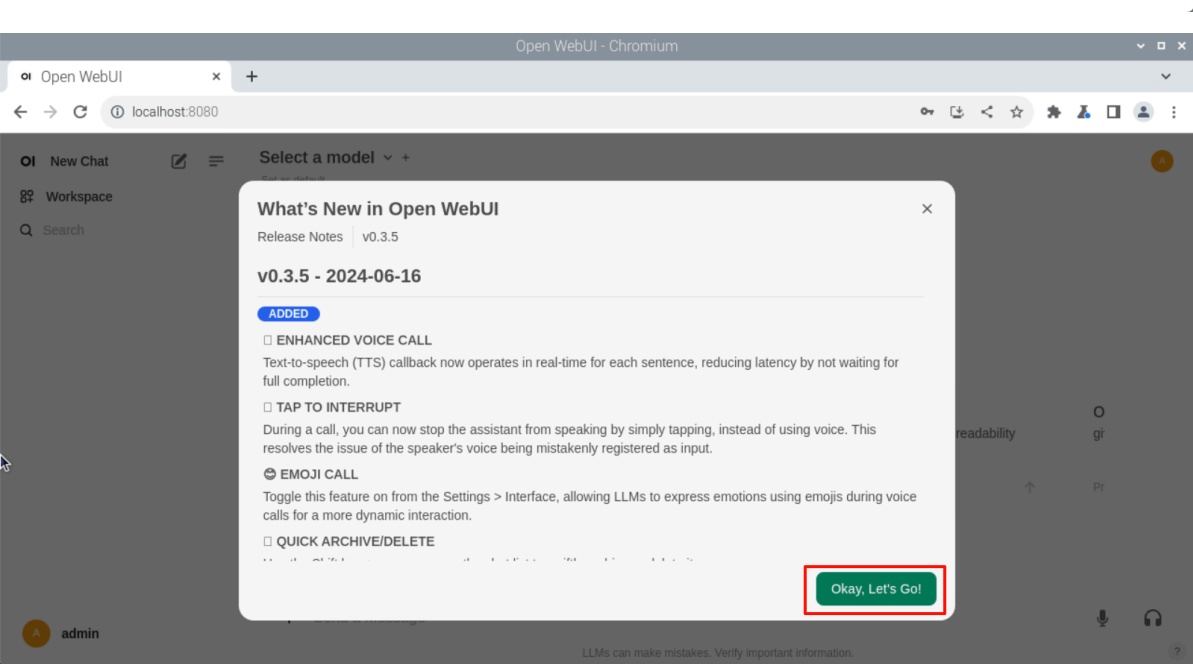

Use interface

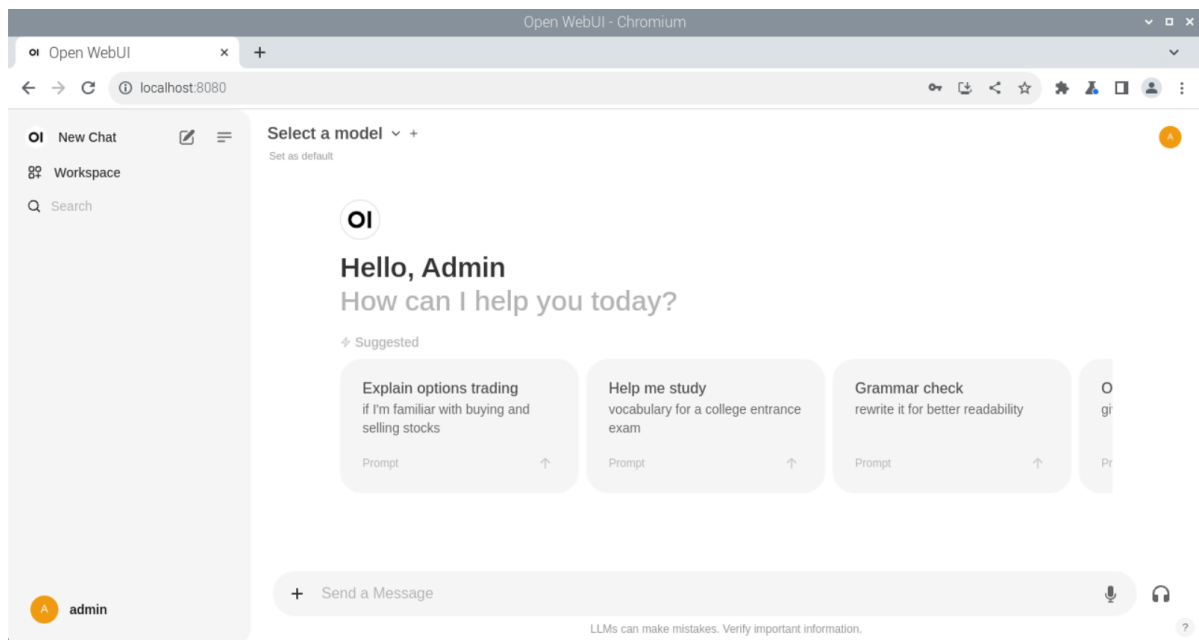

Model dialogue


Dialogue with Open WebUI will be slower than running directly with the Ollama tool, and may even experience timeout service connection failures. This is related to the motherboard's memory and cannot be avoided!

Users with ideas can switch to other Linux environments to build Ollama tools and open webui tools for dialogue.

Switch model

Click `select a model` to select a specified model for dialogue.

The model pulled by ollama will be automatically added to the open webui model options. Refresh the webpage and the new model will appear!

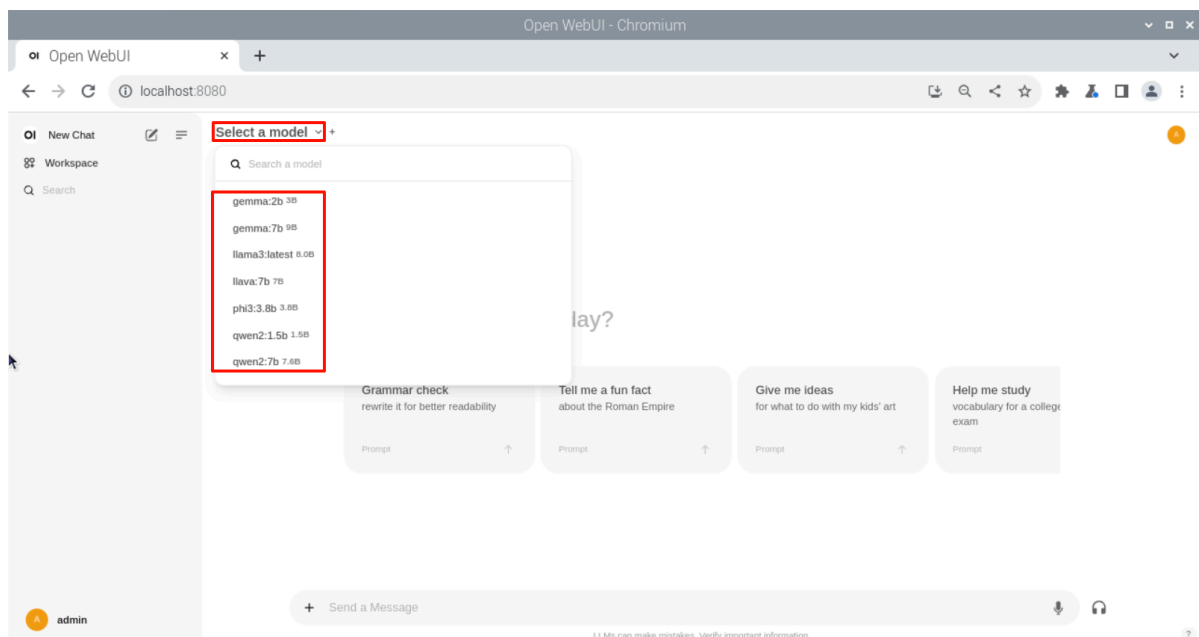

Common Problems

Close Open WebUI

Close the auto-starting Open WebUI.

- View running Docker

```
docker ps
```

- Close the running Docker

```
docker stop [CONTAINER ID] # Example docker stop 5f42ee9cf784
```

- View stopped containers

```
docker ps -a
```

- Clean up stopped containers

```
docker rm [CONTAINER ID] # Example docker rm 5f42ee9cf784
```

Clean up all stopped containers:

```
docker container prune
```

Common Errors

Unable to start Open WebUI

- docker: Error response from daemon: Conflict. The container name "/open-webui" is already in use by container "cfc05c84f8e38b290337e7178c76fd1c49076f94b11ed3d49d9448be72b7f20f". You have to remove (or rename) that container to be able to reuse that name.

Solution: Close Open WebUI once and restart it!

Service connection timed out

- Open WebUI: Server Connection Error

Close Open WebUI once and restart it, then ask the question again or switch to the Ollama tool to run the model and ask the question!