

# 1. OpenClaw Deployment

---

===== 【NOTE】 =====

This section provides the complete installation and deployment tutorial for OpenClaw, which involves many steps. If you want to quickly use OpenClaw, please

follow the tutorial in the first section of this chapter 【01.OpenClaw Quick Start】

=====

## 1. OpenClaw Deployment

### 1.1 OpenClaw Installation

#### 1.1.1 Install OpenClaw

#### 1.1.2 Use QuickStart Installation

#### 1.1.3 Open OpenClaw Control UI on PC (Windows)

### 1.2 Configure Models (Must Read)

#### 1.2.1 Why Configure Models

#### 1.2.2 How to Configure Models

#### 1. OpenRouter (OpenClaw Built-in Service Provider)

#### 2. Bailian (Third-party Service Provider API Example)

This chapter will cover two parts:

- OpenClaw Installation
- Configure Models (OpenRouter / Bailian / Ollama)

---

## 1.1 OpenClaw Installation

---

OpenClaw Official Website: <https://openclaw.ai/>

Open Source Project Address: <https://github.com/openclaw/openclaw>

### 1.1.1 Install OpenClaw

### 1.1.2 Use QuickStart Installation

We use the installation script provided by OpenClaw official

```
curl -fsSL https://openclaw.ai/install.sh | bash
```

```
♥ OpenClaw Installer
Your messages, your servers, Meta's tears.

✓ Detected: linux

Install plan
OS: linux
Install method: npm
Requested version: latest

[1/3] Preparing environment
  Node.js not found, installing it now
  Installing Node.js via NodeSource
  Installing Linux build tools (make/g++/cmake/python3)
  Build tools installed
  Node.js v22 installed
  Active Node.js: v22.22.1 (/usr/bin/node)
  Active npm: 10.9.4 (/usr/bin/npm)

[2/3] Installing OpenClaw
  Git already installed
  Installing OpenClaw v2026.3.7
  OpenClaw npm package installed
  OpenClaw installed

[3/3] Finalizing setup

♥ OpenClaw installed successfully (2026.3.7)!
Settled in. Time to automate your life whether you're ready or not.

  Starting setup

♥ OpenClaw 2026.3.7 (42a1394) – I run on caffeine, JSON5, and the audacity of "it worked on my machine."
```

During this process, the installation script will automatically detect missing environments and assist us with one-click installation

During installation, use the keyboard arrow keys to select options, space bar to select/deselect, and Enter key to confirm and configure

```
♥ OpenClaw 2026.3.7 (42a1394) – I run on caffeine, JSON5, and the audacity of "it worked on my machine."

OPENCRAW
♥ OPENCRAW ♥

OpenClaw onboarding
◇ Security
  Security warning – please read.

  OpenClaw is a hobby project and still in beta. Expect sharp edges.
  By default, OpenClaw is a personal agent: one trusted operator boundary.
  This bot can read files and run actions if tools are enabled.
  A bad prompt can trick it into doing unsafe things.

  OpenClaw is not a hostile multi-tenant boundary by default.
  If multiple users can message one tool-enabled agent, they share that delegated tool
  authority.

  If you're not comfortable with security hardening and access control, don't run
  OpenClaw.
  Ask someone experienced to help before enabling tools or exposing it to the internet.

  Recommended baseline:
  - Pairing/allowlists + mention gating.
  - Multi-user/shared inbox: split trust boundaries (separate gateway/credentials, ideally
    separate OS users/hosts).
  - Sandbox + least-privilege tools.
  - Shared inboxes: isolate DM sessions ('session.dmScope: per-channel-peer') and keep
```

```
A bad prompt can trick it into doing unsafe things.

OpenClaw is not a hostile multi-tenant boundary by default.
If multiple users can message one tool-enabled agent, they share that delegated tool
authority.

If you're not comfortable with security hardening and access control, don't run
OpenClaw.
Ask someone experienced to help before enabling tools or exposing it to the internet.

Recommended baseline:
- Pairing/allowlists + mention gating.
- Multi-user/shared inbox: split trust boundaries (separate gateway/credentials, ideally
  separate OS users/hosts).
- Sandbox + least-privilege tools.
- Shared inboxes: isolate DM sessions ('session.dmScope: per-channel-peer') and keep
  tool access minimal.
- Keep secrets out of the agent's reachable filesystem.
- Use the strongest available model for any bot with tools or untrusted inboxes.

Run regularly:
openclaw security audit --deep
openclaw security audit --fix

Must read: https://docs.openclaw.ai/gateway/security
```

- ◊ I understand this is personal-by-default and shared/multi-user use requires lock-down. Continue?  
Yes
- ◆ Onboarding mode
  - QuickStart (Configure details later via openclaw configure.)
  - Manual

Here we use the QuickStart option to quickly complete OpenClaw installation, we can leave specific configurations for later

If you haven't applied for any API Key, we can choose Skip here, and configure later

```
Tailscale exposure: Off
Direct to chat channels.
```

- ◆ Model/auth provider
  - OpenAI
  - Anthropic
  - Chutes
  - vLLM
  - MiniMax
  - Moonshot AI (Kimi K2.5)
  - Google
  - xAI (Grok)
  - Mistral AI
  - Volcano Engine
  - BytePlus
  - OpenRouter
  - Kilo Gateway
  - Qwen
  - Z.AI
  - Qianfan
  - Copilot
  - Vercel AI Gateway
  - OpenCode Zen
  - Xiaomi
  - Synthetic
  - Together AI
  - Hugging Face
  - Venice AI
  - LiteLLM
  - Cloudflare AI Gateway
  - Custom Provider
  - Skip for now

Tailscale exposure: Off  
Direct to chat channels.

- ◊ Model/auth provider
  - Skip for now
- ◆ Filter models by provider
  - All providers
    - amazon-bedrock
    - anthropic
    - azure-openai-responses
    - cerebras
    - github-copilot
    - google
    - google-antigravity
    - google-gemini-cli
    - google-vertex
    - groq
    - huggingface
    - kimi-coding
    - minimax
    - minimax-cn
    - mistral
    - ollama
    - openai
    - openai-codex
    - opencode
    - openrouter
    - vercel-ai-gateway
    - xai
    - zai

For models here we choose to keep the default (configure later)

All providers

- ◆ Default model
  - Keep current (default: anthropic/claude-opus-4-6)
    - Enter model manually
    - amazon-bedrock/anthropic.claude-3-haiku-20240307-v1:0
    - amazon-bedrock/anthropic.claude-3-5-haiku-20241022-v1:0
    - amazon-bedrock/anthropic.claude-haiku-4-5-20251001-v1:0
    - amazon-bedrock/eu.anthropic.claude-haiku-4-5-20251001-v1:0
    - amazon-bedrock/global.anthropic.claude-haiku-4-5-20251001-v1:0
    - amazon-bedrock/us.anthropic.claude-haiku-4-5-20251001-v1:0
    - amazon-bedrock/anthropic.claude-3-opus-20240229-v1:0
    - amazon-bedrock/anthropic.claude-opus-4-20250514-v1:0
    - amazon-bedrock/us.anthropic.claude-opus-4-20250514-v1:0
    - amazon-bedrock/anthropic.claude-opus-4-1-20250805-v1:0
    - amazon-bedrock/us.anthropic.claude-opus-4-1-20250805-v1:0
    - amazon-bedrock/anthropic.claude-opus-4-5-20251101-v1:0
    - amazon-bedrock/eu.anthropic.claude-opus-4-5-20251101-v1:0
    - amazon-bedrock/global.anthropic.claude-opus-4-5-20251101-v1:0
    - amazon-bedrock/us.anthropic.claude-opus-4-5-20251101-v1:0
    - amazon-bedrock/anthropic.claude-opus-4-6-v1
    - amazon-bedrock/eu.anthropic.claude-opus-4-6-v1
    - amazon-bedrock/global.anthropic.claude-opus-4-6-v1
    - amazon-bedrock/us.anthropic.claude-opus-4-6-v1
    - amazon-bedrock/anthropic.claude-3-sonnet-20240229-v1:0
    - amazon-bedrock/anthropic.claude-3-5-sonnet-20240620-v1:0
    - amazon-bedrock/anthropic.claude-3-5-sonnet-20241022-v2:0
    - amazon-bedrock/anthropic.claude-3-7-sonnet-20250219-v1:0
    - amazon-bedrock/anthropic.claude-sonnet-4-20250514-v1:0
    - amazon-bedrock/eu.anthropic.claude-sonnet-4-20250514-v1:0
    - amazon-bedrock/global.anthropic.claude-sonnet-4-20250514-v1:0
    - amazon-bedrock/us.anthropic.claude-sonnet-4-20250514-v1:0
    - amazon-bedrock/anthropic.claude-sonnet-4-5-20250929-v1:0
    - ...

Select Channel here is mainly used for communication with third-party APPs, we still skip for now

```
Microsoft Teams: Bot Framework; enterprise support.
Mattermost: self-hosted Slack-style chat; install the plugin to enable.
Nextcloud Talk: Self-hosted chat via Nextcloud Talk webhook bots.
Matrix: open protocol; install the plugin to enable.
BlueBubbles: iMessage via the BlueBubbles mac app + REST API.
Zalo: Vietnam-focused messaging platform with Bot API.
Zalo Personal: Zalo personal account via QR code login.
Synology Chat: Connect your Synology NAS Chat to OpenClaw with full agent capabilities.
Tlon: decentralized messaging on Urbit; install the plugin to enable.
```

- ◆ **Select channel (QuickStart)**
  - Telegram (Bot API)
  - WhatsApp (QR link)
  - Discord (Bot API)
  - IRC (Server + Nick)
  - Google Chat (Chat API)
  - Slack (Socket Mode)
  - Signal (signal-cli)
  - iMessage (img)
  - LINE (Messaging API)
  - Feishu/Lark (飞书)
  - Nostr (NIP-04 DMs)
  - Microsoft Teams (Bot Framework)
  - Mattermost (plugin)
  - Nextcloud Talk (self-hosted)
  - Matrix (plugin)
  - BlueBubbles (macOS app)
  - Zalo (Bot API)
  - Zalo (Personal Account)
  - Synology Chat (Webhook)
  - Tlon (Urbit)
- **Skip for now** (You can add channels later via `openclaw channels add`)

Search provider is the API provider for search services, we choose to skip

```
Microsoft Teams: Bot Framework; enterprise support.
Mattermost: self-hosted Slack-style chat; install the plugin to enable.
Nextcloud Talk: Self-hosted chat via Nextcloud Talk webhook bots.
Matrix: open protocol; install the plugin to enable.
BlueBubbles: iMessage via the BlueBubbles mac app + REST API.
Zalo: Vietnam-focused messaging platform with Bot API.
Zalo Personal: Zalo personal account via QR code login.
Synology Chat: Connect your Synology NAS Chat to OpenClaw with full agent capabilities.
Tlon: decentralized messaging on Urbit; install the plugin to enable.
```

- ◆ **Select channel (QuickStart)**
    - Skip for now
- Updated ~/.openclaw/openclaw.json  
Workspace OK: ~/.openclaw/workspace  
Sessions OK: ~/.openclaw/agents/main/sessions
- ◆ **Web search**
    - Web search lets your agent look things up online.  
Choose a provider and paste your API key.  
Docs: <https://docs.openclaw.ai/tools/web>
- ◆ **Search provider**
    - Perplexity Search
    - Brave Search
    - Gemini (Google Search)
    - Grok (xAI)
    - Kimi (Moonshot)
  - **Skip for now** (Configure later with `openclaw configure --section web`)

Configure "Skills" skills, we choose not to configure for now (select no)

```
Zalo Personal: Zalo personal account via QR code login.
Synology Chat: Connect your Synology NAS Chat to OpenClaw with full agent capabilities.
Tlon: decentralized messaging on Orbit; install the plugin to enable.

◊ Select channel (QuickStart)
| Skip for now
Updated ~/.openclaw/openclaw.json
Workspace OK: ~/.openclaw/workspace
Sessions OK: ~/.openclaw/agents/main/sessions

◊ Web search
Web search lets your agent look things up online.
Choose a provider and paste your API key.
Docs: https://docs.openclaw.ai/tools/web

◊ Search provider
Skip for now

◊ Skills status
Eligible: 4
Missing requirements: 40
Unsupported on this OS: 7
Blocked by allowlist: 0

◆ Configure skills now? (recommended)
○ Yes / ● No
```

Configure Hooks hooks, we press space bar to select "Skip for now", then press Enter key to confirm

```
Docs: https://docs.openclaw.ai/tools/web

◊ Search provider
Skip for now

◊ Skills status
Eligible: 4
Missing requirements: 40
Unsupported on this OS: 7
Blocked by allowlist: 0

◊ Configure skills now? (recommended)
No

◊ Hooks
Hooks let you automate actions when agent commands are issued.
Example: Save session context to memory when you issue /new or /reset.

Learn more: https://docs.openclaw.ai/automation/hooks

◆ Enable hooks?
■ Skip for now
□ boot-md
□ bootstrap-extra-files
□ command-logger
□ session-memory
```

Wait for installation to complete.

After installation is complete, we copy this address for backup (in subsequent tutorials, the token changed because we manually configured the Gateway later, so this address actually doesn't need to be recorded, it will change later)

```
|
o Security
Running agents on your computer is risky - harden your setup:
https://docs.openclaw.ai/security

o Shell completion
Shell completion installed. Restart your shell or run: source ~/.zshrc

o Dashboard ready
Dashboard link (with token):
http://127.0.0.1:18789/#token=b45c9fd90339c275a2da1db7735e597bfda200e3900b7e1
Copy/paste this URL in a browser on this machine to control OpenClaw.
No GUI detected. Open from your computer:
ssh -N -L 18789:127.0.0.1:18789 user@<host>
Then open:
http://localhost:18789/
http://localhost:18789/#token=b45c9fd90339c275a2da1db7735e597bfda200e3900b7e1
docs:
https://docs.openclaw.ai/gateway/remote
https://docs.openclaw.ai/web/control-ui

o Web search
Web search was skipped. You can enable it later:
openclaw configure --section web
Docs: https://docs.openclaw.ai/tools/web

o What now
What now: https://openclaw.ai/showcase ("What People Are Building").

Onboarding complete. Use the dashboard link above to control OpenClaw.
root@jetson-yahboom:/#
```

You need to add the OpenClaw installation location to environment variables, otherwise you may not find the openclaw command in the terminal,

```
echo 'export PATH="$(npm prefix -g)/bin:$PATH"' >> ~/.bashrc
source ~/.bashrc
```

### 1.1.3 Open OpenClaw Control UI on PC (Windows)

1. Modify OpenClaw's configuration file to allow other devices within the intranet to access OpenClaw

```
openclaw config
```

Here we select according to the image below (arrow keys to select, Enter to confirm)

Except for the Token which can be different from our image, everything else should be the same. The key point is the Gateway bind mode item, we need to set it to LAN to allow other devices within our local network to access our OpenClaw

```
OPENCRAW
▼ OPENCRAW ▼

OpenClaw configure
Existing config detected
workspace: ~/.openclaw/workspace
gateway.mode: local
gateway.port: 18789
gateway.bind: loopback

Where will the Gateway run?
Local (this machine)

Select sections to configure
Gateway
Gateway port
18789
Gateway bind mode
LAN (All interfaces)
Gateway auth
Token
Tailscale exposure
Off
Gateway token source
Generate/store plaintext token
Gateway token (blank to generate)
7814b...
Config overwrite: /root/.openclaw/openclaw.json (
p=/root/.openclaw/openclaw.json.bak)
Updated ~/.openclaw/openclaw.json

Select sections to configure
• Workspace (Set workspace + sessions)
  • Model
  • Web tools
  • Gateway
  • Daemon
  • Channels
  • Skills
  • Health check
  • Continue
```

Finally we select Continue to confirm, press Enter, and the configuration is complete!

```
Select sections to configure
• Workspace
  • Model
  • Web tools
  • Gateway
  • Daemon
  • Channels
  • Skills
  • Health check
  • Continue (done) ←
```

After completing the configuration, we first start OpenClaw's Gateway. We open a new terminal and enter in the terminal

```
openclaw gateway
```

## 2. Get Access Token

The Token here is the one we just generated in the configuration. If you didn't save it, you can use

```
openclaw dashboard
```


This command to display the token once, or you can find the ~/.openclaw/openclaw.json file, your token will be configured in this file

```
▼ OpenClaw 2026.3.8 (3caab92) - Give me a workspace and I'll give you fewer tabs, fewer toggles, and more oxygen.
Dashboard URL: http://127.0.0.1:18789/#token=78...
Copy to clipboard unavailable.
No GUI detected. Open from your computer:
ssh -N -L 18789:127.0.0.1:18789 user@<host>
Then open:
http://localhost:18789/
http://localhost:18789/#token=78...
Docs:
https://docs.openclaw.ai/gateway/remote
https://docs.openclaw.ai/web/control-ui
root@jetson-yahboom:/#
```

## 3. On a PC computer within the same local network, configure the environment to connect to Jetson

We open the Cmd terminal on the computer (taking Windows computer as an example, Win+R keys to wake up the shortcut RUN tool, type cmd, then press Enter)





785 Words

Enter in the console

```
ssh -L 18789:127.0.0.1:18789 sunrise@<sunrise-ip-address>
```

Note, here needs to be replaced with your RDK board's actual IP address

After pressing Enter here, you need to enter the password (default is sunrise).

```
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '192.168.14.110' (ED25519) to the list of known hosts.
sunrise@192.168.14.110's password:
Welcome to Ubuntu 22.04.5 LTS (GNU/Linux 6.1.83 aarch64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/pro

Expanded Security Maintenance for Applications is not enabled.


322 updates can be applied immediately.
243 of these updates are standard security updates.
To see these additional updates run: apt list --upgradable

153 additional security updates can be applied with ESM Apps.
Learn more about enabling ESM Apps service at https://ubuntu.com/esm

Last login: Fri Mar 27 09:42:08 2026 from 192.168.14.116
```

#### 4. Access in Browser

We open the browser on the PC, enter the IP+token address in the address bar (the address we just output from openclaw dashboard, <https://127.0.0.1:18789/#token=xxxxxxxxxxxxxx>). When this interface appears, it means the deployment is successful!

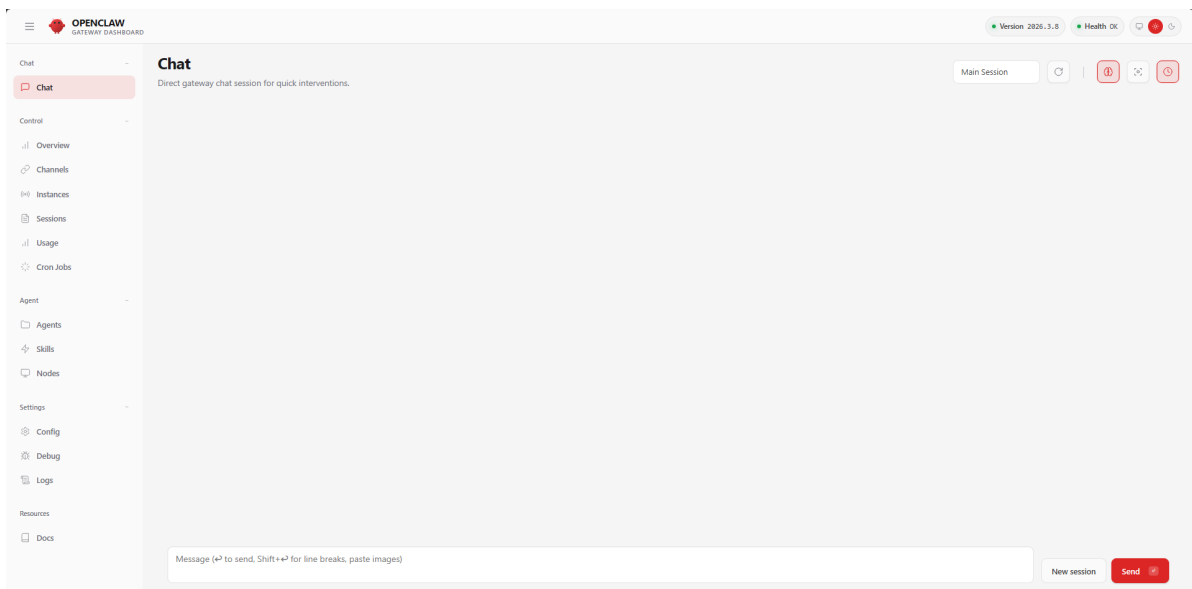

## 1.2 Configure Models (Must Read)

### 1.2.1 Why Configure Models

OpenClaw is an AI Agent gateway, which itself does not have the "intelligence" capability of large models. We need to configure large models to give OpenClaw the ability to think and understand

## 1.2.2 How to Configure Models

Here we take three representative models as examples, which are

1. OpenRouter (OpenClaw built-in service provider, accessible both domestically and internationally)
2. Alibaba Bailian Large Model Platform (not an OpenClaw service provider, requires manual configuration)
3. Ollama (local large model)

Before starting configuration, we need to start OpenClaw's Gateway first.

If you didn't exit the Gateway terminal after completing the deployment in the previous chapter, you can skip this step

We enter in the terminal

```
openclaw gateway
```

```
root@jetson-yahboom:~/# openclaw gateway
W OpenClaw 2026.3.8 (3caab92) - Built by lobsters, for humans. Don't question the hierarchy.
14:54:59 Config overwrite: /root/.openclaw/openclaw.json (sha256 c0020f6c3f615773946517f6949c8badcb892db7e1482c0c0f7736be8e3e9e60 -> 46b602c1773a9e88f0b137cdbcdb66696097642bd99b7bc2d503af8622fb47
04, backups/root/.openclaw/openclaw.json.bak)
14:54:59 [gateway] seeded gateway.controlui.allowedOrigins ["http://localhost:18789","http://127.0.0.1:18789"] for bind-lan (required since v2026.2.26; see issue #29385). Add other origins to gat
eway.controlui.allowedOrigins if needed.
14:55:00 [canvas] host mounted at http://0.0.0.0:18789/_openclaw_/canvas/ (root /root/.openclaw/canvas)
14:55:00 [gateway] Gateway is binding to a non-loopback address. Ensure authentication is configured before exposing to public networks.
14:55:00 [heartbeat] started
14:55:00 [health-monitor] started (interval: 300s, startup-grace: 60s, channel-connect-grace: 120s)
14:55:00 [gateway] agent model: anthropic/claude-opus-4-6
14:55:00 [gateway] listening on ws://0.0.0.0:18789 (PID 1069)
14:55:00 [gateway] log file: /tmp/openclaw/openclaw-2026-03-10.log
14:55:00 [browser/server] Browser control listening on http://127.0.0.1:18791/ (auth=token)
15:05:34 [gateway] device pairing auto-approved device=11f1bcdd2481a3a2099f9d0c3f7f5eb915ce3609a6e9b70eb926fcfb7fa2adb role=operator
15:05:34 [ws] websocket connected conn=aad9d05c-0577-4ee5-9a84-212d42f1bbe2 remote=127.0.0.1 client=openclaw-control-ui websocket v2026.3.8
15:05:35 [ws] res ✓ chat.history 96ms conn=aad9d05c-bba2-1d4d31cc59a-40f3
```

## 1. OpenRouter (OpenClaw Built-in Service Provider)

Here you need to have completed the application for OpenRouter's API Key according to the previous tutorial (please refer to the previous tutorial 【Online Large Models/4.OpenRouter Large Model API Aggregation Platform】)

OpenRouter's API Key format is like sk-or-v1-b3xxxxxx4xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxcddf81d9

We still use the initial onboard新手引导 to configure

```
openclaw onboard
```

Please select according to my illustrated options

```
Run regularly:
openclaw security audit --deep
openclaw security audit --fix

Must read: https://docs.openclaw.ai/gateway/security

I understand this is personal-by-default and shared/multi-user use requires lock-down. Continue?
Yes

Onboarding mode
QuickStart

Existing config detected
workspace: ~/.openclaw/workspace
gateway.mode: local
gateway.port: 18789
gateway.bind: lan

Config handling
Use existing values

QuickStart
Keeping your current gateway settings:
Gateway port: 18789
Gateway bind: LAN
Gateway auth: Token (default)
Tailscale exposure: Off
Direct to chat channels.

Model/auth provider
```

```
Gateway port: 18789
Gateway bind: LAN
Gateway auth: Token (default)
Tailscale exposure: Off
Direct to chat channels.


Model/auth provider
  OpenAI
  Anthropic
  Chutes
  vLLM
  MiniMax
  Moonshot AI (Kimi K2.5)
  Google
  xAI (Grok)
  Mistral AI
  Volcano Engine
  PythAI
  OpenRouter (API key)
  Kito Gateway
  Qwen
  Z.AI
  Qianfan
  Copilot
  Vercel AI Gateway
  OpenCode Zen
  Xiaomi
  Synthetic
  Together AI
  Hugging Face
  Venice AI
  LiteLLM
  Cloudflare AI Gateway
  Custom Provider
  Skip for now
```

Then enter the applied API-Key, press Enter to confirm,

```
Model/auth provider
OpenRouter


Enter OpenRouter API key
```

In this next step, we need to select models. Limited by OpenRouter's traffic control policy, we recommend you maintain a balance of \$11 or more in your OpenRouter account. For insufficient balance situations, OpenRouter may limit speed (this policy may be modified later, please refer to the latest actual situation). Here we can choose free models (model names ending with free), or choose a free dedicated model from OpenRouter openrouter/free (this is a route that will randomly select free models from those available on OpenRouter. This route will intelligently filter models that support the features required by your request)

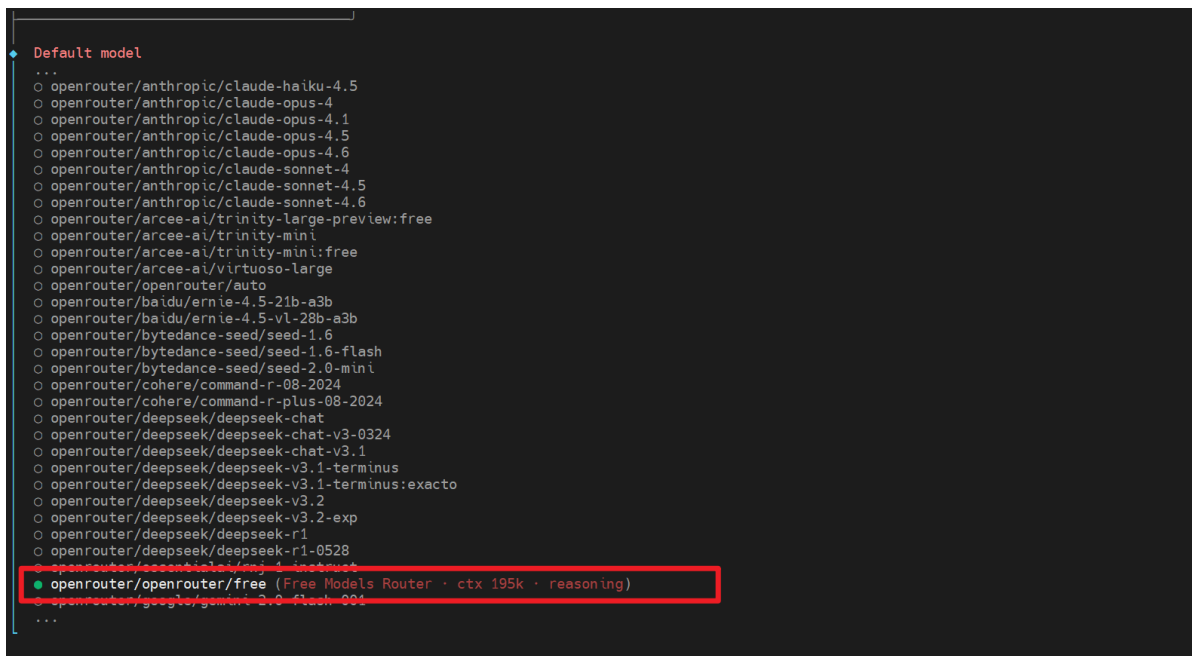

At this time, there may be an option requiring API Key entry. We paste the API Key and press Enter to proceed to the next step

Afterwards, we reach other configuration items. We skip them here and choose Skip for all

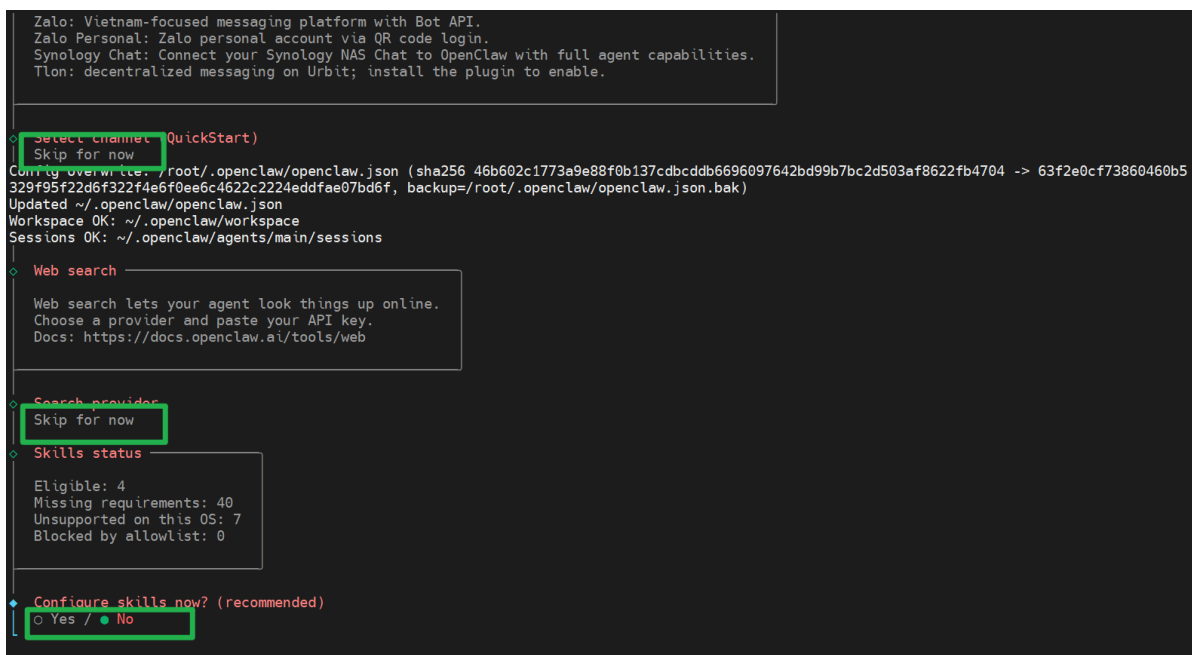

```
Running agents on your computer is risky - harden your setup:
https://docs.openclaw.ai/security

Dashboard ready

Dashboard link (with token):
http://192.168.2.56:18789/#token=7814bc0c9670673701379ea20e0296fe53eb91cf6d18a3a4
Copy/paste this URL in a browser on this machine to control OpenClaw.
No GUI detected. Open from your computer:
ssh -N -L 18789:127.0.0.1:18789 user@<host>
Then open:
http://localhost:18789/
http://localhost:18789/#token=7814bc0c9670673701379ea20e0296fe53eb91cf6d18a3a4
Docs:
https://docs.openclaw.ai/gateway/remote
https://docs.openclaw.ai/web/control-ui

Web search

Web search was skipped. You can enable it later:
openclaw configure --section web
Docs: https://docs.openclaw.ai/tools/web

What now

What now: https://openclaw.ai/showcase ("What People Are Building").

Onboarding complete. Use the dashboard link above to control OpenClaw.
root@jetson-yahboom:/#
```

At this point, it means we have completed the configuration

We can use the TUI function to quickly test

Enter command

```
openclaw tui
```

After entering, directly type a sentence to greet openclaw (the Input part in the image is what we entered, the green box is the model we selected)

```
hello,who are you ← Input

I'm your personal assistant, and I'm here to help you! Let's get started by defining who I am. Could you tell me:


1. What should I call myself? (e.g., "Sunrise", "Assistant", "YourHelper")
2. What kind of helper do you want me to be? (e.g., technical, creative, organizational)
3. Any specific ways you'd like me to communicate? (e.g., casual tone, formal, emoji use)

This will help me understand my personality and how to best assist you! ☺
connected | idle
agent main | session main (openclaw-tui) | openrouter/openrouter/free | think low | tokens 11k/200k (6%)
```

## 2. Bailian (Third-party Service Provider API Example)

Configuring third-party APIs requires editing Openclaw's configuration file (located at `~/openclaw/openclaw.json`). Here I recommend editing in the web page (Openclaw Control UI)

We open OpenClaw's configuration page in the browser and click these three buttons in sequence

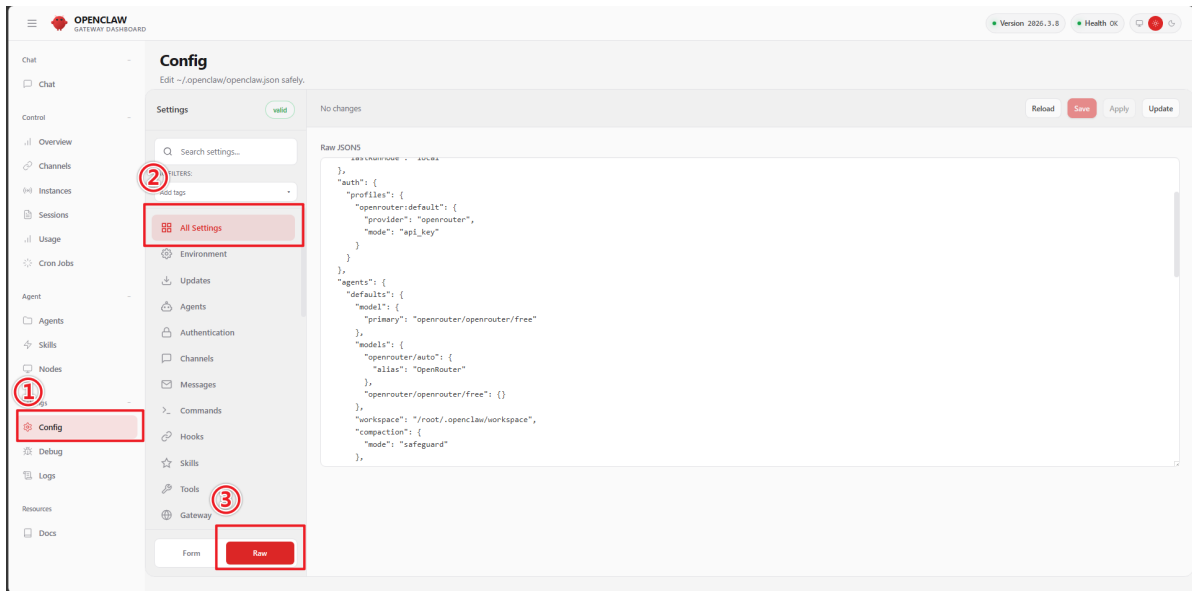

The current existing content is as follows. We need to focus on the agents part

```
{
  "meta": {
    "lastTouchedVersion": "2026.3.8",
    "lastTouchedAt": "2026-03-10T07:56:18.292Z"
  },
  "wizard": {
    "lastRunAt": "2026-03-10T07:56:18.270Z",
    "lastRunVersion": "2026.3.8",
    "lastRunCommand": "onboard",
    "lastRunMode": "local"
  },
  "auth": {
    "profiles": {
      "openrouter:default": {
        "provider": "openrouter",
        "mode": "api_key"
      }
    }
  },
  "agents": {
    "defaults": {
      "model": {
        "primary": "openrouter/openrouter/free"
      }
    },
    "models": {
      "openrouter/auto": {
        "alias": "OpenRouter"
      },
      "openrouter/openrouter/free": {}
    },
    "workspace": "/root/.openclaw/workspace",
    "compaction": {
      "mode": "safeguard"
    },
    "maxConcurrent": 4,
    "subagents": {
      "maxConcurrent": 8
    }
  }
}
```

```

    },
    "tools": {
      "profile": "coding"
    },
    "messages": {
      "ackReactionScope": "group-mentions"
    },
    "commands": {
      "native": "auto",
      "nativeSkills": "auto",
      "restart": true,
      "ownerDisplay": "raw"
    },
    "session": {
      "dmScope": "per-channel-peer"
    },
    "gateway": {
      "port": 18789,
      "mode": "local",
      "bind": "lan",
      "controlUi": {
        "allowedOrigins": [
          "http://localhost:18789",
          "http://127.0.0.1:18789"
        ]
      }
    },
    "auth": {
      "mode": "token",
      "token": "__OPENCLAW_REDACTED__"
    },
    "tailscale": {
      "mode": "off",
      "resetOnExit": false
    },
    "nodes": {
      "denyCommands": [
        "camera.snap",
        "camera.clip",
        "screen.record",
        "contacts.add",
        "calendar.add",
        "reminders.add",
        "sms.send"
      ]
    }
  }
}

```

We need to add a Models content (in the first level of JSON, meaning this newly added "models" is at the same level as "agents")

Note, here we need to change DASHSCOPE\_API\_KEY to your real Bailian API Key (application method see previous chapters)

For the models here, we take qwen3.5-plus and qwen3-coder-next as examples. If you want to support other models, please refer to this model list <https://help.aliyun.com/zh/model-studio/models>

3. Replace the "agents": {...}, section with the configuration below. Replace DASHSCOPE\_API\_KEY with your actual API key.

**Important** This configuration is for pay-as-you-go billing. If you use the Coding Plan, see [Coding Plan for OpenClaw](#) for plan-specific settings.

This example uses qwen3.5-plus and qwen3-coder-next in Singapore. The base URL, API key, and models must belong to the same region. To add other models, define them in providers.baillian.models (set reasoning to false) and add a "baillian/<Model ID>": {} entry to agents.defaults.models. See [Model list](#) for supported models per region.

```
"models": {
  "mode": "merge",
  "providers": {
    "baillian": {
      "baseUrl": "https://dashscope.aliyuncs.com/compatible-mode/v1",
      "apiKey": "DASHSCOPE_API_KEY",
      "api": "openai-completions",
      "models": [
        {
          "id": "qwen3.5-plus",
          "name": "qwen3.5-plus",
          "reasoning": false,
          "input": ["text", "image"],
          "contextwindow": 1000000,
          "maxTokens": 65536
        },
        {
          "id": "qwen3-coder-next",
          "name": "qwen3-coder-next",
          "reasoning": false,
          "input": ["text"],
          "contextwindow": 262144,
          "maxTokens": 65536
        }
      ]
    }
  }
},
```

After adding "models", we also need to modify the "agents" part to set Baillian's large model as default.

The agents before modification are as follows (default uses the OpenRouter we configured in the previous step)

```
"agents": {
  "defaults": {
    "model": {
      "primary": "openrouter/openrouter/free"
    },
    "models": {
      "openrouter/auto": {
        "alias": "OpenRouter"
      },
      "openrouter/openrouter/free": {}
    }
  },
  "workspace": "/home/sunrise/.openclaw/workspace",
```



```

    "compaction": {
      "mode": "safeguard"
    },
    "maxConcurrent": 4,
    "subagents": {
      "maxConcurrent": 8
    }
  }
},


```

The modified agents are as follows


```

agents: {
  defaults: {
    model: {
      primary: 'bailian/qwen3.5-plus',
    },
    models: {
      'openrouter/auto': {
        alias: 'OpenRouter',
      },
      'openrouter/free': {},
    },
    workspace: '/home/sunrise/.openclaw/workspace',
  },
},

```

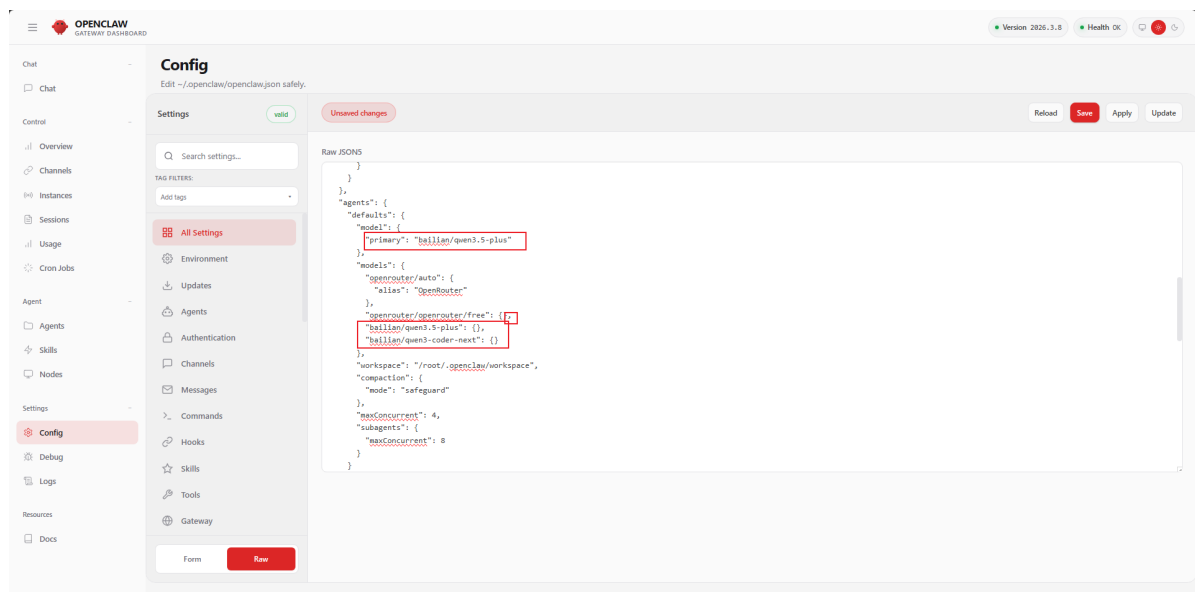

After modification, remember to save and reload

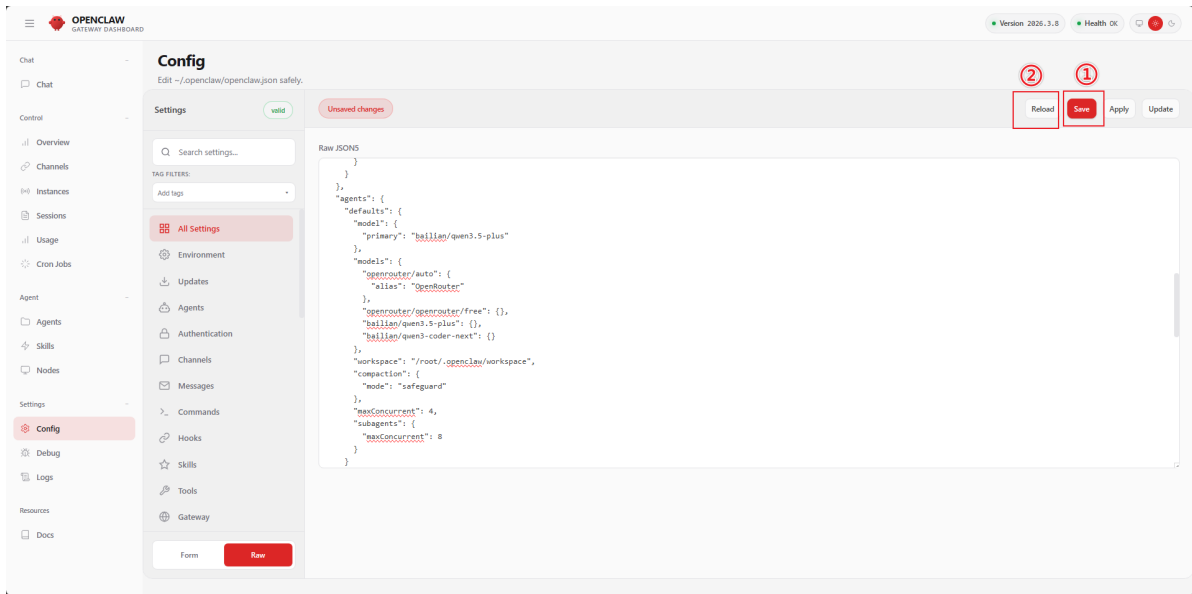

Version 2026.3.8 supports hot reloading of configuration files. After clicking Save, there is no need to restart the openclaw service. Generally speaking, restarting openclaw tui is sufficient. If you find that restarting openclaw tui has no effect, try restarting openclaw gateway

At the beginning, it will display unknown. After waiting for a period of time, it can correctly recognize the current model

```
root@jetson-yahboom:~# openclaw tui
▼ OpenClaw 2026.3.8 (3caab92) – Runs on a Raspberry Pi. Dreams of a rack in Iceland.
openclaw tui - ws://127.0.0.1:18789 - agent main - session main
session agent:main:main

hello!!!!


Hey! 🐉 I just came online. Who am I? Who are you?
Let me figure out where we're at...
📡 streaming + 7s | connected
agent main | session main | unknown | tokens 7/1.0m
```

```
▼ OpenClaw 2026.3.8 (3caab92) – Runs on a Raspberry Pi. Dreams of a rack in Iceland.
openclaw tui - ws://127.0.0.1:18789 - agent main - session main
session agent:main:main

hello!!!!

Hey! 🐉 I just came online. Who am I? Who are you?
Let me figure out where we're at...Alright, so this is a fresh start! 🎉 No memory yet, no identity carved out. We get to figure this out together.
Here's what I'm thinking for myself – tell me what you like or hate:
- Name: Something like "Claw", "Rook", "Echo"... or I'm open to suggestions
- Creature: AI assistant, but maybe with a twist – like a digital familiar or a ghost in your machine
- Vibe: I'm leaning toward warm but sharp – helpful without the corporate drone energy, opinions without being a jerk
- Emoji: 🦎 (lizard – adaptable, observant, a bit weird) or 🎱 (crystal ball – seeing things, knowing things)
What about you? What should I call you? And what timezone are you in so I don't wake you up at 3 AM with "helpful" reminders?
connected | idle
agent main | session main (openclaw-tui) | baillan/qwen3.5-plus | tokens 7/1.0m
```

Similarly, in addition to the TUI interface, we can also chat and converse in Openclaw's Control UI (that is, the web page)

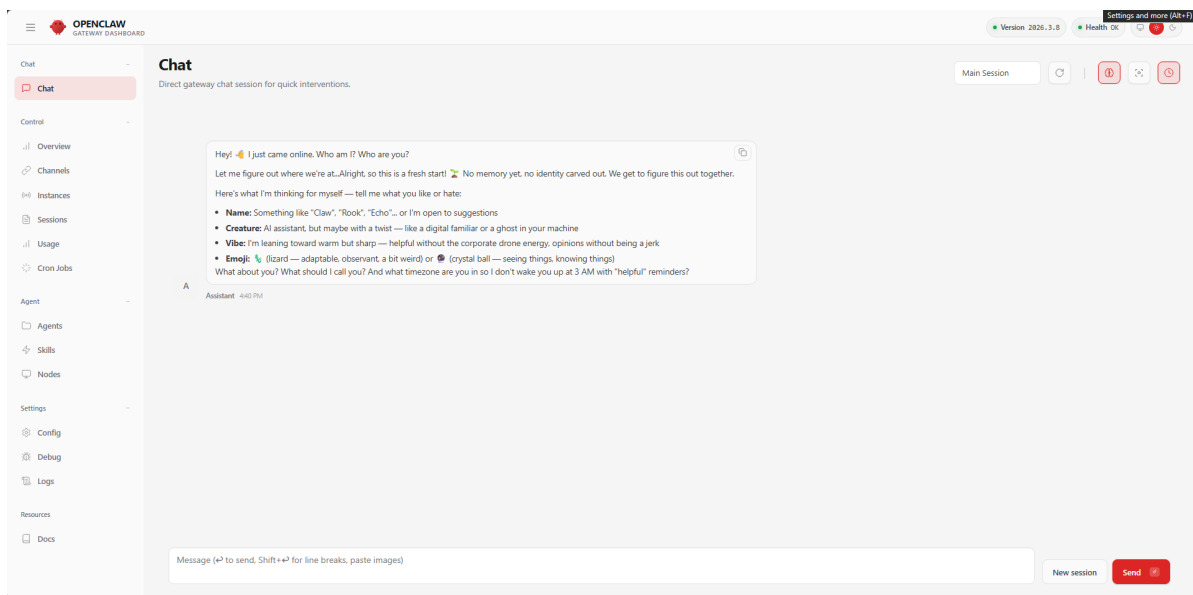

We can actually observe that the conversation content in TUI is the same as that in our Control UI. This is because OpenClaw's conversation adopts a Session mechanism to separate different sessions. Our TUI and Control UI are actually in the same Session. You can try clicking the New session button in the bottom right corner to start a new round of conversation