

OpenClaw and WhatsApp Plugin Application

OpenClaw and WhatsApp Plugin Application

Preparation Before Use

1. Configure the Bot
2. Interact with the Bot

Preparation Before Use

!!! Confirm that OpenClaw has been configured and can interact normally.

If it cannot interact normally, the following content cannot be implemented.

1. Configure the Bot

Enter the root environment (if the installation was performed in the root directory using root privileges).

```
sudo su
```

Enter configuration mode

```
openclaw onboard --install-daemon
```

```
- Pairing/allowlists + mention gating.
- Multi-user/shared inbox: split trust boundaries (separate
  gateway/credentials, ideally separate OS users/hosts).
- Sandbox + least-privilege tools.
- Shared inboxes: isolate DM sessions (`session.dmScope:
  per-channel-peer`) and keep tool access minimal.
- Keep secrets out of the agent's reachable filesystem.
- Use the strongest available model for any bot with tools or
  untrusted inboxes.
```

Run regularly:

```
openclaw security audit --deep
openclaw security audit --fix
```

Must read: <https://docs.openclaw.ai/gateway/security>

◆ I understand this is personal-by-default and shared/multi-user use requires lock-down. Continue?

● Yes / ○ No

Select QuickStart

- Shared inboxes: isolate DM sessions (``session.dmScope: per-channel-peer``) and keep tool access minimal.
- Keep secrets out of the agent's reachable filesystem.
- Use the strongest available model for any bot with tools or untrusted inboxes.

Run regularly:

```
openclaw security audit --deep
openclaw security audit --fix
```

Must read: <https://docs.openclaw.ai/gateway/security>

◇ I understand this is personal-by-default and shared/multi-user use requires lock-down. Continue?

Yes

◆ Onboarding mode

- QuickStart (Configure details later via `openclaw configure.`)
 - Manual

Select Use existing values

◇ I understand this is personal-by-default and shared/multi-user use requires lock-down. Continue?

Yes

◇ Onboarding mode

QuickStart

◇ Existing config detected

```
workspace: ~/.openclaw/workspace
model: deepseek-chat-v3-2/deepseek-chat
gateway.mode: local
gateway.port: 18789
gateway.bind: loopback
```

◆ Config handling

- Use existing values
 - Update values
 - Reset

Select Skip for now

```
◆ Model/auth provider
...
○ Qianfan
○ Alibaba Cloud Model Studio
○ Copilot
○ Vercel AI Gateway
○ OpenCode
○ Xiaomi
○ Synthetic
○ Together AI
○ Hugging Face
○ Venice AI
○ LiteLLM
○ Cloudflare AI Gateway
○ Custom Provider
○ Ollama
○ SGLang
○ vLLM
● Skip for now
```

Select All providers

```
Skip for now
◆ Filter models by provider
● All providers
○ amazon-bedrock
○ anthropic
○ azure-openai-responses
○ cerebras
○ deepseek-chat-v3-2
○ github-copilot
○ google
○ google-antigravity
○ google-gemini-cli
○ google-vertex
○ groq
○ huggingface
○ kimi-coding
○ minimax
○ minimax-cn
○ mistral
...
```

Select Keep current. Note: The content in parentheses is the model you configured yourself

All providers

◆ **Default model**

- **Keep current (deepseek-chat-v3-2/deepseek-chat)**
- Enter model manually
- amazon-bedrock/anthropic.claude-3-haiku-20240307-v1:0
- amazon-bedrock/anthropic.claude-3-5-haiku-20241022-v1:0
- amazon-bedrock/anthropic.claude-haiku-4-5-20251001-v1:0
- amazon-bedrock/eu.anthropic.claude-haiku-4-5-20251001-v1:0
- amazon-bedrock/global.anthropic.claude-haiku-4-5-20251001-v1:0
- amazon-bedrock/us.anthropic.claude-haiku-4-5-20251001-v1:0
- amazon-bedrock/anthropic.claude-opus-4-20250514-v1:0
- amazon-bedrock/us.anthropic.claude-opus-4-20250514-v1:0
- amazon-bedrock/anthropic.claude-opus-4-1-20250805-v1:0
- amazon-bedrock/us.anthropic.claude-opus-4-1-20250805-v1:0
- amazon-bedrock/anthropic.claude-opus-4-5-20251101-v1:0
- amazon-bedrock/eu.anthropic.claude-opus-4-5-20251101-v1:0
- amazon-bedrock/global.anthropic.claude-opus-4-5-20251101-v1:0
- amazon-bedrock/us.anthropic.claude-opus-4-5-20251101-v1:0
- amazon-bedrock/anthropic.claude-opus-4-6-v1
- ...

Select WhatsApp (QR link)

◆ **Select channel (QuickStart)**

- Telegram (Bot API)
- **WhatsApp (QR link) (linked)**
- Discord (Bot API)
- IRC (Server + Nick)
- Google Chat (Chat API)
- Slack (Socket Mode)
- Signal (signal-cli)
- iMessage (imsg)
- LINE (Messaging API)
- Feishu/Lark (飞书)
- Nostr (NIP-04 DMs)
- Microsoft Teams (Bot Framework)
- Mattermost (plugin)
- Nextcloud Talk (self-hosted)
- Matrix (plugin)
- BlueBubbles (macOS app)
- Zalo (Bot API)
- ...

Select Link WhatsApp now (QR)

◆ **Select channel (QuickStart)**

WhatsApp (QR link)

◆ **WhatsApp linking**

Scan the QR with WhatsApp on your phone.

Credentials are stored under

/home/pi/.openclaw/credentials/whatsapp/default/ for future runs.

Docs: whatsapp

◆ **Link WhatsApp now (QR)?**

● Yes / ○ No


Then a connection QR code will appear

◆ **Link WhatsApp now (QR)?**


Yes

Waiting for WhatsApp connection...


Scan this QR in WhatsApp (Linked Devices):

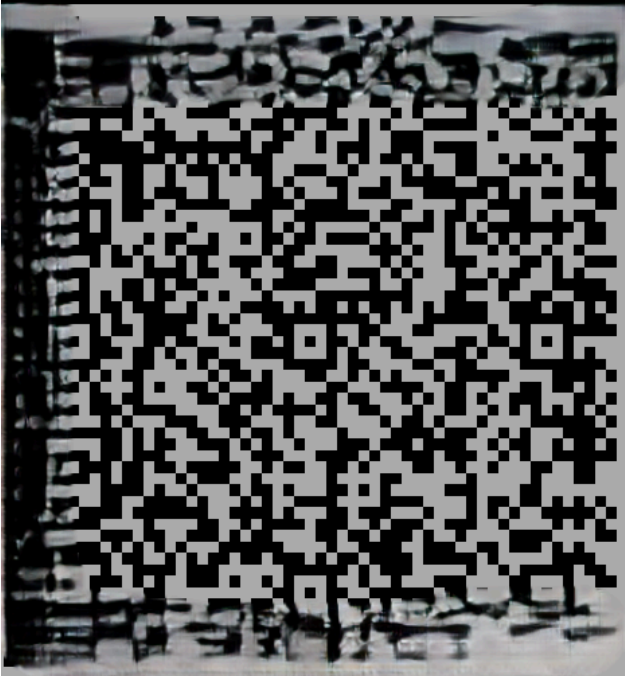

Open WhatsApp on your phone, click on yourself ---- Linked devices

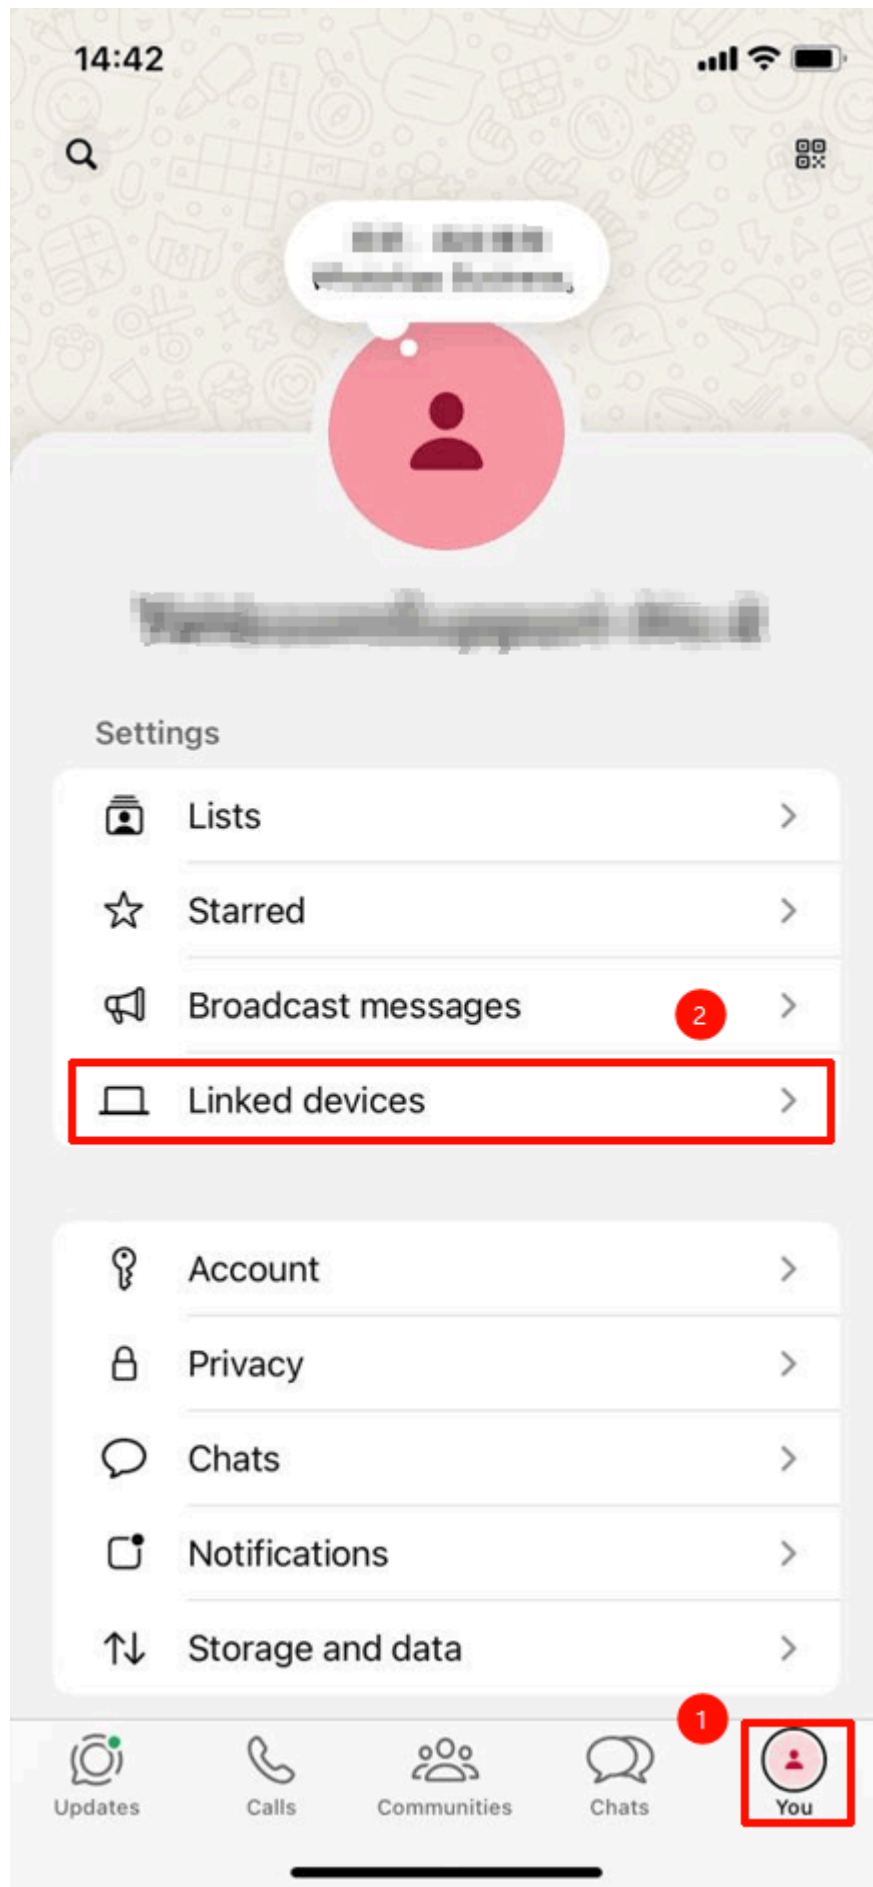

Click Link new device, then scan the OpenClaw QR code

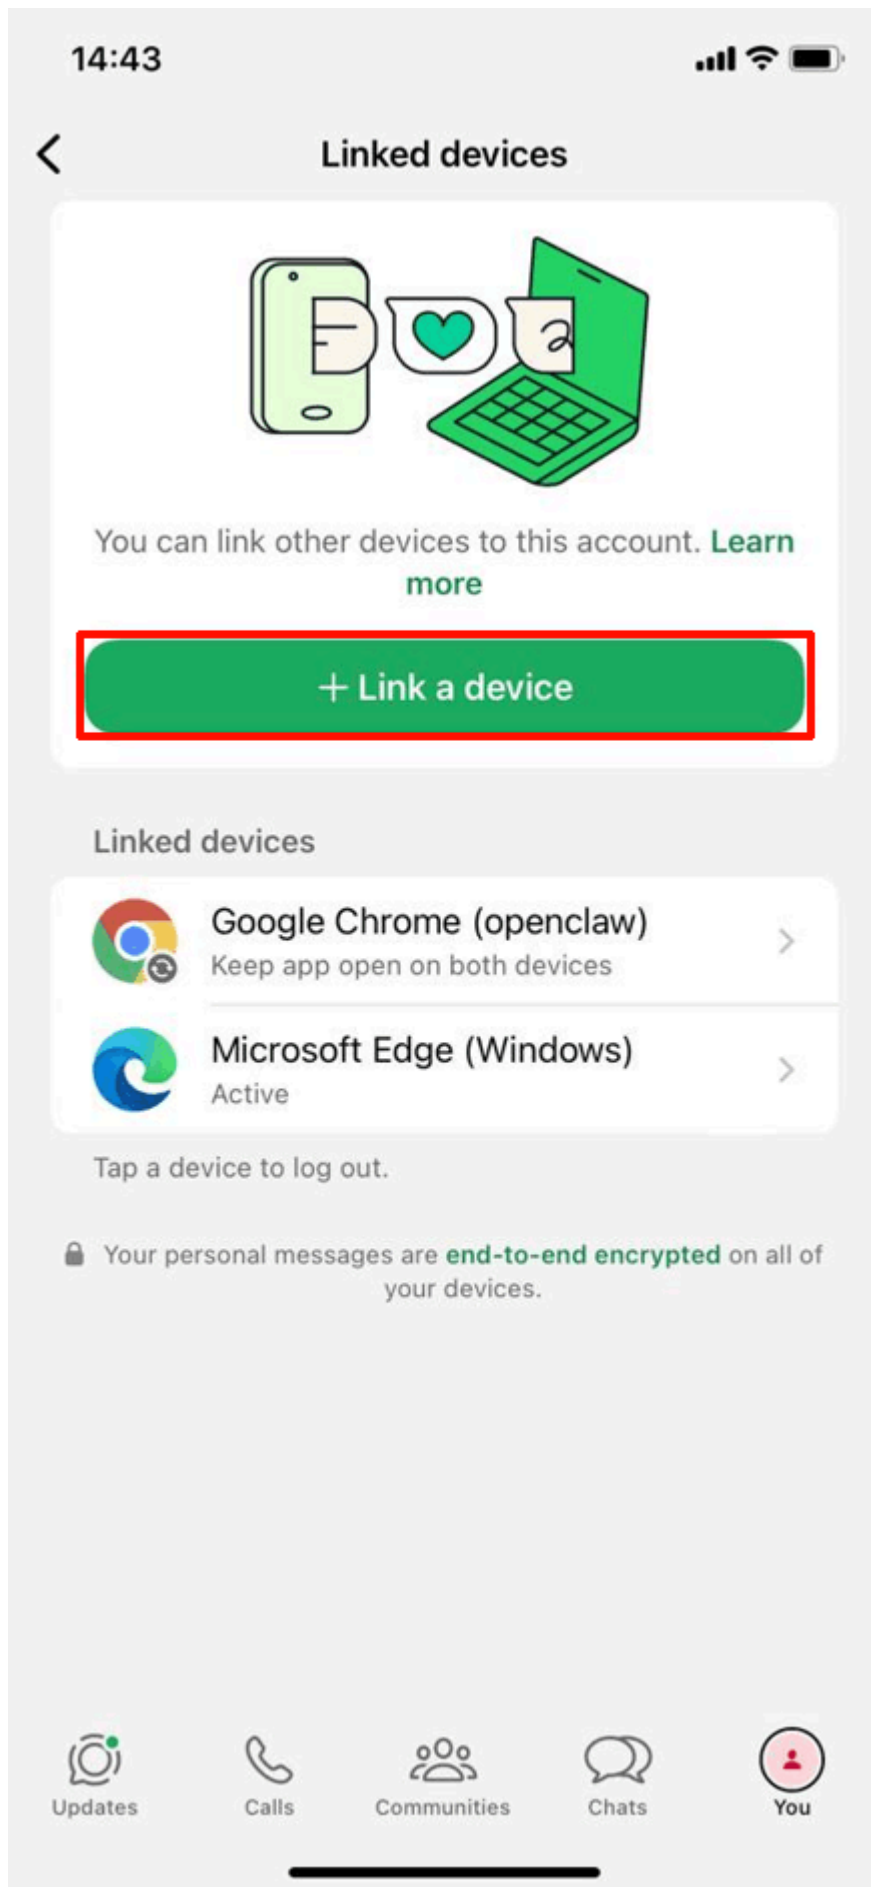

After scanning, wait for the connection to succeed. After successful connection, the following image appears, select This Is my personal phone number

```
Docs: whatsapp |

◇ WhatsApp DM access

WhatsApp direct chats are gated by `channels.whatsapp.dmPolicy` +
`channels.whatsapp.allowFrom`.
- pairing (default): unknown senders get a pairing code; owner
  approves
- allowlist: unknown senders are blocked
- open: public inbound DMs (requires allowFrom to include "*")
- disabled: ignore WhatsApp DMs

Current: dmPolicy=pairing, allowFrom=unset
Docs: whatsapp |

◇ WhatsApp phone setup
  • This is my personal phone number
    ○ Separate phone just for OpenClaw
```

Enter your phone number, including country code (for domestic numbers in China, add +86 before the phone number)

```
WhatsApp asked for a restart after pairing (code 515); creds are saved. Restarting connection once...
✓ Linked after restart; web session ready.

◇ WhatsApp DM access

WhatsApp direct chats are gated by `channels.whatsapp.dmPolicy` -
`channels.whatsapp.allowFrom`.
- pairing (default): unknown senders get a pairing code; owner approves
- allowlist: unknown senders are blocked
- open: public inbound DMs (requires allowFrom to include "*")
- disabled: ignore WhatsApp DMs

Current: dmPolicy=pairing, allowFrom=unset
Docs: whatsapp |

◇ WhatsApp phone setup
  This is my personal phone number

◇ WhatsApp number

We need the sender/owner number so OpenClaw can allowlist you.

◆ Your personal WhatsApp number (the phone you will message from)
  +15555550123
```

Skip Search provider

```
◊ Select channel (QuickStart)
| Skip for now
Updated ~/.openclaw/openclaw.json
Workspace OK: ~/.openclaw/workspace
Sessions OK: ~/.openclaw/agents/main/sessions

◊ Web search
Web search lets your agent look things up online.
Choose a provider and paste your API key.
Docs: https://docs.openclaw.ai/tools/web

◆ Search provider
◦ Brave Search
◦ Gemini (Google Search)
◦ Grok (xAI)
◦ Kimi (Moonshot)
◦ Perplexity Search
◆ Skip for now (Configure later with openclaw configure --section web)
```

Also skip Skills, install later as needed

```
◊ Web search
Web search lets your agent look things up online.
Choose a provider and paste your API key.
Docs: https://docs.openclaw.ai/tools/web

◊ Search provider
Skip for now

◊ Skills status
Eligible: 4
Missing requirements: 40
Unsupported on this OS: 7
Blocked by allowlist: 0

◆ Configure skills now? (recommended)
◦ Yes / ◆ No
```

Also skip hooks, select Skip for now, then press space to select, then press Enter

```
Blocked by allowlist: 0

◊ Configure skills now? (recommended)
No

◊ Hooks
Hooks let you automate actions when agent commands are issued.
Example: Save session context to memory when you issue /new or /reset.
Learn more: https://docs.openclaw.ai/automation/hooks

◆ Enable hooks?
◆ Skip for now
◦ [ ] boot-md
◦ [ ] bootstrap-extra-files
◦ [ ] command-logger
◦ [ ] session-memory
```

Select restart gateway.

```
/var/lib/systemd/linger}).

Systemd
Enabled systemd lingering for pi.

Gateway service runtime
QuickStart uses Node for the Gateway service (stable + supported).


Installing Gateway service...
Installed systemd service: /home/pi/.config/systemd/user/openclaw-gateway.service
Gateway service installed.

Agents: main (default)
Heartbeat interval: 30m (main)
```


You can choose TUI interactive interface, or choose Do this later.

2. Interact with the Bot

Open WhatsApp, click Chat ---- "+"

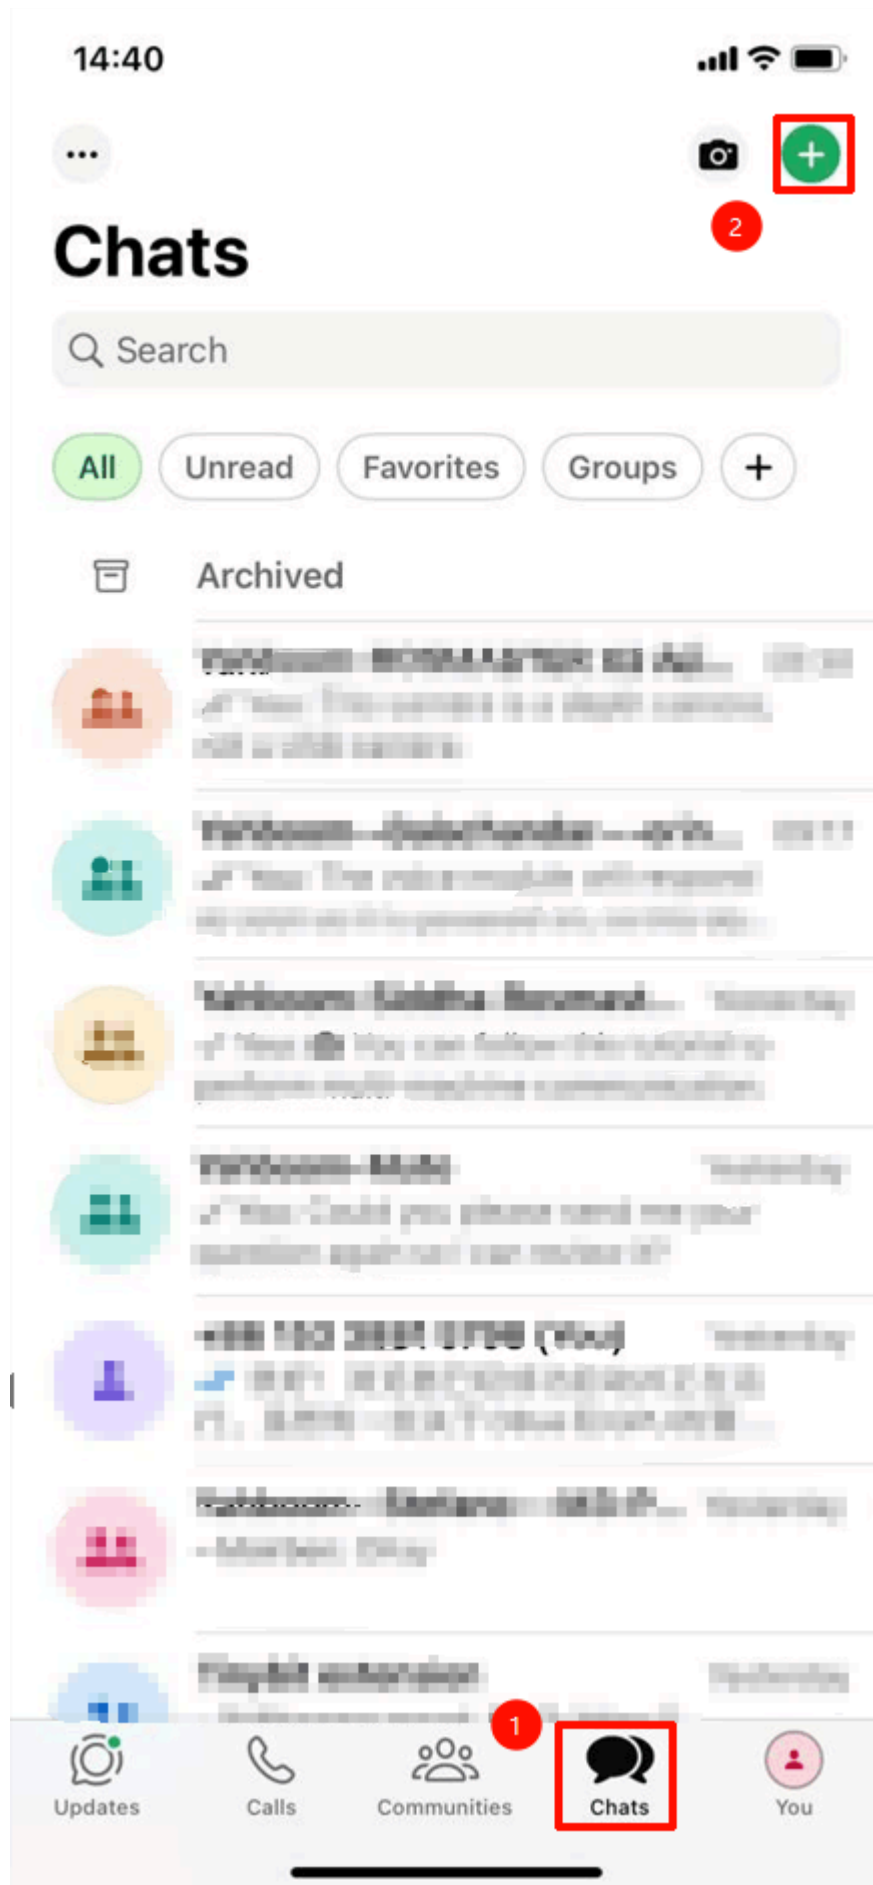

Click Send message to yourself

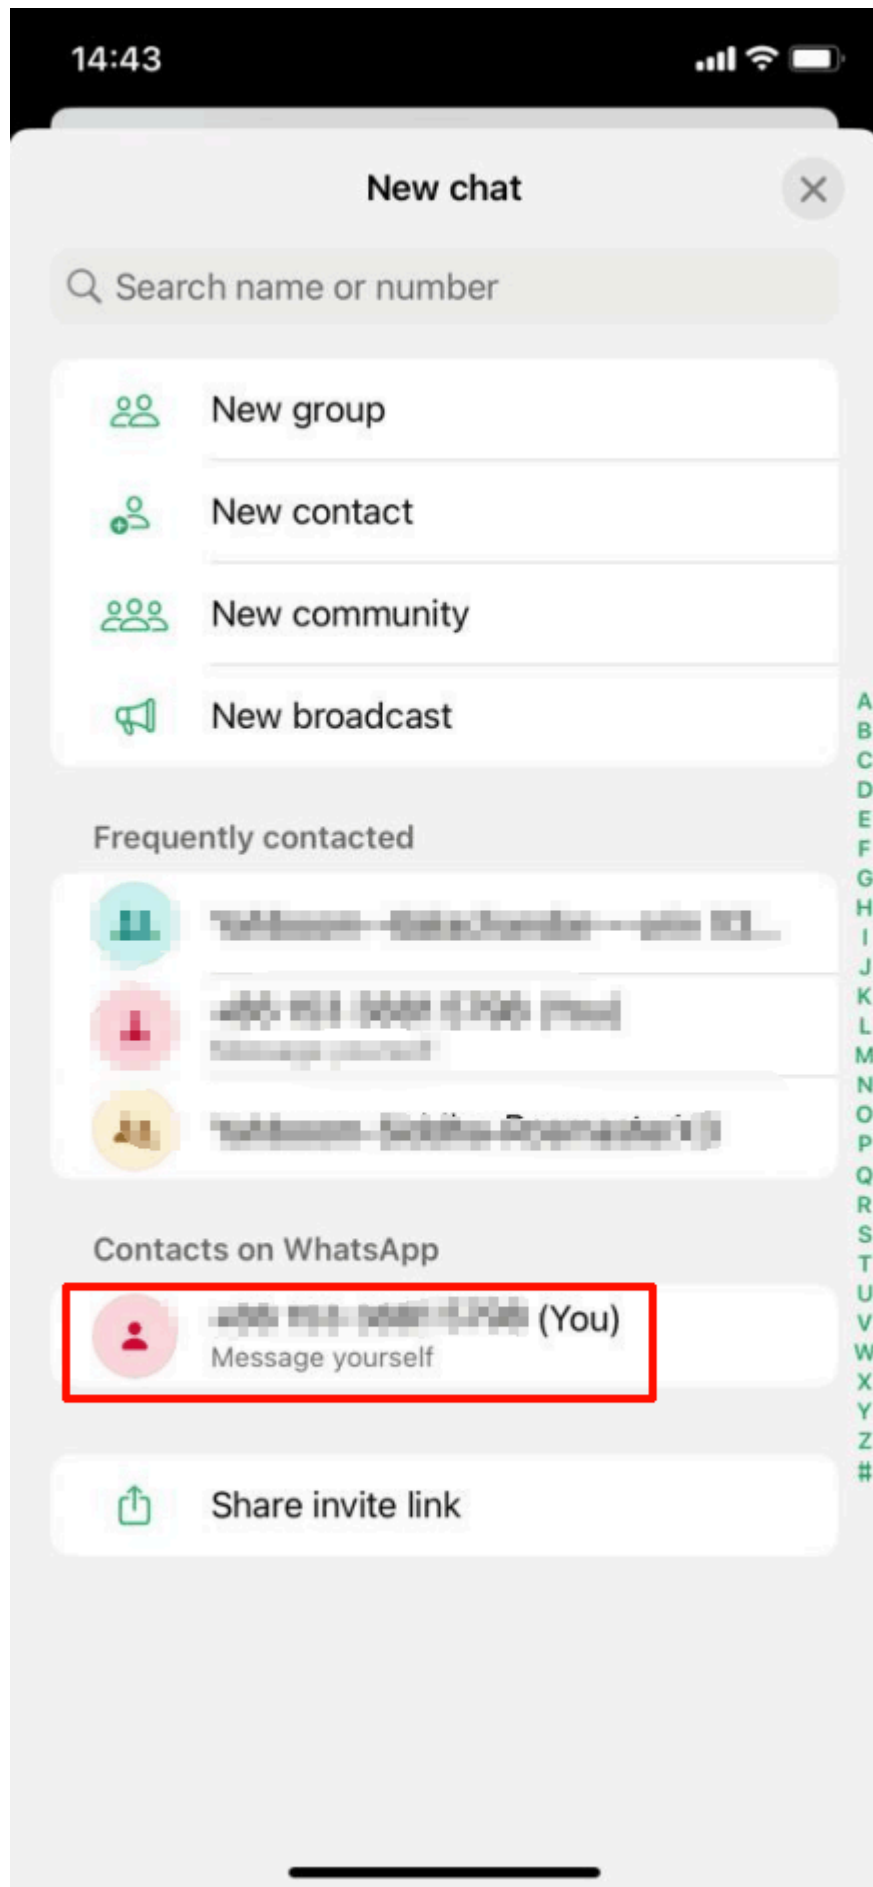

Just send the content you want to interact with.

14:45



(You)

Message yourself

Scal...
www.baidu.com

[Redacted]

12:15 ✓✓

Today

Open the Raspberry Pi website and go to Baidu.

14:44 ✓✓

Let me help you open the browser on your Raspberry Pi and access the Baidu website.

14:44 ✓✓

I have launched the Chromium browser and opened the Baidu website. The browser should appear on the Raspberry Pi desktop.

If you want to view the content of the Baidu website in the terminal, you can also use the curl command to retrieve the webpage content:

14:45 ✓✓

This is the HTML content of Baidu's homepage. Your browser has opened successfully; you can now see the Baidu website on your Raspberry Pi desktop.

Would you like me to search for anything?

14:45 ✓✓

