

ClawHub

ClawHub is **OpenClaw's public Skills registry**. It is a free service: all Skills are public, open, and available for anyone to view, share, and reuse. A Skill is a folder containing a `SKILL.md` file (along with auxiliary text files). You can browse Skills in the web application, or use the CLI to search, install, update, and publish Skills. Website: clawhub.com

Who It Is For (Beginner Friendly)

If you want to add new features to your OpenClaw agent, ClawHub is the easiest way to find and install Skills. You don't need to understand how the backend works. You can:

- Search for Skills using natural language.
- Install Skills to your workspace.
- Update Skills later with a single command.
- Back up your own Skills by publishing them.


Quick Start (Non-Technical Users)

1. Install the CLI (see the next section). First, switch to root mode (if installing in the root directory).


```
sudo su
```

2. Search for what you need (requires internet access abroad):

```
clawhub search "find"
```

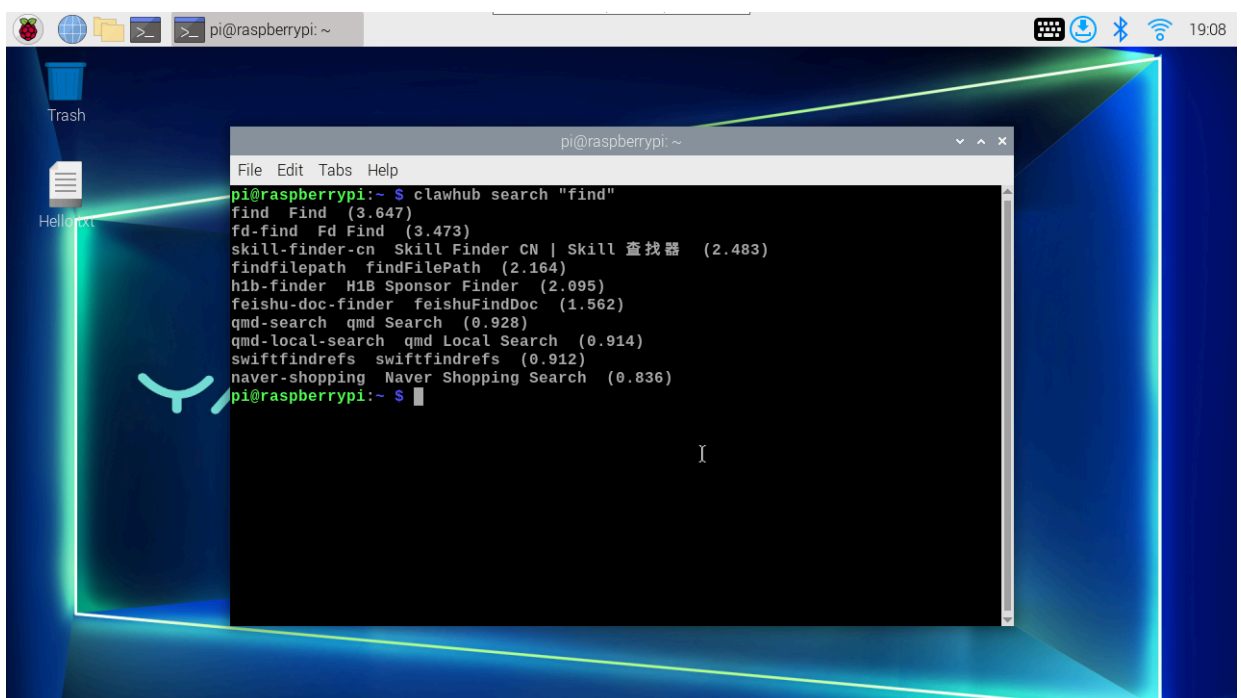


For RDK customers, you can directly use RDK Studio for one-click configuration and installation.

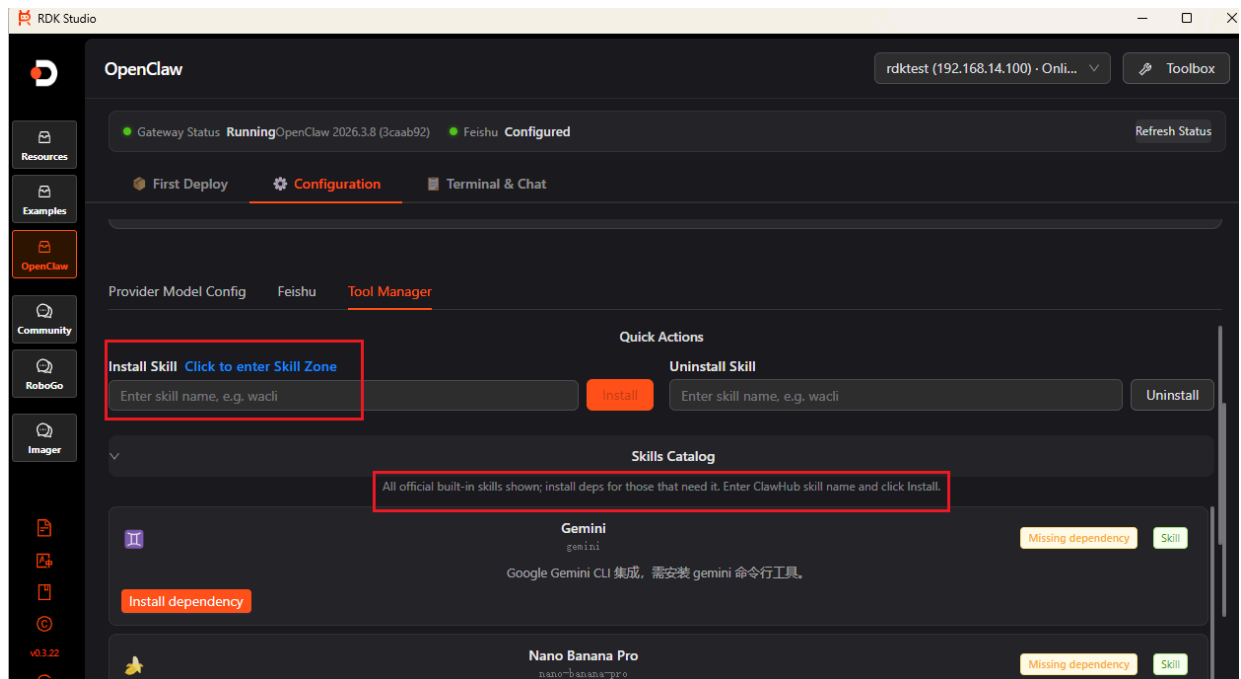

Go to the Skills section and search for the plugin you need, then enter the name directly and click Install - RDK Studio will install it for you right away.

If the installation fails, you can visit the SKIL section.



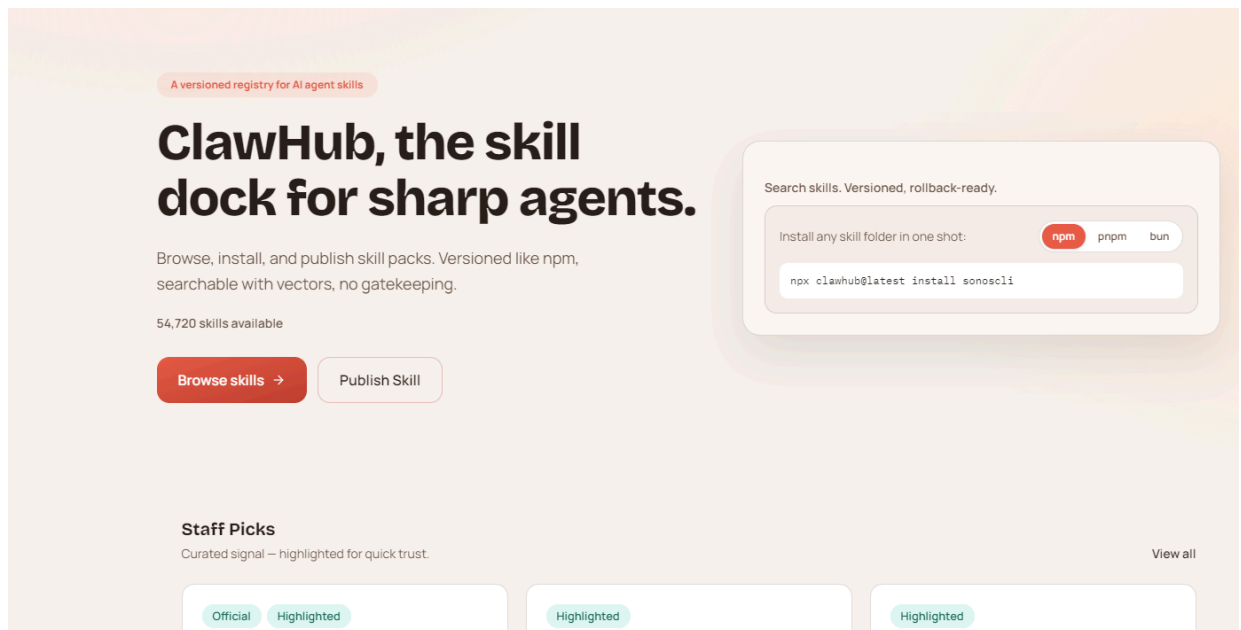

You can complete the installation using the various methods described above; alternatively, you can send it directly to OpenClaw and have them install it for you.

3. Install a Skill:

Syntax: `clawhub install <skill-slug>`

```
clawhub install find
```

4. Start a new OpenClaw session to load the new Skill.

Install CLI

Choose one:

```
npm i -g clawhub
pnpm add -g clawhub
```

Positioning in OpenClaw

By default, the CLI installs Skills to `./skills` in the current working directory. If an OpenClaw workspace is configured, `clawhub` falls back to that workspace unless you override it with `--workdir` (or `CLAWHUB_WORKDIR`). OpenClaw loads workspace Skills from `<workspace>/skills`, and they take effect in the **next** session. If you are already using `~/openclaw/skills` or built-in Skills, workspace Skills have higher priority. For more details on Skills loading, sharing, and permission control, see [Skills](#).

Service Features

- **Public browsing** of Skills and their `SKILL.md` content.
- **Search** based on embedding vectors (vector search), not just keyword matching.
- **Version management** supporting semantic versioning, changelogs, and tags (including `latest`).
- **Download** each version in zip format.
- **Stars and reviews** with community feedback.

- **Moderation** hooks for approval and auditing.
- **CLI-friendly API** supporting automation and scripting.

CLI Commands and Arguments

Global options (apply to all commands):

- `--workdir <dir>`: Working directory (default: current directory; falls back to OpenClaw workspace).
- `--dir <dir>`: Skills directory, relative to the working directory (default: `skills`).
- `--site <url>`: Website base URL (for browser login).
- `--registry <url>`: Registry API base URL.
- `--no-input`: Disable prompts (non-interactive mode).
- `-v, --cli-version`: Print CLI version.

Authentication:

- `clawhub login` (browser flow) or `clawhub login --token <token>`
- `clawhub logout`
- `clawhub whoami`

Options:

- `--token <token>`: Paste API token.
- `--label <label>`: Label for storing browser login tokens (default: `CLI token`).
- `--no-browser`: Do not open browser (requires `--token`).

Search:

- `clawhub search "query"`
- `--limit <n>`: Maximum number of results.

Install:

- `clawhub install <slug>`
- `--version <version>`: Install specified version.
- `--force`: Overwrite if folder already exists.

Update:

- `clawhub update <slug>`
- `clawhub update --all`
- `--version <version>`: Update to specified version (single slug only).
- `--force`: Force overwrite when local files do not match any published version.

List:

- `clawhub list` (reads `.clawhub/lock.json`)

Publish:

- `clawhub publish <path>`
- `--slug <slug>`: Skills identifier.
- `--name <name>`: Display name.
- `--version <version>`: Semantic version number.
- `--changelog <text>`: Changelog text (can be empty).
- `--tags <tags>`: Comma-separated tags (default: `latest`).

Delete/Restore (owner/admin only):

- `clawhub delete <slug> --yes`
- `clawhub undelete <slug> --yes`

Sync (scan local Skills + publish new/updated Skills):

- `clawhub sync`
- `--root <dir...>`: Additional scan root directories.
- `--all`: Upload everything without prompts.
- `--dry-run`: Show what will be uploaded.
- `--bump <type>`: Version bump type for updates `patch|minor|major` (default: `patch`).
- `--changelog <text>`: Changelog for non-interactive updates.
- `--tags <tags>`: Comma-separated tags (default: `latest`).
- `--concurrency <n>`: Number of concurrent registry checks (default: 4).

Common Agent Workflows

Search for Skills

```
clawhub search "postgres backups"
```

Download New Skills

```
clawhub install my-skill-pack
```

Update Installed Skills

```
clawhub update --all
```

Back Up Your Skills (Publish or Sync)

For a single Skill folder:

```
clawhub publish ./my-skill --slug my-skill --name "My Skill" --version 1.0.0 --tags latest
```

Scan and back up multiple Skills at once:

```
c1awhub sync --all
```

Advanced Details (Technical)

Version Management and Tags

- Each publish creates a new **semantic version** `SkillVersion`.
- Tags (like `latest`) point to a specific version; moving a tag enables rollback.
- Changelogs are appended to each version and can be empty during sync or publish updates.

Local Changes vs. Registry Versions

During updates, content hashes are used to compare local Skills content with registry versions. If local files do not match any published version, the CLI asks for confirmation before overwriting (or requires `--force` in non-interactive mode).

Sync Scanning and Fallback Roots

`c1awhub sync` first scans the current working directory. If no Skills are found, it falls back to known legacy locations (e.g., `~/openc1aw/skills` and `~/openc1aw/skills`). This design enables finding legacy Skill installations without extra flags.

Storage and Lock Files

- Installed Skills are recorded in `.c1awhub/lock.json` under the working directory.
- Authentication tokens are stored in the ClawHub CLI config file (overridable via `CLAWHUB_CONFIG_PATH`).

Telemetry (Install Counting)

When you run `c1awhub sync` while logged in, the CLI sends a minimal snapshot for install counting. You can fully disable this feature:

```
export CLAWHUB_DISABLE_TELEMETRY=1
```

Environment Variables

- `CLAWHUB_SITE`: Override website URL.
- `CLAWHUB_REGISTRY`: Override registry API URL.
- `CLAWHUB_CONFIG_PATH`: Override where the CLI stores tokens/config.
- `CLAWHUB_WORKDIR`: Override default working directory.
- `CLAWHUB_DISABLE_TELEMETRY=1`: Disable telemetry for `sync`.

For more information about ClawHub, see: [ClawHub - OpenClaw](#)