Random Movement

1. Content Description


This section explains how to use the MoveIt2 library to make the robot arm in RViz randomly move to a certain pose.

2. Launch

Enter the following command in the terminal to launch the MoveIt2 simulation environment:

```
ros2 launch dofbot_pro_moveit demo_3d.launch.py
```

Once the program starts, when **You can start planning now!** appears in the terminal, it means the startup was successful, as shown in the figure below:

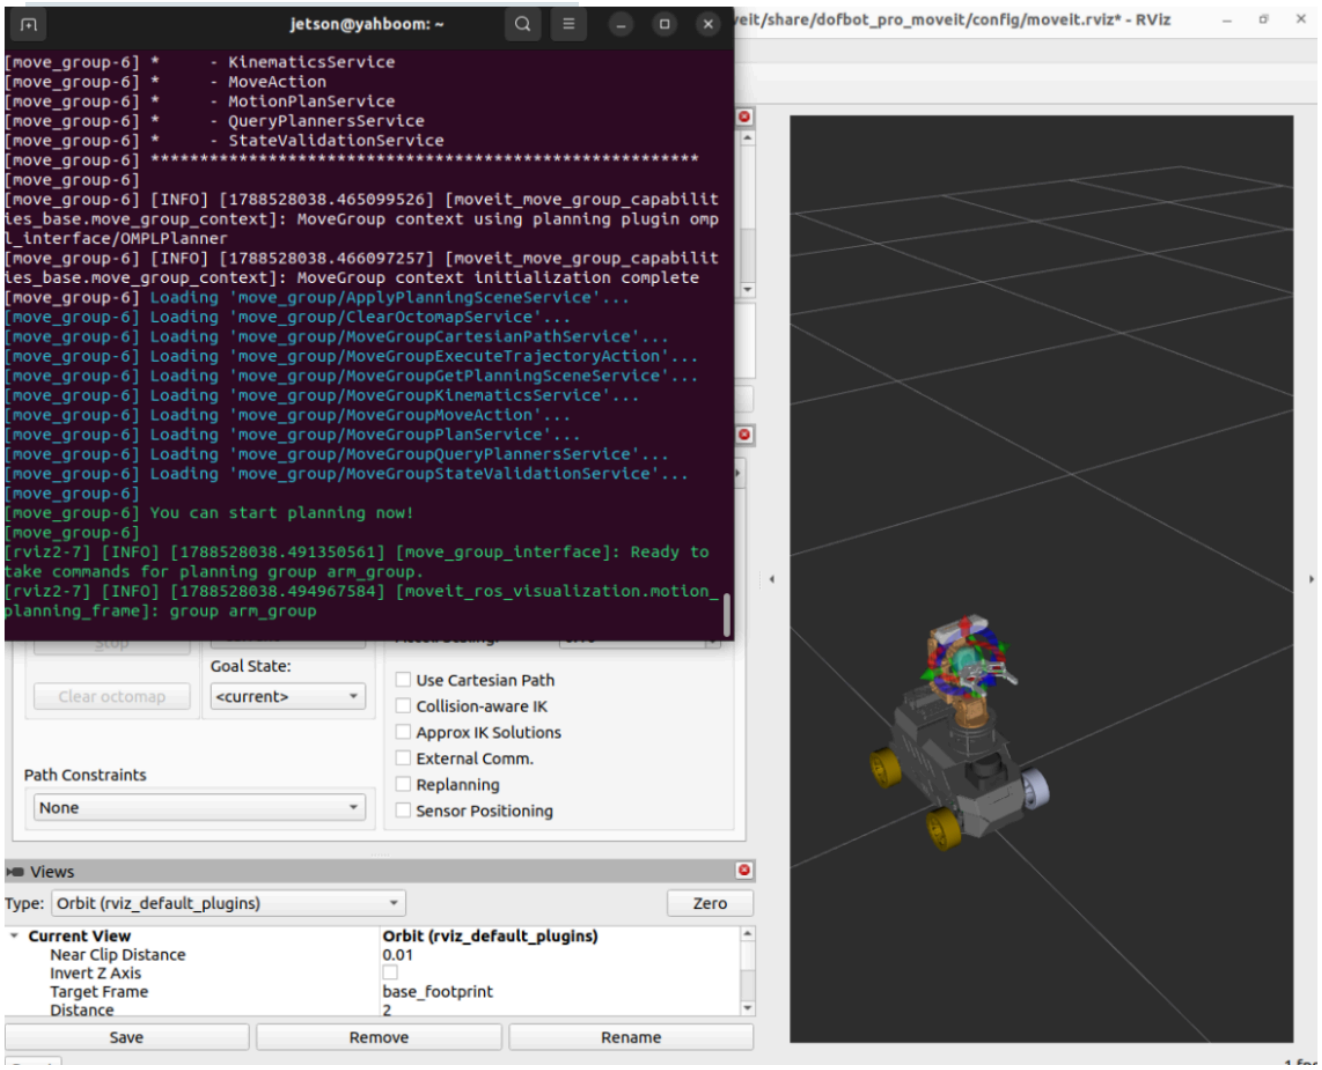

If you want the simulated robot arm to be linked with the real physical robot arm (optional), open another terminal to run the real-machine driver node:


```
ros2 run moveIt_demo SimulationToMachine
```

(It is recommended not to start this node during the initial test. First verify that the obstacle-avoidance trajectory is correct in the pure RViz simulation environment, and ensure the surrounding space is large enough before connecting to the real machine).

Next, enter the following command in another terminal to launch the random movement control node:

```
ros2 run movelt_demo random_move
```

After the program runs, the robot arm in RViz (as well as the physical robot arm) will periodically plan and smoothly move to various random poses within the safe angle range, as shown in the figure below:

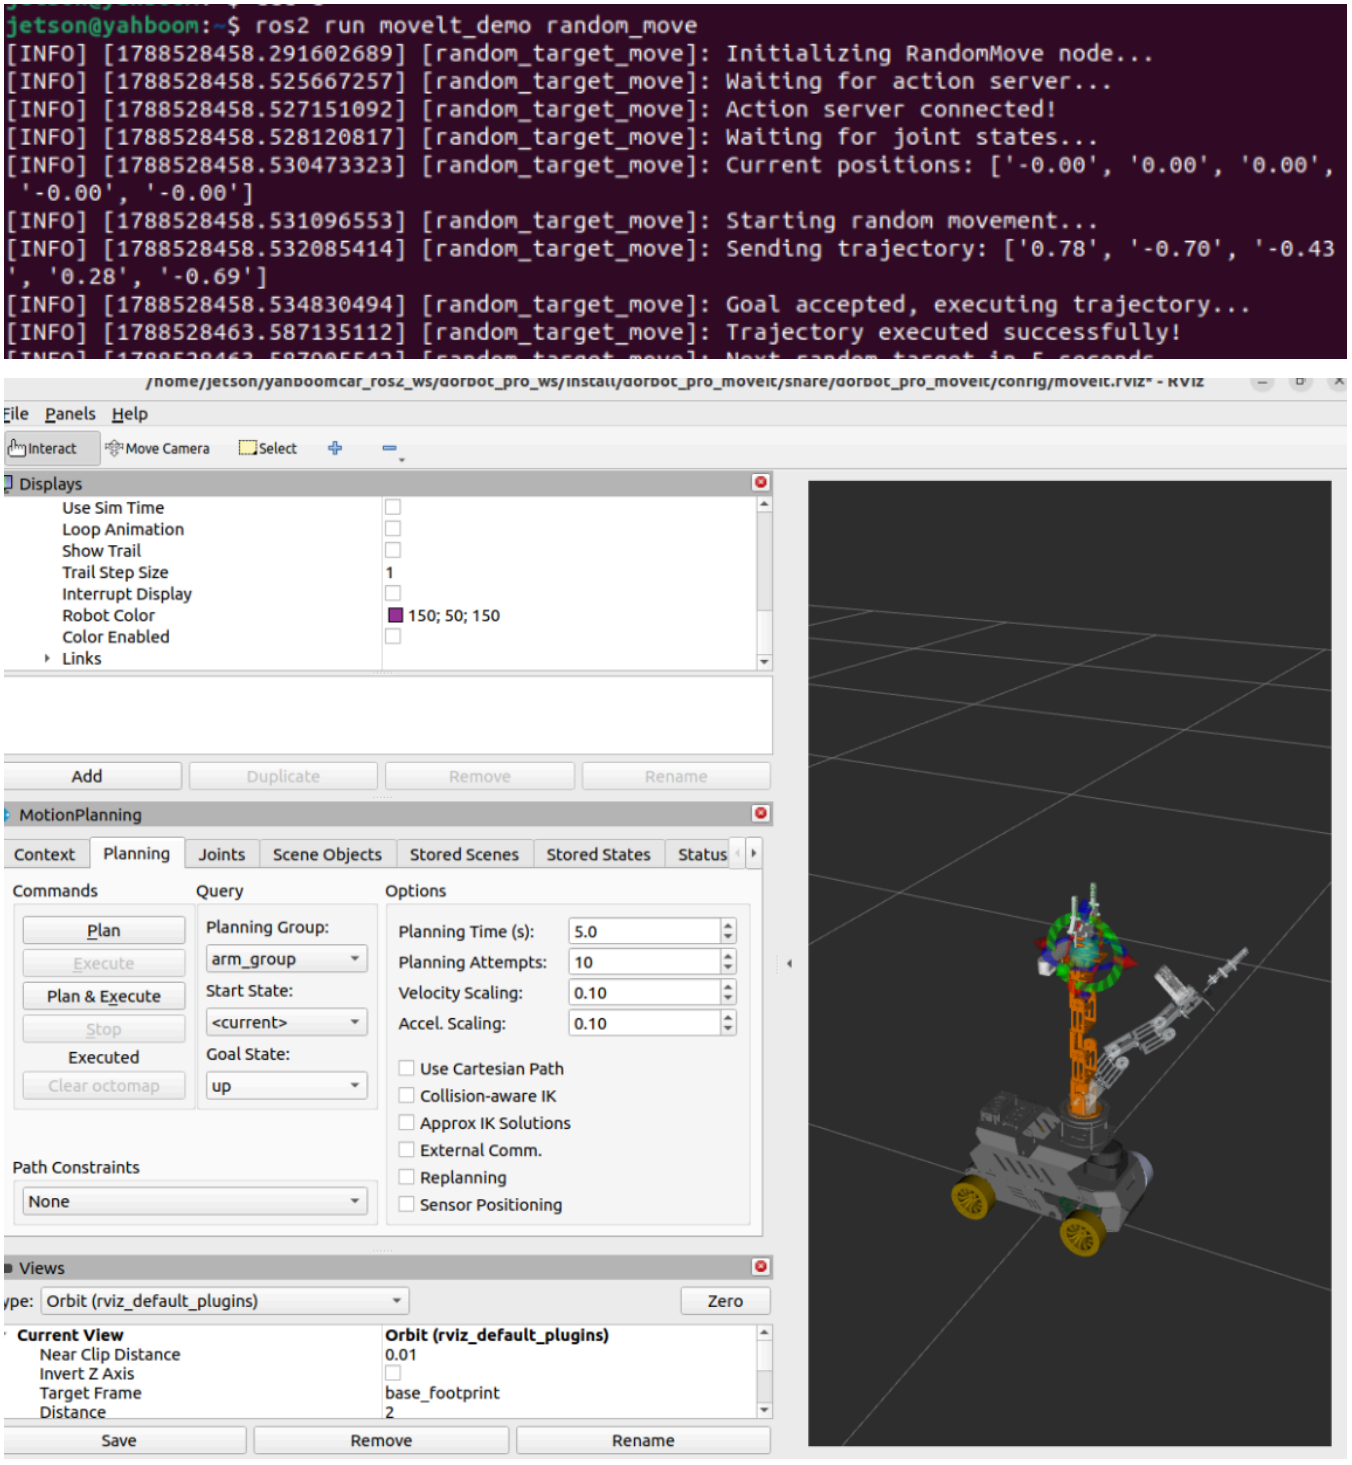

3. Core Code Analysis

Program source code path:
`~/yahboomcar_ros2_ws/dofbot_pro_ws/src/moveIt_demo/moveIt_demo/random_move.py`

3.1 Node Initialization and Action Client Configuration

This node interacts with the controller through the standard ROS 2 `FollowJointTrajectory` Action client, and sets the safe angle limits of the 5-DOF robot arm:

```
import rclpy
from rclpy.node import Node
from rclpy.action import ActionClient
from control_msgs.action import FollowJointTrajectory
from trajectory_msgs.msg import JointTrajectory, JointTrajectoryPoint
from sensor_msgs.msg import JointState
from builtin_interfaces.msg import Duration
import random

class RandomMove(Node):
    def __init__(self):
        super().__init__('random_target_move')
        self.get_logger().info("Initializing RandomMove node...")

        # 1. Create an Action client for FollowJointTrajectory to connect to the robot arm
trajectory controller
        self._action_client = ActionClient(
            self,
            FollowJointTrajectory,
            '/arm_group_controller/follow_joint_trajectory'
        )

        # 2. Robot arm joint names (corresponding to the MoveIt planning group)
        self.joint_names = [
            "arm1_Joint", "arm2_Joint", "arm3_Joint",
            "arm4_Joint", "arm5_Joint"
        ]

        # 3. Motion range limits of each joint (in radians: approximately -90° to +90°)
        self.joint_limits = [
            (-1.57, 1.57),  # arm1 rotating base
            (-1.57, 1.57),  # arm2 upper arm
            (-1.57, 1.57),  # arm3 forearm 1
            (-1.57, 1.57),  # arm4 forearm 2
            (-1.57, 1.57),  # arm5 end-effector flip
        ]

        self.current_positions = [0.0] * 5
        self.joint_state_received = False
        # Subscribe to the current joint states
        self.joint_state_sub = self.create_subscription(
            JointState, '/joint_states', self.joint_state_callback, 10
        )
```

```
        self.executing = False
        self._action_client.wait_for_server()
```

3.2 Safe Random Target Generation and Trajectory Publishing

To ensure that the robot arm is not over-extended or touching the chassis, the program randomly generates target values within the 70% safe range of the joints' physical limits, and packages them as trajectory points to send to the controller:

```
    def generate_random_joint_goals(self):
        """Randomly generate 5 joint angles within the 70% safe threshold"""
        goals = []
        for i, (low, high) in enumerate(self.joint_limits):
            angle = random.uniform(low * 0.7, high * 0.7)
            goals.append(angle)
        return goals

    def send_trajectory(self, joint_goals, duration_sec=3.0):
        """Construct a trajectory and send it asynchronously to the controller for
execution"""
        if self.executing:
            return
        self.executing = True

        trajectory = JointTrajectory()
        trajectory.joint_names = self.joint_names

        point = JointTrajectoryPoint()
        point.positions = joint_goals
        point.velocities = [0.0] * len(joint_goals)
        point.time_from_start = Duration(
            sec=int(duration_sec),
            nanosec=int((duration_sec % 1) * 1e9)
        )
        trajectory.points.append(point)

        goal_msg = FollowJointTrajectory.Goal()
        goal_msg.trajectory = trajectory

        send_goal_future = self._action_client.send_goal_async(goal_msg)
        send_goal_future.add_done_callback(self.goal_response_callback)

    def result_callback(self, future):
        """Action execution completion callback; after success, create a 5-second timer for
the next random movement"""
        result = future.result().result
        self.executing = False
        if result.error_code == 0:
            self.get_logger().info("Trajectory planning executed successfully!")
            self.create_timer(5.0, self.execute_random_move_once)
```