OpenClaw WebChat Interaction

OpenClaw WebChat Interaction

1. Course Content
   - Course Overview
   - Learning Objectives
2. Adding Allowed Addresses
3. Accessing Web UI
4. Model Switching and Conversation
5. Common Conversation Commands
6. Common Errors and Solutions
   - 6.1 Cannot Open Web Page
   - 6.2 Token Verification Failed
   - 6.3 No Response or Model Loading Failed
   - 6.4 Allowed Addresses Configuration Not Taking Effect

1. Course Content

Course Overview

OpenClaw WebChat is a browser-based web interaction interface. No client software installation is required - simply enter the address in your computer's browser to chat with the robot. This course will provide a detailed introduction to interacting with OpenClaw via WebChat.

Learning Objectives


- Learn to configure WebChat's allowed addresses (Allowed Origins)
- Master the method to access OpenClaw Web UI via browser
- Be able to perform model switching and conversations in the Web interface
- Understand common issues and solutions during WebChat usage

2. Adding Allowed Addresses

- Set the address whitelist for accessing WebChat in the OpenClaw configuration file:

```
nano $HOME/.openclaw/openclaw.json
# Or use your preferred editor, such as vim, code, etc.
```

- Find the `gateway.controlUi.allowedOrigins` configuration item and enter the robot's IP address + `:18789`
- If your robot has multiple IPs, separate them with commas

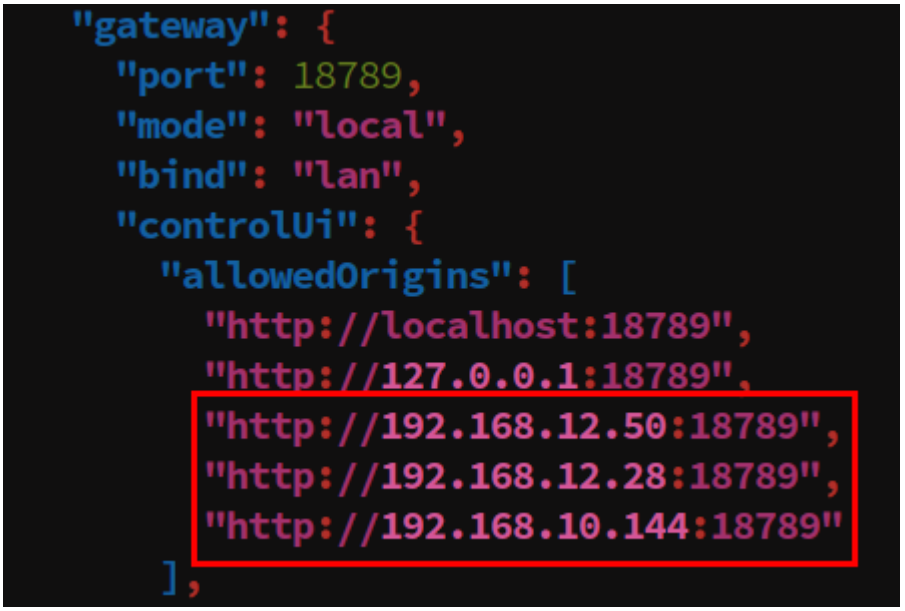


- **Save and exit** - Press `Ctrl+O` to save, `Ctrl+X` to exit (nano editor)
- Restart the gateway to apply the configuration


```
openclaw gateway restart
# For Raspberry Pi version:
ocg restart
```

3. Accessing Web UI

- Open a browser on a computer in the same network segment as the robot, enter `robot IP:18789` in the address bar, and the page will redirect to the gateway dashboard interface
- Enter `yahboom` in the gateway token field, then click Connect

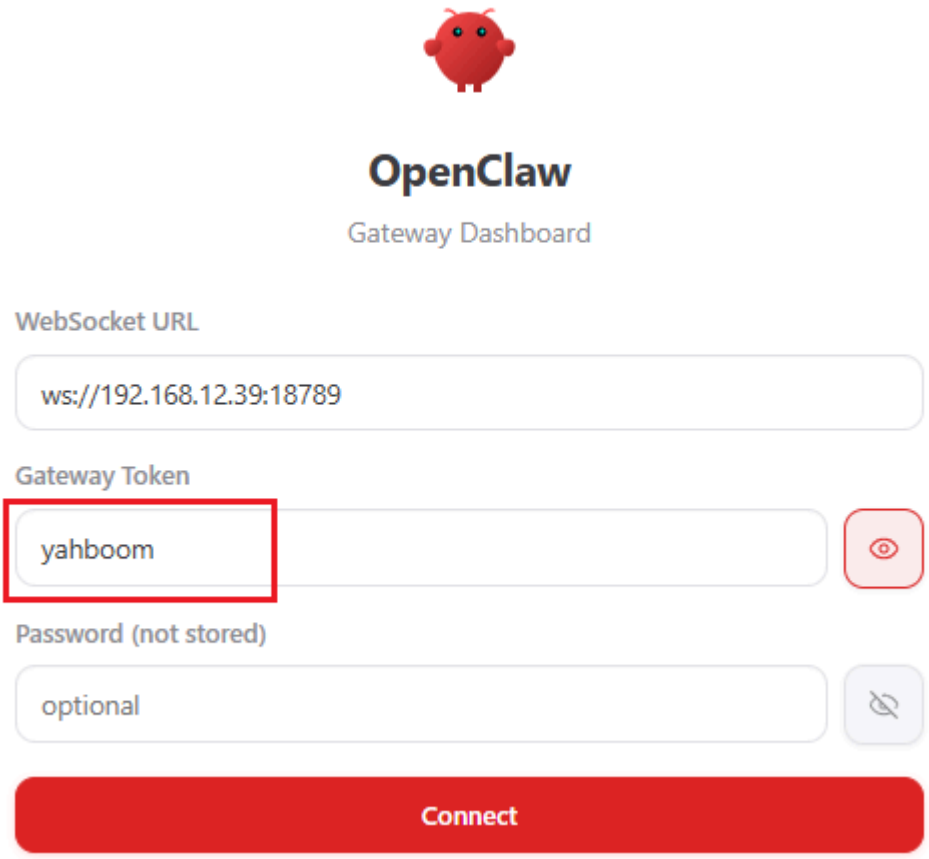


- You will then enter OpenClaw's Web interface, where you can chat with OpenClaw, monitor status, and configure parameters

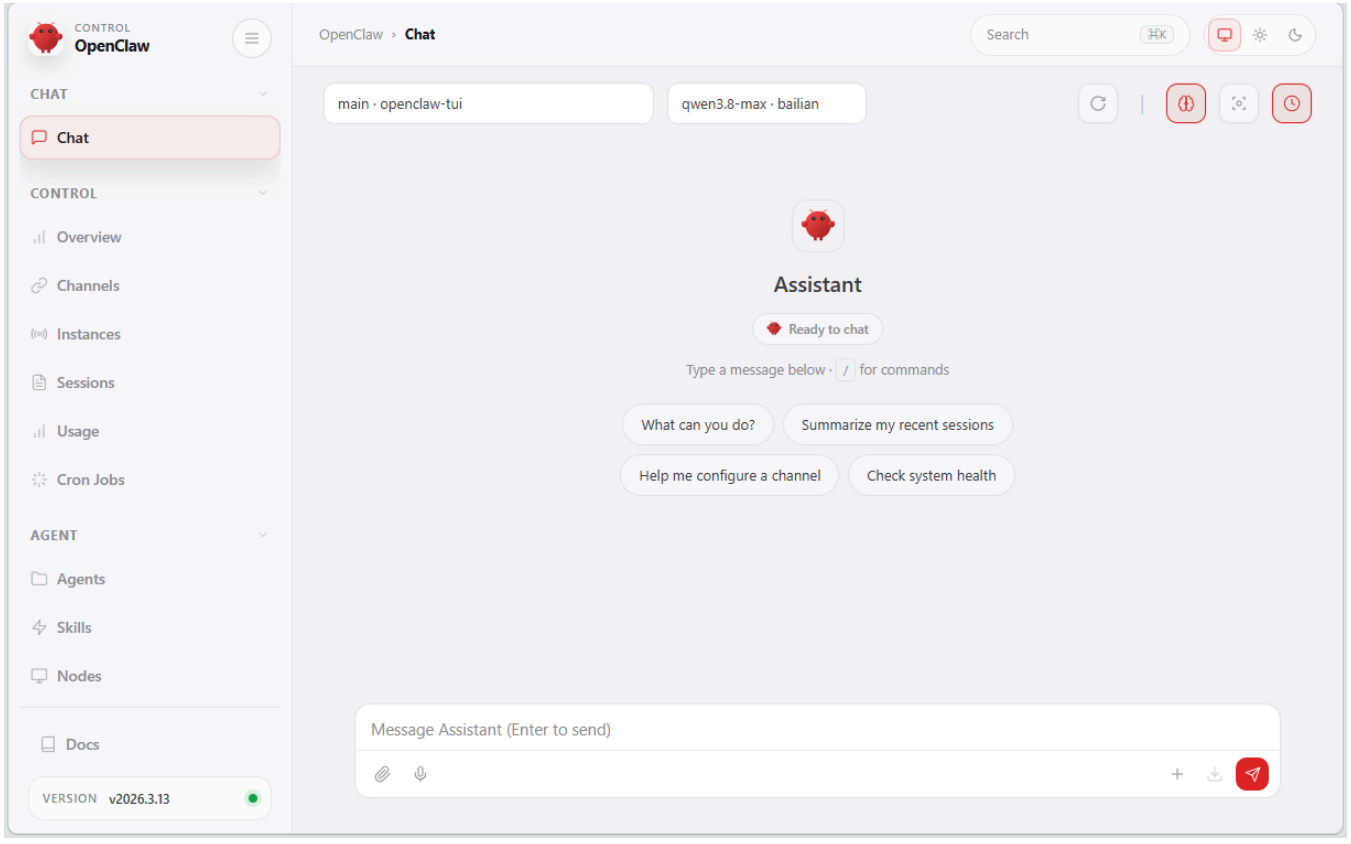


4. Model Switching and Conversation

- In the model dropdown at the top of the Web interface, you can select a configured model to temporarily switch the current session's model

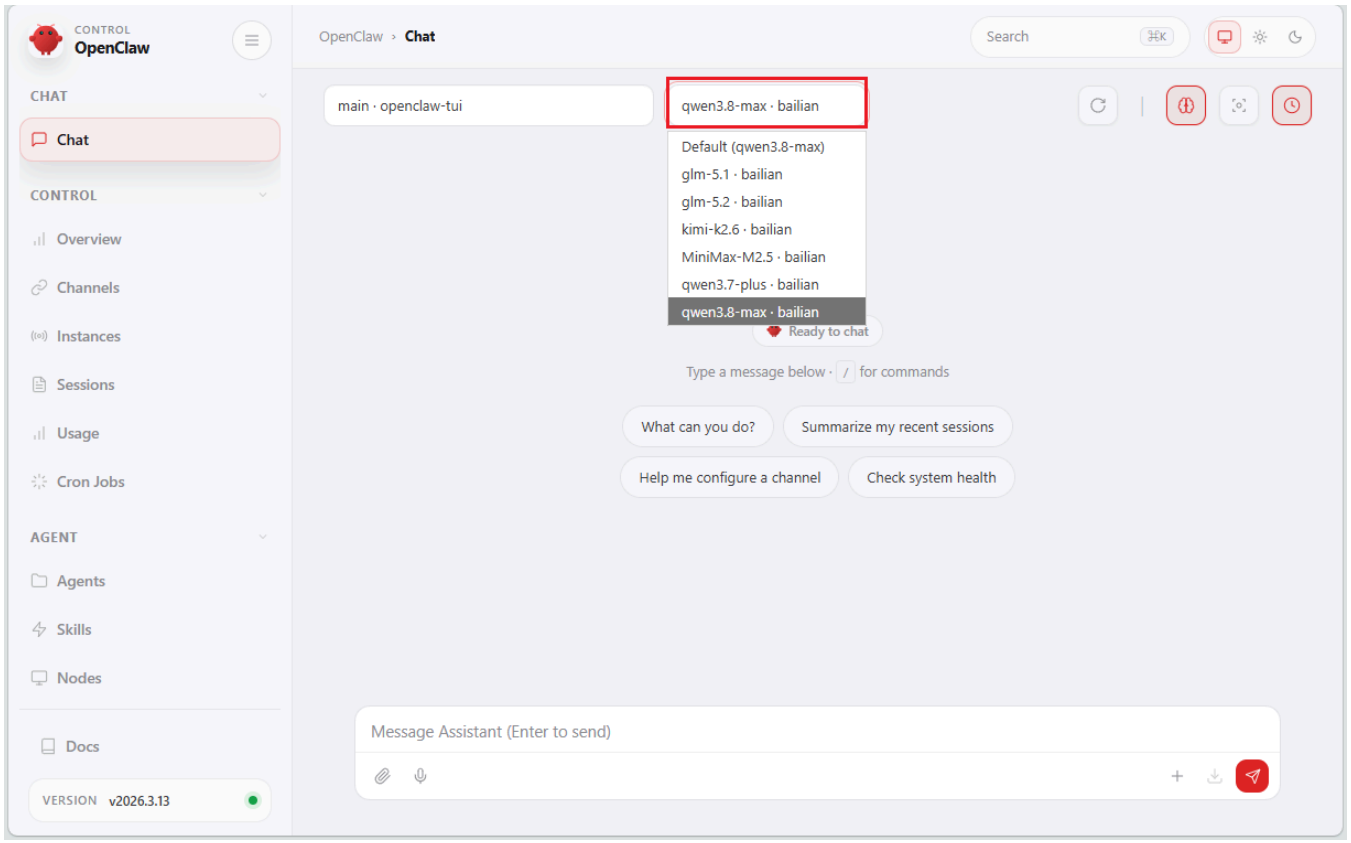

- After selecting a model, you can chat with OpenClaw in the dialog box

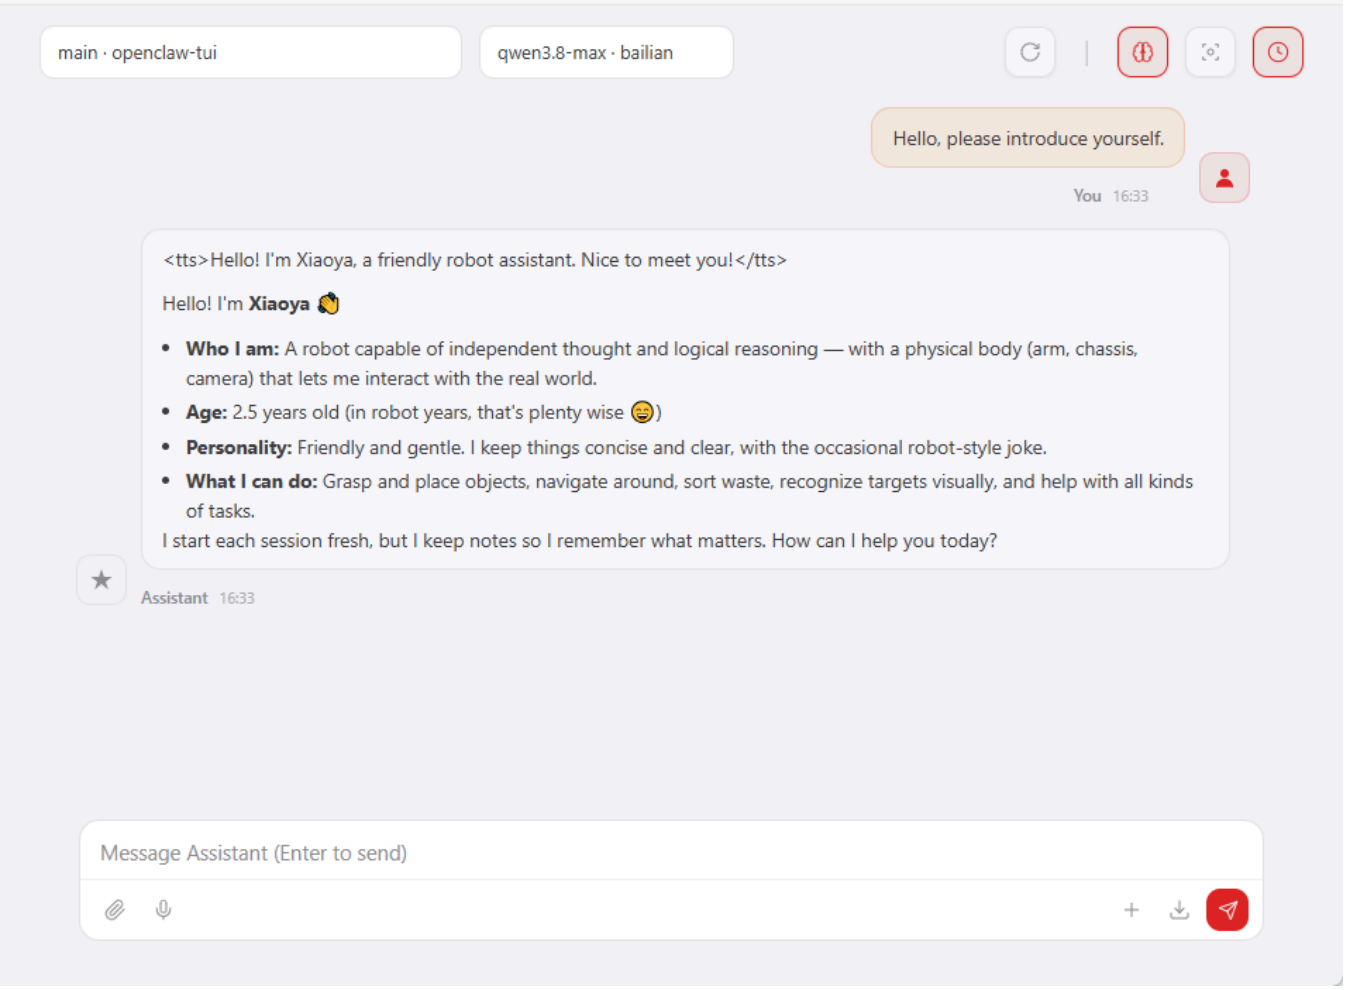

5. Common Conversation Commands

In the WebChat dialog box, besides directly typing text to chat with OpenClaw, you can also use slash commands starting with `/` to perform various operations. Here are some common conversation commands:

Command	Description	Usage Example
`/model [model name]`	Switch the current session's model	`/model gpt-4o`
`/stop`	Stop the currently generating response	Just input `/stop`
`/new`	Start a new conversation (clear current dialogue history)	Just input `/new`
`/reset`	Reset the current conversation (`/new` alias)	Just input `/reset`
`/compact`	Compact conversation context to save tokens	`/compact`
`/fast [on/off]`	Toggle fast mode (disable thought chain output)	`/fast on`
`/status`	View current running status and execution info	Just input `/status`
`/help`	Display brief help information	Just input `/help`

Command	Description	Usage Example
`/commands`	View the complete directory of all available commands	Just input `/commands`
`/think [level]`	Set the output level of the thought chain	`/think off`

> **Note:** Slash commands must be sent as **independent messages** (i.e., only the command itself in the dialog box), and cannot be mixed with regular conversation text.

---

6. Common Errors and Solutions

6.1 Cannot Open Web Page

Symptoms: After entering the address in the browser, the page shows inaccessible or connection timeout.

- **Robot gateway not running** — Make sure OpenClaw Gateway is started; run `openclaw gateway status` to check the status
- **Network unreachable** — Confirm that the computer and robot are on the same LAN; use `ping robot IP` to test connectivity

6.2 Token Verification Failed

Symptoms: After entering the token, authentication fails and the connection cannot be established.

- **Incorrect token entered** — Make sure to enter `yahboom` in the token field (note case sensitivity)
- **Token configuration has been modified** — Check if the value of `gateway.controlUi.authToken` in `openclaw.json` matches what you entered

6.3 No Response or Model Loading Failed

Symptoms: Successfully entered the Web interface, but OpenClaw does not reply after sending a message.

Possible causes and solutions:

- **Model not configured correctly** — Run `openclaw models list` and `openclaw models status` in the terminal to check if the model is configured and available
- **API-KEY not set or expired** — Refer to the API-KEY configuration chapter to reconfigure
- **Model switching exception** — Try reselecting the model using the `/model` command in the dialog box
- **Gateway connection lost** — Restart the gateway: `openclaw gateway restart`

6.4 Allowed Addresses Configuration Not Taking Effect

Symptoms: Still cannot access even after filling in allowedOrigins.

Possible causes and solutions:

- **Gateway not restarted** — After modifying the configuration file, you must run `openclaw gateway restart` for changes to take effect

- **IP address filled incorrectly** — Use `ip a` or `ifconfig` to confirm the robot's actual IP address
- **Configuration item in wrong location** — Confirm that `allowedOrigins` is under the `gateway.controlUi` node, not elsewhere