

【Track Map】 Multimodal visual understand+SLAM navigation

【Track Map】 Multimodal visual understand+SLAM navigation

1. Course Content
2. Preparation
 - 2.1 Content Description
 - 2.2 Configuring the Mapping File
3. Run the Example
 - 3.1 Starting the Program
 - 3.2 Test Cases
 - 3.2.1 Case 1

1. Course Content

1. Learn to use the robot's visual understanding combined with SLAM navigation on a Track map.

2. Preparation



2.1 Content Description

This lesson uses the rdx5, USB camera PTZ version user as an example. For Raspberry Pi and Jetson-Nano boards, you need to open a terminal on the host computer and enter the command to enter the Docker container. Once inside the Docker container, enter the commands mentioned in this lesson in the terminal. For instructions on entering the Docker

container from the host computer, refer to **[01. Robot Configuration and Operation Guide] -- [4.Enter Docker (For JETSON Nano and RPi 5)]**. For RDKX5 and Orin boards, simply open a terminal and enter the commands mentioned in this lesson.

📝 This example uses `model:"qwen/qwen2.5-v1-72b-instruct:free", "qwen-v1-latest"`

⚠️ The responses from the big model for the same test command may not be exactly the same and may differ slightly from the screenshots in the tutorial. To increase or decrease the diversity of the big model's responses, refer to the section on configuring the decision-making big model parameters in **[04.AI Large Model Development] -- [5.Deploy the RAG knowledge base]** .

2.2 Configuring the Mapping File

For detailed information on the principles and concepts of map mapping, please refer to the course content in [2. AI Large Model Basics - 3. Embodied Intelligent Robot System Architecture].

Before running this example, you need to construct and save a map using one of the following algorithms from the **[LiDAR Course]-[5.Gmapping-SLAM mapping], [6.Cartographer-SLAM mapping], [7.slam_toolbox mapping]** , resulting in a .yaml map file.

For Raspberry Pi and Jetson-Nano boards, you need to enter the Docker container first. For RDKX5 and Orin controllers, this is not necessary.

Enter the Docker container (see [Docker course] --- [4. Docker Startup Script] for steps).

All the following commands must be executed within the same Docker container **(see [Docker course] --- [3. Docker Submission and Multi-Terminal Access] for steps).**

Connect to the robot's desktop via VNC, open the terminal, and enter the command.

```
ros2 launch yahboomcar_nav laser_bringup_launch.py
```

Start the virtual machine by creating a new terminal. **(For RDKX5, Raspberry Pi, and Jetson Nano, it is recommended to run the visualization on the virtual machine.)**

```
ros2 launch yahboomcar_nav display_nav_launch.py
```

等待导航算法开启即可出图，再打开终端输入

```
# Choose one of the two navigation algorithms
# Standard navigation
ros2 launch yahboomcar_nav navigation_teb_launch.py


#Fast relocalization navigation (RDKX5 , jetson nano and Raspberry Pi 5 are not supported)
ros2 launch yahboomcar_nav localization_imu_odom.launch.py use_rviz:=false
load_state_filename:=/home/jetson/yahboomcar_ros2_ws/yahboomcar_ws/src/yahboomcar_nav/maps/yahboomcar.pbstream

ros2 launch yahboomcar_nav navigation_cartodwb_launch.py
maps:=/home/jetson/yahboomcar_ros2_ws/yahboomcar_ws/src/yahboomcar_nav/maps/yahboomcar.yaml
params_file:=/home/jetson/yahboomcar_ros2_ws/yahboomcar_ws/src/yahboomcar_nav/params/cartoteb_nav_params.yaml
```

Note: yahboomcar.yaml and yahboomcar.pbstream must be mapped simultaneously, meaning they are the same map. Refer to the cartograph mapping algorithm for saving maps.

After that, follow the navigation function startup process to initialize positioning. The rviz2 visualization interface will open. Click **2D Pose Estimate** in the upper toolbar to enter the selection state. Roughly mark the robot's position and orientation on the map. After initializing positioning, preparations are complete.

The robot's model will be displayed on the map, as shown in the image below:

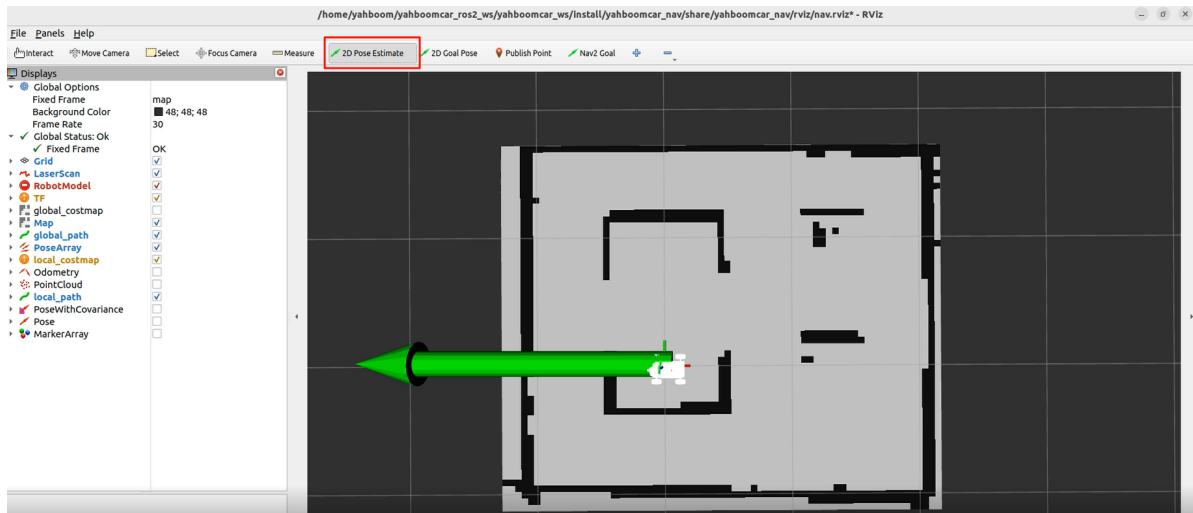

Create another terminal in the virtual machine and enter the command.

```
ros2 topic list
```


```
yahboom@yahboom-virtual-machine: ~  
yahboom@yahboom-virtual-machine: ~ 104x26  
/bt_navigator/transition_event  
/clicked_point  
/cmd_vel  
/cmd_vel_nav  
/controller_server/transition_event  
/cost_cloud  
/diagnostics  
/downsampled_costmap  
/downsampled_costmap_updates  
/evaluation  
/global_costmap/clearing_endpoints  
/global_costmap/costmap  
/global_costmap/costmap_raw  
/global_costmap/costmap_updates  
/global_costmap/footprint  
/global_costmap/global_costmap/transition_event  
/global_costmap/published_footprint  
/global_costmap/voxel_grid  
/global_costmap/voxel_marked_cloud  
/goal_pose  
/imu/data  
/imu/data_raw  
/imu/mag  
/initialpose  
/joint_states  
/local_costmap/clearing_endpoints
```

You can see the **/initialpose** topic. This topic was published using the **2D Pose Estimate** tool in rviz2 in the previous step. We can use this tool to publish coordinates and view the data of the **/initialpose** topic to obtain the coordinates and orientation angle of a point on the map.


Enter the following command in the terminal to observe the data on the **/initialpose** topic.

```
ros2 topic echo /initialpose
```

We can name any point on the map; here's an example of naming as shown in the image.

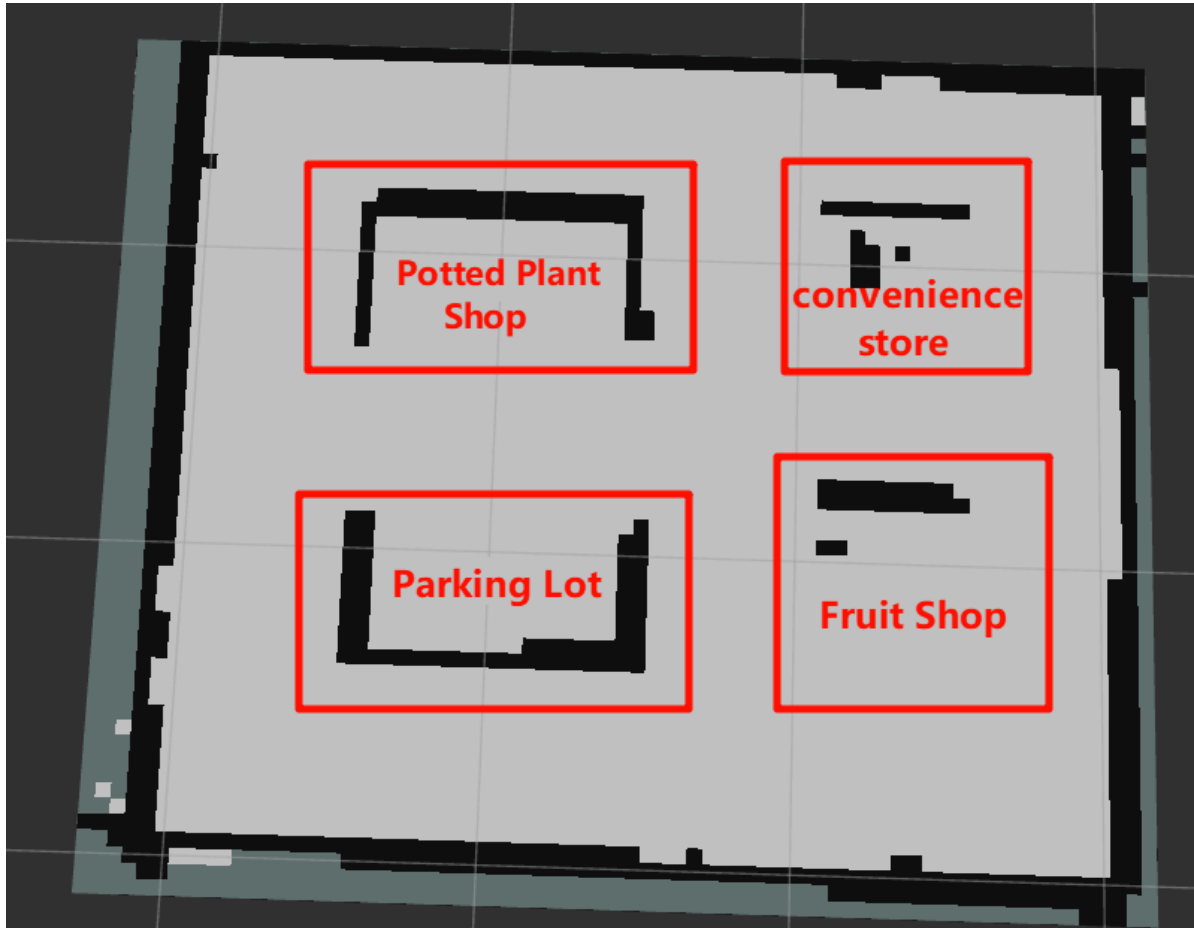

As shown in the image below, first click the **2D Pose Estimate** tool, then left-click and hold any location in the "Fruit Shop" area to adjust the orientation. Release the mouse button when you're satisfied.

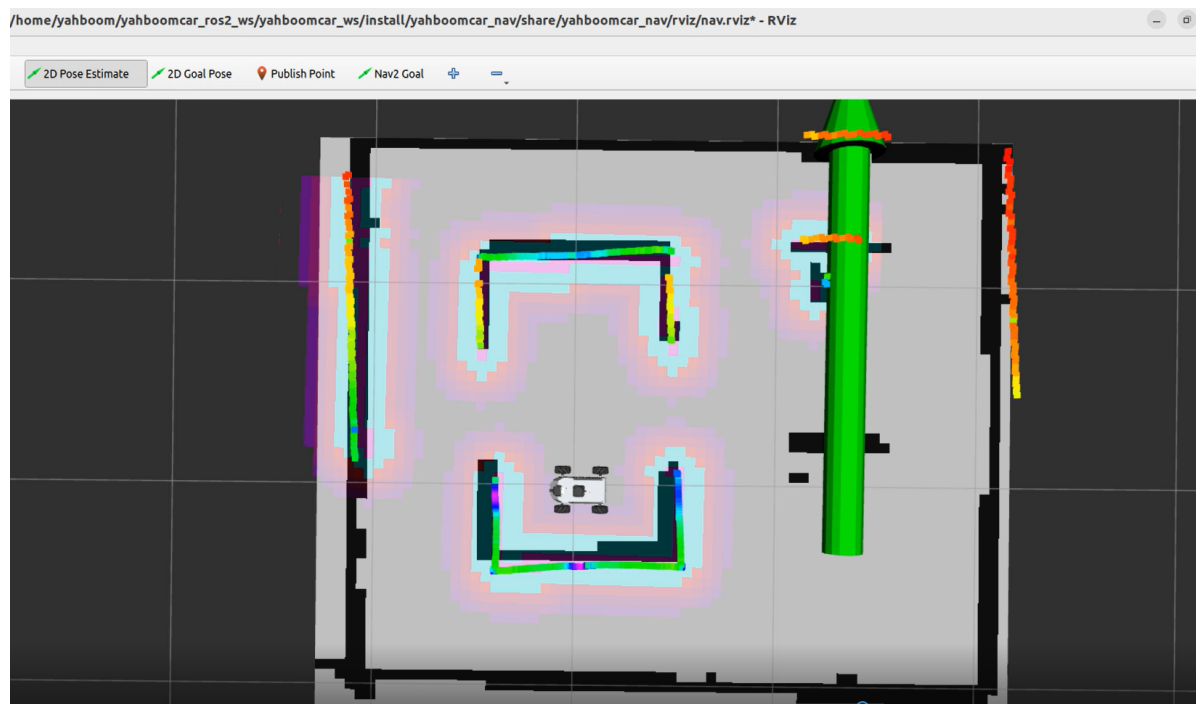

The robot's position will be adjusted to the previously selected location and orientation. You can preview the robot's expected position and orientation in RViz.



The last frame of information in the terminal window shows the coordinates of the target point we just marked using the **2D Pose Estimate** tool.


```
orientation:
  x: 0.0
  y: 0.0
  z: 0.7038725577603971
  w: 0.7103262788548911
```

#此处可新增添加区域对应的栅格地图坐标点，注意和上面格式保持一致

#Here, you can add the raster map coordinate points corresponding to the added area. Please note that the format should be consistent with the above

In the same way, we can add a map mapping for the "Potted Plant Shop".

#根据实际的场景环境，自定义地图中的区域，可以添加任意个区域，注意和大模型的地图映射保持一致即可
#According to the actual scene environment, customize the areas in the map. You can add any number of areas, just make sure they are consistent with the map mapping of the large model

#地图映射Map mapping

A:

```
name: 'Fruit Shop'
position:
  x: 1.339120626449585
  y: -0.4776395797729492
  z: 0.0
orientation:
  x: 0.0
  y: 0.0
  z: 0.7038725577603971
  w: 0.7103262788548911
```

B:

```
name: 'Potted Plant Shop'
position:
  x: -0.0008649379014968872
  y: 0.4937915802001953
  z: 0.0
orientation:
  x: 0.0
  y: 0.0
  z: 0.7133229968132297
  w: 0.7008354316224266
```

#此处可新增添加区域对应的栅格地图坐标点，注意和上面格式保持一致

#Here, you can add the raster map coordinate points corresponding to the added area. Please note that the format should be consistent with the above

Then, switch to the `/yahboomcar_ros2_ws/yahboomcar_ws#` workspace in the terminal:
recompile the largemodel package to apply the configuration. **(For Jetson Nano and Raspberry Pi hosts, you need to enter Docker first)**

```
cd ~/yahboomcar_ros2_ws/yahboomcar_ws/
```

Recompile the package:

```
colcon build --packages-select multi_brains
```

```
• sunrise@ubuntu:~$ cd yahboomcar_ros2_ws/yahboomcar_ws/
• sunrise@ubuntu:~/yahboomcar_ros2_ws/yahboomcar_ws$ colcon build --packages-select largemodel
Starting >>> largemodel
Finished <<< largemodel [10.5s]

Summary: 1 package finished [12.0s]
```

3. Run the Example

3.1 Starting the Program

Open the host terminal and start the Dify environment.

```
sh ~/bringup_dify.sh
```

```
[System Information]
IP_Address_1: 192.168.11.108
IP_Address_2: 172.18.0.1
-----
ROS_DOMAIN_ID: 63 | ROS: humble
my_robot_type: M1 | my_lidar: c1 | my_camera: usb
-----
sunrise@ubuntu:~$ sh ~/bringup_dify.sh
[+] Running 11/11
✓ Container docker-ssrf_proxy-1    Running    0.0s
✓ Container docker-web-1          Running    0.0s
✓ Container docker-redis-1        Running    0.0s
✓ Container docker-weaviate-1     Running    0.0s
✓ Container docker-db-1           Healthy    0.5s
✓ Container docker-sandbox-1      Running    0.0s
✓ Container docker-api-1          Running    0.0s
✓ Container docker-worker-1       Running    0.0s
✓ Container docker-worker_beat-1  Running    0.0s
✓ Container docker-plugin_daemon-1 Running    0.0s
✓ Container docker-nginx-1        Running    0.0s
```

For Raspberry Pi and Jetson-Nano boards, you need to enter the Docker container first. For RDKX5 and Orin controllers, this is not necessary.

Open the terminal and enter the command:

```
ros2 launch multi_brains llm_agent_control.launch.py
```

```
sunrise@ubuntu: ~
IP_Address_2: 172.17.0.1
-----
ROS_DOMAIN_ID: 64 | ROS: humble
my_robot_type: M1 | my_lidar: c1 | my_camera: usb
-----
sunrise@ubuntu:~$ ros2 launch largemodel largemodel_control.launch.py
[INFO] [launch]: All log files can be found below /home/sunrise/.ros/log/2025-10-14-09-53-15-309512-ubuntu-60685
[INFO] [launch]: Default logging verbosity is set to INFO
----- robot_type = M1, rplidar_type = c1, camera_type = usb -----
-----robot_type = M1-----
[INFO] [usb_cam_node_exe-1]: process started with pid [60853]
[INFO] [joint_state_publisher-2]: process started with pid [60855]
[INFO] [robot_state_publisher-3]: process started with pid [60857]
[INFO] [Mcnamu_driver_M1-4]: process started with pid [60859]
[INFO] [base_node_M1-5]: process started with pid [60861]
[INFO] [imu_filter_madgwick_node-6]: process started with pid [60863]
[INFO] [ekf_node-7]: process started with pid [60865]
[INFO] [yahboom_joy_M1-8]: process started with pid [60867]
[INFO] [joy_node-9]: process started with pid [60869]
[INFO] [sllidar_node-10]: process started with pid [60874]
[INFO] [static_transform_publisher-11]: process started with pid [60897]
[INFO] [model_service-12]: process started with pid [60901]
[INFO] [action_service_usb-13]: process started with pid [60906]
[INFO] [asr-14]: process started with pid [60919]
[static_transform_publisher-11] [WARN] [1760406797.864417941] []: Old-style arguments are deprecated; see --help for new-style arguments
[imu_filter_madgwick_node-6] [INFO] [1760406797.994437091] [imu_filter_madgwick]: Starting ImuFilter
[imu_filter_madgwick_node-6] [INFO] [1760406798.003139890] [imu_filter_madgwick]: Using dt computed from message headers
[imu_filter_madgwick_node-6] [INFO] [1760406798.003312181] [imu_filter_madgwick]: The gravity vector is kept in the IMU message.
[imu_filter_madgwick_node-6] [INFO] [1760406798.027057993] [imu_filter_madgwick]: Imu filter gain set to 0.100000
[imu_filter_madgwick_node-6] [INFO] [1760406798.029684703] [imu_filter_madgwick]: Gyro drift bias set to 0.000000
[imu_filter_madgwick_node-6] [INFO] [1760406798.030990788] [imu_filter_madgwick]: Magnetometer bias values: 0.000000 0.000000 0.000000
[base_node_M1-5] [INFO] [1760406797.996725051] [base_node]: Received parameters - linear_scale_x: 1.000000, linear_scale_y: 1.000000, angular_scale: 1.000000
[robot_state_publisher-3] [INFO] [1760406798.178167743] [robot_state_publisher]: got segment base_footprint
[robot_state_publisher-3] [INFO] [1760406798.182040287] [robot_state_publisher]: got segment base_link
[robot_state_publisher-3] [INFO] [1760406798.182197788] [robot_state_publisher]: got segment cam1 Link
```

Start the virtual machine by creating a new terminal. **(For RDKX5, Raspberry Pi, and Jetson Nano, it is recommended to run the visualization on the virtual machine.)**

```
ros2 launch yahboomcar_nav display_nav_launch.py
```

Wait for the navigation algorithm to activate and the map to appear, then open the terminal and enter...



```
# Choose one of the two navigation algorithms
# Standard navigation
ros2 launch yahboomcar_nav navigation_teb_launch.py

#Fast relocalization navigation (RDKX5, Jetson nano and Raspberry Pi 5 are not supported)
ros2 launch yahboomcar_nav localization_imu_odom.launch.py use_rviz:=false
load_state_filename:=/home/jetson/yahboomcar_ros2_ws/yahboomcar_ws/src/yahboomcar_nav/maps/yahboomcar.pbstream

ros2 launch yahboomcar_nav navigation_cartodwb_launch.py
maps:=/home/jetson/yahboomcar_ros2_ws/yahboomcar_ws/src/yahboomcar_nav/maps/yahboomcar.yaml
params_file:=/home/jetson/yahboomcar_ros2_ws/yahboomcar_ws/src/yahboomcar_nav/params/cartoteb_nav_params.yaml
```

Note: yahboomcar.yaml and yahboomcar.pbstream must be mapped simultaneously, meaning they are the same map. Refer to the cartograph mapping algorithm for saving maps.

After that, follow the navigation function startup process to initialize positioning. The rviz2 visualization interface will open. Click **2D Pose Estimate** in the upper toolbar to enter the selection state. Roughly mark the robot's position and orientation on the map. After initializing positioning, preparations are complete.

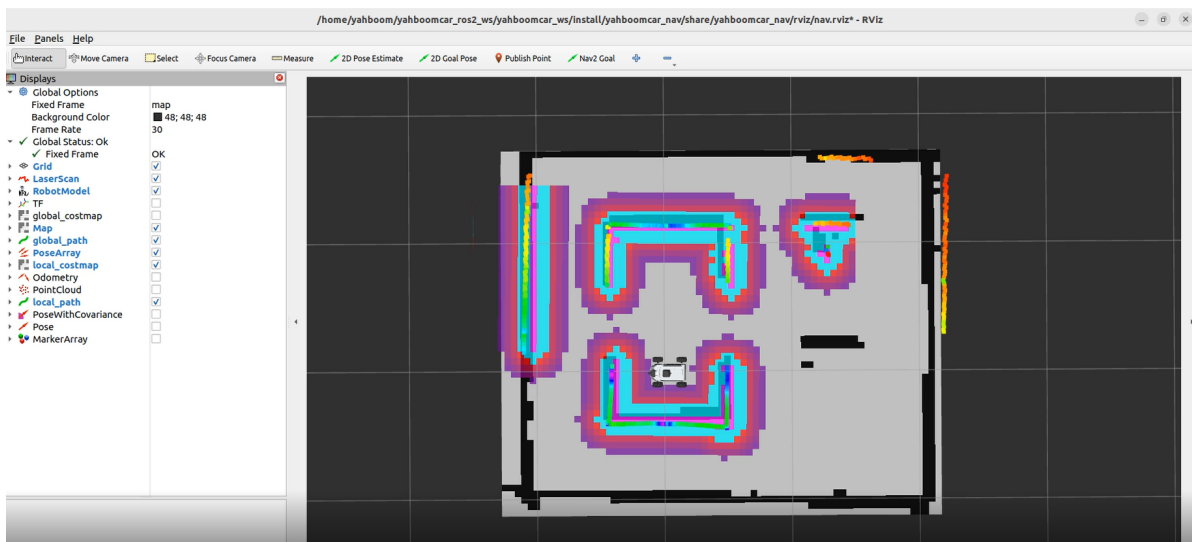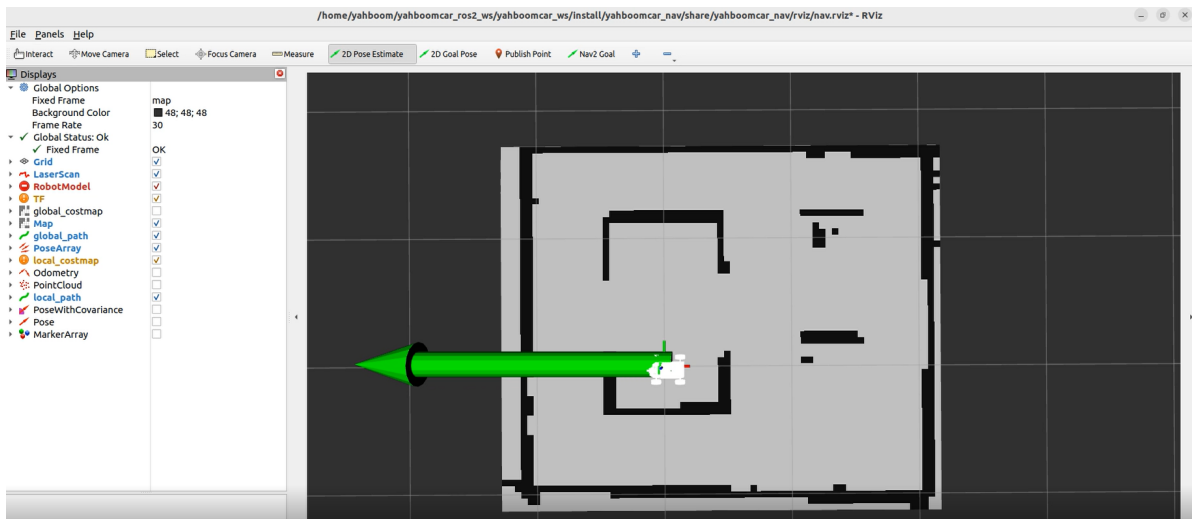

3.2 Test Cases

Here is a sample test case; users can create their own dialogue commands:

- Please remember your current location, then go to the fruit shop and the convenience store in sequence, return to your original location, and tell me what you saw.

3.2.1 Case 1

First, wake up the robot by saying "Hello yahboom". The robot will respond, "I'm here, please give me order." After the robot responds, its buzzer will sound briefly (beep-), and then the user can speak. The robot will perform dynamic sound detection; if there is sound activity, it will print "1", and if there is no sound activity, it will print "-". After speaking, it will detect the end of the sound; if there is silence for more than 450ms, recording will stop.

Dynamic Sound Detection (VAD) is shown in the following figure:

```
sunrise@ubuntu: ~  
sunrise@ubuntu: ~ 125x41  
[action_service usb-13] from pkg resources import resource, resource_exists  
[imu_filter madgwick_node-6] [INFO] [1760406802.016424537] [imu_filter madgwick]: First IMU message received.  
[joint_state_publisher-2] [INFO] [1760406802.045628686] [joint_state_publisher]: Waiting for robot_description to be published on the robot_description topic...  
[asr-14] [INFO] [1760406845.891056276] [asr]: The online asr model :gummy-chat-v1 is loaded  
[asr-14] [INFO] [1760406845.929901140] [asr]: asr_node Initialization completed  
[action_service usb-13] [INFO] [1760406846.994750362] [action_service]: action service started...  
[model_service-12] [INFO] [1760406848.181021930] [model_service]: LargeModelService node Initialization completed...  
[asr-14] [INFO] [1760406985.899403811] [asr]: I'm here  
[asr-14] ALSA lib pcm dmix.c:1032:(snd_pcm_dmix_open) unable to open slave  
[asr-14] ALSA lib pcm.c:2664:(snd_pcm_open_noupdate) Unknown PCM cards.pcm.rear  
[asr-14] ALSA lib pcm.c:2664:(snd_pcm_open_noupdate) Unknown PCM cards.pcm.center_lfe  
[asr-14] ALSA lib pcm.c:2664:(snd_pcm_open_noupdate) Unknown PCM cards.pcm.side  
[asr-14] ALSA lib pcm.c:2664:(snd_pcm_open_noupdate) Unknown PCM cards.pcm.hdmi  
[asr-14] ALSA lib pcm.c:2664:(snd_pcm_open_noupdate) Unknown PCM cards.pcm.hdmi  
[asr-14] ALSA lib pcm.c:2664:(snd_pcm_open_noupdate) Unknown PCM cards.pcm.modem  
[asr-14] ALSA lib pcm.c:2664:(snd_pcm_open_noupdate) Unknown PCM cards.pcm.modem  
[asr-14] ALSA lib pcm.c:2664:(snd_pcm_open_noupdate) Unknown PCM cards.pcm.phoneline  
[asr-14] ALSA lib pcm.c:2664:(snd_pcm_open_noupdate) Unknown PCM cards.pcm.phoneline  
[asr-14] ALSA lib pcm_oss.c:397:(snd_pcm_oss_open) Cannot open device /dev/dsp  
[asr-14] ALSA lib pcm_oss.c:397:(snd_pcm_oss_open) Cannot open device /dev/dsp  
[asr-14] ALSA lib confmisc.c:160:(snd_config_get_card) Invalid field card  
[asr-14] ALSA lib pcm_usb_stream.c:482:(snd_pcm_usb_stream_open) Invalid card 'card'  
[asr-14] ALSA lib confmisc.c:160:(snd_config_get_card) Invalid field card  
[asr-14] ALSA lib pcm_usb_stream.c:482:(snd_pcm_usb_stream_open) Invalid card 'card'  
[asr-14] ALSA lib pcm dmix.c:1032:(snd_pcm_dmix_open) unable to open slave  
[asr-14] [INFO] [1760406987.880841151] [asr]: 1  
[asr-14] [INFO] [1760406987.944597697] [asr]: 1  
[asr-14] [INFO] [1760406988.004579198] [asr]: 1  
[asr-14] [INFO] [1760406988.061712031] [asr]: 1  
[asr-14] [INFO] [1760406988.124015326] [asr]: 1  
[asr-14] [INFO] [1760406988.193104750] [asr]: -  
[asr-14] [INFO] [1760406988.253492544] [asr]: -  
[asr-14] [INFO] [1760406988.314953421] [asr]: -  
[asr-14] [INFO] [1760406988.376768924] [asr]: -  
[asr-14] [INFO] [1760406988.438891385] [asr]: -  
[asr-14] [INFO] [1760406988.475412495] [asr]: -  
[asr-14] [INFO] [1760406988.538105831] [asr]: -  
[asr-14] [INFO] [1760406988.599228750] [asr]: -  
[asr-14] [INFO] [1760406988.662174045] [asr]: -  
[asr-14] [INFO] [1760406988.721234796] [asr]: -
```

The robot will first interact with the user to get a response, then follow the instructions, and the terminal will print the following information:

```
Applications  
sunrise@ubuntu: ~/Desktop  
sunrise@ubuntu: ~/Desktop 125x41  
[asr-14] [INFO] [1760409924.594647191] [asr]: -  
[asr-14] [INFO] [1760409924.633898613] [asr]: -  
[asr-14] [INFO] [1760409924.702939117] [asr]: -  
[asr-14] [INFO] [1760409924.769259147] [asr]: -  
[asr-14] [INFO] [1760409924.828899211] [asr]: -  
[asr-14] [INFO] [1760409924.893134188] [asr]: -  
[asr-14] [INFO] [1760409924.954098207] [asr]: -  
[asr-14] [INFO] [1760409925.019916889] [asr]: -  
[asr-14] [INFO] [1760409925.063276862] [asr]: -  
[asr-14] [INFO] [1760409925.122269396] [asr]: -  
[asr-14] [INFO] [1760409925.181049650] [asr]: -  
[asr-14] [INFO] [1760409925.245269395] [asr]: -  
[asr-14] [INFO] [1760409925.308561452] [asr]: -  
[asr-14] [INFO] [1760409925.370602235] [asr]: -  
[asr-14] [INFO] [1760409925.435111034] [asr]: -  
[asr-14] [INFO] [1760409925.465799757] [asr]: -  
[asr-14] [INFO] [1760409925.528144423] [asr]: -  
[asr-14] [INFO] [1760409925.591287725] [asr]: -  
[asr-14] [INFO] [1760409925.651482296] [asr]: -  
[asr-14] [INFO] [1760409925.715464558] [asr]: -  
[asr-14] [INFO] [1760409925.776213409] [asr]: -  
[asr-14] [INFO] [1760409925.837235527] [asr]: -  
[asr-14] [INFO] [1760409928.747220973] [asr]: 请你先记住现在的位置，然后依次去水果店和便利店返回到原来的位置，告诉我你都看到了什么东西。  
[asr-14] [INFO] [1760409928.750486364] [asr]: @okay, let me think for a moment...  
[model_service-12] [INFO] [1760409935.823681474] [model_service]: 决策层AI规划:1. 调用记录当前位置函数，记录位置  
[model_service-12] 2. 导航到水果店  
[model_service-12] 3. 调用视觉函数观察周围环境，并记录观察结果  
[model_service-12] 4. 导航到便利店  
[model_service-12] 5. 调用视觉函数观察周围环境，并记录观察结果  
[model_service-12] 6. 返回初始位置  
[model_service-12] 7. 将在水果店和便利店观察到的物品告知用户  
[model_service-12] [INFO] [1760409942.339012741] [model_service]: "action": ['get_current_pose()'], "response": 好的，我现在记住当前位置了。接下来我会去水果店和便利店看看，并告诉你我看到了什么。  
[action_service usb-13] [INFO] [1760409951.745392583] [action_service]: Recorded Pose - Position: x=0.05996864206231826, y=-0.001885812804798556, z=0.0, Orientation: x=0.0, y=0.0, z=0.9999999663923336, w=-0.00025925919808082477  
[action_service usb-13] [INFO] [1760409951.757109709] [action_service]: Published message: 机器人反馈:get_current_pose()成功  
[model_service-12] [INFO] [1760409953.821517973] [model_service]: "action": ['navigation(A)'], "response": 我已经记住了当前位置，现在准备导航去水果店。
```


The large-scale model at the decision-making level outputs the planned task steps:

```

[model_service-12] [INFO] [1760409935.823681474] [model_service]: 决策层AI规划:1. 调用记录当前位置函数, 记录位置
[model_service-12] 2. 导航到水果店
[model_service-12] 3. 调用视觉函数观察周围环境, 并记录观察结果
[model_service-12] 4. 导航到便利店
[model_service-12] 5. 调用视觉函数观察周围环境, 并记录观察结果
[model_service-12] 6. 返回初始位置
[model_service-12] 7. 将在水果店和便利店观察到的物品告知用户

```

The execution layer will then follow the steps of this task:

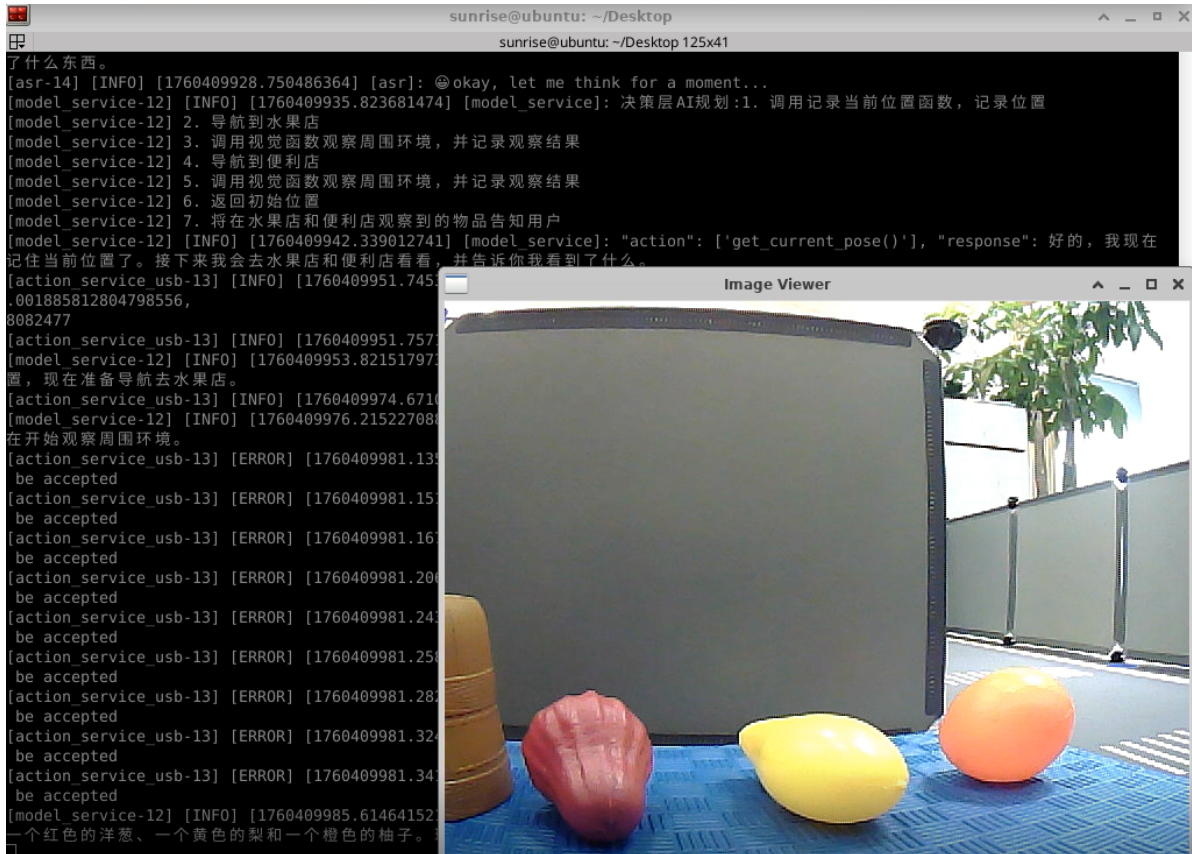

Once the task is completed, wake up the robot by saying "Hello yahboom," and the robot will respond, "I'm here, please give me order." At this point, you can proceed with the next command.

```
sunrise@ubuntu: ~/Desktop
sunrise@ubuntu: ~/Desktop 125x41
[action_service_usb-13] [ERROR] [1760409981.282069568] [action_service]: The image is being saved and no new information will be accepted
[action_service_usb-13] [ERROR] [1760409981.324090812] [action_service]: The image is being saved and no new information will be accepted
[action_service_usb-13] [ERROR] [1760409981.341005415] [action_service]: The image is being saved and no new information will be accepted
[model_service-12] [INFO] [1760409985.614641521] [model_service]: "action": ['navigation(C)'], "response": 在水果店，我看到了一个红色的洋葱、一个黄色的梨和一个橙色的柚子。现在我将前往便利店。
[action_service_usb-13] [INFO] [1760410009.050422579] [action_service]: Published message: 机器人反馈:执行navigation(C)完成
[model_service-12] [INFO] [1760410011.116937432] [model_service]: "action": ['seewhat()'], "response": 我已经到达便利店，现在开始观察周围环境。
[action_service_usb-13] [ERROR] [1760410015.760043930] [action_service]: The image is being saved and no new information will be accepted
[action_service_usb-13] [ERROR] [1760410015.776716037] [action_service]: The image is being saved and no new information will be accepted
[action_service_usb-13] [ERROR] [1760410015.817135095] [action_service]: The image is being saved and no new information will be accepted
[action_service_usb-13] [ERROR] [1760410015.838184189] [action_service]: The image is being saved and no new information will be accepted
[action_service_usb-13] [ERROR] [1760410015.860054990] [action_service]: The image is being saved and no new information will be accepted
[action_service_usb-13] [ERROR] [1760410015.896011637] [action_service]: The image is being saved and no new information will be accepted
[action_service_usb-13] [ERROR] [1760410015.922096241] [action_service]: The image is being saved and no new information will be accepted
[model_service-12] [INFO] [1760410019.950384394] [model_service]: "action": ['navigation(zero)'], "response": 在便利店，我看到一个篮子里有蓝色和红色的物品。现在我将返回到原来的位置。
[action_service_usb-13] [INFO] [1760410053.650422781] [action_service]: Navigation failed with status: 6
[action_service_usb-13] [INFO] [1760410053.656257538] [action_service]: Published message: 机器人反馈:执行navigation(zero)失败
[model_service-12] [INFO] [1760410055.950689589] [model_service]: "action": ['navigation(zero)'], "response": 哎呀，返回原来位置时遇到了一点小问题，让我再试一次。
[action_service_usb-13] [INFO] [1760410093.548177663] [action_service]: Published message: 机器人反馈:执行navigation(zero)完成
[model_service-12] [INFO] [1760410097.636336494] [model_service]: "action": [], "response": 我已经成功返回到原来的位置。让我来告诉你我在水果店和便利店看到的东：在水果店，我看到了一个红色的洋葱、一个黄色的梨和一个橙色的柚子；在便利店，我看到一个篮子里有蓝色和红色的物品。这就是我的观察结果哦！
[action_service_usb-13] [INFO] [1760410119.507591328] [action_service]: Published message: 机器人反馈:回复用户完成
[model_service-12] [INFO] [1760410121.481314996] [model_service]: "action": ['finishtask()'], "response": 我已经完成了全部任务，如果你还有其他需要帮忙的，请随时告诉我！
```

After completing its task, the robot will enter a waiting state. At this point, the robot will re-enter a free-conversation state, but all conversation history will be retained. You can then wake yahboom again and "End Current Task" to terminate the current task cycle, clear the conversation history, and begin a new task cycle.

```
jetson@yahboom: ~ 122x34
[asr-14] [INFO] [1755679669.327887218] [asr]: 1
[asr-14] [INFO] [1755679669.388356288] [asr]: 1
[asr-14] [INFO] [1755679669.448540247] [asr]: 1
[asr-14] [INFO] [1755679669.509674586] [asr]: 1
[asr-14] [INFO] [1755679669.571171770] [asr]: 1
[asr-14] [INFO] [1755679669.630793924] [asr]: -
[asr-14] [INFO] [1755679669.691181227] [asr]: -
[asr-14] [INFO] [1755679669.751568947] [asr]: -
[asr-14] [INFO] [1755679669.812568907] [asr]: -
[asr-14] [INFO] [1755679669.873032793] [asr]: -
[asr-14] [INFO] [1755679669.933673172] [asr]: -
[asr-14] [INFO] [1755679669.994094078] [asr]: -
[asr-14] [INFO] [1755679670.024206570] [asr]: -
[asr-14] [INFO] [1755679670.084441603] [asr]: -
[asr-14] [INFO] [1755679670.145278316] [asr]: -
[asr-14] [INFO] [1755679670.205037150] [asr]: -
[asr-14] [INFO] [1755679670.266176063] [asr]: -
[asr-14] [INFO] [1755679670.326090750] [asr]: -
[asr-14] [INFO] [1755679670.386630159] [asr]: -
[asr-14] [INFO] [1755679670.446504875] [asr]: -
[asr-14] [INFO] [1755679670.506955765] [asr]: -
[asr-14] [INFO] [1755679670.567423776] [asr]: -
[asr-14] [INFO] [1755679670.628749552] [asr]: -
[asr-14] [INFO] [1755679670.688834205] [asr]: -
[asr-14] [INFO] [1755679670.750200240] [asr]: -
[asr-14] [INFO] [1755679670.809695021] [asr]: -
[asr-14] [INFO] [1755679670.870388459] [asr]: -
[asr-14] [INFO] [1755679671.689391598] [asr]: 结束当前任务。
[asr-14] [INFO] [1755679671.691073141] [asr]: 😊okay, let me think for a moment...
[model_service-12] [INFO] [1755679673.748230368] [model_service]: "action": ['finish_dialogue()'], "response": 好的，任务已经结束了，我就退下休息啦，有需要再叫我哦~
[model_service-12] [INFO] [1755679679.725228752] [model_service]: The current instruction cycle has ended
[action_service_usb-13] [INFO] [1755679679.725376348] [action_service]: Published message: finish
```

