# OpenClaw WebChat Interaction

**OpenClaw WebChat Interaction**

1. Course Content
   - Course Overview
   - Learning Objectives
2. Adding Allowed Addresses
3. Accessing Web UI
4. Model Switching and Conversation
5. Common Conversation Commands
6. Common Errors and Solutions
   - 6.1 Cannot Open the Web Page
   - 6.2 Token Verification Failed
   - 6.3 No Response or Model Loading Failed
   - 6.4 Allowed Addresses Configuration Not Taking Effect

## 1. Course Content

### Course Overview

OpenClaw WebChat is a browser-based web interaction interface. You do not need to install any client software; simply enter the address in your computer's browser to chat with the robot. This course will provide a detailed introduction to interacting with OpenClaw via WebChat.

### Learning Objectives


- Learn to configure WebChat's allowed addresses (Allowed Origins)
- Master the method to access OpenClaw Web UI via browser
- Be able to perform model switching and conversations in the Web interface
- Understand common issues and solutions during WebChat usage

## 2. Adding Allowed Addresses


- Set the address whitelist for accessing WebChat in the OpenClaw configuration file:

```
nano $HOME/.openclaw/openclaw.json
# Or use your preferred editor, such as vim, code, etc.
```

- Find the `gateway.controlUi.allowedOrigins` configuration item and enter the robot's IP address and port number `:18789`
- If your robot has multiple IPs, separate them with commas

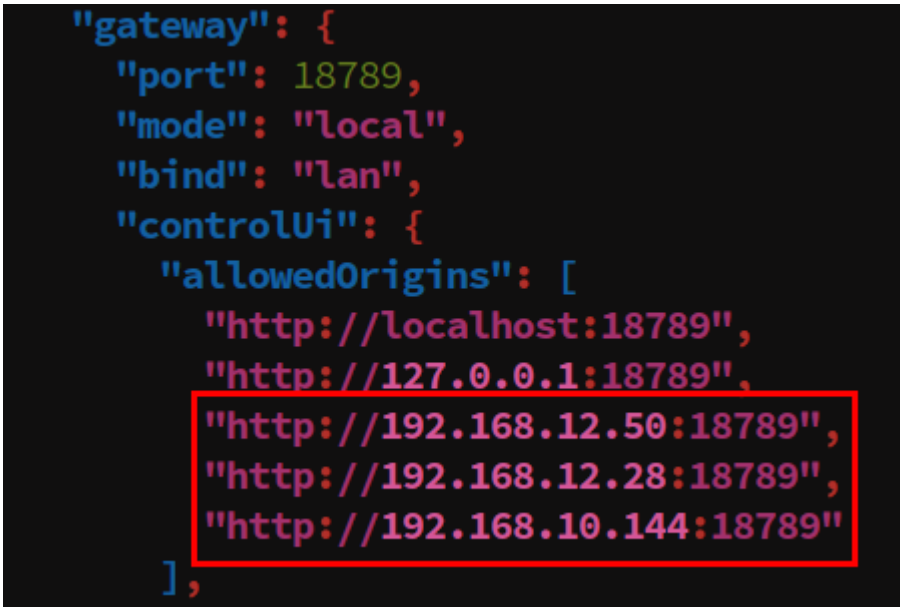


- The robot's IP can be viewed in several ways, for example by using `robot_manage info` or by checking the robot's OLED

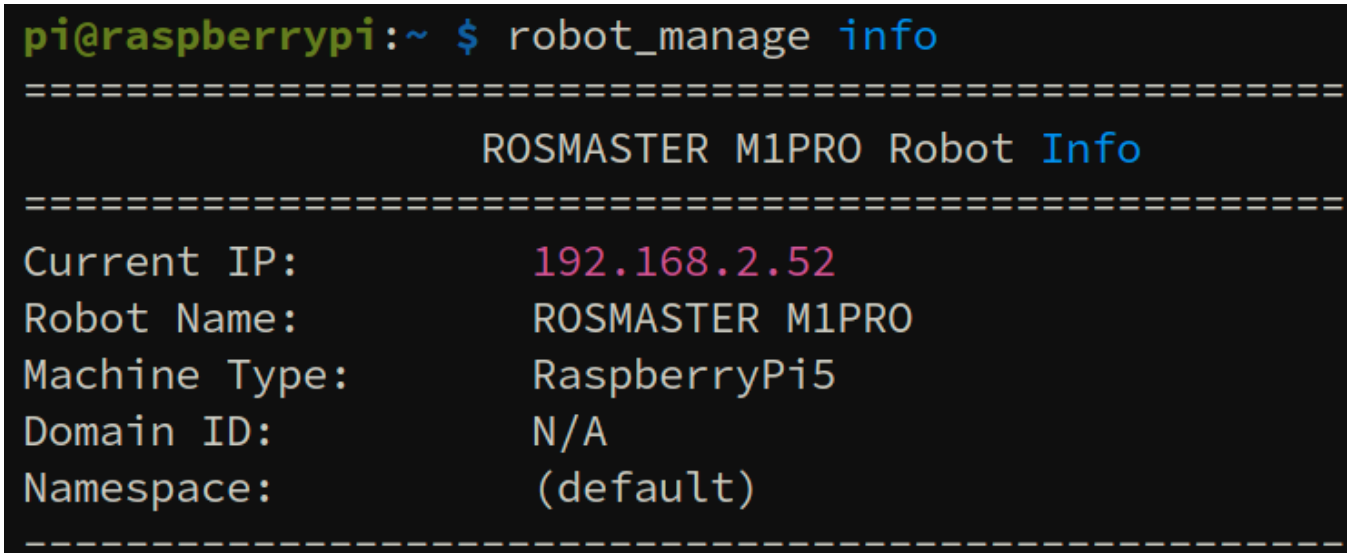


- **Save and exit**


  Press `Ctrl+O` to save, `Ctrl+X` to exit (nano editor)

- Restart the gateway to apply the configuration


```
openclaw gateway restart
```

## 3. Accessing Web UI

- On a computer in the same network segment as the robot, open a browser (regardless of operating system), enter `robot IP:18789` in the address bar, and the page will redirect to the gateway dashboard interface
- Enter `yahboom` in the gateway token field, then click Connect directly

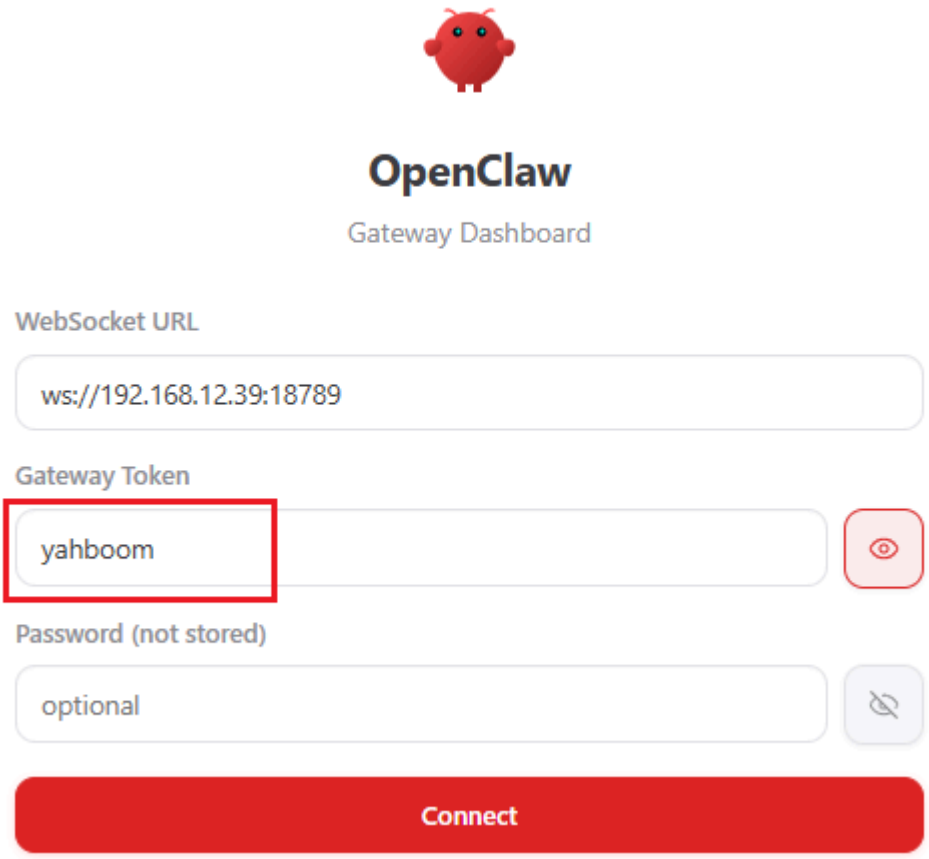



- You will then enter OpenClaw's Web interface, where you can chat with OpenClaw, monitor, and configure parameters

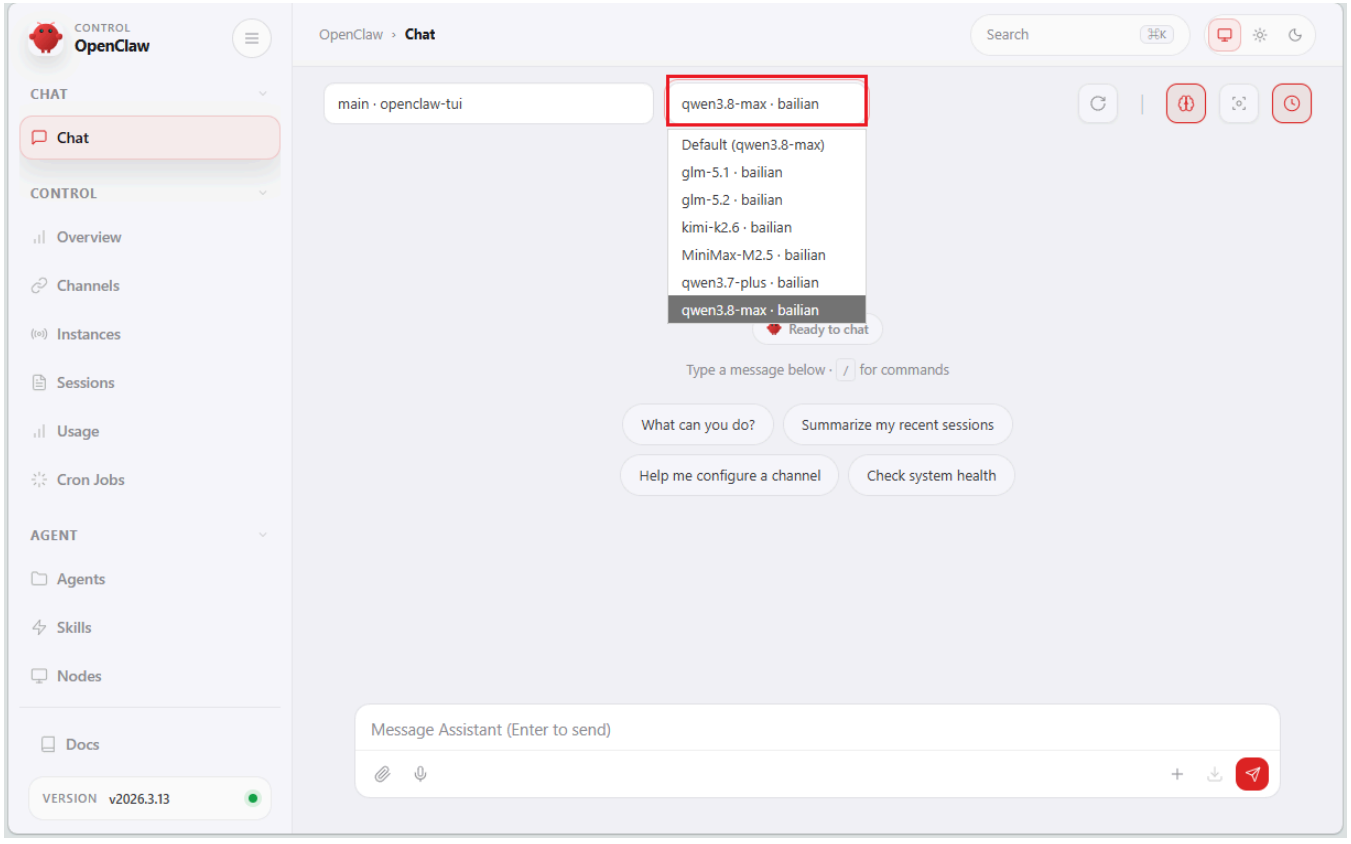


# 4. Model Switching and Conversation

- In the model option box at the top of the Web interface, you can select a configured model to temporarily switch the current session's model

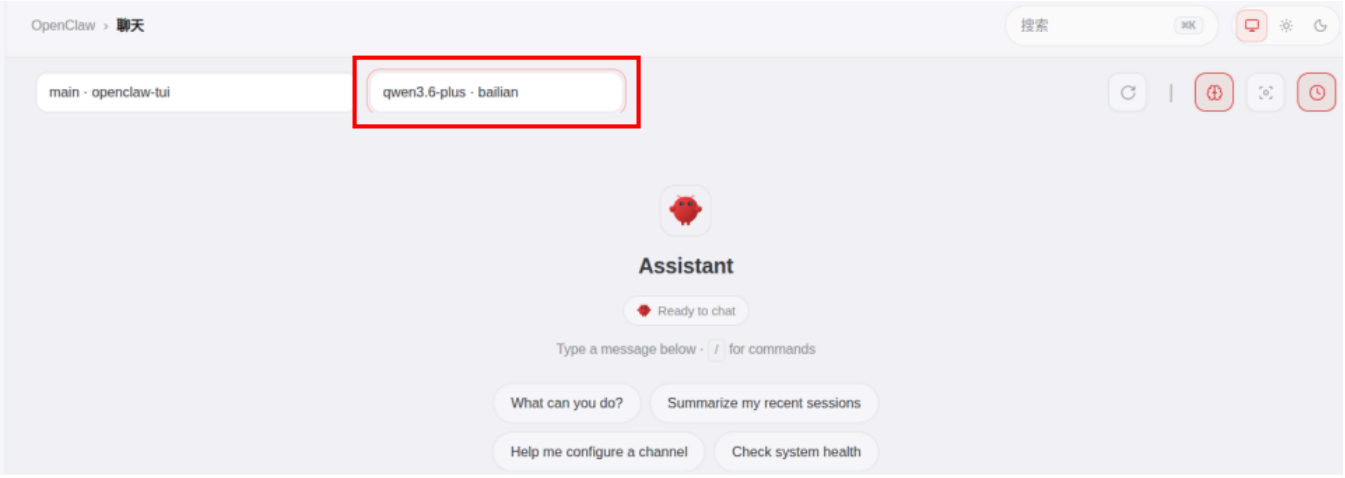


- After selecting a model, you can chat with OpenClaw in the dialog box

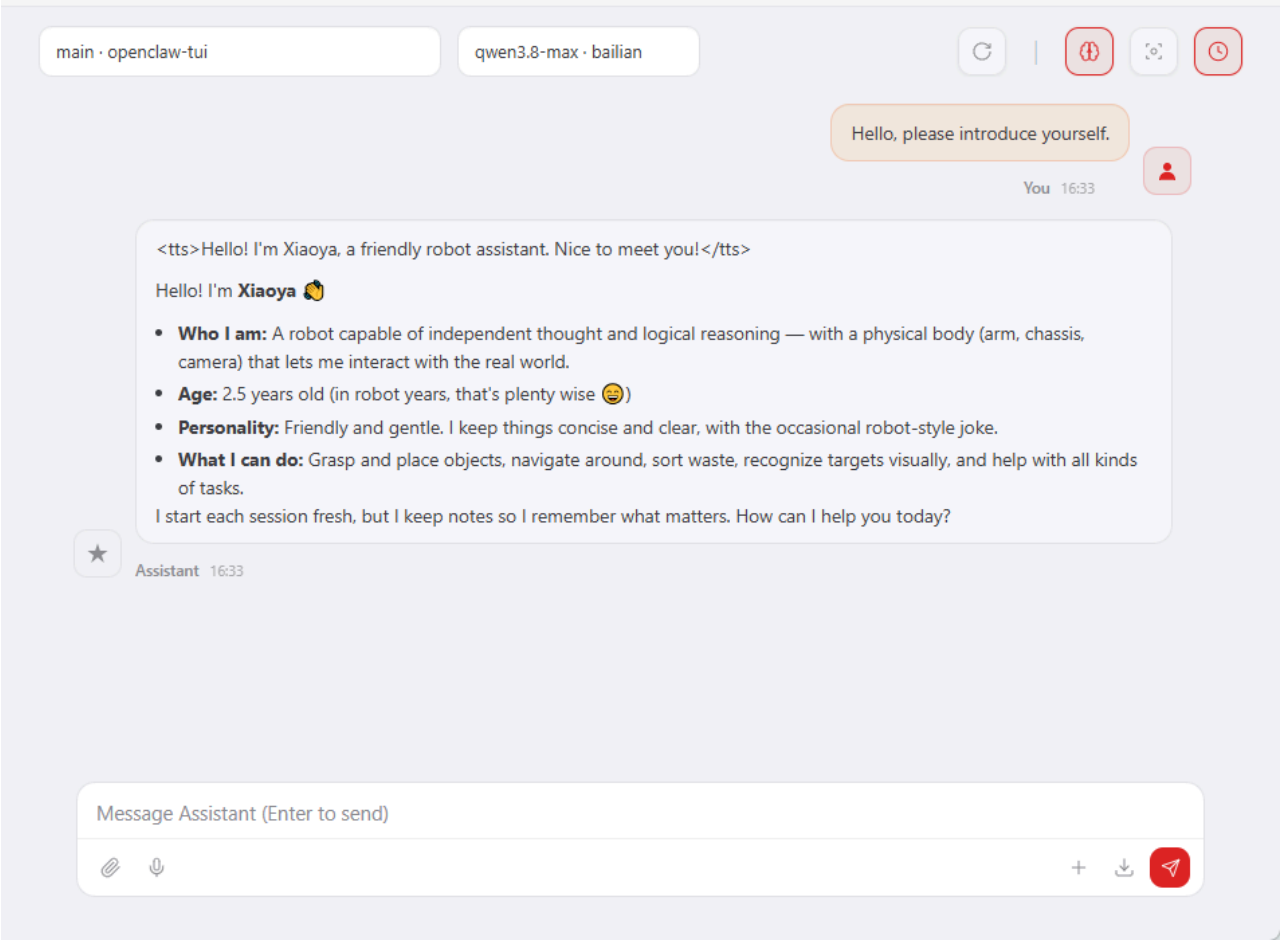


# 5. Common Conversation Commands

In the WebChat dialog box, besides directly typing text to chat with OpenClaw, you can also use slash commands starting with `/` to perform various operations. Here are some common conversation commands:

| Command | Description | Usage Example |
| --- | --- | --- |
| `/model [model name]` | Switch the current session's model | `/model gpt-4o` |
| `/stop` | Stop the currently generating response | Just enter `/stop` |
| `/new` | Start a new conversation (clear the current dialogue history) | Just enter `/new` |
| `/reset` | Reset the current conversation (alias of `/new`) | Just enter `/reset` |
| `/compact` | Compact the conversation context to save tokens | `/compact` |
| `/fast [on/off]` | Toggle fast mode (disable thought chain output) | `/fast on` |
| `/status` | View the current running status and execution information | Just enter `/status` |
| `/help` | Display brief help information | Just enter `/help` |
| `/commands` | View the complete directory of all available commands | Just enter `/commands` |
| `/think [level]` | Set the output level of the thought chain | `/think off` |

> **Note:** Slash commands must be sent as **independent messages** (i.e., only the command itself is entered in the dialog box) and cannot be mixed with regular conversation text.

---

# 6. Common Errors and Solutions

## 6.1 Cannot Open the Web Page

**Symptoms:** After entering the address in the browser, it shows inaccessible or connection timeout.

**Possible causes and solutions:**

- **Robot gateway not running** — Make sure OpenClaw Gateway is started; run `openclaw gateway status` to check the status
- **Network unreachable** — Confirm that the computer and the robot are on the same LAN; use `ping robot IP` to test connectivity
- **Port not open** — Confirm that the access address and port number are correct (should be `robot IP:18789`)
- **Firewall blocked** — Check whether the robot's firewall allows port 18789

## 6.2 Token Verification Failed

**Symptoms:** After entering the token, it reports authentication failure and cannot connect.

**Possible causes and solutions:**

- **Incorrect token entered** — Make sure to enter `yahboom` in the token field (note case sensitivity)
- **Token configuration modified** — Check whether the value of the `gateway.controlUi.authToken` item in `openclaw.json` matches what you entered

## 6.3 No Response or Model Loading Failed

**Symptoms:** You successfully enter the Web interface, but OpenClaw does not reply after you send a message.

**Possible causes and solutions:**

- **Model not configured correctly** — Run `openclaw models list` and `openclaw models status` in the terminal to check whether the model is configured and available
- **API-KEY not set or expired** — Refer to the API-KEY configuration chapter to reconfigure
- **Model switching exception** — Try re-selecting the model using the `/model` command in the dialog box
- **Gateway connection lost** — Restart the gateway: `openclaw gateway restart`

## 6.4 Allowed Addresses Configuration Not Taking Effect

**Symptoms:** Still cannot access even after filling in allowedOrigins.

**Possible causes and solutions:**

- **Gateway not restarted** — After modifying the configuration file, you must run `openclaw gateway restart` for changes to take effect
- **IP address filled in incorrectly** — Use `ip a` or `ifconfig` to confirm the robot's actual IP address
- **Configuration item in the wrong location** — Confirm that `allowedOrigins` is under the `gateway.controlUi` node, not elsewhere