

8. ROS+Opencv foundation

8. ROS+Opencv foundation

8.1. Overview

8.2. Astra

8.2.1. Start Astra Camera

8.2.2. Start the color map subscription node

8.2.3. Start the depth graph subscription node

8.2.4. Start color image inversion

This lesson takes the Astra camera as an example, which is similar to ordinary cameras.

8.1. Overview

Wiki: http://wiki.ros.org/cv_bridge/


Teaching: http://wiki.ros.org/cv_bridge/Tutorials

Source code: https://github.com/ros-perception/vision_opencv.git

Feature pack location: ~/yahboomcar_ws/src/yahboomcar_visual

ROS has already integrated Opencv3.0 or above during the installation process, so the installation configuration hardly requires too much consideration. ROS uses its own [sensor_msgs/Image](#) message format transfers images and cannot directly perform image processing, but the provided [CvBridge] can perfectly convert and be converted image data formats. [CvBridge] is a ROS library, equivalent to the bridge between ROS and Opencv.

Opencv and ROS image data conversion is shown in the figure below:

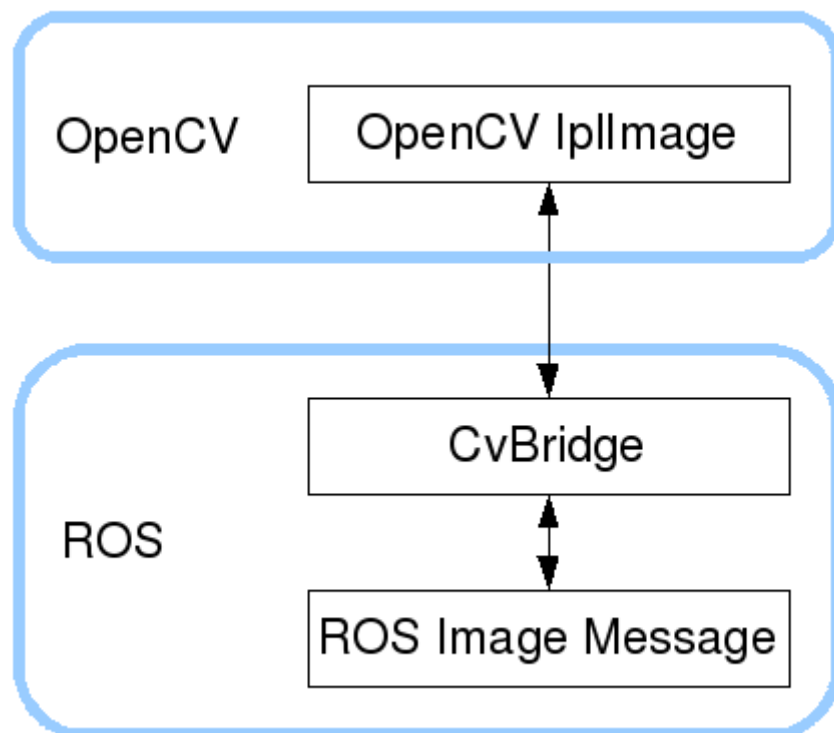

- Although the installation configuration does not require too much consideration, the usage environment still needs to be configured, mainly the two files [package.xml] and [CMakeLists.txt]. This function package not only uses [CvBridge], it also requires [Opencv] and [PCL], so it is configured together.
- package.xml

Add the following

```
<build_depend>sensor_msgs</build_depend>
<build_export_depend>sensor_msgs</build_export_depend>
<exec_depend>sensor_msgs</exec_depend>

<build_depend>std_msgs</build_depend>
<build_export_depend>std_msgs</build_export_depend>
<exec_depend>std_msgs</exec_depend>
<build_depend>cv_bridge</build_depend>
<build_export_depend>cv_bridge</build_export_depend>
<exec_depend>cv_bridge</exec_depend>
<exec_depend>image_transport</exec_depend>
```

【cv_bridge】： Image conversion dependency package.

- CMakeLists.txt

There are many configuration contents in this file. For details, please refer to the source file.

8.2、Astra

8.2.1. Start Astra Camera

```
#You need to enter docker first, perform this step more
#If running the script to enter docker fails, please refer to Jetson Orin-
Docker/05, Enter the robot's docker container
~/run_docker.sh
#Multiple ros commands require multiple terminals to enter the same docker
container for execution, please refer to Jetson Orin-Docker/05, Section 5.8
tutorial
```

```
roslaunch orbbec_camera astraproplus.launch
```

View threads


```
rostopic list
```

You can see a lot of topics, just a few commonly used in this section


topic name	type of data
/camera/depth/image_raw	sensor_msgs/Image
/camera/rgb/image_raw	sensor_msgs/Image
/camera/ir/image_raw	sensor_msgs/Image

Check the encoding format of the topic: `rostopic echo + 【topic】 +encoding`, for example

```
rostopic echo /camera/rgb/image_raw/encoding
rostopic echo /camera/depth/image_raw/encoding
```

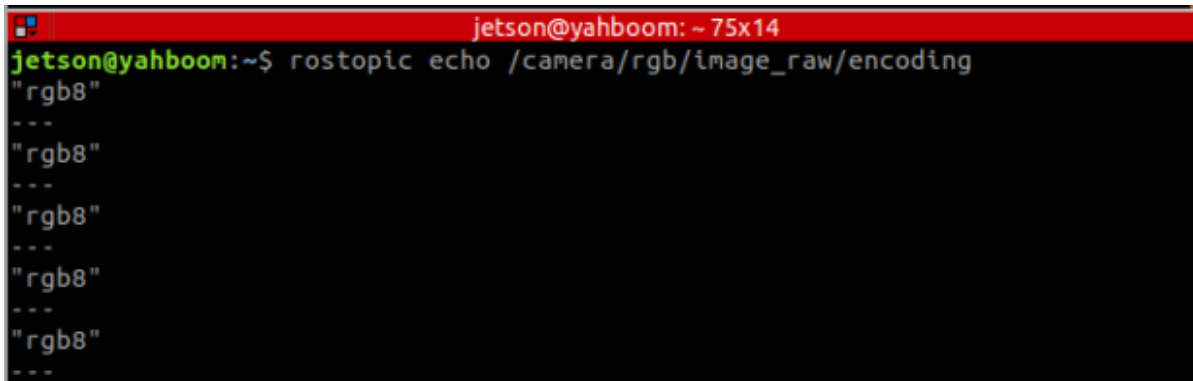A terminal window with a red title bar showing the command `rostopic echo /camera/rgb/image_raw/encoding` and its output, which is a series of "rgb8" strings separated by dashes.

```
jetson@yahboom: ~ 75x14
jetson@yahboom:~$ rostopic echo /camera/rgb/image_raw/encoding
"rgb8"
---
"rgb8"
---
"rgb8"
---
"rgb8"
---
"rgb8"
---
```

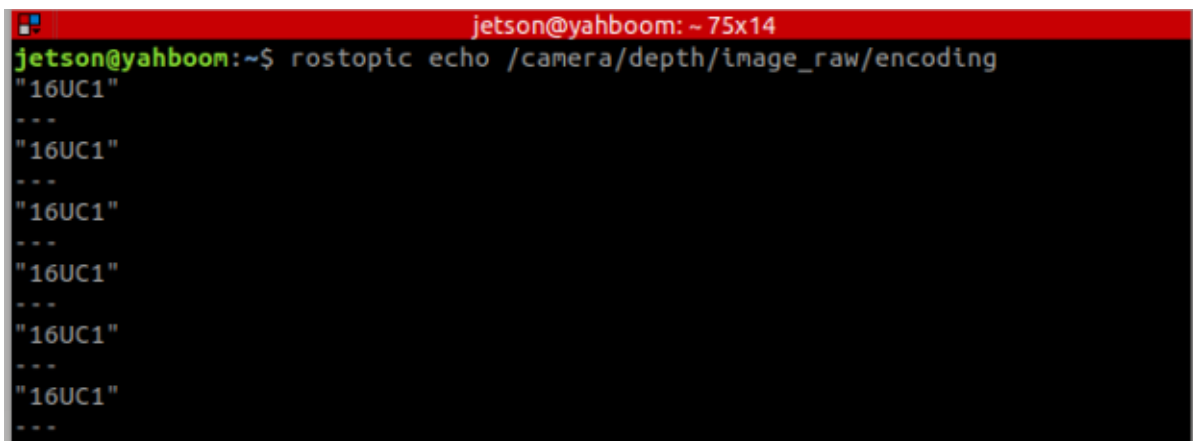A terminal window with a red title bar showing the command `rostopic echo /camera/depth/image_raw/encoding` and its output, which is a series of "16UC1" strings separated by dashes.

```
jetson@yahboom: ~ 75x14
jetson@yahboom:~$ rostopic echo /camera/depth/image_raw/encoding
"16UC1"
---
"16UC1"
---
"16UC1"
---
"16UC1"
---
"16UC1"
---
"16UC1"
---
```

8.2.2. Start the color map subscription node

```
roslaunch yahboomcar_visual astra_get_rgb.launch version:=cpp
```

- version parameter: optional [py, cpp] different codes have the same effect.

View node graph

```
rqt_graph
```

When you open the node graph, densely packed nodes and relationships between nodes will appear. At this time, we are using the part linked to the topic `/camera/rgb/image_raw`, and `/astra_rgb_image_cpp` is the node we wrote.

- py code analysis

Create a subscriber: The subscribed topic is `"/camera/rgb/image_raw"`, the data type is `[Image]`, and the callback function is `[topic()]`

```
sub = rospy.Subscriber("/camera/rgb/image_raw", Image, topic)
```

Use [CvBridge] to convert data. What you need to pay attention to here is the encoding format. If the encoding format is incorrect, the converted image will have problems.

```
frame = bridge.imgmsg_to_cv2(msg, "bgr8")
```

- c++ code analysis

similar to py code

```
//Create a receiver.  
ros::Subscriber subscriber = n.subscribe<sensor_msgs::Image>  
("/camera/rgb/image_raw", 10, RGB_Callback);  
//Create cv_bridge example  
cv_bridge::CvImagePtr cv_ptr;  
// Data conversion  
cv_ptr = cv_bridge::toCvCopy(msg, sensor_msgs::image_encodings::BGR8);
```


8.2.3. Start the depth graph subscription node

```
roslaunch yahboomcar_visual astra_get_depth.launch version:=cpp
```

View node graph

```
rqt_graph
```

Opening the node graph will show dense nodes and relationships between nodes. At this time, we use the part linked to the [/camera/depth/image_raw] topic. , [/astra_depth_Image_cpp] is the node we wrote.

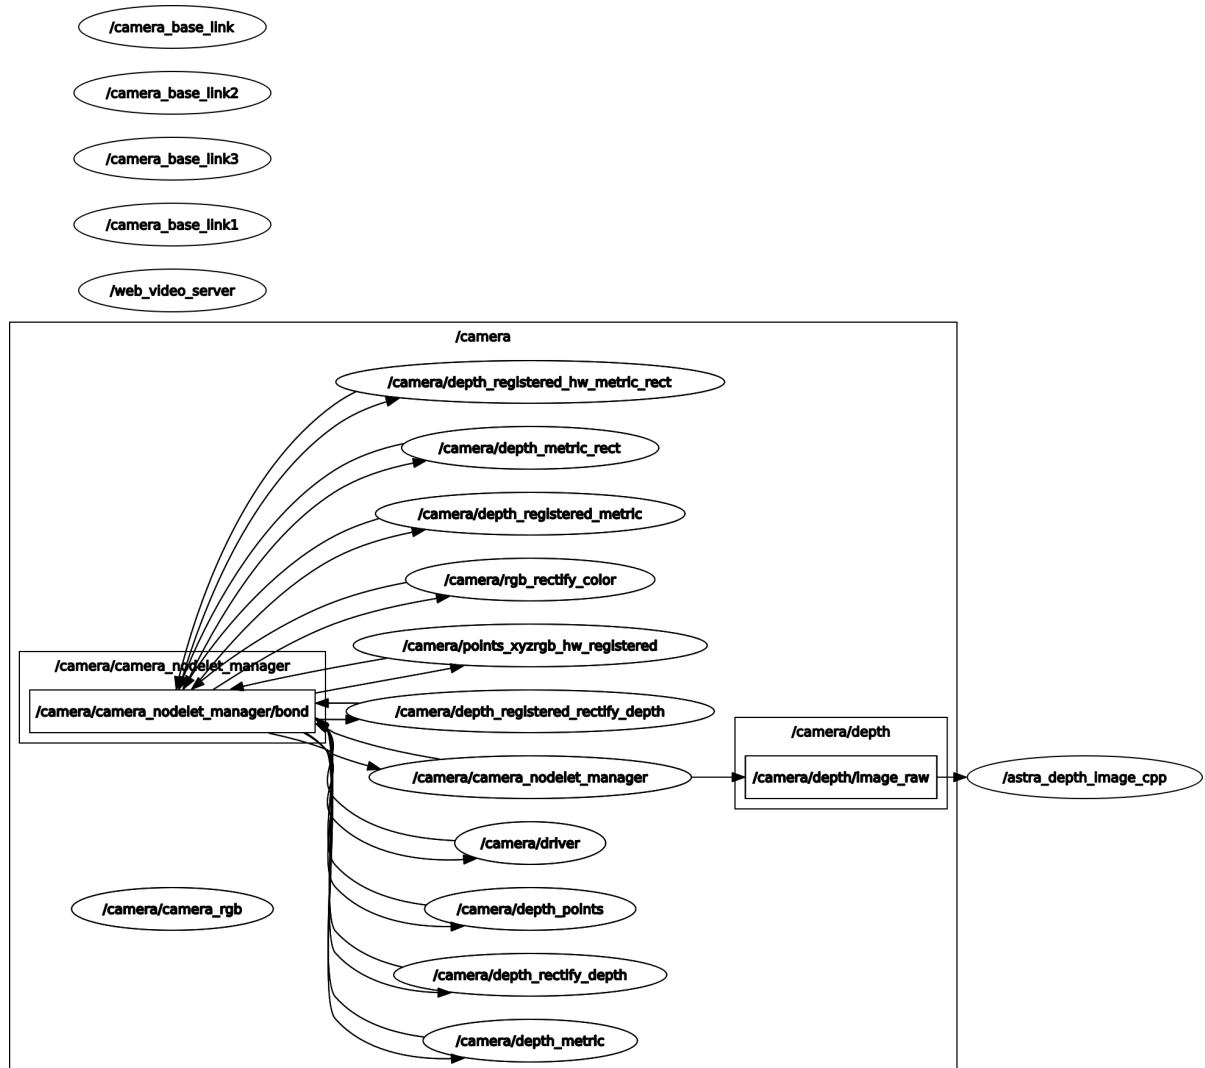

- py code analysis

Create a subscriber: The subscribed topic is `["/camera/depth/image_raw"]`, the data type is `[Image]`, and the callback function is `[topic()]`

```
sub = rospy.Subscriber("/camera/depth/image_raw", Image, topic)
```

Use `[CvBridge]` to convert data. What you need to pay attention to here is the encoding format. If the encoding format is incorrect, the converted image will have problems.

```
# Encoding format
encoding = ['16UC1', '32FC1']
# You can switch to different encoding formats to test the effect
frame = bridge.imgmsg_to_cv2(msg, encoding[1])
```

- c++ code analysis

similar to py code

```
//Create a receiver.
ros::Subscriber subscriber = n.subscribe<sensor_msgs::Image>
("/camera/depth/image_raw", 10, depth_Callback);
//Create cv_bridge example
cv_bridge::CvImagePtr cv_ptr;
//Data conversion
cv_ptr = cv_bridge::toCvCopy(msg, sensor_msgs::image_encodings::TYPE_16UC1);
```

8.2.4. Start color image inversion

```
roslaunch yahboomcar_visual astra_image_flip.launch
```

image view

```
rqt_image_view
```

- py code analysis

Here the subscriber publisher is created,

1. Create subscribers

The subscribed topic is ["/camera/rgb/image_raw"], the data type [Image], and the callback function [topic()].

2. Create publisher

The published topic is ["/camera/rgb/image_flip"], the data type [Image], and the queue size [10].

```
sub_img = rospy.Subscriber("/camera/rgb/image_raw", Image, topic)
pub_img = rospy.Publisher("/camera/rgb/image_flip", Image, queue_size=10)
```

3. Callback function

```
# Normal image transfer processing
def topic(msg):
    if not isinstance(msg, Image):
        return
    bridge = CvBridge()
    frame = bridge.imgmsg_to_cv2(msg, "bgr8")
    # Opencv process images
    frame = cv.resize(frame, (640, 480))
    frame = cv.flip(frame, 1)
    # opencv mat -> ros msg
    msg = bridge.cv2_to_imgmsg(frame, "bgr8")
    # After image processing is completed, publish it directly
    pub_img.publish(msg)
```