

1. Color Image Histogram

1. Color Image Histogram

1.1. Color image histogram

1.2 Actual effect display

1.1. Color image histogram

Color histogram refers to the color distribution in an image. It has nothing to do with the specific objects in the image. It is only used to indicate the color distribution in the image observed by the human eye, for example, how much red accounts for in a picture, how much green accounts for, etc.

We know that computer color displays use the principle of R, G, and B additive color mixing. By emitting three electron beams of different intensities, the red, green, and blue phosphorescent materials covered on the inside of the screen emit light to produce color. In the RGB color space, any color light F can be added and mixed with different components of the three colors RGB. In other words, the color value of each pixel in the image can be represented by a ternary value (R, G, B), for example (0, 0, 0) represents black, (0, 0, 255) represents blue, ... The size of each component ranges from 0 to 255.

So, we can know that a color image can be stacked by the three channels of R, G, and B. It can be imagined as stacking three pieces of paper of the same size, and then the image seen by the human eye from top to bottom is the original color image. Here, assuming that the image resolution is 320x240, then each channel is 320 long and 240 wide, in pixels, and the total number of pixels is 3x320x240.

Method 1:

Use pyplot, a sub-library of matplotlib, which provides a drawing framework similar to Matlab. Matplotlib is a very powerful and basic Python drawing package. The histogram is mainly drawn by calling the hist() function, which draws the histogram based on the data source and pixel level.

The form of the hist() function is as follows:

```
hist(data source, pixel level)
```

Among them, the parameters are:

Data source: must be a one-dimensional array, usually the image needs to be straightened through the ravel() function

Pixel level: generally 256, indicating [0, 255]

The ravel() function reduces a multidimensional array to a one-dimensional array, and its format is:

One-dimensional array = multidimensional array.ravel()

eg: plt.hist(img.ravel(), 256) #ravel() reduces two-dimensional to one-dimensional Grouping of 256 gray levels

Method 2:

The function provided by OpenCV is:

```
cv2.calcHist(image,channels,mask,histSize,ranges[,hist[,accumulate]])
```

This function has 5 parameters:

image: input image, which should be enclosed in brackets [] when passed in

channels: the channel of the passed image. If it is a grayscale image, then it goes without saying that there is only one channel with a value of 0. If it is a color image (with 3 channels), then the value is 0, 1, 2, and one is selected, corresponding to each BGR channel. This value must also be passed in with [].

mask: mask image. If the entire image is counted, it is none. Mainly, if you want to count the histogram of part of the image, you have to construct the corresponding mask to calculate.

histSize: the number of gray levels, brackets are required, such as [256]

ranges: the range of pixel values, usually [0,256]. If some images are not 0-256, for example, if you transform back and forth and the pixel values are negative or large, you need to adjust them.

1.2 Actual effect display

Source code path:

/home/pi/project_demo/06.Open_source_cv_fundamentals_course/D.Image_Enhancement/01_Color_Image_Histogram.ipynb


```
import cv2
import numpy as np
import matplotlib.pyplot as plt

img = cv2.imread('Road_test.jpg', 1)
img = cv2.cvtColor(img, cv2.COLOR_BGR2RGB)
plt.imshow(img)
plt.show()
```

```
@Copyright (C): 2015-2024, Shenzhen Yahboom Tech
@Author: clhchan
@Date: 2024-07-24
```

```
[1]: import cv2
import numpy as np
import matplotlib.pyplot as plt


img = cv2.imread('Road_test.jpg', 1)
img = cv2.cvtColor(img, cv2.COLOR_BGR2RGB)
plt.imshow(img)
plt.show()
```

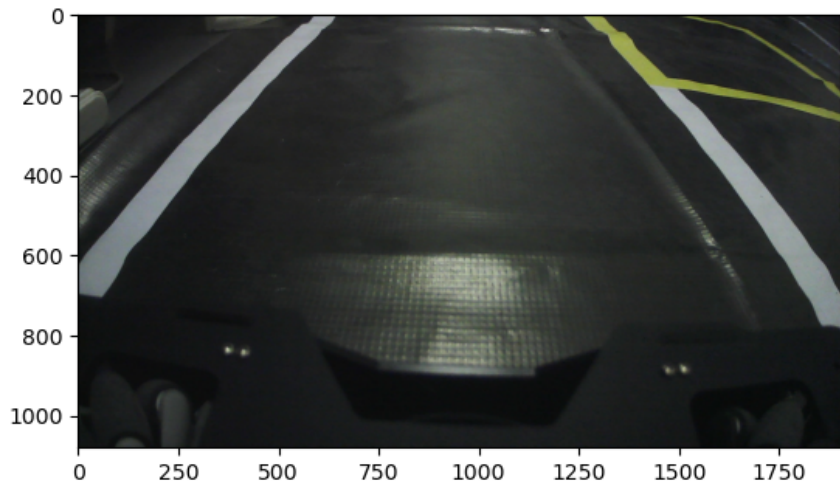

```
plt.hist(img.ravel(), 256)    #ravel() 二维降一维  256灰度级的分组情况 2D to 1D
Grouping of 256 gray levels
plt.show()
```

plot绘制直方图 Plot histogram

```
[2]: plt.hist(img.ravel(), 256) #ravel() 二维降一维 256灰度级的分组情况 2D to 1D Grouping of 256 gr
plt.show()
```

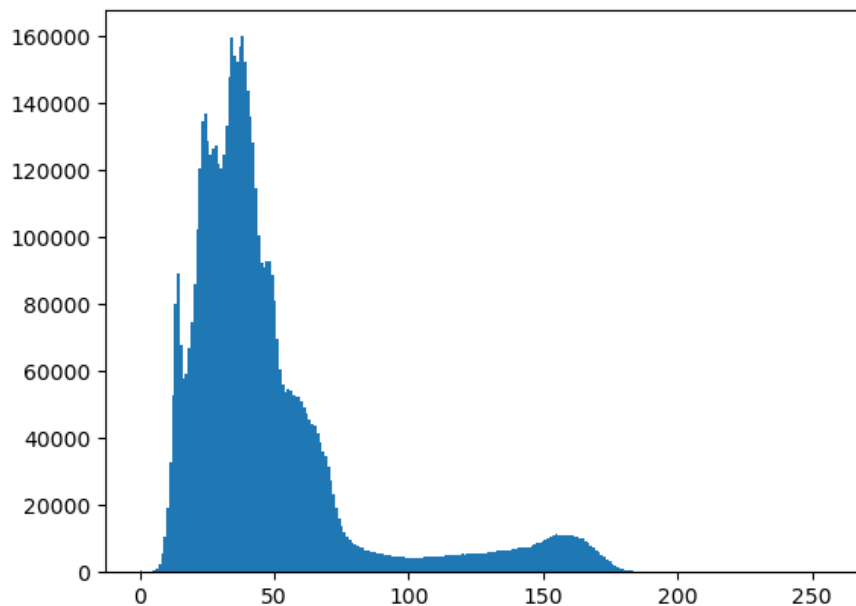

```
histb = cv2.calcHist([img], [1], None, [256], [0, 255])
plt.plot(histb, color='b')
plt.show()
```

plot绘制opencv返回的直方图值plot plots the histogram values returned by opencv

```
[4]: histb = cv2.calcHist([img], [1], None, [256], [0, 255])
plt.plot(histb, color='b')
plt.show()
```

