

Data Structure and Algorithms - Queue

https://www.tutorialspoint.com/data_structures_algorithms/dsa_queue.htm

Copyright © tutorialspoint.com


Queue is an abstract data structure, somewhat similar to Stacks. Unlike stacks, a queue is open at both its ends. One end is always used to insert data *enqueue* and the other is used to remove data *dequeue*. Queue follows First-In-First-Out methodology, i.e., the data item stored first will be accessed first.



A real-world example of queue can be a single-lane one-way road, where the vehicle enters first, exits first. More real-world examples can be seen as queues at the ticket windows and bus-stops.

Queue Representation

As we now understand that in queue, we access both ends for different reasons. The following diagram given below tries to explain queue representation as data structure –

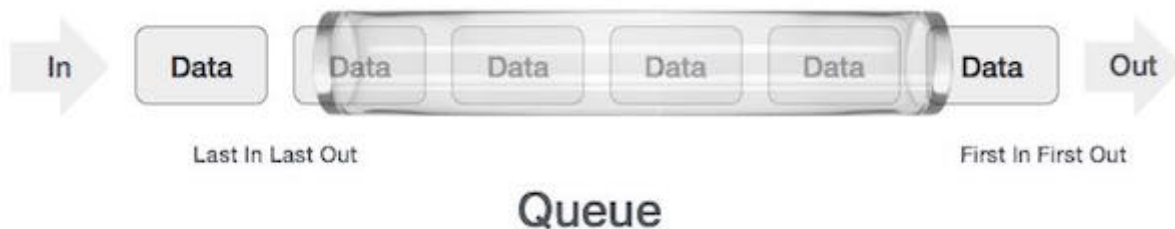

As in stacks, a queue can also be implemented using Arrays, Linked-lists, Pointers and Structures. For the sake of simplicity, we shall implement queues using one-dimensional array.

Basic Operations

Queue operations may involve initializing or defining the queue, utilizing it, and then completely erasing it from the memory. Here we shall try to understand the basic operations associated with queues –

- **enqueue** – add *store* an item to the queue.
- **dequeue** – remove *access* an item from the queue.

Few more functions are required to make the above-mentioned queue operation efficient. These are –

- **peek** – Gets the element at the front of the queue without removing it.

- **isfull** – Checks if the queue is full.
- **isempty** – Checks if the queue is empty.

In queue, we always dequeue *oraccess* data, pointed by **front** pointer and while enqueueing *orstoring* data in the queue we take help of **rear** pointer.

Let's first learn about supportive functions of a queue –

peek

This function helps to see the data at the **front** of the queue. The algorithm of peek function is as follows –

Algorithm

```
begin procedure peek
    return queue[front]
end procedure
```

Implementation of peek function in C programming language –

Example

```
int peek() {
    return queue[front];
}
```

isfull

As we are using single dimension array to implement queue, we just check for the rear pointer to reach at MAXSIZE to determine that the queue is full. In case we maintain the queue in a circular linked-list, the algorithm will differ. Algorithm of isfull function –

Algorithm

```
begin procedure isfull
    if rear equals to MAXSIZE
        return true
    else
        return false
    endif
end procedure
```

Implementation of isfull function in C programming language –

Example

```
bool isfull() {
    if(rear == MAXSIZE - 1)
        return true;
    else
        return false;
}
```

isempty

Algorithm of isempty function –

Algorithm

```
begin procedure isempty
    if front is less than MIN OR front is greater than rear
        return true
    else
        return false
    endif
end procedure
```

If the value of **front** is less than MIN or 0, it tells that the queue is not yet initialized, hence empty.

Here's the C programming code –

Example


```
bool isempty() {
    if(front < 0 || front > rear)
        return true;
    else
        return false;
}
```

Enqueue Operation

Queues maintain two data pointers, **front** and **rear**. Therefore, its operations are comparatively difficult to implement than that of stacks.

The following steps should be taken to enqueue *insert* data into a queue –

- **Step 1** – Check if the queue is full.
- **Step 2** – If the queue is full, produce overflow error and exit.
- **Step 3** – If the queue is not full, increment **rear** pointer to point the next empty space.
- **Step 4** – Add data element to the queue location, where the rear is pointing.
- **Step 5** – return success.

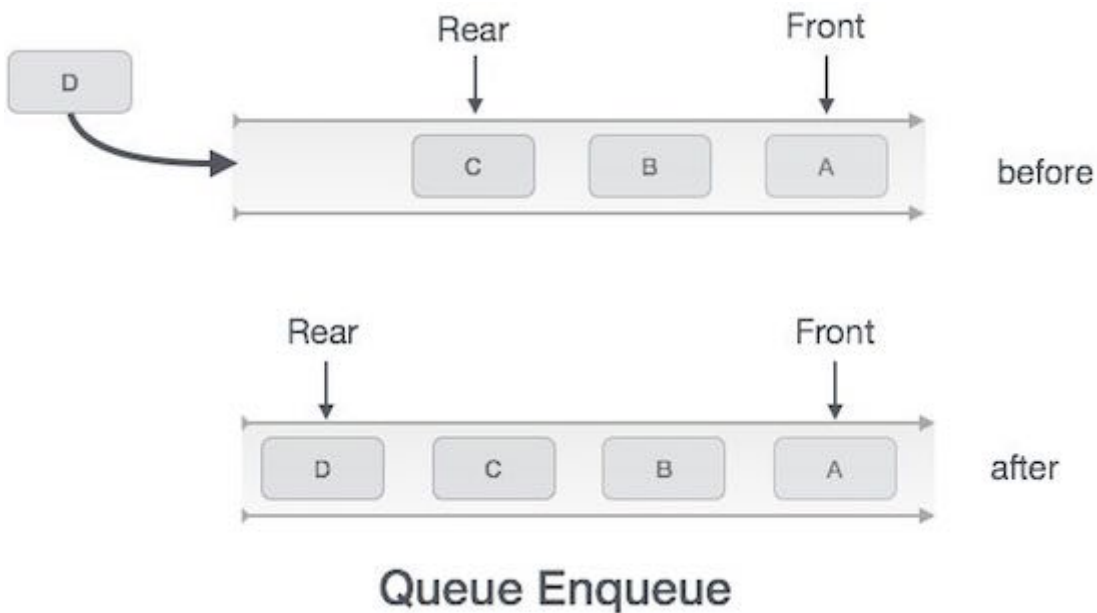

Sometimes, we also check to see if a queue is initialized or not, to handle any unforeseen situations.

Algorithm for enqueue operation

```

procedure enqueue(data)
  if queue is full
    return overflow
  endif
  rear ← rear + 1
  queue[rear] ← data
  return true
end procedure

```

Implementation of enqueue in C programming language –

Example

```

int enqueue(int data)
{
  if(isfull())
    return 0;

  rear = rear + 1;
  queue[rear] = data;

  return 1;
}


```

Deque Operation

Accessing data from the queue is a process of two tasks – access the data where **front** is pointing and remove the data after access. The following steps are taken to perform **dequeue** operation –

- **Step 1** – Check if the queue is empty.
- **Step 2** – If the queue is empty, produce underflow error and exit.

- **Step 3** – If the queue is not empty, access the data where **front** is pointing.
- **Step 4** – Increment **front** pointer to point to the next available data element.
- **Step 5** – Return success.

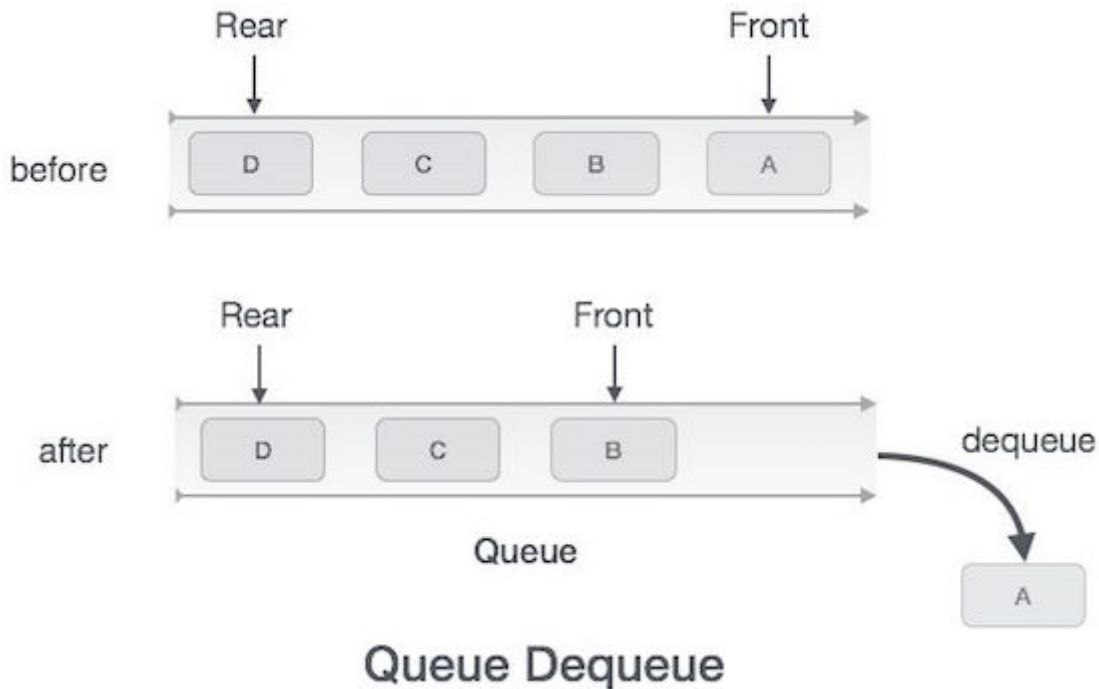

Algorithm for dequeue operation

```

procedure dequeue
  if queue is empty
    return underflow
  end if

  data = queue[front]
  front ← front + 1

  return true
end procedure

```

Implementation of dequeue in C programming language –

Example

```

int dequeue() {
    if(isempty())
        return 0;

    int data = queue[front];
    front = front + 1;

    return data;
}

```

For a complete Queue program in C programming language, please [click here](#).