

LAPORAN JOBSHEET PEMROGRAMAN BERBASIS FRAMEWORK



Nama : Yan Daffa Putra Liandhie

NIM: 2341720142

Kelas: TI 3E

**POLITEKNIK NEGERI MALANG TAHUN
2026**

A. Langkah Praktikum

1. Global CSS

a. File Global

```
i.praktikum-Styling > my-app > src > styles > # globals.css > ...  
1  
2  
3 * {  
4   box-sizing: border-box;  
5   padding: 0;  
6   margin: 0;  
7 }  
8  
9 html,  
10 body {  
11   max-width: 100vw;  
12   overflow-x: hidden;  
13 }  
14  
15  
16  
17 a {  
18   color: inherit;  
19   text-decoration: none;  
20 }  
21  
22  
23 .navbar {  
24   width: 100%;  
25   height: 60px;  
26   background-color: #333;  
27   color: white;  
28   display: flex;  
29   align-items: center;  
30   padding: 0 20px;  
31 }
```

```
1 *{  
2   box-sizing: border-box;  
3   padding: 0;  
4   margin: 0;  
5 }  
6  
7 html, body {  
8   max-width: 100vw;  
9   overflow-x: hidden;  
10 }  
11  
12 a{  
13   color: inherit;  
14   text-decoration: none;  
15 }  
16  
17 .navbar{  
18   width: 100%;  
19   height: 60px;  
20   background-color: #333;  
21   color: white;  
22   display: flex;  
23   align-items: center;  
24   padding: 0 20px;  
25 }  
26 .footer{  
27   width: 100%;  
28   height: 60px;  
29   background-color: #333;  
30   color: white;  
31   display: flex;  
32   align-items: center;  
33   padding: 0 20px;  
34 }
```

b. Import Global CSS

```
// pages/_app.tsx
```

```
import "@/styles/globals.css";
```

```

4.praktikum-Styling > my-app > src > pages > _app.tsx > ...
1  import '@styles/globals.css'
2  import type { AppProps } from 'next/app'
3  import AppShell from '@components/layouts/Appshell'
4  import Navbar from '@components/layouts/navbar'
5
Windsurf: Refactor | Explain | Generate JSDoc | X
6  export default function App({ Component, pageProps }: AppProps) {
7    return (
8      <AppShell>
9        <Component {...pageProps} />
10     </AppShell>
11   );
12 };
13
14
15

```

```

1  import '@styles/globals.css'
2  import type { AppProps } from 'next/app'
3  import Navbar from './components/layouts/navbar'
4  import AppShell from './components/layouts/Appshell';
5
Windsurf: Refactor | Explain | Generate JSDoc | X
6  export default function App({ Component, pageProps }: AppProps) {
7    return (
8      // <div>
9      <AppShell>
10        <Component {...pageProps} />
11      </AppShell>
12      // </div>
13    );
14  };
15

```

☞ Catatan:

- Global CSS hanya bisa di-import di `_app.tsx`
- Berlaku untuk seluruh aplikasi


2. CSS Module (Local Scope)

a. Struktur Komponen Navbar

src/components/layout/Navbar/

└─ index.tsx

└─ Navbar.module.css

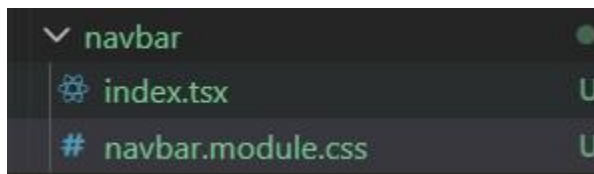

b. File CSS Module

- Modifikasi global.css

```
4.praktikum-Styling > my-app > src > styles > # globals.css > ...
1
2
3  * {
4    box-sizing: border-box;
5    padding: 0;
6    margin: 0;
7  }
8
9  html,
10 body {
11   max-width: 100vw;
12   overflow-x: hidden;
13 }
14
15
16
17 a {
18   color: inherit;
19   text-decoration: none;
20 }
21
```

```

1  *{
2    box-sizing: border-box;
3    padding: 0;
4    margin: 0;
5  }
6
7  html, body {
8    max-width: 100vw;
9    overflow-x: hidden;
10 }
11
12 a{
13   color: inherit;
14   text-decoration: none;
15 }
16

```

- Modifikasi navbar.module.css

4.praktikum-Styling > my-app > src > components > layouts > navbar > # navbar.module.css > .navbar

```

1  .navbar {
2    width: 100%;
3    height: 60px;
4    background-color: #333;
5    color: white;
6    display: flex;
7    align-items: center;
8    padding: 0 20px;
9  }

```

```

1
2  .navbar{
3    width: 100%;
4    height: 60px;
5    background-color: #333;
6    color: white;
7    display: flex;
8    align-items: center;
9    padding: 0 20px;
10 }

```

c. Pemanggilan di Komponen

- Modifikasi kode pada index.tsx pada folder navbar

4.praktikum-Styling > my-app > src > components > layouts > navbar > index.tsx > ...

```

1  import styles from './navbar.module.css';
2
3
4  const Navbar = () => {
5    return (
6      <div className={styles.navbar}>
7        <div>
8          <h1>Navbar Component</h1>
9        </div>
10     </div>
11   );
12 };
13
14 export default Navbar;
15

```

```

1 import styles from './navbar.module.css';
2
3 const Navbar = () => {
4   return(
5     <div className={styles.navbar}>
6       <div>Navbar Component</div>
7     </div>
8   );
9 };
10 export default Navbar;

```

- Jalankan browser



Praktikum Next.js Pages Router

Mahasiswa D4 Pengembangan Web

Navbar Component

Praktikum Next.js Pages Router

Keunggulan CSS Module:


- Scope lokal
- Tidak bentrok antar class
- Cocok untuk komponen reusable

3. Styling untuk Pages (CSS Module)

a. Contoh Login Page

- Tambahkan login.module.css pada folder auth



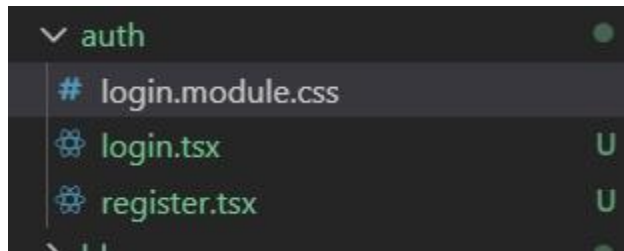

- Modifikasi login.module.css

```
4.praktikum-Styling > my-app > src > pages > auth > # login.module.css > .login
1  .login{
2    display: flex;
3    flex-direction: column;
4    justify-content: center;
5    align-items: center;
6    height: 100vh;
7  }
```

```
1  .login{
2    display: flex;
3    flex-direction: column;
4    justify-content: center;
5    align-items: center;
6    height: 100vh;
7  }
```

- Modifikasi login.tsx

- Tambahkan import styles
- Tambahkan classname = { styles.login}

```
4.praktikum-Styling > my-app > src > pages > auth > login.tsx > halamanLogin
1  import Link from "next/link";
2  import { useRouter } from "next/router";
3  import styles from './login.module.css';
4
5  Windsurf: Refactor | Explain | Generate JSDoc | X
6  const halamanLogin = () => {
7    const {push} = useRouter();
8    Windsurf: Refactor | Explain | Generate JSDoc | X
9    const handlerLogin = () => {
10     // logic login disini
11     push('/produk');
12   }
13   return (
14     <div className={styles.login}>
15       <h1>Halaman Login</h1>
16       <div>
17         <button onClick={handlerLogin}>Login</button> <br />
18         <button onClick={() => push('/produk')}>Login</button> <br />
19         <button onClick={() => handlerLogin()}>Login</button> <br />
20         <Link href="/auth/register">Ke Halaman Register</Link>
21       </div>
22     );
23   };
24   export default halamanLogin;
```




```

1 import Link from "next/link";
2 import { useRouter } from "next/router";
3 import styles from "../login.module.css";
4
5 Windsurf: Refactor | Explain | Generate JSDoc | X
6 const halamanlogin = () => {
7   // const {push} = useRouter();
8   const router = useRouter();
9
10  Windsurf: Refactor | Explain | Generate JSDoc | X
11  const handleLogin = () => {
12    // push("/produk");
13    console.log("Login berhasil");
14    localStorage.setItem("isLoggedIn", "true");
15    router.push("/produk");
16  }
17
18  return (
19    <div className={styles.login}>
20      <h1>Halaman Login</h1>
21      <button onClick={handleLogin}>Login ke produk</button> <br />
22      { /* <button onClick={() => push("/produk")}>Login</button> <br />
23        <button onClick={() => handleLogin()}>Login</button> <br /> */ }
24      <Link href="/auth/register">
25        Ke Halaman Register
26      </Link>
27    </div>
28  );
29 };
30 export default halamanlogin;

```

- Jalankan browser

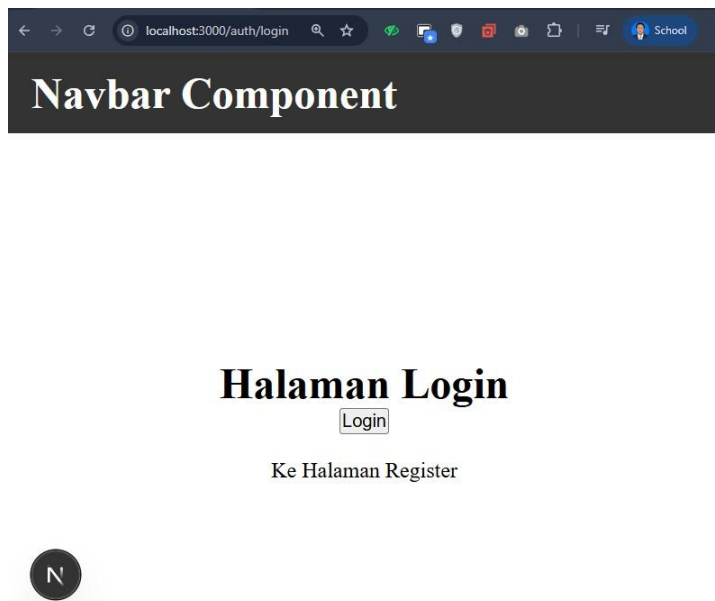

Halaman Login

Login ke produk

Ke Halaman Register

4. Conditional Rendering Navbar (Tanpa Navbar di Login)

- Modifikasi index.tsx pada folder Appshell
 - import { useRouter } from "next/router";
 - const disableNavbar = ["/auth/login", "/auth/register"];
 - const {pathname} = useRouter();
 - {!disableNavbar.includes(router.pathname) && <Navbar />}

4.praktikum-Styling > my-app > src > components > layouts > Appshell > index.tsx > ...

```
1 | import { useRouter } from "next/router";
2 | import Navbar from "../navbar";
3 |
4 |
5 | const disableNavbar = ['/auth/login', '/auth/register'];
6 |
7 |
8 | type AppShellProps = {
9 |   children: React.ReactNode;
10 | }
11 |
12 |
13 | const AppShell = (props: AppShellProps) => {
14 |
15 |
16 |
17 |   const { children } = props;
18 |   const { pathname } = useRouter();
19 |   return (
20 |     <main>
21 |       {!disableNavbar.includes(pathname) && <Navbar />}
22 |       {children}
23 |
24 |     </main>
25 |   );
26 |
27 | };
28 |
29 |
30 | export default AppShell;
```

```
src > pages > components > layouts > Appshell > index.tsx > Appshell
1 | import Navbar from "../navbar";
2 | import {useRouter} from "next/router";
3 |
4 | const disableNavbar = ['/auth/login', '/auth/register'];
5 |
6 | type AppShellProps = {
7 |   children: React.ReactNode;
8 | };
9 |
10 |
11 | const AppShell = (props: AppShellProps) => {
12 |   const { children } = props;
13 |   const { pathname } = useRouter();
14 |   return (
15 |     <main>
16 |       {!disableNavbar.includes(pathname) && <Navbar />}
17 |       {children}
18 |
19 |     <div>footer</div>
20 |     </main>
21 |   );
22 | };
23 |
24 | export default AppShell;
```

- Jalankan browser



Halaman Login

Login

Ke Halaman Register





Halaman Login

Login ke produk

Ke Halaman Register

Insight:

- Gunakan router.pathname jika ada query parameter
 - const {pathname} = useRouter();
 - Darimana kah pathname => lakukan console.log pada router

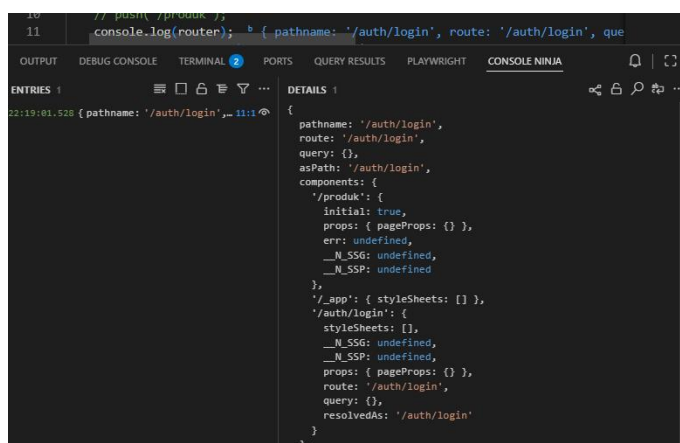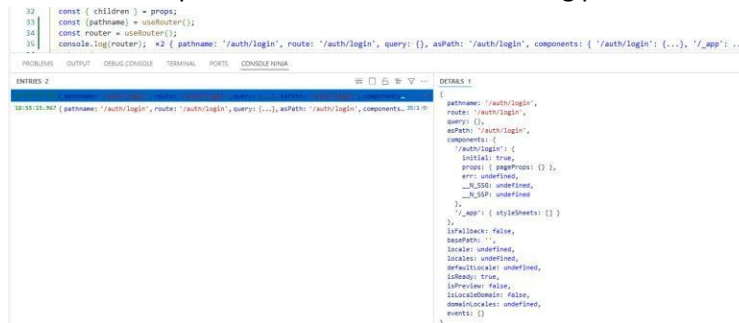


- Jangan gunakan asPath jika ada query parameter

5. Refactoring Struktur Project (Best Practice)

a. Struktur Awal (Kurang Rapi)

pages/login.tsx

styles/login.module.css

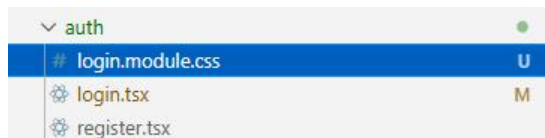



b. Struktur Refactor (Disarankan)

pages/auth/login.tsx

src/views/auth/Login/

└─ index.tsx

└─ Login.module.css

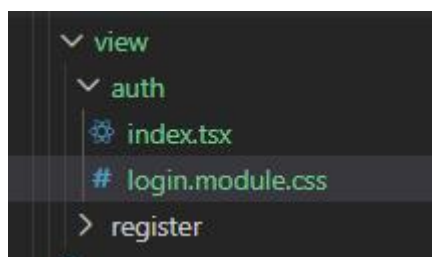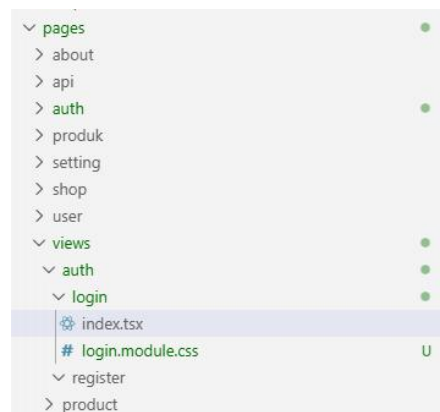


- Modifikasi login.module.css pada folder view/auth/login/
 4.praktikum-Styling > my-app > src > pages > views > auth > login > # login.module.css > ...

```


1  .login{
2      display: flex;
3      flex-direction: column;
4      justify-content: center;
5      align-items: center;
6      height: 100vh;
7  }
```

```
src > pages > view > auth > # login.module.css > .login
1  .login{
2      display: flex;
3      flex-direction: column;
4      justify-content: center;
5      align-items: center;
6      height: 100vh;
7  }
```

- Login.module.css pada folder pages/auth dihapus

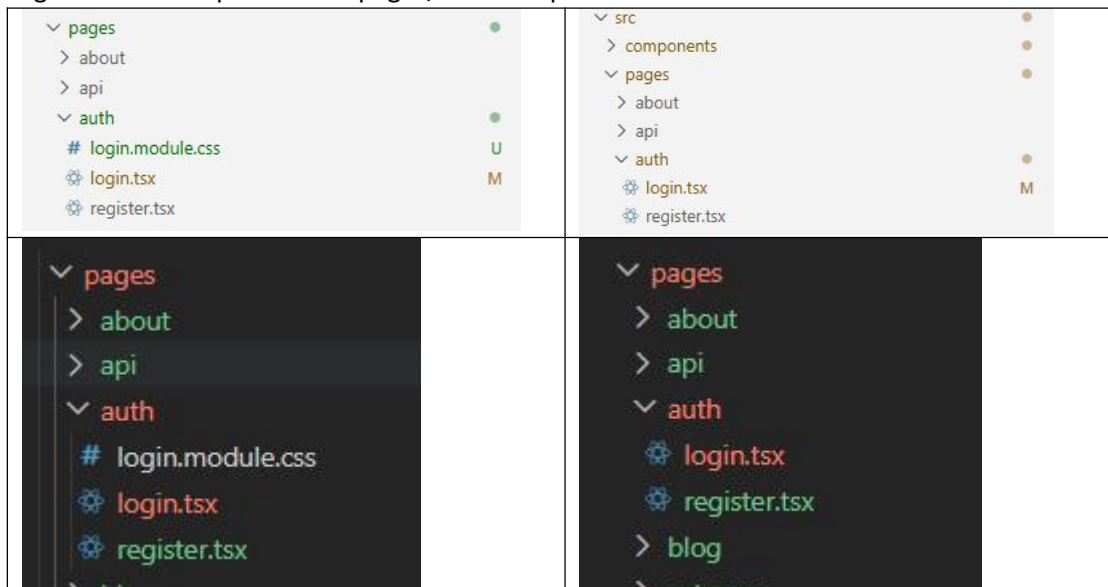

- Modifikasi login.tsx pada folder pages/auth

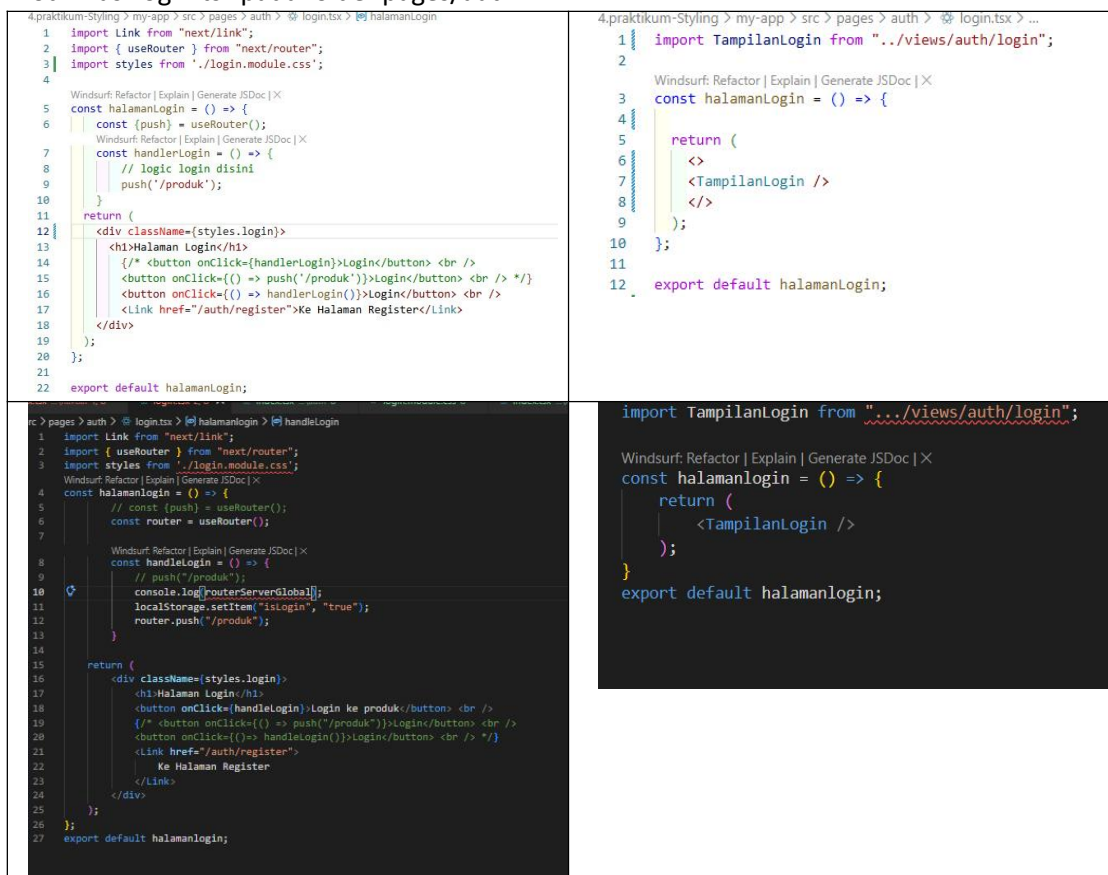

- Modifikasi index.tsx pada folder views/auth/login

4.praktikum-Styling > my-app > src > pages > views > auth > login > index.tsx > [🔗] TampilanLogin > [🔗] handleLogin

```

1  import Link from "next/link";
2  import { useRouter } from "next/router";
3  import styles from './login.module.css';
4
5  Windsurf: Refactor | Explain | Generate JSDoc | X
6  const TampilanLogin = () => {
7    const {push} = useRouter();
8    Windsurf: Refactor | Explain | Generate JSDoc | X
9    const handleLogin = () => {
10      // logic login disini
11      push('/produk');
12    }
13    return (
14      <div className={styles.login}>
15        <h1>Halaman Login</h1>
16        <button onClick={()=> handleLogin()}>Login</button> <br />
17        <Link href="/auth/register">Ke Halaman Register</Link>
18      </div>
19    );
20  }
21
22  export default TampilanLogin


```

```

1  import Link from "next/link";
2  import { useRouter } from "next/router";
3  import styles from './login.module.css';
4
5  Windsurf: Refactor | Explain | Generate JSDoc | X
6  const TampilanLogin = () => {
7    const {push} = useRouter();
8    Windsurf: Refactor | Explain | Generate JSDoc | X
9    const handleLogin = () => {
10      push('/produk');
11    }
12    return(
13      <div className={styles.login}>
14        <h1>Halaman Login</h1>
15        <button onClick={()=>handleLogin()}>Login</button> <br />
16        <Link href="/auth/register">ke halaman register</Link>
17      </div>
18    );
19  }
20
21  export default TampilanLogin;

```

- Jalankan browser

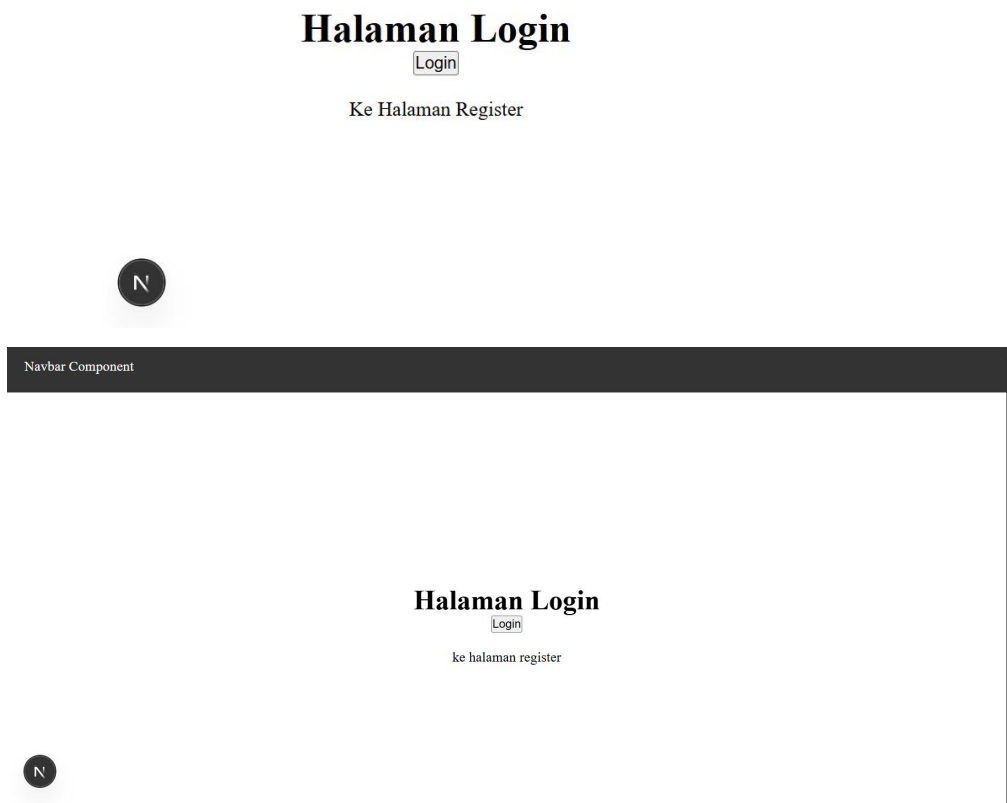

Manfaat:

- Routing tetap bersih
- Logic & UI terpisah
- Mudah dikembangkan

6. Inline Styling (CSS-in-JS)

- Modifikasi index.tsx pada folder views/auth/login
 - `<h1 style={{ color: "red",borderRadius: "10px",padding: "10px",}}>`

```
4.praktikum-Styling > my-app > src > pages > views > auth > login > index.tsx > ...
1  import Link from "next/link";
2  import { useRouter } from "next/router";
3  import styles from './login.module.css';
4
5  Windsurf: Refactor | Explain | Generate JSDoc | X
6  const TampilanLogin = () => {
7    const {push} = useRouter();
8    const handleLogin = () => {
9      // logic login disini
10     push('/produk');
11   }
12   return (
13     <div className={styles.login}>
14       <h1>Halaman Login</h1>
15       <button onClick={()=> handleLogin()}>Login</button> <br />
16       <h1 style={{color:"red",border:"1px solid red",borderRadius:"5px",padding:"5px"}}> belum punya akun</h1>
17       <Link href="/auth/register">Ke Halaman Register</Link>
18     </div>
19   );
20 }
21 export default TampilanLogin
```

```

c > pages > views > auth > login > index.tsx > [TampilanLogin]
1  import Link from "next/link";
2  import { useRouter } from "next/router";
3  import styles from "../login.module.css";
4
5  Windsurf: Refactor | Explain | Generate JSDoc | ×
6  const TampilanLogin = () => {
7    const { push } = useRouter();
8    Windsurf: Refactor | Explain | Generate JSDoc | ×
9    const handleLogin = () => {
10     push("/produk");
11   };
12   return (
13     <div className={styles.login}>
14       <h1>Halaman Login</h1>
15       <button onClick={() => handleLogin()}>Login</button> <br />
16       <h1>
17         style={{
18           color: "red",
19           border: "1px solid red",
20           borderRadius: "5px",
21           padding: "5px",
22         }}
23       >
24         Belum Punya Akun|
25       </h1>
26       <Link href="/auth/register">ke halaman register</Link>
27     </div>
28   );
29 };
30 export default TampilanLogin;

```

-
- Jalankan browser



Navbar Component



🔴 Catatan Penting:

- Menggunakan camelCase
 - borderRadius: "10px",
- Cocok untuk styling kecil & dinamis
- Tidak disarankan untuk layout besar

7. Kombinasi Global CSS + CSS Module

- Modifikasi global.css

```
4.praktikum-Styling > my-app > src > styles > # globals.css > ...
1
2
3  * {
4    box-sizing: border-box;
5    padding: 0;
6    margin: 0;
7  }
8
9  html,
10 body {
11    max-width: 100vw;
12    overflow-x: hidden;
13  }
14
15
16
17  a {
18    color: inherit;
19    text-decoration: none;
20  }
21
22
23  .big{
24    font-size: 1.5rem;
25  }
```

```
16
17  .big{
18    font-size: 1.5rem;
19  }
```

- Modifikasi index.tsx pada folder components/layouts/navbar
 - <div className="big">navbar</div>

```
4.praktikum-Styling > my-app > src > components > layouts > navbar > index.tsx > ...
1  import styles from './navbar.module.css';
2
3
4  Windsurf: Refactor | Explain | Generate JSDoc | X
5  const Navbar = () => {
6    return (
7      <div className={styles.navbar}>
8        <div className="big">
9          Navbar
10        </div>
11      </div>
12    );
13  };
14  export default Navbar;
```

```
pages > components > layouts > navbar > index.tsx > ...
1  import styles from './navbar.module.css';
2
3  Windsurf: Refactor | Explain | Generate JSDoc | X
4  const Navbar = () => {
5    return(
6      <div className={styles.navbar}>
7        <div className='big'>
8          Navbar
9        </div>
10      </div>
11    );
12  };
13  export default Navbar;
```

- Global → utility umum
- Module → styling spesifik komponen

8. SCSS (SASS)

a. Install SASS

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS CONSOLE NINJA

PS D:\1.MateriKuliah\2026-ganjil\PemogramanFrameWork\Code\4.praktikum-Styling\my-app> npm i --save-dev sass

D:\tugas\semester 6\framework\js5\code\my-app> npm i --save-dev sass

- Cek pada package.css jika berhasil mak akan muncul seperti pada gambar

4.praktikum-Styling > my-app > {} package.json > ...

```
1 {
2   "name": "my-app",
3   "version": "0.1.0",
4   "private": true,
5   "scripts": {
6     "dev": "next dev",
7     "build": "next build",
8     "start": "next start",
9     "lint": "next lint"
10  },
11  "dependencies": {
12    "@types/node": "25.2.1",
13    "@types/react": "19.2.13",
14    "@types/react-dom": "19.2.3",
15    "eslint": "9.39.2",
16    "eslint-config-next": "16.1.6",
17    "next": "16.1.6",
18    "react": "19.2.4",
19    "react-dom": "19.2.4",
20    "typescript": "5.9.3"
21  },
22  "devDependencies": {
23    "sass": "^1.97.3"
24  }
25 }
26
```


```

1  {
2    "name": "my-app",
3    "version": "0.1.0",
4    "private": true,
5    "scripts": {
6      "dev": "next dev",
7      "build": "next build",
8      "start": "next start",
9      "lint": "next lint"
10   },
11   "dependencies": {
12     "@types/node": "25.2.3",
13     "@types/react": "19.2.14",
14     "@types/react-dom": "19.2.3",
15     "eslint": "9.39.2",
16     "eslint-config-next": "16.1.6",
17     "next": "16.1.6",
18     "react": "19.2.4",
19     "react-dom": "19.2.4",
20     "typescript": "5.9.3"
21   },
22   "devDependencies": {
23     "sass": "^1.97.3"
24   }
25 }
26

```

b. Global Variable

- Tambahkan colors.scss pada folder styles

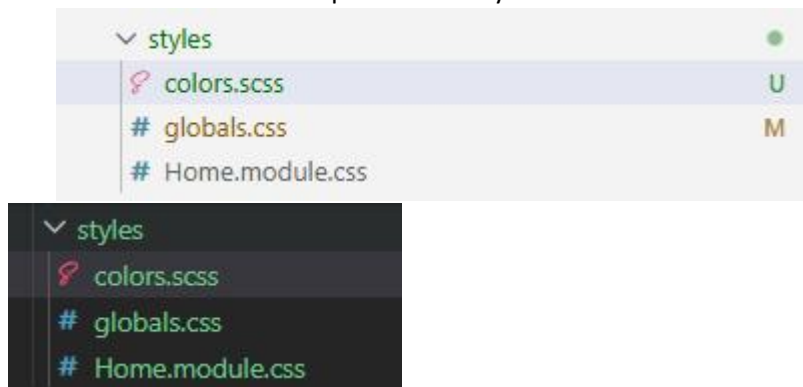

- Modifikasi colors.scss



4.praktikum-Styling > my-app > src > styles > colors.scss > \$schema

```
1  $schema:(
2    color-primary: #3498db,
3    color-secondary: #2ecc71,
4    color-accent: #e74c3c,
5    color-background: #ecf0f1,
6    color-text: #2c3e50
7  )
```

```
1  $schema:(
2    color-primary: #3498db,
3    color-secondary: #2ecc71,
4    color-accent: #e74c3c,
5    color-background: #ecf0f1,
6    color-text: #2c3e50,
7  )
```

c. Gunakan di Module

- Tambahkan file login.module.scss pada folder views/auth/login/

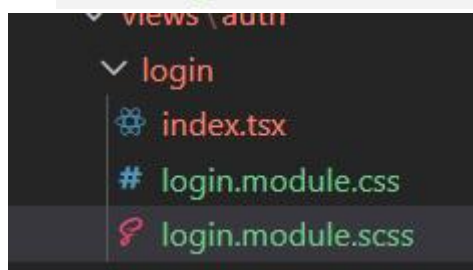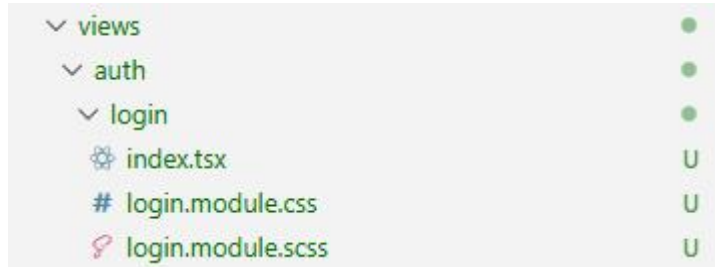

- Modifikasi index.tsx
 - Tambahkan import styles from login.module.scss
 - Disable import styles from login.module.css

4.praktikum-Styling > my-app > src > pages > views > auth > login > index.tsx > ...

```
1 import Link from "next/link";
2 import { useRouter } from "next/router";
3 // import styles from './login.module.css';
4 import styles from './login.module.scss';
5
6 const TampilanLogin = () => {
7   const {push} = useRouter();
8   const handleLogin = () => {
9     // logic login disini
10    push('/produk');
11  }
12  return (
13    <div className={styles.login}>
14      <h1>Halaman Login</h1>
15      <button onClick={() => handleLogin()}>Login</button> <br />
16      <h1 style={{color:"red",border:"1px solid red",borderRadius:"5px",padding:"5px"}}> belum punya akun</h1>
17      <Link href="/auth/register">Ke Halaman Register</Link>
18    </div>
19  );
20 }
21
22 export default TampilanLogin
23
```

```
1 import Link from "next/link";
2 import { useRouter } from "next/router";
3 // import styles from './login.module.css';
4 import styles from './login.module.scss';
5
6 const TampilanLogin = () => {
7   const { push } = useRouter();
8   const handleLogin = () => {
9     push("/produk");
10  };
11  return (
12    <div className={styles.login}>
13      <h1>Halaman Login</h1>
14      <button onClick={() => handleLogin()}>Login</button> <br />
15      <h1
16        style={{
17          color: "red",
18          border: "1px solid red",
19          borderRadius: "5px",
20          padding: "5px",
21        }}
22      >
23        Belum Punya Akun
24      </h1>
25      <Link href="/auth/register">ke halaman register</Link>
26    </div>
27  );
28 };
29 export default TampilanLogin;
30
```

- Modifikasi login.module.scss


- `background-color: map-get($map: $schema, $key:color-secondary);`

4.praktikum-Styling > my-app > src > pages > views > auth > login > login.module.scss > ...

```
1 @import "@styles/colors.scss";
2
3 .login{
4   display: flex;
5   flex-direction: column;
6   justify-content: center;
7   align-items: center;
8   height: 100vh;
9   background-color: map-get($map: $schema, $key:color-secondary );
10 }
```

```
src > pages > views > auth > login > login.module.scss > .login
1  @import "@styles/colors.scss";
2
3  .login{
4    display: flex;
5    flex-direction: column;
6    justify-content: center;
7    align-items: center;
8    height: 100vh;
9    background-color: map-get($map: $schema, $key: color-secondary);
10 }
```

- Jalankan browser

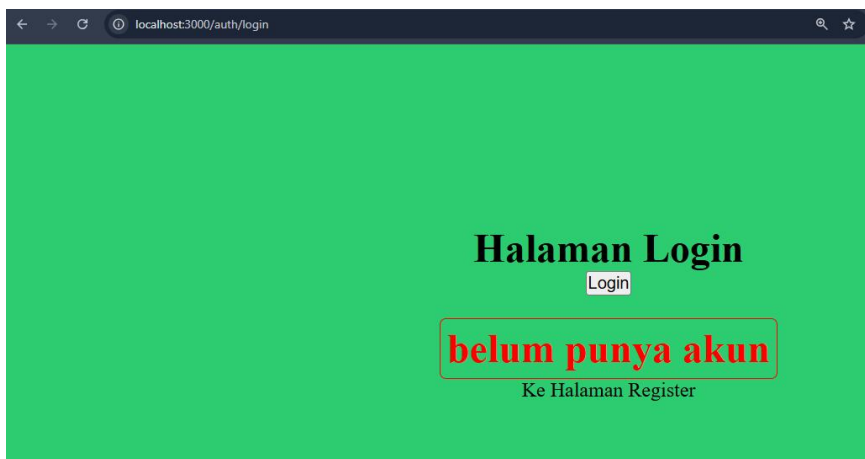

Keunggulan SCSS:

- Variable
 - Bisa simpan warna, font, ukuran, dll di satu tempat.

```
4.praktikum-Styling > my-app > src > styles > colors.scss > $schema
1  $schema:(
2    color-primary: #3498db,
3    color-secondary: #2ecc71,
4    color-accent: #e74c3c,
5    color-background: #ecf0f1,
6    color-text: #2c3e50
7  )
```

- Nested rule

- Struktur CSS mengikuti struktur HTML.

```
.navbar {
  ul {
    li {
      a {
        color: white;
      }
    }
  }
}
```

- Maintainable untuk project besar

9. Tailwind CSS

a. Install

- `npm install -D tailwindcss postcss autoprefixer`

```
PS D:\1.MateriKuliah\2026-ganjil\PemogramanFramework\Code\4.praktikum-Styling\my-app> npm i -D tailwindcss postcss autoprefixer
added 5 packages, changed 1 package, and audited 352 packages in 2s

143 packages are looking for funding
  run `npm fund` for details

found 0 vulnerabilities
```

```
added 5 packages, changed 2 packages, and audited 354 packages in 10s
```

```
145 packages are looking for funding
  run `npm fund` for details
```

- `npx tailwindcss init -p`
 - jika terjadi error seperti berikut

```
PS D:\1.MateriKuliah\2026-ganjil\PemogramanFramework\Code\4.praktikum-Styling\my-app> npm i -D tailwindcss postcss autoprefixer
added 5 packages, changed 1 package, and audited 352 packages in 2s

143 packages are looking for funding
  run `npm fund` for details

found 0 vulnerabilities
PS D:\1.MateriKuliah\2026-ganjil\PemogramanFramework\Code\4.praktikum-Styling\my-app> npx tailwindcss init -p
npm error could not determine executable to run
npm error A complete log of this run can be found in: C:\Users\DimashW\AppData\Local\npm-cache\_logs\2026-02-07T15_29_07_887Z-debug-0.log
PS D:\1.MateriKuliah\2026-ganjil\PemogramanFramework\Code\4.praktikum-Styling\my-app> 
```

```
D:\tugas\semester 6\framework\js5\code\my-app>npx tailwindcss init -p
npm error could not determine executable to run
npm error A complete log of this run can be found in: C:\Users\YAN DAFFA\AppData\Local\npm-cache\_logs\2026-03-02T18_08_08_551Z-0.log
```

- Solusinya downgrade versi tailwindcss nya

```
PS D:\1.MateriKuliah\2026-ganjil\PemogramanFramework\Code\4.praktikum-Styling\my-app> npm install tailwindcss@3 postcss autoprefixer
up to date, audited 387 packages in 899ms

150 packages are looking for funding
  run `npm fund` for details

found 0 vulnerabilities
PS D:\1.MateriKuliah\2026-ganjil\PemogramanFramework\Code\4.praktikum-Styling\my-app> npx tailwindcss init -p
Created Tailwind CSS config file: tailwind.config.js
Created PostCSS config file: postcss.config.js
```

```
D:\tugas\semester 6\framework\js5\code\my-app>npm install -D tailwindcss@3 postcss autoprefixer
```

```
added 35 packages, changed 1 package, and audited 389 packages in 8s
```

```
152 packages are looking for funding
  run `npm fund` for details
```



```
D:\tugas\semester 6\framework\js5\code\my-app>npx tailwindcss init -p

Created Tailwind CSS config file: tailwind.config.js
Created PostCSS config file: postcss.config.js
```

b. Konfigurasi tailwind.config.js

```
4.praktikum-Styling > my-app > JS tailwind.config.js > ...
1  /** @type {import('tailwindcss').Config} */
2  module.exports = {
3    content: [
4      "./app/**/*.js,ts,jsx,tsx,mdx",
5      "./pages/**/*.js,ts,jsx,tsx,mdx",
6      "./components/**/*.js,ts,jsx,tsx,mdx",
7      "./src/**/*.js,ts,jsx,tsx,mdx",
8    ],
9    theme: {
10     extend: {},
11   },
12   plugins: [],
13 }
```

```
1  /** @type {import('tailwindcss').Config} */
2  module.exports = {
3    content: [
4      "./app/**/*.js,jsx,ts,tsx",
5      "./pages/**/*.js,jsx,ts,tsx",
6      ".components/**/*.js,jsx,ts,tsx",
7      ".src/**/*.js,jsx,ts,tsx",
8    ],
9    theme: {
10     extend: {},
11   },
12   plugins: [],
13 }
14
15
```

c. Import di Global CSS

- @tailwind base;
- @tailwind components;
- @tailwind utilities;

```
4.praktikum-Styling > my-app > src > styles > # globals.css > ...
1
2  @tailwind base;
3  @tailwind components;
4  @tailwind utilities;
5
6
7  > * { ...
11 }
12
13  html,
14 > body { ...
17 }
18
19
20
21 > a { ...
24 }
25
26
27 > .big{ ...
29 }
30
```

```

@tailwind base;
@tailwind components;
@tailwind utilities;
> *{ ...
}

> html, body { ...
}

```

d. Contoh Penggunaan

- Modifikasi index.tsx pada folder auth/login/
 - `<h1 className="text-3xl font-bold text-blue-600 ">Halaman Login</h1>`

4.praktikum-Styling > my-app > src > pages > views > auth > login > index.tsx > TampilanLogin

```

1 import Link from "next/link";
2 import { useRouter } from "next/router";
3 // import styles from './login.module.css';
4 import styles from './login.module.scss';
5
6 const TampilanLogin = () => {
7   const {push} = useRouter();
8   const handleLogin = () => {
9     // logic login disini
10    push('/produk');
11  }
12  return (
13    <div className={styles.login}>
14      <h1 className="text-3xl font-bold text-blue-600 ">Halaman Login</h1>
15      <button onClick={() => handleLogin()}>Login</button> <br />
16      <h1 style={{color:"red",border:"1px solid red",borderRadius:"5px",padding:"5px"}}> belum punya akun</h1>
17      <Link href="/auth/register">Ke Halaman Register</Link>
18    </div>
19  );
20 }
21
22 export default TampilanLogin


```


```

push('/produk');
};
return (
  <div className={styles.login}>
    <h1 className="text-3xl font-bold text-blue-600 ">Halaman Login</h1>
    <button onClick={() => handleLogin()}>Login</button> <br />
    <h1

```

- Jalankan browser

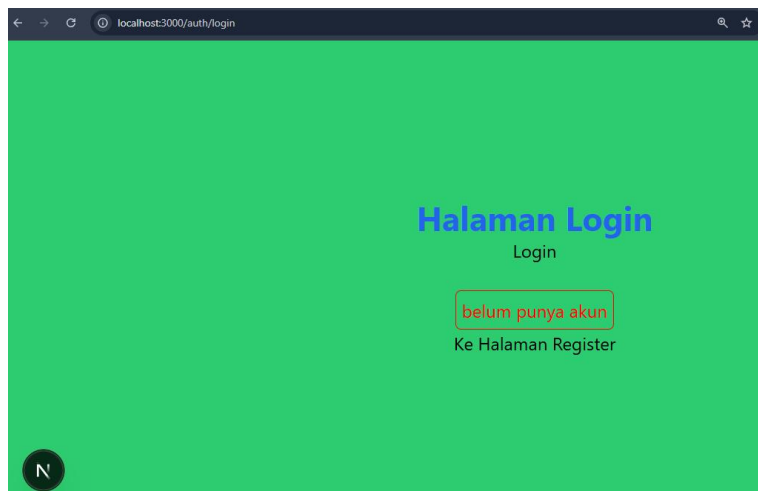


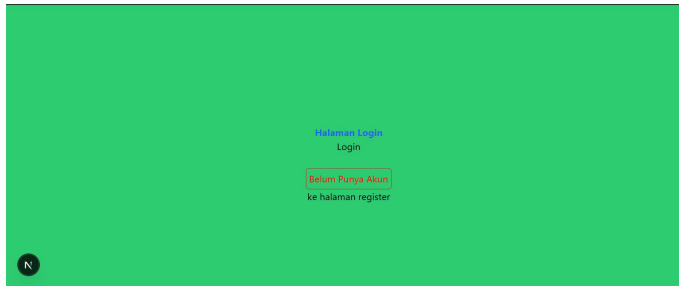



B. Tugas Praktikum


Tugas 1

- Buat halaman Register

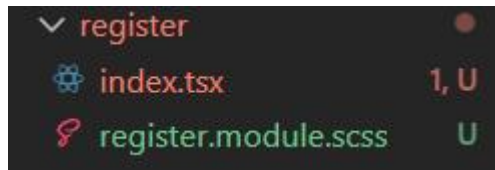


- Gunakan CSS Module

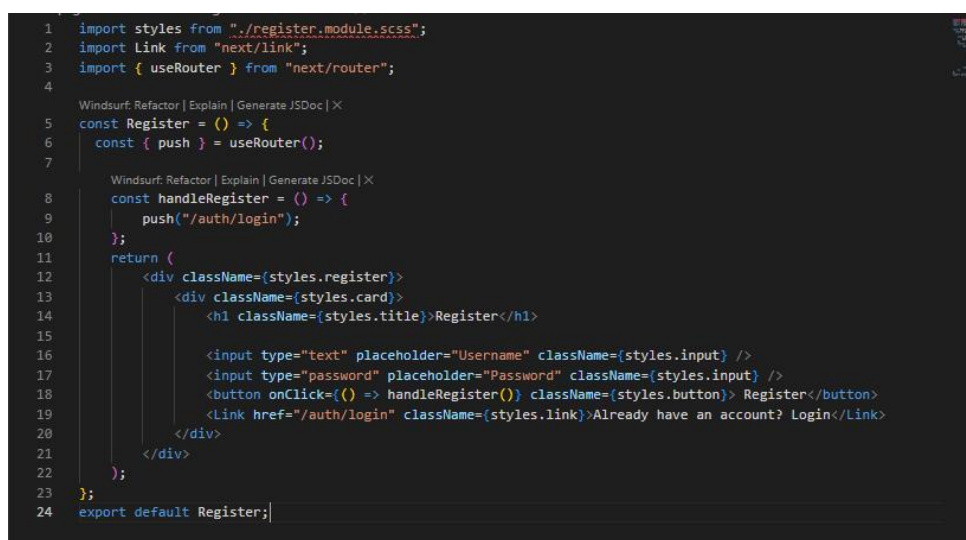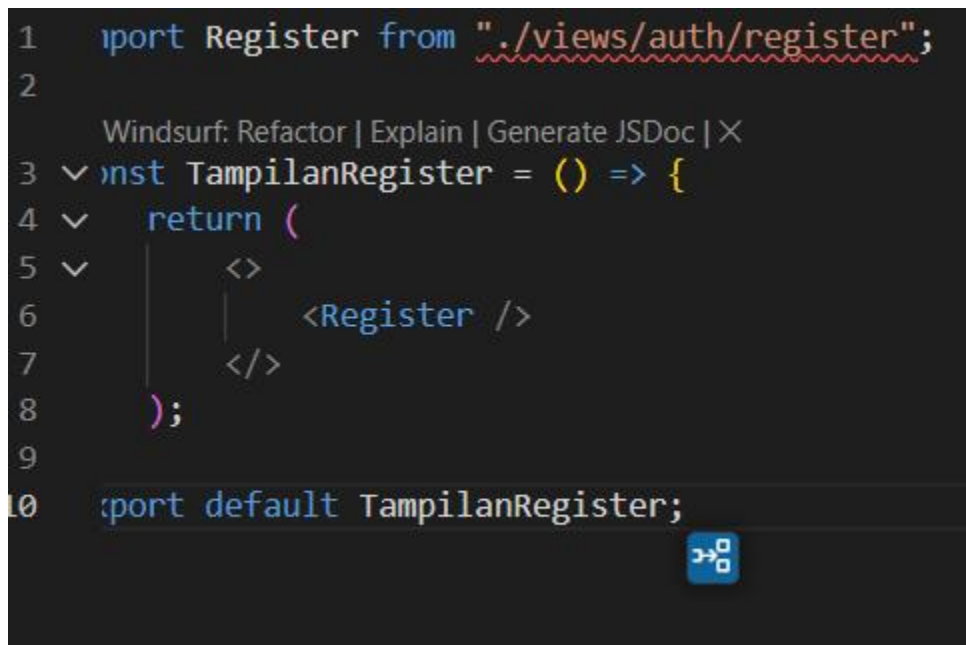

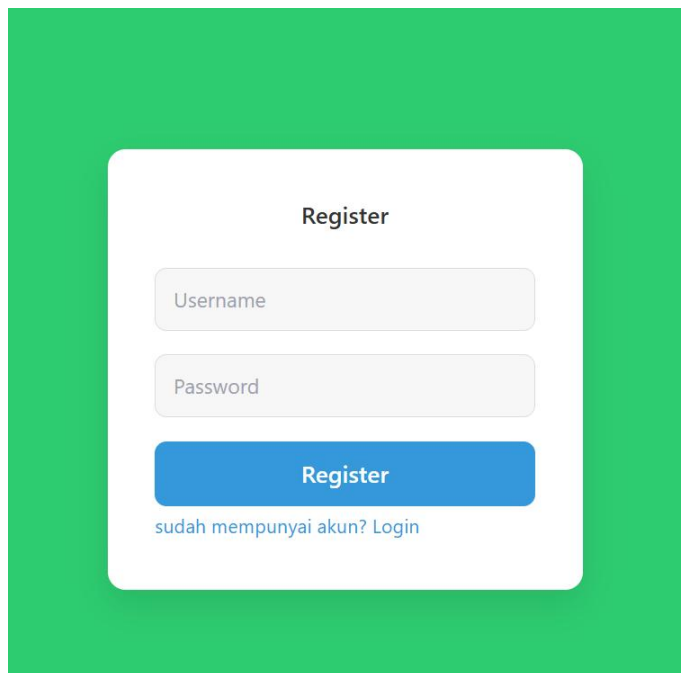

Tugas 2

- Refactor halaman Produk ke folder views
- Pisahkan Hero Section dan Main Section

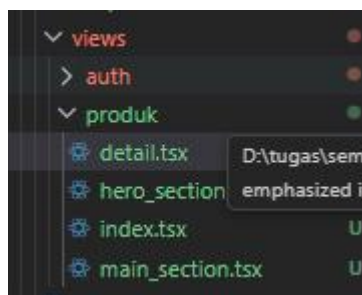

Detail.tsx

```
src > pages > views > produk > detail.tsx > DetailProdukView
1  import {useRouter} from "next/router";
2
   Windsurf. Refactor | Explain | Generate JSDoc | X
3  const DetailProdukView = () => {
4    const router = useRouter();
5    const { id } = router.query;
6    return (
7      <div>
8        <h1>Halaman Produk</h1>
9        <p>Produk ID: {id}</p>
10     </div>
11   );
12 }
13 export default DetailProdukView;
14
```

Hero_section.tsx

```
Windsurf: Refactor | Explain | Generate JSDoc | X
1  const HeroSection = () => {
2    return (
3      <div>
4        <h1>Halaman Produk</h1>
5      </div>
6    );
7  };
8  export default HeroSection;
9
```

Main_section.tsx

```
Windsurf: Refactor | Explain | Generate JSDoc | X
1  const MainSection = () => {
2    return (
3      <div>
4        <h2>Produk</h2>
5
6        <div>
7          <h2>Produk 1</h2>
8        </div>
9
10       <div>
11         <h2>Produk 2</h2>
12       </div>
13
14       <div>
15         <h2>Produk 3</h2>
16       </div>
17     </div>
18   );
19 };
20 export default MainSection;
```

Index.tsx

Views:

```
src > pages > views > produk > index.tsx > Produk > useEffect() callback
1  import { useRouter } from "next/navigation";
2  import { useEffect } from "react";
3  import HeroSection from "../hero_section";
4  import MainSection from "../main_section";
5
6  Windsurf: Refactor | Explain | Generate JSDoc | X
7  const Produk = () => {
8    const router = useRouter();
9    useEffect(() => {
10      const isLogin = localStorage.getItem("isLogin");
11      if (!isLogin) {
12        router.push("/auth/login");
13      }
14    }, [router]);
15    return (
16      <div>
17        <HeroSection />
18        <MainSection />
19      </div>
20    );
21  };
22  export default Produk;
```

Pages/produk:

```
1 import ProdukView from "../views/produk";
2
3 const Produk = () => {
4   return (
5     <>
6       <ProdukView />
7     </>
8   );
9 }
10 export default Produk;
```

[id].tsx

```
src / pages / produk / [id].tsx / default
1 import DetailProdukView from "../views/produk/detail";
2
3 const DetailProduk = () => {
4   return (
5     <>
6       <DetailProdukView />
7     </>
8   );
9 }
10 export default DetailProduk;
```

Hasil :

Halaman Produk

Produk

Produk 1

Produk 2

Produk 3

Halaman Produk

Produk ID: 3

Tugas 3

- Terapkan Tailwind CSS
- Gunakan minimal 5 utility class

```
src > pages > views > produk > index.tsx > [P] Produk
1  import { useRouter } from "next/navigation";
2  import { useEffect } from "react";
3  import HeroSection from "../hero_section";
4  import MainSection from "../main_section";
5
Windsurf: Refactor | Explain | Generate JSDoc | X
6  const Produk = () => {
7    const router = useRouter();
8    useEffect(() => {
9      const isLogin = localStorage.getItem("isLogin");
10     if (!isLogin) {
11       router.push("/auth/login");
12     }
13   }, [router]);
14   return (
15     <div className="min-h-screen bg-gray-100">
16       <HeroSection />
17       <MainSection />
18     </div>
19   );
20 }
21 export default Produk;
```


```
src > pages > views > produk > detail.tsx > [P] DetailProdukView
1  import {useRouter} from "next/router";
2
Windsurf: Refactor | Explain | Generate JSDoc | X
3  const DetailProdukView = () => {
4    const router = useRouter();
5    const { id } = router.query;
6    return (
7      <div className="min-h-screen flex items-center justify-center bg-gray-100">
8        <div className="bg-white p-6 rounded shadow-md">
9          <h1 className="text-xl font-bold mb-2">Halaman Produk</h1>
10         <p className="text-gray-600">Produk ID: {id}</p>
11       </div>
12     </div>
13   );
14 }
15 export default DetailProdukView;
16
```

```
Windsurf: Refactor | Explain | Generate JSDoc | X
1  const HeroSection = () => {
2    return (
3      <div className="bg-blue-600 text-white py-5 text-center">
4        <h1 className="text-4xl font-bold mb-4">Halaman Produk</h1>
5      </div>
6    );
7  };
8  export default HeroSection;
9
```



```
hero_section.tsx U  index.tsx ...views\produk U  index.tsx ...pages\produk U  [id].tsx U  main_section.tsx U >
src > pages > views > produk > main_section.tsx > MainSection
1  import Link from "next/link";
2
Windsurf Refactor | Explain | Generate JSDoc | X
3  const MainSection = () => {
4    return (
5      <div className="p-6 grid grid-cols-1 md:grid-cols-3 gap-4">
6        <div className="bg-white border rounded-lg p-6 shadow">
7          <h2 className="text-lg font-bold mb-2">Produk 1</h2>
8          <Link href="/produk/1" className="bg-blue-500 text-white px-4 py-2 rounded">
9            Detail
10          </Link>
11        </div>
12
13        <div className="bg-white border rounded-lg p-6 shadow">
14          <h2 className="text-lg font-bold mb-2">Produk 2</h2>
15          <Link href="/produk/2" className="bg-blue-500 text-white px-4 py-2 rounded">
16            Detail
17          </Link>
18        </div>
19
20        <div className="bg-white border rounded-lg p-6 shadow">
21          <h2 className="text-lg font-bold mb-2">Produk 3</h2>
22          <Link href="/produk/3" className="bg-blue-500 text-white px-4 py-2 rounded">
23            Detail
24          </Link>
25        </div>
26      </div>
27    );
28  };
29
30  export default MainSection;
```

hasil:

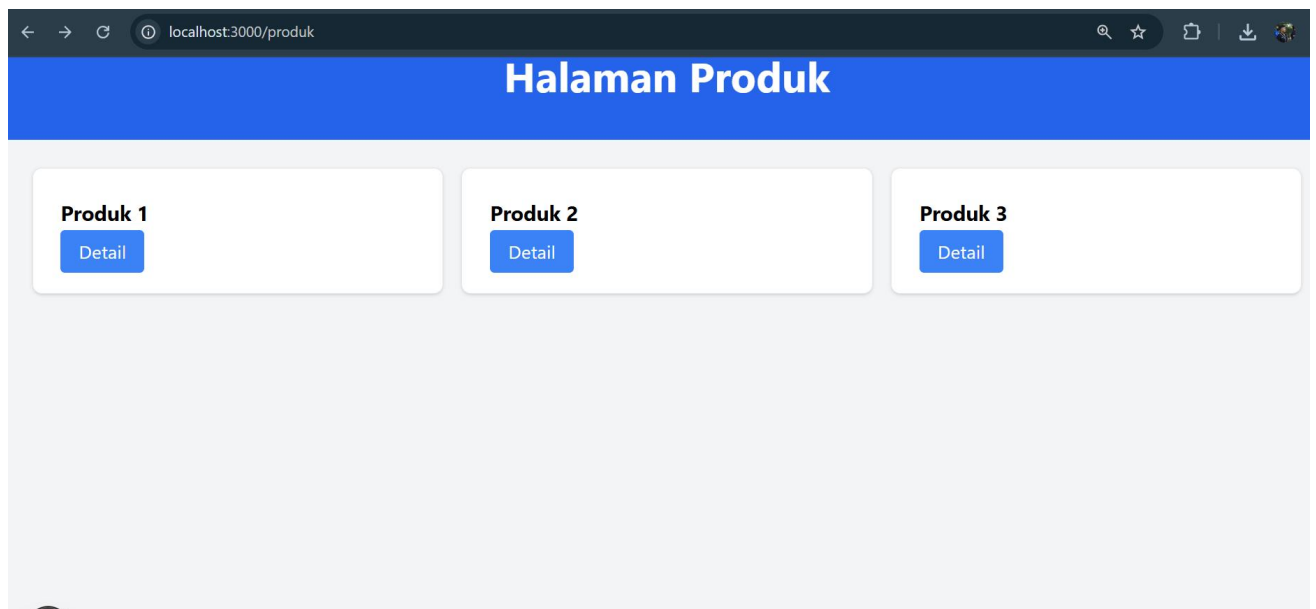

Halaman Produk

Produk ID: 2

C. Pertanyaan Refleksi

1. Kapan sebaiknya menggunakan CSS Module dibanding Global CSS?

Jawab : CSS Module digunakan saat styling hanya digunakan dalam 1 komponen saja

2. Apa kelemahan inline styling?

Jawab : tidak dapat menggunakan pseudo-class seperti hover atau focus, tidak mendukung media query, dan sulit untuk dikelola jika jumlah styling semakin banyak

3. Mengapa SCSS cocok untuk project skala besar?

Jawab : SCSS cocok untuk project skala besar karena memiliki fitur tambahan seperti variable, nesting, dan mixin yang membantu mengorganisir kode dengan lebih baik

4. Apa keunggulan Tailwind dibanding CSS tradisional?

Jawab : Tailwind menggunakan pendekatan utility-first, yaitu styling langsung melalui class kecil yang sudah tersedia

D. Kesimpulan

Next.js memberikan fleksibilitas penuh dalam styling:

- Global CSS → utility umum
- CSS Module → komponen
- Inline Style → dinamis

- SCSS → scalable
- Tailwind CSS → cepat & konsisten

Pemilihan teknik styling harus disesuaikan dengan skala dan kebutuhan project.