

Trace-Tree Magmas: Proof-Producing Infinite Countermodels and 28 New Order-Five Austin Classifications

Jiaming Zhao^{1,2}, Bing Wu¹, and Xu Miao^{1*}

¹ Yanbiao Lab, DataCanvas Co., Ltd., Beijing, China

² School of Mathematical Sciences, Peking University, Beijing, China

Abstract. Finite model finders cannot witness an Austin law: an identity whose finite models are all trivial but which has a nontrivial infinite model. We introduce rank-decreasing sparse trace-tree magmas, a finitely presented class of total operations on a countably infinite constructor-tree carrier. The default product pairs its arguments, while finitely many positive Horn clauses define exceptional outputs. Our main procedure derives candidate clauses from symbolic evaluation traces. For every reported model, it proves functionality of the exceptional relation by descent on constructor size, proves the source identity by exhaustive symbolic case analysis, and compiles the result into a self-contained Lean 4 certificate. A least simultaneous fixed point gives the model language an implementation-independent semantics, so bounded search may miss models but cannot invalidate a certified result.

On ETP’s 96 order-five Austin candidates, we discover and Lean-verify infinite countermodels for 28 identities that had no prior public classification in our documented literature-and-artifact audit. They form fourteen classes under opposite-magma duality and establish 28 new Austin classifications; each class has a one-clause trace-tree representative. Supplemental searches independently reconstruct four further identities in two duality classes previously reported by ALPS, giving 32 certified candidates in total. We evaluate generalization separately on Canonical-4187, the deduplicated union of Order5-130—ten known Austin laws, the 96 candidates, and 24 identities open on both the finite and infinite sides—and the public 4,141-row ALPS pool. A fresh trace run generates 636 certificates, all accepted by Judge v3: 36 from Order5-130 and 600 from the ALPS-only canonical remainder. In a separate same-resource comparison at two vCPUs, 2,048 MiB, and 120 seconds per identity, Vampire 5.0.1, E 3.5.1, and a parameter-free complete Twee 2.6.1 run have a 94-class union on the implication-proof side. Only Twee produces trusted counter-satisfiable outcomes: 18 canonical classes, of which independent finite-side certificates force 16 to be infinite. None of these ATP runs emits an explicit model or a Lean certificate, and none is decisive on the 28 newly classified identities. This comparison documents a complementary capability gap. To the best of our audit, this is the

* Corresponding author: miaoxu@zetyun.com.

first automated system to synthesize this trace-tree model family, generate its well-founded inversion proofs, and emit self-contained Lean 4 certificates.

Keywords: automated deduction · infinite model synthesis · equational logic · Austin identities · Lean 4 · term rewriting

1 Introduction

A magma consists of a carrier and one binary operation. Despite this minimal signature, its equational logic exhibits a sharp finite–infinite gap. Austin showed that an identity may force every finite model to be trivial while still admitting a nontrivial infinite model [1,2]. Such *Austin laws* are difficult for standard model search for a structural reason: no finite multiplication table can witness the required model.

The Equational Theories Project (ETP) turns this classical phenomenon into a large, formally specified classification problem [6]. Its order-five study isolated 96 identities known to have only trivial finite models but with no known infinite model in the fixed public snapshot [10]. Proving that one of these identities is an Austin law requires more than a satisfiability answer. One must describe an infinite carrier and a total binary operation, prove the identity for every valuation, and show that the carrier is nontrivial.

This paper develops automated semantic searches that produce exactly such objects. Their principal language consists of operations on the free constructor algebra

$$\mathcal{T} ::= e \mid k(\mathcal{T}) \mid \langle \mathcal{T}, \mathcal{T} \rangle.$$

The default product is the ordered pair of its arguments. A finite set of universally quantified Horn rules presents exceptional products; the induced relations are defined by a least simultaneous fixed point, without reference to the search program. The principal algorithm extracts rule shapes from an evaluation trace of the source law. Pair projections recover rule parameters, while constructor size provides a well-founded measure for recursive inversion. The generated source proof then considers every relevant way in which an earlier computation can return either an exceptional result or the default pair. Thus the result is not a finite approximation to a large model. It is a finite presentation of a genuinely infinite magma.

The second defining feature is proof production. A model is reported only with a self-contained Lean 4 theorem that reconstructs the carrier and operation, proves universal source validity, and refutes the target identity. The common constructor presentation separately supplies the uniform injection $n \mapsto k^n(e)$, so every trace carrier is infinite (Lemma 3). The Python search and code generator remain untrusted: a wrong candidate or a defective proof script is rejected by Lean’s kernel [23,30].

The trace procedure produced the first public nontrivial infinite models found in our documented literature-and-artifact audit for 28 order-five identities, forming 14 duality classes. The distinction from prior ATP results is concrete. All

28 occur among the 96 order-five candidates that the published Vampire campaign left unresolved; that campaign reports no constructed infinite model for them [10]. In our same-resource experiment, Vampire, E, and one parameter-free complete Twee run likewise return no decisive status on any of the 28. The later Vampire/E extraction of explicit, possibly infinite models applies to the order-at-most-four ETP corpus rather than these identities [15]. Our supplemental searches also reconstruct four identities in two duality classes previously reported by ALPS; those four are explicitly excluded from the novelty count [31,32].

The published ALPS experiment is separate from our same-resource runs. Its eight-configuration ATP portfolio resolves 2.2% of the 4,141-law pool at its initial budget, and a twentyfold budget increase adds only 0.6 percentage points. At the largest budget it reports 110 implication proofs but only four construction-side models, all from complete Twee; under ALPS’s fixed reasoning-model protocol, the strongest tested model solves no construction-side instance [32]. These results expose a measured shortage of model-construction methods rather than merely a shortage of proof-search time.

Our novelty lies in a specific combination: a finite presentation derived from source-law traces, a functionality proof based on rank-decreasing inversion, and end-to-end compilation of every reported operation into a self-contained Lean 4 theorem. To the best of our literature and public-artifact audit, no prior system searches this model family or generates certificates for it.

The contributions are:

1. an implementation-independent semantics for finitely presented trace-tree magmas, together with a trace-clause synthesis algorithm. An explicit theorem chain starts from the least relational semantics, proves the exceptional relation functional by constructor-size induction, and obtains a total magma on a countably infinite carrier;
2. a proof-producing trace search whose depth sweep, orientation schedule, source generalizations, and finite resource bounds are explicit, together with a Lean 4 compiler producing end-to-end certificates and an explicit trust boundary: untrusted enumeration, proof search, and text generation cannot create a counted result without kernel acceptance;
3. the first public infinite models for 28 previously unclassified order-five identities, establishing 28 new Austin classifications in fourteen duality classes, together with a one-clause structural taxonomy and a fresh evaluation on Canonical-4187, the explicitly deduplicated union of Order5-130 and ALPS-4141;
4. three supplementary searches with proof production—guarded decoding, strict completion, and canonical-form search—whose different model languages and targeted regression scopes are reported separately rather than merged into the comparison with Vampire, E, and Twee.

The paper emphasizes the model language, search principles, correctness, and mathematical structure of the synthesized models. Runtime and memory are reported only to establish feasibility.

Section 2 fixes the equational setting and duality notation. Sections 3 and 4 define the model language and the search algorithm. Section 5 gives the soundness chain and trust boundary, after which Section 6 analyzes the models found. Section 7 reports the independent experiments and the comparison with established ATPs.

2 Problem setting

2.1 Equational nonimplication and Austin laws

We follow the notation of the ETP report [6]. If X is an alphabet, let $\mathcal{M}_X = (M_X, \diamond)$ denote the free magma generated by X . Thus a word in M_X is either a letter of X or a product $u \diamond v$. Every map $f : X \rightarrow M$ into a magma $\mathcal{M} = (M, \diamond)$ extends uniquely to a homomorphism $\varphi_f : \mathcal{M}_X \rightarrow \mathcal{M}$. A law is a formal equality $s \simeq t$ with $s, t \in M_X$, and $\mathcal{M} \models s \simeq t$ means $\varphi_f(s) = \varphi_f(t)$ for every $f : X \rightarrow M$. For laws E, F , we write $E \models F$ when every magma satisfying E also satisfies F . Following ETP, the order of a law is the total number of occurrences of $\diamond$ on its two sides.

ETP assigns stable names En to laws. The law E2 is $x \simeq y$ and therefore holds exactly in singleton magmas. A countermodel to

$$En \implies E2$$

is consequently a nontrivial model of En . Combining such a model with an independent result that every finite model of En is trivial proves the following classification.

Definition 1. *A law E is an Austin law if every finite magma satisfying E is trivial and some infinite magma satisfies E .*

The certificate problem addressed here is semantic: given a source law E and target law F , synthesize a magma $\mathcal{A} = (A, \diamond)$, a proof $\mathcal{A} \models E$, and a valuation refuting F . For $F = E2$, the last component is simply a pair of distinct carrier elements.

2.2 Opposite-magma duality

For a magma $\mathcal{M} = (M, \diamond)$, let $\mathcal{M}^{\text{op}} = (M, \diamond^{\text{op}})$, where $a \diamond^{\text{op}} b = b \diamond a$. Reversing the two children at every internal word node maps a law E to its dual E^* , and

$$\mathcal{M} \models E \iff \mathcal{M}^{\text{op}} \models E^*.$$

Finiteness, infinitude, and nontriviality are preserved. We therefore analyze the new results as 14 duality classes, although Lean checks a separate certificate for every one of the 28 identities.

3 A search language for infinite tree magmas

Three objects play different roles throughout the paper. First, search produces a finite rule set R . Second, the rules define two relations: $C_R(a, b; o)$ says that o is an exceptional output allowed for the input pair (a, b) , while $S_R(a, b; o)$ says that o is an admissible intermediate result. An admissible result may be either the default pair or an exceptional output. Third, after proving that C_R has at most one output for each input pair, we define the total operation eval_R . The relation S_R is deliberately multivalued and is never used as the magma operation. The implementation name `Code` refers to C_R ; it does not mean generated Lean source code.

3.1 The constructor-tree carrier

Let $\mathcal{T}$ be the inductive set generated by a constant $\mathbf{e}$, a unary constructor $\mathbf{k}$, and an ordered-pair constructor $\langle -, - \rangle$. Define

$$|\mathbf{e}| = 0, \quad |\mathbf{k}(a)| = |a| + 1, \quad |\langle a, b \rangle| = (|a| + 1) + (|b| + 1).$$

Both pair components are strictly smaller than their parent. Constructor disjointness and injectivity give total structural projections that reveal the left or right component of a pair. To make the cardinality statement explicit, fix an injective pairing function $\pi : \mathbb{N}^2 \rightarrow \mathbb{N}$ and define

$$\gamma(\mathbf{e}) = 0, \quad \gamma(\mathbf{k}(a)) = 3\gamma(a) + 1, \quad \gamma(\langle a, b \rangle) = 3\pi(\gamma(a), \gamma(b)) + 2.$$

The residue modulo three identifies the outer constructor, and injectivity of π then proves by structural induction that γ is injective. Conversely, $n \mapsto \mathbf{k}^n(\mathbf{e})$ is injective by constructor injectivity and disjointness. Hence $\mathcal{T}$ is countably infinite.

The carrier is chosen for three concrete reasons. A default pair records the two arguments of a multiplication. Projections expose those arguments to the generated uniqueness proof. Constructor size turns an attempted cyclic tree equation into an arithmetic contradiction.

3.2 Formal clause syntax and semantics

Let $V = \{v_1, \dots, v_r\}$ be clause parameters and let $H = \{h_1, \dots, h_m\}$ be disjoint metavariables for intermediate results. Write $P(V, H)$ for the free constructor algebra generated by $V \cup H$:

$$p ::= v \mid h \mid \mathbf{e} \mid \mathbf{k}(p) \mid \langle p_1, p_2 \rangle, \quad v \in V, \quad h \in H.$$

A dependency-respecting trace clause is

$$\forall V H. \quad \bigwedge_{i=1}^m S(p_i, q_i; h_i) \implies C(p_L, p_R; p_O), \quad (1)$$

The clause must satisfy three dependency conditions. The patterns p_i, q_i may mention only V and $\{h_j \mid j < i\}$; the third argument of the i th premise is exactly h_i ; and the head may mention all of $V \cup H$. A ground substitution $\theta : V \cup H \rightarrow \mathcal{T}$ extends homomorphically to patterns. The principal trace generator uses the distinguished source variable as p_O ; the larger syntax is useful for stating the semantic class and for the related completion procedure.

For $S \subseteq \mathcal{T}^3$, let $\text{Inst}_R(S)$ be the set of all triples $(\theta p_L, \theta p_R, \theta p_O)$ obtained from a clause of R and a ground substitution θ whose instantiated premises all belong to S . Let

$$\text{Raw} = \{(a, b, \langle a, b \rangle) \mid a, b \in \mathcal{T}\}.$$

On the complete lattice $\mathcal{P}(\mathcal{T}^3) \times \mathcal{P}(\mathcal{T}^3)$, define the monotone operator

$$\Phi_R(C, S) = (C \cup \text{Inst}_R(S), S \cup \text{Raw} \cup C \cup \text{Inst}_R(S)). \quad (2)$$

Definition 2 (Relational semantics). *For a finite dependency-respecting rule set R , let $(\mathbf{C}_R, \mathbf{S}_R) = \text{lfp}(\Phi_R)$. Thus $\mathbf{C}_R$ is the ternary exceptional-output relation generated by ground rule instances, and $\mathbf{S}_R$ is the relation of allowed intermediate results generated jointly by default pairs and exceptional outputs.*

Proposition 1 (Least semantics). *Definition 2 determines a unique least pair of relations. It is the union of the finite iterates of Φ_R from $(\emptyset, \emptyset)$, and it is equivalent to the mutually inductive default-pair, exceptional-output, and clause-instantiation rules used in the generated Lean certificate.*

Proof. The operator in Eq. (2) is monotone. Its clauses are finitary, so the union of the ascending ω -chain from the bottom is a fixed point. Induction on the iteration number proves that it is contained in every pre-fixed point, hence it is least. The same induction translates iterations to finite constructor derivations and conversely.

When R is fixed, we suppress its subscript on $\mathbf{C}_R$, $\mathbf{S}_R$, and eval_R . The two constructors of the generated Lean relation are called **raw** and **hit**; mathematically they express the following default-pair and exceptional-output rules:

$$\mathbf{S}(a, b; \langle a, b \rangle) \quad \text{for all } a, b, \quad (3)$$

$$\mathbf{C}(a, b; o) \implies \mathbf{S}(a, b; o). \quad (4)$$

Thus $\mathbf{S}_R$ records admissible intermediate results rather than defining a partial function. If $\mathbf{C}_R(a, b; o)$ and $o \neq \langle a, b \rangle$, then the same inputs have at least the two admissible outputs o and $\langle a, b \rangle$. No theorem below assumes global functionality of $\mathbf{S}_R$.

Definition 3 (Well-formed trace-tree presentation). *A finite dependency-respecting rule set R is semantically well formed when its least exceptional relation is output-functional:*

$$\forall a, b, o, o' \in \mathcal{T}. \quad \mathbf{C}_R(a, b; o) \wedge \mathbf{C}_R(a, b; o') \implies o = o'.$$

Its exceptional domain is $\text{Exc}(R) = \{(a, b) \mid \exists o \mathbf{C}_R(a, b; o)\}$. The adjective *finitely presented* refers only to finiteness of R : $\text{Exc}(R)$ may be infinite, or even all of $\mathcal{T}^2$. No set-theoretic density claim is intended.

For a well-formed R , define

$$a \diamond_R b = \text{eval}_R(a, b) = \begin{cases} o, & \text{if } \mathbf{C}_R(a, b; o) \text{ for some } o, \\ \langle a, b \rangle, & \text{if no exceptional output exists.} \end{cases} \quad (5)$$

Functionality makes the first branch independent of witness choice. The resulting magma $\mathcal{T}_R = (\mathcal{T}, \diamond_R)$ is a *trace-tree magma*. Lean implements the first branch by classical choice and proves its independence using the generated functionality theorem.

Proposition 2 (Total tree operation). *If R is well formed, Eq. (5) defines a total magma on the countably infinite carrier $\mathcal{T}$. Moreover, $\mathbf{S}_R(a, b; \text{eval}_R(a, b))$ holds for all $a, b \in \mathcal{T}$.*

Proof. If no exceptional output exists, the second branch is unique and Eq. (3) supplies the step. Otherwise all exceptional outputs agree; the chosen output is therefore well defined and Eq. (4) supplies the step. Countability and infinitude were proved above.

The mutually inductive presentation is essential. A rule may depend on an earlier admissible computation without deciding whether that computation was itself default or exceptional. Soundness therefore cannot be inferred from one preferred execution trace; it must cover both derivation forms of $\mathbf{S}_R$.

3.3 Projection–rank certificates

Rank belongs to the proof discipline, not to the semantic definition above. Intuitively, the certificate is a finite case-analysis graph: it may return to an earlier proof state only after proving that an explicit constructor-size measure has decreased. The following definition makes this condition independent of Lean syntax. Fix a presentation R . An *inversion obligation* is a universally closed schematic sequent $\Gamma \vdash G$. Its assumptions Γ may contain constructor equalities, $\mathbf{C}_R$ - or $\mathbf{S}_R$ -derivations, and inequalities between constructor sizes. Each node of the certificate names one obligation. An expansion replaces that obligation by finitely many successors and records a derivation showing that the successors imply their parent. This derivation uses only the first-order theory of free constructors and the usual order on natural numbers. Inverting a $\mathbf{C}_R$ or $\mathbf{S}_R$ derivation creates one successor for each applicable constructor. Projections or constructor clashes may close a successor immediately. When inversion exposes an inner exceptional derivation, the expansion may refer back to an already named obligation.

A *projection–rank certificate* is a finite directed hypergraph of these nodes and expansions with the following data:

1. every nonrecursive expansion carries a local derivation, using only constructor inversion, injectivity, disjointness, projection along a fixed path, and valid arithmetic over the size equations;
2. every leaf has a derivation of its obligation without successors; and
3. for each recursive strongly connected component there is a fixed dimension d and a rank $\mu : Q_{\text{ground}} \rightarrow \mathbb{N}^d$. Each component of μ is the size of an explicit constructor pattern in the state's ground arguments, and every recursive edge proves $\mu(q') <_{\text{lex}} \mu(q)$.

Here Q_{ground} denotes the ground instances of the finitely many schematic obligations. A recursive edge also records the substitution that maps the successor schema to the exposed ground subobligation. Lexicographic order on $\mathbb{N}^d$ is well founded, so recursive back edges unfold to a well-founded (possibly unbounded-depth) derivation rather than a finite-depth approximation. Certificates with no recursive edge have a vacuous rank component.

The finite hypergraph is a metatheoretic abstraction of the generated proof, not a separately serialized intermediate representation in the released artifact. The released implementation realizes only the scalar fragment $d = 1$: every mutually recursive Lean theorem uses an explicit natural-valued constructor-size expression, such as $|a|$ or $|\langle o, a \rangle|$, in its `termination_by` clause, and emits the corresponding strict-decrease obligation. It neither searches for nor emits lexicographic tuple ranks. The $\mathbb{N}^d$ formulation records a sound extension of the proof discipline; every experimental claim in this paper and every released certificate instantiates $d = 1$.

Proposition 3 (Certified inversion). *Every closed projection–rank certificate proves its root sequent. In particular, a certificate rooted at*

$$C_R(a, b; o) \wedge C_R(a, b; o') \implies o = o'$$

proves that R is semantically well formed.

Proof. Within each recursive component, use well-founded induction on μ . The recorded substitution and decrease proof make every recursive successor available at smaller rank; each nonrecursive expansion is locally sound and each leaf is closed. Process the acyclic component graph in reverse topological order. The resulting root proof is uniform over all ground substitutions.

This definition separates three notions that the implementation must not conflate: a finite syntactic rule set, its independently defined least semantics, and a proof that establishes the required semantic property. In the artifact that last object is the elaborated Lean proof term; the derivation hypergraph above is the proof-system account used for the soundness argument. Failure to synthesize an accepted Lean proof yields *unknown*; it does not make the rule set mathematically ill defined.

4 Proof-producing trace search

The principal procedure targets a law normalized to $x \simeq t$, where x is a variable and t is a non-variable term of the free magma. This includes all 28 new order-five classifications. The implementation parses t into an evaluation tree and performs the following stages. Its search state contains only the two parsed laws, a deterministic candidate index, and resource counters; equation numbers are absent.

4.1 Trace-mask enumeration

Let N be the non-root internal nodes of t , ordered bottom-up. A *trace mask* is a subset $M \subseteq N$. Nodes in M are called *active*; the other nodes in N are *inactive*. Define a symbolic value $r_M(n)$ recursively. A leaf retains its variable. An inactive node is represented by the free pair of its two child values. An active node n receives a fresh symbol h_n and contributes the premise

$$S(r_M(n_L), r_M(n_R); h_n).$$

At the root, the two symbolic child values become the inputs of an exceptional clause whose output is x . Thus every mask determines one candidate of the form Eq. (1). Masks are enumerated by increasing number of active nodes and then deterministically by bit pattern. This favors small semantic descriptions, but does not enter the soundness argument.

Write $I_M = N \setminus M$ for all inactive nodes. A node in I_M is *outer-visible* if it has no active ancestor; let $V_M \subseteq I_M$ be this subset. The distinction matters in the universal proof. Nodes in V_M are rewritten explicitly while evaluating the root expression. Inactive descendants of an active node are not outer-visible, but their values may still be needed to identify the symbolic inputs of that active node's S premise. The proof generator therefore reasons about every node in I_M , not only V_M .

The released implementation exposes every finite search bound. It accepts source terms with two through eight internal product nodes and runs the core on both the given and opposite orientations. Within one core invocation, the candidate index i counts masks that survive clause construction, all three proof builders (for functionality, universal source validity, and a target witness), and certificate compilation. The tuned schedule fixes $i = 0$ and instead enlarges the symbolic tableau systematically. For each depth

$$d = 0, 1, 2, 3, 4, 5,$$

it tries the given orientation and then the opposite orientation, allowing 9.5 seconds for each call. Thus each call asks for the first fully supported mask at that tableau depth; increasing d permits longer chains of nested exceptional-step inversions in absence-of-exception proofs. This change alters the finite enumeration schedule, not the clause semantics or acceptance obligations.

After the depth sweep, a second finite schedule tries at most the first four deterministic source generalizations in both orientations. Generalization replaces either a proper nonempty subset of repeated occurrences or one proper compound subterm by a fresh variable. The trace core runs at depth one and the generated source proof explicitly specializes that variable back to the original term. Each generalized call has a three-second local deadline. A single 120-second global deadline truncates every local allowance, so late jobs may receive less time or may not start; any call that finishes early proceeds immediately. These bounds restrict coverage only: every returned candidate must satisfy the same functionality, universal-source, and target-witness proof requirements.

For example, if the active subcomputation is $(z \diamond (x \diamond x)) \diamond y$, the mask may introduce

$$S(\langle z, \langle x, x \rangle \rangle, y; h)$$

and leave the inactive nodes as explicit free pairs. Search never specializes x, y, z to ground trees: they remain universally quantified rule parameters.

4.2 Functionality and ranking synthesis

A candidate is discarded unless the system constructs a closed projection–rank certificate, in the precise sense of Sec. 3.3, for output functionality. To prove that derivations $C(a, b; o)$ and $C(a, b; o')$ have $o = o'$, the generator combines four kinds of facts:

1. constructor projections equate parameters visible at fixed paths;
2. constructor injectivity propagates those equalities into trace premises;
3. pattern-specific inversion lemmas for admissible-step premises recover equal clause parameters after considering the default-pair and exceptional-output constructors; these local lemmas do not assert global functionality of S ; and
4. strict size inequalities exclude cyclic or self-embedding matches.

The rank analysis is performed symbolically. Pair constructors generate linear inequalities such as $|a| < |\langle a, b \rangle|$. A rule has three distinguished values—its two inputs and its output—and hence six ordered comparisons between distinct values. In the general trace case, the implementation begins with these six comparisons. A comparison is retained exactly when, after splitting every premise into its default and exceptional derivations, the current retained set proves that comparison in every branch. Iteration to a fixed point terminates because the candidate set is finite. The retained comparisons become invariants of the mutually recursive inversion states; specialized shapes use direct projection inequalities. Each recursive call is annotated by an explicit natural-valued constructor-size expression, and the compiler emits the corresponding strict-decrease obligation. Arithmetic closes only branches whose accumulated inequalities are inconsistent. Finite testing of tree assignments is never accepted as a substitute for functionality.

4.3 Universal source-proof synthesis

Even a functional operation may fail the identity away from the trace that suggested it. The second filter therefore synthesizes a universal proof of the source identity rather than replaying one preferred execution. It builds a finite symbolic proof tree by repeatedly splitting the constructors of **S** and **C** derivations. This proof tree is a certificate-construction device, not an additional semantic object. For any pair of symbolic inputs, define the *absence-of-exception predicate*

$$\text{NoExc}_R(a, b) \quad \Longleftrightarrow \quad \neg \exists o. \text{C}_R(a, b; o). \quad (6)$$

A formula $\text{NoExc}_R(a, b)$ is an *obligation* while the generator is trying to prove it and a *theorem* only after Lean has checked the generated proof. Its exact operational consequence is $\text{eval}_R(a, b) = \langle a, b \rangle$ by Eq. (5): no exceptional rule applies, so the product takes the default-pair branch.

For every inactive node $n \in I_M$, with symbolic children a_n, b_n , the source-proof generator constructs the obligation

$$\text{NoExc}_R(a_n, b_n).$$

It proves this formula in the context of the **S** facts on which a_n, b_n depend. To do so, the generator considers both constructors of every such fact: the default-pair case in Eq. (3) and the exceptional-output case in Eq. (4). In the latter case, it inverts the applicable **C** clause, uses constructor projections and unification to expose its parameters, and may recursively analyze another exceptional-output premise. The proof therefore does not assume that an active node took the default branch.

A proof branch is discharged only by a contradiction that the compiler can express and Lean can check:

1. constructor projections make the required exceptional pattern impossible;
2. constructor disjointness or injectivity yields a contradiction;
3. unification would require a finite tree to contain itself; or
4. accumulated rank inequalities form a strict cycle.

If a branch cannot be discharged, the current mask is rejected and enumeration continues. For an active node, the checked predicates for its inactive descendants identify the node's actual child values with the symbolic inputs of its **S** premise; Prop. 2 then supplies that premise for the actual product. After active subtrees have been summarized by their fresh symbols, the predicates for the outer-visible nodes V_M rewrite the remaining products to free pairs. The root **C** clause finally rewrites the whole right-hand side to x . The generated Lean proof consists of the corresponding case splits, equalities, projection lemmas, and arithmetic arguments. It covers every admissible-step case required by the trace; it is not random testing or bounded enumeration of carrier elements.

4.4 Witness synthesis and certificate compilation

For target E2, the fixed witness is $e \neq k(e)$. General targets can instead be evaluated symbolically under a synthesized valuation. The compiler emits the tree datatype, C and S , the functionality theorem, the total operation, the universal source proof, and the target refutation required by the official `Goal` interface. That interface has no separate infinitude field: infinitude of the emitted trace carrier is supplied uniformly by Lemma 3. If a proof pattern is unsupported, the compiler returns failure rather than emitting a candidate. The protocol wrapper likewise rejects empty output and output beyond the submission-size limit. The official Judge independently enforces its proof policy and determines semantic acceptance in Lean.

Internally, only equality chains use a typed intermediate representation. The released class `_v13_EqProof` stores the symbolic endpoints of each chain together with its Lean text. Before composing that text, the generator checks the endpoints of every use of reflexivity, symmetry, transitivity, congruence, or constructor projection. An inconsistent chain is therefore rejected in Python. Functionality inversions, symbolic source-proof branches, and target normalization are emitted as structured Lean fragments, with separate Python checks for unsupported constructions. The implementation does not serialize one common proof graph for all of these tasks. Constructor case splits bind the actual fields of the selected C or S constructor instead of asking Lean’s elaborator to infer unnamed witnesses. Both internal representations remain untrusted: only elaboration and kernel checking of the complete Lean theorem turn a candidate into evidence.

These failure paths affect only search completeness. If a source-proof branch remains unresolved, the current mask is rejected and the mask loop continues. If target-witness synthesis finds no separating valuation, the current mask is likewise rejected. After a ground target witness has been found, failure to generate a NoExc_R proof for one of its default products also rejects only the current mask, and enumeration proceeds to later masks. No such failure can accept an unsupported model.

Figure 1 gives the core search independently of benchmark identifiers. The implementation receives only parsed source and target terms; equation numbers are not part of its search state or candidate grammar.

The algorithm maintains three acceptance obligations. First, the generated functionality theorem proves output uniqueness of the least relation C_{RM} by constructor projection and scalar size descent. Second, the source theorem resolves every default-pair/exceptional-output case needed to interpret the law under an arbitrary valuation. Third, the target theorem evaluates both sides under the same explicit valuation and proves distinct constructor normal forms. The compiler may represent an obligation by a typed equality record or by a direct Lean fragment, but it never infers validity from the mask or from a finite test set. The wrapper returns a model only after assembling all three obligations into one checkable theorem. Conversely, mask order, conservative early termination of a core call, schedule truncation, symbolic-proof depth bounds, and budget B

```

procedure TraceCore( $x \simeq t, F, i, d, D$ )
 $j \leftarrow 0$ 
for  $M \subseteq N(t) \setminus \{\text{root}\}$  in increasing  $(|M|, \text{bits}(M))$ , while before  $D$ , do
   $(R_M, I_M, V_M) \leftarrow \text{BuildTraceClause}(t, M)$ ; handle reject/abort as below
   $P_{\text{fun}} \leftarrow \text{EmitFunctionalityProof}(R_M)$ ; handle reject/abort as below
   $P_{\text{src}} \leftarrow \text{EmitSourceProof}(x \simeq t, R_M, I_M, V_M, d)$ ; if an unresolved branch re-
maines then reject-mask
   $(\nu, W_{\text{tgt}}) \leftarrow \text{SynthesizeTargetWitness}(F, R_M)$ ; if none then reject-mask
   $P_{\text{tgt}} \leftarrow \text{EmitTargetNormalization}(F, R_M, \nu, W_{\text{tgt}})$ ; if unsupported then reject-
mask
   $L \leftarrow \text{CompileLean}(R_M, P_{\text{fun}}, P_{\text{src}}, \nu, P_{\text{tgt}})$ ; handle reject/abort as below
if  $j < i$  then  $j \leftarrow j + 1$ ; continue
return  $L$ 
return failure
where reject-mask continues the mask loop, whereas abort-job returns failure
from TraceCore
procedure TraceSynth( $E, F, B$ )
 $D_B \leftarrow \text{now} + B$ 
for each job  $J = (E_J, F_J, i, d, \delta_J, \tau_J)$  in the fixed schedule while  $\text{now} < D_B$  do
   $D \leftarrow \min(D_B, \text{now} + \delta_J)$ 
   $L \leftarrow \text{TraceCore}(E_J, F_J, i, d, D)$ ; if failure then continue
   $L \leftarrow \tau_J(L)$ 
if  $L$  passes the postprocessing syntax and byte-size checks then return  $L$ 
return unknown

```

Fig. 1. Core trace-model synthesis. Here I_M is the set of inactive nodes and $V_M \subseteq I_M$ is the subset with no active ancestor. A scheduled job fixes an orientation or source generalization, candidate rank, proof depth, local allowance δ_J , and proof-preserving conversion τ_J . The released depth sweep uses rank zero. The two failure modes reproduce the implementation: *reject mask* continues enumeration, whereas *abort job* ends the current core invocation. The returned Lean theorem is the certificate; finite bounds affect completeness only.

can omit a valid presentation. Returning *unknown* therefore means only that no accepted certificate was found in the explored finite search.

4.5 Supplementary proof-producing model searches

Three additional searches reuse parts of the constructor vocabulary and certificate infrastructure but enumerate different mathematical presentations. They are not trace-mask ablations. Their role in this paper is supplementary: the tuned trace search receives the full Canonical-4187 union, whereas guarded decoding, completion, and CNF are rerun on fixed historical-hit sets to check that their optimized implementations still regenerate accepted certificates.

Guarded decoding enumerates a fixed grammar of total decoders on **e**, unary constructors, and selected pair patterns. Multiplication either invokes the decoder under a syntactic guard or returns a free pair. The tuned implementation

observes that its Lean proof contract forces all seven decoder choices and therefore tries that unique admissible program directly, in both orientations, rather than enumerating programs that the same contract must later reject. Shallow and depth-two tree evaluations remain search filters; the compiler proves the resulting source identity by complete constructor cases. Thus the optimization changes enumeration cost, not the accepted decoder semantics. Section 6.3 gives the model for the known dual pair.

Strict completion starts from oriented consequences of the source, using an occurs-checked unifier and a Knuth–Bendix-style order to retain only variable-safe, decreasing root rules. It computes critical peaks, requires joinability when using the confluence route, proves that every rule maps normal inputs to a normal output, and constructs a symbolic proof of the source over every possible choice between a matching rule and the default pair. Selected variants use that exhaustive proof directly rather than relying on confluence. Like trace search, the resulting operation changes the default pairing only at roots matched by finitely many rules, but completion derives its candidates from critical-pair reasoning rather than trace masks. Direct and opposite orientations are searched explicitly. A bounded algebraic prefix check can discard an unpromising seed, but never serves as acceptance evidence: every emitted candidate still requires a complete symbolic source proof and a Lean certificate. The main tuned implementation uses a hybrid compiler for the same completed-rule semantics: it selects the regular proof representation for small rule systems whose indexed proof graph contains an occurs-cycle leaf, and the indexed representation otherwise. The two supplemental completion profiles used in Section 7 change search scheduling or proof representation only; they do not define new model semantics.

4.6 Canonical-form search

The fourth standalone program uses a narrower grammar of canonical forms. We retain its implementation name, *CNF search*, where CNF abbreviates *canonical normal form* and is unrelated to conjunctive normal form. Candidate seeds come from diagonal simplification, abstraction of a compound shared by the two source sides, or direct orientation of the source. A bounded critical-pair completion, capped at 16 rules and 16 rounds, may extend a seed; completed systems are tried before uncompleted seeds. A rule is admissible only when its left-hand side has a pair at the root, its variables are closed, and it decreases the selected order. This pair-root condition is enforced at orientation, seed construction, rule admission, tableau, witness, and compilation boundaries. It is a soundness restriction: without it, the Python evaluator and Lean normal-form carrier can disagree about where a rule may fire. A retained system must also send normal inputs to normal outputs. Its source checker shares repeated subterms in an evaluation directed acyclic graph and considers, at every product node, each matching root rule and the default-pair case. Occurs-checked unification detects cyclic substitutions; negative constraints record when a rule pattern does not match; and normal-form closure is used to resolve every proof branch. Any unresolved branch rejects the system. Target-witness search and a dedicated

Lean compiler then produce the candidate. For a retained rule system R , write $\mathcal{T}_{\text{NF}}(R)$ for the constructor trees containing no R -redex at any subtree; output safety makes this carrier closed under the synthesized operation.

Semantically, CNF search also defines a free-pair operation modified at roots matched by finitely many rules. Algorithmically it has its own seed grammar, completion loop, symbolic source proof, compiler, and 120-second experimental budget. We therefore report it separately rather than folding its targeted hits into the primary trace comparison.

5 Correctness and the Lean trust boundary

The mathematical checker embedded in the search and the final Lean checker serve different roles. The former efficiently rejects bad candidates and constructs proof terms; the latter is the authority for every reported model.

5.1 Soundness as a theorem chain

Fix a dependency-respecting presentation R , and interpret C and S by the least simultaneous semantics of Definition 2. Write

$$\text{Fun}(C) \iff \forall a, b, o, o' \in \mathcal{T}. \quad C(a, b; o) \wedge C(a, b; o') \implies o = o'.$$

The following statements separate semantic assumptions from the algorithm that constructs their certificates.

Lemma 1 (Functionality from certified inversion). *If a closed projection-rank certificate has root sequent $C(a, b; o) \wedge C(a, b; o') \Rightarrow o = o'$, then $\text{Fun}(C)$.*

Proof. Apply Proposition 3 uniformly to every ground quadruple a, b, o, o' . Notice that the argument proves functionality of the least exceptional relation; it does not assume, and generally cannot prove, functionality of the multivalued relation S .

Lemma 2 (Evaluation equations and step adequacy). *Assume $\text{Fun}(C)$. For all $a, b, o \in \mathcal{T}$:*

1. $C(a, b; o)$ implies $\text{eval}(a, b) = o$;
2. $\neg \exists q. C(a, b; q)$ implies $\text{eval}(a, b) = \langle a, b \rangle$; and
3. $S(a, b; \text{eval}(a, b))$.

Proof. In the exceptional case, functionality equates the witness selected in Eq. (5) with o ; in the nonexceptional case the second branch of that definition applies. The exceptional-output and default-pair rules, respectively, establish the third item.

Lemma 3 (Infinite carrier). *The map $n \mapsto \mathbf{k}^n(\mathbf{e})$ embeds $\mathbb{N}$ into $\mathcal{T}$. Consequently every full-tree trace or guarded presentation has a countably infinite, hence nontrivial, carrier.*

Proof. Constructor injectivity and disjointness make the unary tower injective; the encoding γ from Section 3 gives the converse countability bound.

Lemma 4 (Universal trace-proof soundness). *Let a mask for the law $x \simeq t$ determine a well-formed rule set R , the inactive-node set I_M , and the outer-visible subset V_M . Suppose the symbolic proof establishes $\text{NoExc}_R(a_n, b_n)$ for every $n \in I_M$ under both the default-pair and exceptional-output cases of every S premise on which a_n, b_n depend. Then $\mathcal{T}_R \models x \simeq t$.*

Proof. Fix an arbitrary valuation $f : X \rightarrow \mathcal{T}$ and evaluate t from the leaves upward. At every inactive node, its NoExc_R theorem and Eq. (5) identify the actual product with the free pair used in the symbolic trace. This has two distinct uses. First, inactive descendants of an active node identify its actual child values with the symbolic inputs in that node's S premise. Lemma 2 then supplies the premise for the active node's actual output, whether that output is the default pair or an exceptional value. Continuing upward establishes every active-node premise and instantiates its fresh result symbol. Second, once active subtrees have been summarized in this way, the NoExc_R theorems for the outer-visible nodes V_M rewrite the remaining products above them to their symbolic free pairs. The two root inputs now match the instantiated head of the generated C clause, whose output is $f(x)$. Lemma 2 therefore identifies the root product with $f(x)$. Since f was arbitrary, the law holds.

Lemma 5 (Countervaluation soundness). *Let F be $u \simeq v$. If, under one valuation ν , symbolic evaluation derives $\varphi_\nu(u) = a$, $\varphi_\nu(v) = b$, and $a \neq b$, then $\mathcal{T}_R \not\models F$.*

Proof. The two evaluation derivations interpret the same operation and valuation. Substituting them into a hypothetical equality for F gives $a = b$, contrary to the constructor inequality.

Lemma 6 (Soundness of scheduled transports). *Every transport τ_J used by the fixed schedule preserves a certified nonimplication and the cardinality of its carrier.*

Proof. The schedule composes only four operations. Swapping the two sides of a law uses symmetry of equality. A generalized source E_J is accompanied by an explicit term substitution σ with $\sigma(E_J) = E$; satisfaction of a universal identity is closed under term substitution, so a model of E_J is a model of E . Identity jobs require no transport. Finally, an opposite job applies the equivalence of Section 2 simultaneously to the source and target: a model of E^* refuting F^* yields its opposite magma, which models E and refutes F . None of these operations changes the underlying carrier. Closure under composition proves the claim.

Theorem 1 (Soundness of a kernel-accepted trace-search output). *Suppose the procedure in Fig. 1 returns a Lean declaration for source $x \simeq t$ and target F , and the fixed official Lean environment accepts that declaration under the stated proof policy. Then its presentation defines a countably infinite magma satisfying $x \simeq t$ and refuting F .*

Proof. Kernel acceptance checks the generated functionality, source, and target proofs rather than trusting the Python emitter. The checked functionality proof and Lemma 1 make R well formed; Proposition 2 supplies the total operation. Lemmas 3, 4, and 5 establish infinitude, source validity, and target failure for the core search instance, respectively. Lemma 6 transfers these conclusions to the source and target supplied to the outer procedure.

Corollary 1 (Kernel-accepted certificate). *If the fixed official Lean environment accepts a generated declaration of type `Goal`, then the submitted carrier and operation satisfy the encoded source theorem and refute the encoded target. Combining that checked declaration with Lemma 3 for full-tree carriers, or Proposition 4 for normal-form carriers, yields the claimed infinite countermodel.*

Proof. The declaration packages the selected carrier and operation, the universal source theorem, and a target countervaluation against the official problem interface. Lean elaboration and kernel checking reconstruct those claims. The separate theorem about the chosen carrier supplies infinitude, which is not a separate field of the official `Goal` interface.

Each returned file contains a complete Lean instance of the relevant argument. For a trace model, the file proves C functional before defining `eval` by choice. In particular, no certificate assumes that S is globally functional: its local inversion lemmas are used only under the constructor patterns and premise context for which they were generated. For the normal-form specialization of Sec. 6.4, both the completion and CNF compilers prove closure of the carrier under every possible selected rule. Their symbolic source proofs consider every root rule and the default-pair case at each product node. They use occurs-checked unification, record negative constraints when a rule does not match, and reject a candidate if any proof branch remains unresolved. Source theorems in both model families quantify over all carrier variables, and the final declaration inhabits the official `Goal` type with the carrier, magma instance, source theorem, and target refutation.

Proposition 4 (Normal-form soundness). *Let R be a finite set of root rules whose outputs are normal whenever their inputs are normal. Suppose the symbolic proof resolves every default-pair and rule branch of the source, and an explicit normal valuation separates the two target terms. Then the choice operation induced by R on $\mathcal{T}_{\text{NF}}(R)$ is an infinite model of the source and a countermodel to the target.*

Proof. Closure makes the operation total on $\mathcal{T}_{\text{NF}}(R)$. The symbolic proof covers every output that the choice operation can select at each source node, so every evaluation satisfies the source. The unary tower is normal and injective, hence the carrier is infinite; the recorded valuation refutes the target. Both compilers check closure, the universal source theorem, and the target refutation in Lean. The CNF compiler also emits its tower-injectivity lemma; for completion certificates the same carrier fact is supplied by the uniform mathematical argument above.

5.2 Trust boundary

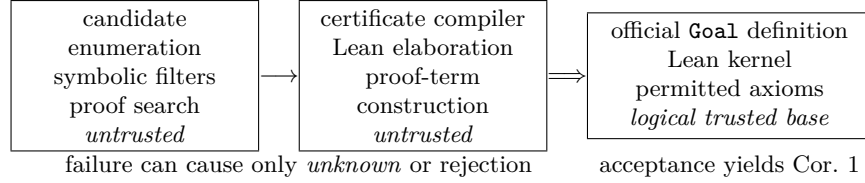


Fig. 2. Data flow and trust boundary. Search metadata and Python proof objects are hints only; the counted result is the theorem reconstructed from the submitted source and accepted by the official Lean environment.

The logical trusted base is the Lean kernel together with the official `Goal` definition and the axioms permitted by the Judge policy. The elaborator translates source into proof terms but does not enlarge that base: the kernel checks the resulting term and all imported Mathlib declarations. Enumeration, heuristics, Python unification, and certificate text generation are likewise untrusted. They may miss a model or emit a rejected file, but, relative to the official encoding and permitted axioms, cannot make a false theorem pass kernel checking. Figure 2 also separates logical validation from experimental bookkeeping: a JSON status or a generator’s own `valid` flag is never counted without the matching accepted Judge receipt. A receipt records the pinned checking environment; the theorem’s logical authority comes from kernel checking, not from the JSON record or its archive hash.

6 Mathematical structure of the synthesized models

The 28 new classifications are not 28 unrelated programs. Modulo duality, all fourteen use the full carrier $\mathcal{T}$, the same free-pair default, the same constructor size, and exactly one constructor for C . For a presentation of the form Eq. (1), call m its *trace arity* and call the ordered dependency graph $h_j \rightarrow h_i$ whenever h_j occurs in the i th premise its *trace dependency graph*. Dependency-respecting syntax makes this graph acyclic. Eleven discovered classes have trace arity one; three have trace arity two. Table 1 gives their complete mathematical presentations.

This yields a compact structural classification.

Proposition 5 (One-clause structure). *Every new Austin model reported here is a well-formed, finitely presented one-clause extension of the free-pair magma, and its functionality is witnessed by a projection-rank certificate. Up to opposite-magma duality, its complete law-specific data consist of one Horn clause with at most two admissible-step premises.*

Table 1. The fourteen new duality classes as one-clause trace-tree models. Here $\langle a, b \rangle$ is the free pair constructor, S is the admissible-step relation, and C is the exceptional-output relation. The listed representative uses $\star = \text{eval}$; the other law in the first column is modeled by the opposite magma.

Duality class	Premises	Law-specific Horn clause
E4952 / E41252	1	$S(z, y; h) \Rightarrow C(y, \langle x, \langle y, \langle y, h \rangle \rangle \rangle; x)$
E40914 / E4957	1	$S(y, x; h) \Rightarrow C(\langle \langle \langle h, y \rangle, z \rangle, x \rangle, z; x)$
E5012 / E41253	1	$S(y, z; h) \Rightarrow C(y, \langle x, \langle z, \langle z, h \rangle \rangle \rangle; x)$
E5066 / E41239	1	$S(z, y; h) \Rightarrow C(y, \langle y, \langle x, \langle y, h \rangle \rangle \rangle; x)$
E5141 / E40917	1	$S(x, y; h) \Rightarrow C(y, \langle y, \langle z, \langle y, h \rangle \rangle \rangle; x)$
E5295 / E40909	1	$S(x, y; h) \Rightarrow C(y, \langle z, \langle y, \langle y, h \rangle \rangle \rangle; x)$
E38303 / E7701	2	$S(x, z; h_0) \wedge S(y, \langle h_0, x \rangle; h_1) \Rightarrow C(\langle h_1, y \rangle, y; x)$
E7755 / E38249	1	$S(\langle z, \langle x, x \rangle \rangle, y; h) \Rightarrow C(y, \langle y, h \rangle; x)$
E9345 / E36713	1	$S(x, y; h) \Rightarrow C(y, \langle h, \langle z, \langle y, y \rangle \rangle \rangle; x)$
E9384 / E36714	1	$S(x, z; h) \Rightarrow C(y, \langle h, \langle y, \langle z, z \rangle \rangle \rangle; x)$
E9680 / E36524	2	$S(z, y; h_0) \wedge S(x, y; h_1) \Rightarrow C(y, \langle h_0, \langle y, h_1 \rangle \rangle; x)$
E9667 / E36638	1	$S(z, y; h) \Rightarrow C(y, \langle h, \langle x, \langle y, y \rangle \rangle \rangle; x)$
E35036 / E11081	2	$S(y, z; h_0) \wedge S(x, y; h_1) \Rightarrow C(\langle h_0, \langle h_1, x \rangle \rangle, y; x)$
E11116 / E34888	1	$S(z, x; h) \Rightarrow C(y, \langle \langle x, h \rangle, \langle y, y \rangle \rangle; x)$

Proof. For each of the fourteen rows of Table 1, the archived certificate defines precisely the displayed clause as the sole constructor of C , proves the corresponding `code_unique` theorem, and proves the source theorem by complete default-pair/exceptional-output case analysis. Counting the displayed premises gives eleven rows of arity one and three rows of arity two. The certificate for the dual law transports the operation to the opposite magma and is checked separately.

Theorem 2 (Twenty-eight new Austin classifications). *Each of the first 28 laws in Table 7 is an Austin law. They form fourteen classes under opposite-magma duality.*

Proof. The finite-model half is the published ETP classification: every finite magma satisfying any of these 28 laws is trivial [10]. For one representative of each row of Table 1, the archived Lean certificate checks the universal source theorem and an explicit nontrivial valuation in the full-tree carrier. Lemma 3 proves that this carrier is infinite. The separately checked opposite construction and the equivalence in Section 2 give the dual representative. Thus both clauses of the Austin-law definition hold for all 28 laws.

6.1 Worked example: a one-premise trace model

Consider E7755:

$$x \simeq y \diamond (y \diamond ((z \diamond (x \diamond x)) \diamond y)).$$

Its only exceptional clause is

$$S(\langle z, \langle x, x \rangle \rangle, y; h) \Longrightarrow C(y, \langle y, h \rangle; x). \quad (7)$$

To match Lemma 4 explicitly, name the five product nodes from the leaves upward:

$$n_0 = x \diamond x, \quad n_1 = z \diamond n_0, \quad n_2 = n_1 \diamond y, \quad n_3 = y \diamond n_2, \quad n_4 = y \diamond n_3.$$

The mask makes n_2 active and uses the root n_4 as the exceptional-clause head. The nodes n_0, n_1, n_3 are inactive. The generated proofs of NoExc_R for n_0 and n_1 show that their actual values are $\langle x, x \rangle$ and $\langle z, \langle x, x \rangle \rangle$; these equalities identify the first input of the active-node premise. Proposition 2 then supplies

$$S(\langle z, \langle x, x \rangle \rangle, y; h)$$

for the actual value h of n_2 . The NoExc_R proof for n_3 , which is checked under both possible constructors of that S premise, yields $n_3 = \langle y, h \rangle$. Equation (7) therefore makes the root n_4 equal to x . This is precisely the two-part use of inactive nodes in Lemma 4: n_0, n_1 justify the symbolic inputs of an active node, while the outer-visible node n_3 rewrites the expression above that active node.

Functionality is equally structural. The left projection of the exceptional clause's second input recovers its first input y . If two instances of Eq. (7) share both inputs, constructor injectivity equates their trace outputs. The generated pattern-specific S -inversion lemma then recovers the embedded x values. Any remaining cyclic case would force a finite constructor tree to contain a strictly larger copy of itself, and the size inequalities rule it out. The opposite operation gives the dual model for E38249.

6.2 Two-premise models

Three exceptional classes remember two earlier evaluations rather than one. For E38303, the clause has the sequential trace

$$S(x, z; h_0) \wedge S(y, \langle h_0, x \rangle; h_1) \implies C(\langle h_1, y \rangle, y; x).$$

The second premise consumes the first trace output, and the root pattern recovers the second. Projection and size reasoning then propagates uniqueness back through both premises. No new carrier or semantic principle is needed.

The newly found class E9680/E36524 instead records two independent steps:

$$S(z, y; h_0) \wedge S(x, y; h_1) \implies C(y, \langle h_0, \langle y, h_1 \rangle \rangle; x).$$

Thus trace arity two does not by itself imply a dependency edge: the two premises can be evaluated independently and only meet in the exceptional root pattern. The third arity-two class, E35036/E11081, has the same empty dependency graph with a different root projection pattern (Table 1).

6.3 The previously classified guarded pair

The two guarded-decoding certificates, E22619/E22634, independently formalize a pair already classified by ALPS. They use the same tree carrier but a guarded

decoder δ :

$$\begin{aligned}\delta(\mathbf{e}) &= \mathbf{e}, & \delta(\mathbf{k}(a)) &= a, \\ \delta(\langle a, a \rangle) &= \mathbf{k}(a), & \delta(\langle a, \langle a, x \rangle \rangle) &= x,\end{aligned}$$

with all other pair shapes decoded to $\mathbf{e}$. For E22619, multiplication returns $\delta(a)$ when the right input is $\mathbf{e}$. When $b \neq \mathbf{e}$ and $a = \langle b, b \rangle$, it returns $\mathbf{e}$; in every other case it returns the free pair $\langle a, b \rangle$. The key identity $\delta(y \diamond (y \diamond x)) = x$ supplies the required cancellation. The model for E22634 uses the opposite operation. These two certificates strengthen the formal evidence but are excluded from the novelty count.

6.4 Normal-form models from completion and CNF search

The completion procedure and the independently extracted CNF procedure use different candidate enumerators and Lean compilers, but their accepted models share the following mathematical form. They synthesize finitely many root rules

$$\mathbf{C}(\ell_i, r_i; o_i), \quad i = 1, \dots, k,$$

over constructor patterns. Let $\mathbf{NF}_R(t)$ mean that every subtree is normal and no pair root matches a rule input. The carrier becomes

$$\mathcal{T}_{\mathbf{NF}}(R) = \{t \in \mathcal{T} \mid \mathbf{NF}_R(t)\}.$$

On normal inputs, multiplication chooses a matching root-rule output when one exists and otherwise forms a free pair. Search proves that every possible rule output is normal and symbolically checks the source under every matching rule and default-pair case. Overlapping rules need not be confluent: classical choice selects one output, while the proof covers every selectable constructor. The unary tower remains normal and therefore proves infinitude.

For E20034,

$$x \simeq (y \diamond y) \diamond ((z \diamond (x \diamond x)) \diamond z),$$

one root rule suffices:

$$\langle y, y \rangle \diamond \langle \langle z, \langle x, x \rangle \rangle, z \rangle \mapsto x.$$

Normality forces the displayed inner products to be free pairs and the source contracts at the root. In the clean experiment, completion and CNF each independently generated and certified this same one-rule presentation. Across the six further duality classes in Table 4, accepted CNF presentations use one to thirteen root rules; completion covers five of the six classes. CNF also reconstructs the previously published ALPS pair E19966/E26105. These results illustrate a complementary model language, but neither they nor the guarded pair enter the new-classification count. Agreement on a model does not identify the two enumeration algorithms.

7 Evaluation

The evaluation addresses four questions. First, does each generated object survive independent Lean checking? Second, what does each search contribute under its stated evaluation scope? Third, does trace synthesis transfer beyond the Austin identities on which it was developed? Fourth, what capability remains uncovered by established equational ATPs under the same resource tier? Trace is the only procedure evaluated on the full Canonical-4187 union and is the only one compared with the ATPs. Guarded decoding, completion, and CNF search are reported as targeted regressions of complementary model languages.

7.1 Two source groups and two deduplication levels

We froze two evaluation groups and their SHA-256 hashes before running the procedures; neither contents nor hashes were changed in response to outcomes. The first group, Order5-130, is a disjoint union of three order-five subsets: KnownAustin-10, ten previously known Austin laws; Candidate-96, the 96 identities listed by ETP as having only trivial finite models and, in the source snapshot, no known infinite model; and Open-24, 24 identities for which both finite- and infinite-model statuses were unresolved in the originating study. The second group, ALPS-4141, is the public 4,141-row ALPS evaluation pool, spanning orders five through eight [31,32]. For backward compatibility, machine-readable provenance retains the legacy tags `austin96` for Candidate-96 and `generality34` for KnownAustin-10 together with Open-24. These are source tags, not additional evaluation groups.

Together the two groups contain 4,271 source rows: 130 in Order5-130 and 4,141 in ALPS-4141. Of the Order5 identities, 83 also occur as ALPS rows. Retaining one record for each cross-group overlap gives Merged-4188: all 130 Order5 records and 4,058 ALPS-only records. At a second, explicitly different level, we quotient Merged-4188 by variable renaming and exchange of the two sides of an equality. Exactly one additional pair, internal to ALPS-4141, collapses under this equivalence, giving Canonical-4187: 130 Order5 classes and 4,057 ALPS-only classes. Magma duality is *not* part of this canonicalization; we use it only to organize mathematical discoveries.

Unless a sentence explicitly says “source row” or “original ALPS row,” all full-search and ATP counts below refer to Canonical-4187. The internal ALPS duplicate belongs to a class solved by trace. Consequently, 624 accepted canonical classes have an ALPS representative, but they project to 625 accepted rows in the original 4,141-row file. This convention prevents counts from the two overlapping source groups from being added as though they were disjoint.

The tuned trace executable was run afresh on all 4,187 classes in Canonical-4187. The other executables were rerun only on frozen historical-hit sets: two problems for guarded decoding, 61 for completion, and 17 for sound CNF search. These regressions test preservation of known capability and certificate validity; they are not estimates of coverage on Canonical-4187. Every profile has a 120-second internal search budget, a 125-second outer allowance, a 2,000-MiB

Table 2. Fresh trace result on Canonical-4187. The first three rows are the disjoint constituents of Order5-130; “ALPS-only” is the residual canonical contribution of ALPS-4141 after cross-group deduplication. The three terminal generation states are exhaustive. “No candidate” and “memory limit” make no mathematical claim about the input.

Canonical partition	Inputs	Accepted	No candidate	Memory limit
Candidate-96	96	28	65	3
KnownAustin-10	10	6	4	0
Open-24	24	2	22	0
Order5-130 subtotal	130	36	91	3
ALPS-only canonical	4,057	600	3,204	253
Canonical-4187	4,187	636	3,295	256

process-tree ceiling, and a 1,024,000-byte certificate ceiling in a two-vCPU, 2,048-MiB sandbox. Search output is counted only when the exact Lean source emitted for that run has an **accepted** Judge v3 receipt.

7.2 Independent coverage and certificate validity

Primary trace result. The tuned depth sweep generates 636 certificates, and Judge v3 accepts all 636. Among the 3,551 unsolved problems, 3,295 terminate without a candidate and 256 reach the process-tree memory ceiling. These are outcomes of a bounded search, not counterevidence to the existence of a model. The largest emitted certificate is 521,804 bytes, below the configured ceiling.

On Candidate-96, trace generates and certifies 28 new infinite countermodels, or fourteen classes under duality. The other 68 problems are unresolved by this bounded trace run: 65 terminate without a candidate and three reach the memory ceiling. All 28 identities occur in the published 96-candidate campaign and were left unresolved by its Vampire procedure [10]. In the released ALPS data, 24 have null baseline resolution; E4957, E5012, E40917, and E41252 are absent from the screened pool. The exact-law literature and artifact audit found no earlier classification for any of the 28.

Across Order5-130, trace accepts 36 identities. Its three constituent subsets remain separate in Table 2: Candidate-96 contributes 28; KnownAustin-10 contributes six, namely three known Austin duality classes; and Open-24 contributes the pair E17260/E28740. The last pair now has certified infinite models but is not called Austin until its finite side is settled. On the 4,057 ALPS-only classes, trace accepts 600. A further 24 accepted Candidate-96 identities also occur in ALPS-4141, so 624 accepted canonical classes have an ALPS representative. The accepted internal ALPS duplicate makes these 624 classes correspond to 625 rows of the original pool. This transfer result is evidence that the trace language is not an encoding of the fourteen new classes by equation identifier.

Supplementary searches. Table 3 deliberately reports the three other search families on their historical-hit regressions. Guarded decoding regenerates and certifies E22619/E22634. The main completion profile generates 60 of its 61 targets:

Table 3. Scope-correct accounting for the four tuned searches. Trace was run on Canonical-4187, the canonical union of Order5-130 and ALPS-4141. The other rows are regressions on each method’s historical hit set and therefore do not measure accuracy over all of Canonical-4187. “Selected coverage” uses accepted alternate completion certificates for the four cases not accepted by the main profile.

Search and evaluation scope	Tested	Main accepted	Selected accepted	Trace overlap
Trace depth sweep (Canonical-4187)	4,187	636	636	–
Guarded decoder (historical hits)	2	2	2	0
Strict completion (historical hits)	61	57	61	38
CNF NF16 (sound historical hits)	17	17	17	8

Judge accepts 57, while three receive no terminal response before the experiment’s 60-minute client cutoff. It does not generate E9001325. A generalized schedule accepts that last problem, and an indexed certificate profile accepts the three client-cutoff cases. These alternatives cover the same completed-rule model language; they differ in candidate schedule and Lean proof representation. We therefore count 61 completion problems, not 65 certificates. Sound CNF search regenerates and certifies all 17 of its targets.

Across the four selected accepted sets, trace, guarded decoding, completion, and CNF cover 668 canonical classes in union. Viewed through the two source groups, this union contains 44 Order5-130 classes and 652 classes having an ALPS-4141 representative (653 original ALPS rows); these views overlap and must not be added. The individual selected sets have sizes 636, 2, 61, and 17. Trace contributes 598 classes not covered by a selected supplementary set; guarded contributes two, completion 21, and CNF seven. The intersections are 38 for trace–completion, eight for trace–CNF, and ten for completion–CNF; eight problems lie in all three of those sets, and guarded is disjoint from them. Because only trace was run on all of Canonical-4187, this 668-class union is coverage accounting for the accepted artifacts, not a full-benchmark accuracy estimate for the supplementary searches.

The order-five supplemental results clarify what the other model languages add. Guarded decoding reconstructs the ALPS pair E22619/E22634; CNF reconstructs the ALPS pair E19966/E26105. These four identities were already classified and are excluded from the 28-new-identity count. Within the KnownAustin-10 and Open-24 subsets of Order5-130, completion covers five of the six classes in Table 4, while CNF covers all six. Trace covers four. The Open-24 pair E17260/E28740 remains described only as an infinite countermodel.

Across the public result table there are 731 certificate–profile occurrences: 728 accepted and the three completion client-cutoff records above. This total includes alternate certificates, cross-family overlap, and twelve archived trace certificates from an earlier preflight; it is not a solved-problem count. There are no incorrect, malformed, or other non-timeout Lean rejections. An earlier trace preflight solved 643 problems, but its later repeat missed twelve of them; their

Table 4. Supplementary Order5-130 results on six further duality classes. The first five rows lie in KnownAustin-10; the last lies in Open-24. Trace accepts three known Austin classes and the class whose two statuses were open; completion covers five classes and CNF covers all six in their targeted regressions. The last row now has a kernel-checked infinite model, but its finite-model status remains open.

Duality class	Prior status	Trace	Completion	CNF rules
E4916 / E41082	known Austin	–	accepted	5
E15535 / E30591	known Austin	–	–	13
E17522 / E28770	known Austin	accepted	accepted	2
E20034 / E25964	known Austin	accepted	accepted	1
E22455 / E22818	known Austin	accepted	accepted	2
E17260 / E28740	both statuses open	accepted	accepted	2

Table 5. Same-resource ATP outcomes, with the overlapping source groups kept separate. “Proofs” are implications to E2, not models. A trusted counter-satisfiable result is available only from complete Twee; “infinite” is then inferred from an independent finite-side certificate, not emitted by the ATP. The four ALPS counter rows duplicate Order5-130 rows. No ATP emitted an explicit model or a Lean-checkable certificate.

Benchmark	Tool	Implication proofs	Trusted counter-sat.	Infinite by admissibility	No decisive result
Order5-130	Vampire 5.0.1	0	0	0	130
Order5-130	E 3.5.1	0	0	0	130
Order5-130	Twee complete	2	18	16	110
ALPS-4141	Vampire 5.0.1	28	0	0	4,113
ALPS-4141	E 3.5.1	54	0	0	4,087
ALPS-4141	Twee complete	79	4	4	4,058

accepted certificates are retained as a separately labelled fluctuation archive and are excluded from the fresh count, the primary conclusions, and Table 2.

7.3 Construction-aware ATP comparison

Our same-resource experiment. We ran Vampire 5.0.1 [20], E 3.5.1 [27], and Twee 2.6.1 [28] independently on both frozen source groups. Every tool received one 120-second allowance per source row in a two-vCPU, 2,048-MiB sandbox, with a sampled 2,000-MiB aggregate process-group RSS limit. Vampire used its CASC portfolio and E used `-auto`, both in the conjecture-proving direction. Twee used one parameter-free complete run, `twee -tstp -formal-proof problem.p`; the last option retains proof output but does not change the search. This is one ALPS-aligned completion configuration, not the published eight-configuration ALPS sweep. Table 5 keeps Order5-130 and ALPS-4141 separate because 83 Order5 rows recur in the ALPS pool. We compare the ATPs with trace alone, the only one of our searches run on the full canonical union.

The result types answer different questions. An implication proof establishes that the source law forces E2; it is a proof-side result, not a model. Raw `CounterSatisfiable` messages from the incomplete Vampire and E proof-mode runs are retained in the artifact as diagnostics but are not treated as scientific

verdicts. Only a clean terminating saturation from the parameter-free complete Twee run is counted as trusted counter-satisfiable. Such a result establishes a nontrivial model of the source law, but does not by itself identify its carrier, prove it infinite, or provide a Lean certificate.

After cross-source deduplication and quotienting by variable renaming and equality symmetry, the three-tool union on Canonical-4187 contains 94 implication proofs and 18 trusted counter-satisfiable classes, with no conflict. Independent finite-side certificates exclude nontrivial finite models for 16 of those 18 classes, so infinitude follows for them; the remaining pair, E17260/E28740, belongs to Open-24 and yields only nontrivial-model existence. No ATP run emits an explicit carrier operation or a Lean-checkable model certificate. By contrast, trace constructs and Lean-certifies explicit infinite magmas for 636 canonical classes. Its accepted set is disjoint from the 94-class proof union and overlaps the 18-class counter-satisfiable union on eight classes. None of the three ATP runs is decisive on any of the 28 newly classified identities. These are bounded observations, not impossibility results; the construction comparison concerns the 16 externally justified infinite existences, rather than the aggregate 112 proof- and model-side statuses.

The published ALPS baseline. Xie et al.’s experiment uses a different protocol: an eight-configuration portfolio and a staged per-configuration sweep up to 600 seconds [32,31]. At the 30-second rung it reports 87 new implication proofs and four construction-side models; the later rungs add 23 implication proofs and no models. Thus its largest-budget total is 110 proof-side results and four model-side results, leaving 4,027 of 4,141 rows unresolved. All four models come from `twee/complete`; the Vampire saturation configurations’ resolutions are implication proofs. ALPS certifies the four model-side cases through finite presentations and complete saturation, but does not emit an explicit carrier operation as a Lean theorem. We report these published results separately and do not pool them with our same-resource measurements. They nevertheless reinforce the same qualitative point: the scarce outcome is a constructed model, not a proof that an implication holds.

7.4 Feasibility, environment, and artifact

Table 6 reports the algorithmic interval from parsed input through candidate compilation for accepted records, separate from Judge time.

The accepted trace models are usually found early: the mean search time is 3.909 seconds, the median is 0.766 seconds, and the maximum is 118.562 seconds. In contrast, the median over all 4,187 Canonical-4187 trace runs is 120.406 seconds because an unsuccessful bounded run normally consumes its allocation. Peak RSS is sampled rather than read atomically at the enforcing boundary; a few samples can therefore slightly exceed 2,000 MiB before termination. Judge time and queue or transport time are recorded separately from search time.

The experiment used at most 120 reusable sandboxes and at most 48 concurrent Judge calls. The official solver image uses Python 3.11. Receipts identify

Table 6. Search time and sampled peak process-tree RSS. Entries are mean / median / maximum; Judge time is excluded. Trace rows come from the fresh full run. Auxiliary rows are measured only on the targeted regressions of Table 3.

Profile / scope	Count	Search time (s)			Peak RSS (MiB)		
		Mean	Median	Max.	Mean	Median	Max.
Trace / Candidate-96 accepted	28	1.29	0.58	10.77	112.8	66.1	823.3
Trace / KnownAustin-10 accepted	6	0.54	0.57	0.64	64.9	66.0	68.9
Trace / Open-24 accepted	2	0.55	0.55	0.56	64.2	64.2	66.2
Trace / ALPS-only accepted	600	4.08	0.79	118.56	163.6	66.1	1908.3
Trace / Canonical-4187 accepted	636	3.91	0.77	118.56	160.2	66.1	1908.3
Guarded / targeted accepted	2	0.58	0.58	0.59	41.3	41.3	41.3
Completion (main) / targeted accepted	57	13.95	13.64	43.00	122.9	75.3	1934.8
CNF / targeted accepted	17	1.15	1.22	1.73	22.7	23.9	24.5

Judge v3 revision 380d1b2c, Lean 4.33.1, and Mathlib revision 0df444a3. The artifact records the full combined service name, the complete Mathlib commit, and the proof policy.

The release records both frozen source groups (4,271 rows), the 83 cross-group matches defining Merged-4188, and the additional within-ALPS equivalence defining Canonical-4187. It also contains exact standalone programs for all selected profiles, per-run results, 731 receipt occurrences, 731 individual certificate files, and a SHA-256 manifest. Its verifier recomputes the fresh trace count, supplemental selected coverage, exact intersections, certificate–receipt pairing, source hashes, Judge revision, and privacy allowlist. A separate same-resource ATP artifact contains the completed run records, decisive proof streams, the Canonical-4187 view, tool commands and versions, and its own manifest; its verifier recomputes the benchmark-separated results, the canonical 94/18 unions, and the absence of contradictory statuses. The public artifacts intentionally exclude controller secrets, sandbox identifiers, private endpoints, and the full multi-method production solver. The repository is available at <https://github.com/YanbiaoLab/trace-tree-magmas>. Each experiment README gives a one-command offline verification path; no network access or re-execution of the search is required for the evidence audit. Re-running the searches and replaying Lean proofs are documented as separate reproducibility levels rather than being conflated with hash verification.

8 Related work

Austin and Kisielewicz established and analyzed identities with no nontrivial finite models [1,2,16,17]. The present work addresses the constructive infinite half of that classification problem.

Automatic finite and infinite model building. Finite model finders such as Mace4 enumerate bounded domains and are powerful for ordinary equational counter-models, but a finite table cannot witness the infinite side of an Austin law [22].

Nitpick integrates a relational model finder into Isabelle, supports rich higher-order syntax, and obtains countermodels through finite scopes [5]. Recent Lean-oriented counterexample generation similarly produces checked witnesses to false statements, but does not synthesize an infinite algebra satisfying a universal magma identity [21].

Automated infinite-model construction itself has a substantial history. Peltier represented infinite first-order models by tree automata and regular tree grammars, later constructing non-ambiguous formulae for equational clause sets and connecting finite and infinite model builders [24,25,26]. Model Evolution lifts the DPLL view to first-order logic and represents candidate interpretations by evolving contexts [4]. AGES synthesizes logical models for order-sorted first-order theories from algebraic interpretations and has both a formal account and a dedicated implementation [11,12]. More recently, symbolic model construction has been developed for saturated constrained Horn clauses and for first-order literal models [8,7], while RInGen searches quantified invariants over algebraic data types using grammar-based symbolic representations [19]. These lines make clear that neither automated infinite-model construction nor finite descriptions of infinite interpretations are first introduced here.

Elad, Padon, and Shoham provide another genuinely infinite representation: symbolic structures for satisfiable quantified verification conditions, together with a model-finding procedure and a decidable fragment for which the representation is complete [9]. Trace-tree magmas have a different mathematical interface. They search for one total binary operation on a free constructor algebra. A source-law trace proposes finitely many Horn rules for exceptional outputs; descent on constructor size proves that the resulting relation is functional; and exhaustive case analysis over default pairs and exceptional outputs proves the universal identity. Our search space and proof requirements are therefore specialized to equational algebra rather than being an alternative notation for those general frameworks.

ATP saturation and extracted models. General first-order ATPs such as Vampire establish many equational implications by refutation [20,14]. A saturated unit-equational clause set can sometimes be read as a convergent rewrite presentation of an explicit, possibly infinite model. Janota, Rawson, and Schulz systematize that construction for Vampire and E and propose certified termination and confluence checks [15]. Their reported study starts from successful saturations in the order-at-most-four ETP corpus; it does not cover the order-five identities classified here. Our procedure instead searches the constructor-tree operation directly and emits its source proof and separating valuation in Lean.

Against this background, our claim is specific. We introduce *rank-decreasing sparse trace-tree magmas* as a model language for magma identities, an automated procedure that searches this language directly from a source identity, and a compiler whose output is a self-contained Lean 4 proof of functionality, universal source validity, carrier infinitude, and target failure.

Deductive program synthesis also couples search and proof. Hozzová et al. extend superposition with answer literals to synthesize recursion-free programs

from proofs of functional specifications [13]. Our target is instead a semantic structure—a total operation on a provably infinite carrier—whose universal law and countervaluation are Lean-certified; our grammar and obligations therefore concern model construction rather than program extraction.

Knuth–Bendix completion and term-rewriting theory motivate free constructors, critical matches, and normal forms [18,3]. Sternagel and Winkler’s verified certifier checks ordered-completion runs and equational satisfiability certificates in Isabelle/HOL [29]. That work validates completion-based reasoning; our main procedure instead synthesizes an exceptional operation from a source evaluation trace, while the smaller completion variant emits a direct Lean model rather than an ordered-completion run. The trace family is not merely an orientation of the source. Its mutually inductive admissible-step relation permits earlier exceptional evaluations, and the generator must prove the exceptional-output relation functional.

ETP combines large-scale automated reasoning with formal verification [6], while ALPS explores construction-oriented mathematical reasoning [32]. To the best of our literature and public-artifact audit, no prior work defines or searches the trace-tree model family above, or compiles discovered members of that family into self-contained Lean 4 model certificates. Our searches certify 32 order-five Austin candidates in total. For 28 of them—fourteen classes modulo opposite-magma duality—they provide the first public infinite countermodels and hence 28 new Austin classifications. The remaining four identities, forming two duality classes previously reported by ALPS, are independent reconstructions and are explicitly excluded from that novelty count.

9 Limitations and future work

The trace grammar and its bounded enumeration are intentionally incomplete. It is strongest for identities orientable as a variable equal to a term and whose evaluation closes through a small number of exceptional traces. Failure to find a model proves nothing. In particular, this work does not classify inputs on which a procedure finishes without a certificate or is stopped by a time or memory limit. A generated candidate is likewise not evidence until Lean accepts its certificate. Lean accepts every certificate in the fresh trace run and in the guarded and CNF regressions. In the main completion regression, three generated certificates receive no terminal response before the 60-minute client cutoff; accepted indexed alternatives for the same three problems are supplied, but the original three files are not counted as accepted. A further generalized schedule covers the main profile’s one no-candidate case. We make no correctness claim for an unaccepted file, and the artifact preserves every outcome.

The one-clause result suggests a mathematical research program. A syntactic criterion for a constructor projection that recovers the output parameter, together with an acyclic size ranking, could replace mask enumeration by a theorem for a class of identities. Multiple compatible Horn clauses may cover terms with several essential branches. Richer constructors or lexicographic ranks

may expose models that the current tree size cannot certify. Finally, the infinite models for E17260/E28740 motivate a finite-model investigation to determine whether this pair is Austin.

At the implementation level, a future verified compiler could reduce the trusted engineering gap between the Python candidate and its Lean rendering. The present design instead follows a proof-producing discipline: every output is independently reconstructed and checked, so compiler bugs cause rejection rather than unsound acceptance.

10 Conclusion

Trace-tree magmas provide a finite search language for genuinely infinite algebraic countermodels. A least relational semantics defines their meaning independently of the implementation. For each reported model, a generated Lean proof uses constructor projection and size descent to establish functionality of the exceptional-output relation. Complete case analysis over default pairs and exceptional outputs proves the source identity for every valuation, and a concrete countervaluation refutes the target. This theorem chain turns heuristic search into proof-producing model synthesis without claiming that the search is complete.

The method establishes the first public infinite countermodels in our audit for 28 previously unclassified order-five identities, or fourteen classes modulo duality. Each new class admits a single dependency-respecting Horn clause with at most two admissible-step premises, revealing a common mathematical structure rather than 28 unrelated witnesses. Evaluation keeps Order5-130 and ALPS-4141 distinct: their 4,188-record deduplicated union has 4,187 classes after one further within-ALPS pair is identified under variable renaming and equality-side exchange. In a fresh run on those classes, trace produces 636 certificates—36 on Order5-130 and 600 on the ALPS-only remainder—all accepted by the official Judge. Of these, 624 canonical classes have ALPS representatives and correspond to 625 rows of the original 4,141-row ALPS pool. Targeted regressions separately confirm accepted outputs of the guarded, completion, and CNF model languages without folding their union into the ATP comparison. In the same-resource experiment, every one of the 28 new cases remains without a decisive ATP answer. The three ATPs prove implications for 94 canonical classes; only complete Twee supplies trusted counter-satisfiable results, on 18 classes, and independent finite-side facts force infinitude for 16 of them. No ATP run produces an explicit Lean-certified infinite model. These results locate the contribution at the intersection of automated deduction, explicit model synthesis, and proof production, and motivate a broader theory of which magma laws admit finite trace-tree presentations.

Author contributions. Jiaming Zhao generalized the central concept, extracted the mathematical structure, designed and implemented the algorithms and Lean certificate generator, ran the large-scale experiments, discovered the new Austin-law classifications, and wrote the manuscript. Bing Wu curated and maintained

the database and contributed to offline exploration. Xu Miao is the corresponding author.

A The 32 certified Austin identities

The operation is written as $*$. The first 28 rows are the new classifications. The final two dual pairs, E19966/E26105 and E22619/E22634, are independent formal reconstructions of earlier ALPS classifications.

Table 7. The 32 certified Austin identities, grouped by duality. The binary operation is written as $*$. The first 28 identities are new classifications established by trace search. The final two pairs were previously classified by ALPS and are independently reconstructed here by the supplemental searches.

Law	Identity
E4952	$x \simeq y * (x * (y * (y * (z * y))))$
E41252	$x \simeq (((y * z) * y) * y) * x * y$
E40914	$x \simeq (((y * x) * y) * z) * x * z$
E4957	$x \simeq y * (x * (y * (z * (x * z))))$
E5012	$x \simeq y * (x * (z * (z * (y * z))))$
E41253	$x \simeq (((y * z) * y) * y) * x * z$
E5066	$x \simeq y * (y * (x * (y * (z * y))))$
E41239	$x \simeq (((y * z) * y) * x) * y * y$
E5141	$x \simeq y * (y * (z * (y * (x * y))))$
E40917	$x \simeq (((y * x) * y) * z) * y * y$
E5295	$x \simeq y * (z * (y * (y * (x * y))))$
E40909	$x \simeq (((y * x) * y) * y) * z * y$
E38303	$x \simeq (y * ((x * z) * x)) * y * y$
E7701	$x \simeq y * (y * ((x * (z * x)) * y))$
Law	Identity
E7755	$x \simeq y * (y * ((z * (x * x)) * y))$
E38249	$x \simeq ((y * ((x * x) * z)) * y) * y$
E9345	$x \simeq y * ((x * y) * (z * (y * y)))$
E36713	$x \simeq (((y * y) * z) * (y * x)) * y$
E9384	$x \simeq y * ((x * z) * (y * (z * z)))$
E36714	$x \simeq (((y * y) * z) * (y * x)) * z$
E9680	$x \simeq y * ((z * y) * (y * (x * y)))$
E36524	$x \simeq (((y * x) * y) * (y * z)) * y$
E9667	$x \simeq y * ((z * y) * (x * (y * y)))$
E36638	$x \simeq (((y * y) * x) * (y * z)) * y$
E35036	$x \simeq ((y * z) * ((x * y) * x)) * y$
E11081	$x \simeq y * ((x * (y * x)) * (z * y))$
E11116	$x \simeq y * ((x * (z * x)) * (y * y))$
E34888	$x \simeq ((y * y) * ((x * z) * x)) * y$
E19966	$x \simeq (y * y) * ((x * (x * z)) * z)$
E26105	$x \simeq (y * ((y * x) * x)) * (z * z)$
E22619	$x \simeq (y * (y * x)) * ((z * z) * z)$
E22634	$x \simeq (y * (y * y)) * ((x * z) * z)$

References

1. Austin, A.K.: A note on models of identities. *Proceedings of the American Mathematical Society* **16**, 522–523 (1965)
2. Austin, A.K.: Finite models for laws in two variables. *Proceedings of the American Mathematical Society* **17**, 1410–1412 (1966)
3. Baader, F., Nipkow, T.: *Term Rewriting and All That*. Cambridge University Press (1998). <https://doi.org/10.1017/CB09781139172752>
4. Baumgartner, P., Tinelli, C.: The model evolution calculus as a first-order DPLL method. *Artificial Intelligence* **172**(4–5), 591–632 (2008). <https://doi.org/10.1016/j.artint.2007.09.005>
5. Blanchette, J.C., Nipkow, T.: Nitpick: A counterexample generator for higher-order logic based on a relational model finder. In: *Interactive Theorem Proving. Lecture Notes in Computer Science*, vol. 6172, pp. 131–146. Springer (2010). https://doi.org/10.1007/978-3-642-14052-5_11
6. Bolan, M., et al.: The equational theories project: Advancing collaborative mathematical research at scale. *arXiv preprint arXiv:2512.07087* (2025). <https://doi.org/10.48550/arXiv.2512.07087>
7. Bromberger, M., Krasnopol, F., Möhle, S., Weidenbach, C.: First-order automatic literal model generation. In: *Automated Reasoning – IJCAR 2024. Lecture Notes in Computer Science*, vol. 14739, pp. 133–153. Springer (2024). https://doi.org/10.1007/978-3-031-63498-7_9
8. Bromberger, M., Leutgeb, L., Weidenbach, C.: Symbolic model construction for saturated constrained Horn clauses. In: *Frontiers of Combining Systems. Lecture Notes in Computer Science*, vol. 14279, pp. 137–155. Springer (2023). https://doi.org/10.1007/978-3-031-43369-6_8
9. Elad, N., Padon, O., Shoham, S.: An infinite needle in a finite haystack: Finding infinite counter-models in deductive verification. *Proceedings of the ACM on Programming Languages* **8**(POPL), 970–1000 (2024). <https://doi.org/10.1145/3632875>
10. Equational Theories Project contributors: Order 5 austin laws. *Equational Theories Blueprint*, Chapter 20 (2026), https://teorth.github.io/equational_theories/blueprint/order-5-austin-laws.html, snapshot accessed 1 September 2026; exact hash archived with the artifact
11. Gutiérrez, R., Lucas, S.: Automatic synthesis of logical models for order-sorted first-order theories. *Journal of Automated Reasoning* **60**(4), 465–501 (2018). <https://doi.org/10.1007/s10817-017-9419-3>
12. Gutiérrez, R., Lucas, S.: Automatic generation of logical models with AGES. In: *Automated Deduction – CADE 27. Lecture Notes in Computer Science*, vol. 11716, pp. 287–299. Springer (2019). https://doi.org/10.1007/978-3-030-29436-6_17
13. Hozzová, P., Kovács, L., Norman, C., Voronkov, A.: Program synthesis in saturation. In: *Automated Deduction – CADE 29. Lecture Notes in Computer Science*, vol. 14132, pp. 307–324. Springer (2023). https://doi.org/10.1007/978-3-031-38499-8_18
14. Janota, M.: Experimental results for Vampire on the equational theories project. *arXiv preprint arXiv:2508.15856* (2025). <https://doi.org/10.48550/arXiv.2508.15856>
15. Janota, M., Rawson, M., Schulz, S.: Case study: Saturations as explicit models in equational theories. *arXiv preprint arXiv:2602.16324* (2026). <https://doi.org/10.48550/arXiv.2602.16324>

16. Kisielewicz, A.: Varieties of algebras with no nontrivial finite members. In: Lattices, Semigroups, and Universal Algebra, pp. 129–136. Plenum Press, New York (1990). https://doi.org/10.1007/978-1-4899-2608-1_14
17. Kisielewicz, A.: Austin identities. *Algebra Universalis* **38**(3), 324–328 (1997). <https://doi.org/10.1007/s000120050057>
18. Knuth, D.E., Bendix, P.B.: Simple word problems in universal algebras. In: Computational Problems in Abstract Algebra, pp. 263–297. Pergamon Press (1970). <https://doi.org/10.1016/B978-0-08-012975-4.50028-X>
19. Kostyukov, Y., Mordvinov, D., Fediyukovich, G.: Beyond the elementary representations of program invariants over algebraic data types. In: Proceedings of the 42nd ACM SIGPLAN International Conference on Programming Language Design and Implementation. pp. 451–465. ACM (2021). <https://doi.org/10.1145/3453483.3454055>
20. Kovács, L., Voronkov, A.: First-order theorem proving and Vampire. In: Computer Aided Verification. Lecture Notes in Computer Science, vol. 8044, pp. 1–35. Springer (2013). https://doi.org/10.1007/978-3-642-39799-8_1
21. Li, Z., Li, Z., Yang, K., Ma, X., Su, Z.: Learning to disprove: Formal counterexample generation with large language models. arXiv preprint arXiv:2603.19514 (2026). <https://doi.org/10.48550/arXiv.2603.19514>
22. McCune, W.: Mace4 reference manual and guide. Tech. Rep. ANL/MCS-TM-264, Argonne National Laboratory (2003), <https://www.cs.unm.edu/~mccune/mace4/mace4.pdf>
23. de Moura, L., Ullrich, S.: The Lean 4 theorem prover and programming language. In: Automated Deduction – CADE 28. Lecture Notes in Computer Science, vol. 12699, pp. 625–635. Springer (2021). https://doi.org/10.1007/978-3-030-79876-5_37
24. Peltier, N.: Tree automata and automated model building. *Fundamenta Informaticae* **30**(1), 59–81 (1997). <https://doi.org/10.3233/FI-1997-30105>
25. Peltier, N.: Building infinite models for equational clause sets: Constructing non-ambiguous formulae. *Logic Journal of the IGPL* **11**(1), 97–129 (2003). <https://doi.org/10.1093/jigpal/11.1.97>
26. Peltier, N.: Automated model building: From finite to infinite models. In: Intelligent Computer Mathematics. Lecture Notes in Computer Science, vol. 5144, pp. 155–169. Springer (2008). https://doi.org/10.1007/978-3-540-85110-3_13
27. Schulz, S.: E—a brainiac theorem prover. *AI Communications* **15**(2–3), 111–126 (2002). <https://doi.org/10.3233/EAI-2002-260>
28. Smallbone, N.: Twee: An equational theorem prover. In: Automated Deduction – CADE 28. Lecture Notes in Computer Science, vol. 12699, pp. 602–613. Springer (2021). https://doi.org/10.1007/978-3-030-79876-5_35
29. Sternagel, C., Winkler, S.: Certified equational reasoning via ordered completion. In: Automated Deduction – CADE 27. Lecture Notes in Computer Science, vol. 11716, pp. 508–525. Springer (2019). https://doi.org/10.1007/978-3-030-29436-6_30
30. The mathlib Community: The Lean mathematical library. In: Proceedings of the 9th ACM SIGPLAN International Conference on Certified Programs and Proofs. pp. 367–381. ACM (2020). <https://doi.org/10.1145/3372885.3373824>
31. Xie, E., Ye, W., Zhang, A.: ALPS complete automated-baseline results and evaluation pool. GitHub repository data release (2026), <https://github.com/EricX22/ALPS>, gitHub commit e831af76da02; accessed 1 September 2026

32. Xie, E., Ye, W., Zhang, A.: ALPS: Measuring valid creativity in large language models with mathematical construction. arXiv preprint arXiv:2608.15979 (2026). <https://doi.org/10.48550/arXiv.2608.15979>