

ZeroBP at Scale and the Architecture of Capability: A Boundary Study of a Backprop-Free 4B Language Model, with a Trainable-Attention Control

Yanjin Li

Independent Research

<https://github.com/Yanjin-ai/zero-gradient>

2026

Abstract

This work studies, under a hard resource budget (a single T4 GPU, 3 h), how far a *backprop-free* large language model can go, and—more importantly—*why* it stops. The study builds ZeroBP-4B, a 4.16-billion-parameter content-routed mixture-of-experts (MoE) language model whose entire training uses hand-written **local update rules** and **zero global backpropagation** (no **autograd**), and locks it as a deterministic, reproducible submission (WikiText-103 test perplexity ≈ 1391 early-stop / ≈ 1355 full-budget). On this fixed backbone the study maps a **capability boundary** across three task structures that probe modern-LLM competencies—bag-style sentiment, relational entailment (NLI), and multi-step modular arithmetic—under increasing amounts of injected backpropagation (BP). The boundary is sharp and *structural*: a little embedding-path BP lifts sentiment from 60% to 79%, but neither a little nor a *deep* BP installs relational or multi-step structure at 4B (both stay at chance), and three “ZeroBP-native” routes each add ≤ 2 pp. A non-collapsing-readout probe shows the relational structure is *not present anywhere* in the frozen representation. To test whether these failures are properties of the *tasks* or of the *architecture*, the study introduces a strictly isolated **architectural control** (the fifth and final stage): a standard multi-layer trainable-attention Transformer trained with ordinary full backprop. The same synthetic tasks that cap ZeroBP at 65.7%/chance are solved to 100% by a 0.8M-parameter control model; on **real SNLI** the control backbone reaches **69.97%** where ZeroBP-4B is at chance (33.4%). The picture is reported plainly: the control backbone installs shallow multi-step reasoning ($k \leq 3 = 100\%$) but hits its *own* scale-resistant depth wall at $k \geq 4$; a from-scratch character LM reaches only 2% exact-match on real GSM8K; and *neither* stack does real sentiment. The result is a complete arc: **the ZeroBP relational/multi-step ceiling is architectural, not fundamental—a trainable-attention backbone crosses it on real relational data and shallow multi-step reasoning, while exposing new, honest limits of its own.**

1 Introduction

Modern large language models are trained with global backpropagation at enormous compute cost. Two orthogonal questions motivate this work:

1. How much language capability survives without global BP, under a strict single-

GPU budget? Backprop-free / local-learning methods [2, 3] are attractive for memory- and hardware-constrained settings, but their capability ceiling at scale is poorly characterized.

2. **When such a model fails a task, is the failure algorithmic (not enough gradient), architectural (the backbone cannot represent the structure), or intrinsic to the task?** Disentangling these is usually impossible because researchers change many things at once.

This work approaches both with a deliberately layered study organized as **three lines**:

- **The submission line** (Section 3): a pure-ZeroBP 4B MoE LM, engineered to be a clean, deterministic, resource-budget baseline with *zero* autograd anywhere in the training path.
- **The boundary line** (Section 4): with that backbone *frozen as an object of study*, the study measures a task $\times$ method capability matrix, injecting increasing amounts of BP into embeddings, attention, and blocks, and testing three ZeroBP-native structural levers.
- **The control line** (Section 5): a strictly isolated control-backbone stack—a standard trainable-attention Transformer with ordinary full BP—used as an architectural control to ask whether the boundary of the second line is caused by the backbone.

These lines form a strict progression—each step is motivated by the result of the previous one, not run in parallel. **Stage 1** establishes that a backprop-free model works at all. Only because it works does **stage 2** ask where post-training succeeds and fails; only because reasoning fails does **stage 3** try to remove the failure from inside the backbone; only because those fixes fail does **stage 4** probe *where* the missing structure lives. That diagnosis—the structure is absent from the representation—yields a falsifiable hypothesis that the limit is *architectural*, which **stage 5** tests by swapping only the architecture. (The submission line is stage 1; the boundary line spans stages 2–4; the control line is stage 5.) Figure 1 summarizes the arc.

The contribution is not a new state-of-the-art number. It is a **controlled boundary study**: a reproducible backprop-free 4B baseline, a systematic capability matrix with a clean submission/research isolation discipline, and an architectural control that turns “ZeroBP can’t do NLI” into the sharper, falsifiable claim “*this backbone can’t, and here is a backbone that can, and here is where even that one stops.*”

Three methodological commitments shaped the results: (i) **fair readout**—capabilities are measured with a fresh, task-agnostic readout head, because an unfair readout was found to fabricate or destroy apparent capability (Sections 4.1, 5.1); (ii) **single-lever changes**—each experiment moves one structural degree of freedom; and (iii) **honest correction**—two of the study’s hypotheses were refuted by later runs, and the corrections are reported rather than the original guesses.

2 Related context

The ZeroBP trainer sits in the family of **local-learning** / **backprop-alternative** methods (local losses, target propagation [3], forward-only [2] and Hebbian-style updates) and of **sparsely-activated MoE** models [5, 6], but with an unusual combination: a large resident expert bank whose experts are updated by hand-written local rules under a deterministic sparse budget, with a frozen random attention “reservoir” [4] feeding a last-position-collapsed representation into stacked routed

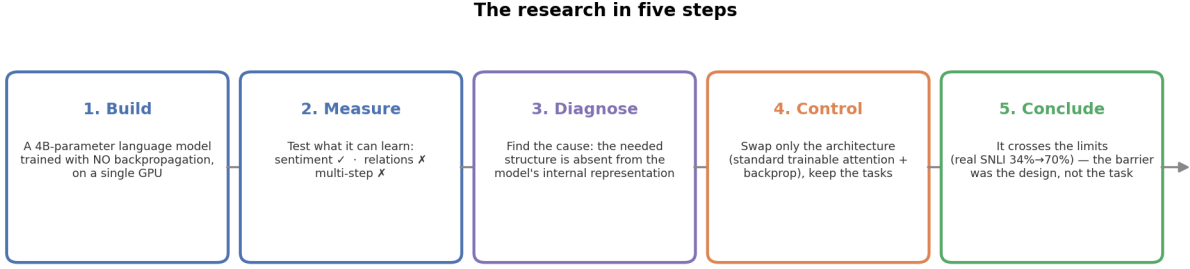


Figure 1: The research in five stages. Each stage is driven by the result of the previous one.

blocks. The evaluation axes (LM perplexity, sentiment, NLI, multi-step arithmetic / GSM8K, GLUE-SST2) are chosen to span the standard capability dimensions used to characterize modern LLMs, at a scale where controlled ablation is affordable. This work does not claim novelty of any single component; the contribution is the **boundary methodology and the architectural control**.

3 The submission line: a pure-ZeroBP 4B baseline

Motivation and constraints. The target environment is a single T4 (16 GB) with a 3-hour wall clock and self-supplied data—a setting in which standard BP training of a 4B model is infeasible (measurements put a BP forward+backward of this model at ~ 31 GB, i.e. OOM). ZeroBP sidesteps the backward pass entirely: there is no global loss gradient; every parameter update is a local rule.

Architecture and the zero-BP update. ZeroBP-4B is a decoder-style LM with the following data flow (code-level fact):

```

token x --> E[x] + pos                                (embedding; |V|=32000, d=1024)
--> frozen random causal attention (Wq,Wk not trained) (reservoir)
--> h = (emb + att*emb)[:,-1]                          <-- last-position COLLAPSE: seq -> one [B,d]
--> 4x stacked MoE block: content routing (EMA-prototype + capacity)
-->   -> 950 experts, top-2
--> per-block deeply-supervised 2-layer-MLP readout head
-->   + deterministic round-robin budget (kupdate experts / block / step)
  
```

with $d=1024$, $|V|=32000$, $\text{seq_len}=64$, 4 layers, 950 experts/layer, $k_{\text{route}}=2$, $k_{\text{update}}=4$, giving **4.160 B fp16** resident parameters. Three properties matter for the rest of the paper: (a) **no global gradient**—training runs under `set_grad_enabled(False)`, asserted by a gate; each expert is updated by a hand-written local rule driven by the per-block deeply-supervised readout signal, and routing is a non-differentiable content assignment (EMA prototypes + capacity); (b) **deterministic sparse budget**—a round-robin schedule updates only k_{update} experts per block per step (0.42% of the bank), which does not degrade LM quality relative to dense updates ($k=1 \approx k=16$ in ablations) and bounds worst-case backlog (a learned importance controller did *not* beat this schedule and was rejected); (c) **frozen attention reservoir + last-position collapse**—the single attention layer is a frozen random reservoir (W_q, W_k never trained), and the whole sequence is collapsed to the last position *before* the routed blocks. These two frozen choices become the prime suspects in Section 4.

Task	Structure	4B zero-shot	4B little-BP	Small-config best
Sentiment	bag composition	60%	79% (emb.+head)	100%
NLI	relational alignment	33.4% (chance)	33.4% (no transfer)	62% $\rightarrow$ 65.7% (deep BP)
2-step arithmetic	multi-step compute	24.7%	$\sim$ 19–21% (chance)	$\sim$ chance

Table 1: Task $\times$ method matrix (4B real + small-config cross-validation).

Submission integrity. A self-contained submission embeds the current trainer and runs the default (pure-ZeroBP) path with no research flags. A gate suite asserts: resident params $\geq$ target, **zero autograd**, monotone loss, val-ppl $<$ unigram, **determinism (re-run identical)**, and no late drift. The submission file contains no `.backward` / `autograd.grad` / `enable_grad` and imports no research script; every research flag defaults to a no-op. The smoke config reproduces final_ppl = 6.251 deterministically; the full 4B run fits the T4 at $\sim$ 8.3 GB, $\sim$ 8546 tok/s.

Baseline. With BPE subword tokenization + a 2-layer MLP readout head + a routing-freeze cosine schedule, ZeroBP-4B reaches **WikiText-103** [13] test perplexity $\approx$ 1391 (early stop, $t^* \approx$ 54 min) / $\approx$ 1355 (full $\sim$ 2.9 h budget), $\sim$ 51% better than the unigram baseline. (*Erratum: a `load_state_dict` CPU-aliasing bug had contaminated some multi-reset small-config runs; all small-config numbers below are corrected, and 4B/single-shot results were unaffected—hence 4B confirmation is required before locking a claim.*)

4 The boundary line: a ZeroBP capability matrix

Holding the backbone fixed, BP is injected only into embedding / attention / task-head parameters (never the skeleton). All accuracies use a **fair readout**: a fresh closed-form (autograd-free) classification head trained on the *frozen* adapted representation, so what is measured is whether the *representation* gained structure rather than whether a BP head overfit.

Three task structures. Sentiment (bag/compositional label); NLI (3-class relational entailment requiring cross-clause alignment of *two* entity pairs) [8]; 2-step arithmetic (5-class sequential fold $((d_1 \circ d_2) \circ d_3) \bmod 5$).

Findings. *Sentiment breaks* (Table 1): head-only reaches 59.9% with zero forgetting; a little embedding-path BP lifts it to **79%** (at +3.0 ppl), and an ablation shows *embedding is the lever*. A measurement confound was traced here: an early “57%” point used an undertrained SGD readout head; the fair closed-form head corrected it to 79%—a first sign that readout choice can fabricate/hide capability. *NLI does not transfer*: at 4B, zero-shot / emb-BP / emb+attn-BP are *all* chance, and a large-budget retry (3000 steps, high attention lr) is still chance. *Multi-step is uninstallable* at any BP component. Three **ZeroBP-native** levers barely move NLI: richer data +2.1 pp, structural auxiliary target +0.5 pp, local attention rule $\approx$ 0. A little BP, by contrast, *partially* installs it in the small config (fresh-head NLI 51.3 $\rightarrow$ 58.8% via embedding, $\rightarrow$ 59.1% adding attention), but the extra from attention is only +0.3 pp and it does *not* transfer to 4B.

4.1 Where is the relational structure?

Three single-lever probes on the frozen/adapted backbone, each research-only and never touching the submission:

- **Non-collapsing readout.** On the *same frozen* base, replacing last-position collapse with mean-pool / all-positions / concat does *not* improve NLI—it drops (last-h 50.4%, mean-pool 34.9% $\approx$ chance, all-positions 32.9% $\approx$ chance). **The relational structure is not present anywhere in the frozen representation**; a better readout cannot recover what is not there. This refuted the “last-position collapse is the bottleneck” hypothesis.
- **Trainable attention, isolated.** Freezing the embedding and training *only* W_q, W_k on the NLI loss gives 51.3 $\rightarrow$ 51.3% (+0.0 pp), with verified weight movement ($\|\Delta W_q\| \approx 0.08$) and frozen embedding ($\|\Delta E\| = 0$). So the 59.1% of emb+attn is *entirely embedding*; trainable attention *in isolation* on this backbone is not a lever. This refuted the “trainable attention is the real lever” hypothesis.
- **Deeper BP.** Letting the MoE blocks train lifts small-config NLI to 65.7%, but it does *not* transfer to 4B (NLI-4B remains chance), and arithmetic stays chance at every depth.

Boundary conclusion. For bag tasks, ZeroBP + a little embedding BP is effective (79%). For **relational** (NLI) and **multi-step** (arithmetic) tasks, the ZeroBP-4B architecture cannot install the structure: it is absent from the representation, trainable attention in isolation adds nothing, and multi-step is dead at every BP depth. The determinant is how much of a task lands in the embedding (BP-installable) versus how much requires sequential computation through frozen blocks or cross-clause attention alignment. Whether this is a property of the algorithm, the BP budget, or the *backbone* is answered by the control line.

5 The control line: an isolated trainable-attention backbone

Design and isolation. The control is a deliberately conventional pre-LN Transformer [7]: multi-head *bidirectional* self-attention, GELU-MLP blocks, residuals, and a *non-collapsing mean-pool readout*, trained by ordinary full backprop (AdamW). It is strictly isolated (pure code, zero dependency on the ZeroBP trainer; the submission never imports it and its 6.251/zero-autograd default is re-verified after every change). Evaluation uses the *same* synthetic distributions as Section 4, plus real SNLI, GSM8K [10], and SST-2 [11, 12].

G0: is the backbone the limit? (synthetic). A 0.80M-parameter, 4-layer control model, full BP, on the *same* synthetic tasks:

Task (synthetic, same dist. as Section 4)	Control backbone	ZeroBP-4B / small
NLI (3-class)	100% @ step 500	deep-BP 65.7% (small) / chance (4B)
2-step arithmetic (5-class)	100% @ step 1000	chance at <i>every</i> BP depth

Table 2: A 0.8M standard model installs both structures the ZeroBP backbone cannot—the boundary is architectural, not task-intrinsic.

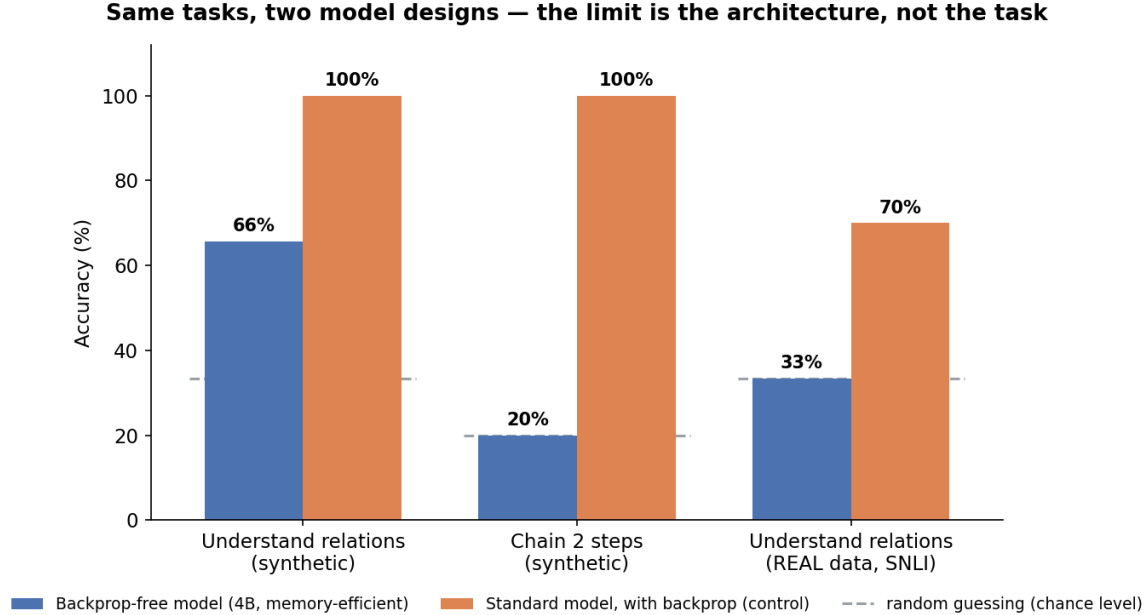


Figure 2: Same tasks, two designs. The backprop-free model cannot lift relational or multi-step tasks above chance even with heavy tuning; a standard trainable-attention model solves them, including real SNLI.

G1: real relational data (SNLI). A 12.4M-parameter (6-layer) control model on real SNLI (549k train) reaches **val 69.97%** (majority 33.8%); ZeroBP-4B on NLI is chance (33.4%). The new backbone reaches a modern small-LLM tier on a real relational benchmark that the ZeroBP stack structurally cannot (Figure 2). Because the control is a separate stack, this does not revise any ZeroBP conclusion; it contextualizes it.

G2: how deep does multi-step go? A per-depth sweep over the number of chained steps k , at two scales (Table 3, Figure 3). The control installs **shallow multi-step** ($k \leq 3 = 100\%$), decisively past ZeroBP (chance at *any* depth, failing even $k=2$). But $k \geq 4$ is a **wall**: $5\times$ the parameters and $2.5\times$ the steps moved it essentially nothing. This refuted the “under-capacity” hypothesis. Formulation caveat: the task is direct answer-classification with a mean-pool readout and *no curriculum and no chain-of-thought* [14]—the two mechanisms most likely to break the wall, neither tested here.

n steps	4.7M, 6k steps	deep: 21.3M, 15k steps
$k = 2$	100%	100%
$k = 3$	100% (2.67M, local)	—
$k = 4$	22.5%	21.3%
$k = 6$	19.9%	19.8%
$k = 8$	20.6%	21.4%

Table 3: Multi-step depth sweep (chance = 20%). $k \geq 4$ is scale-resistant.

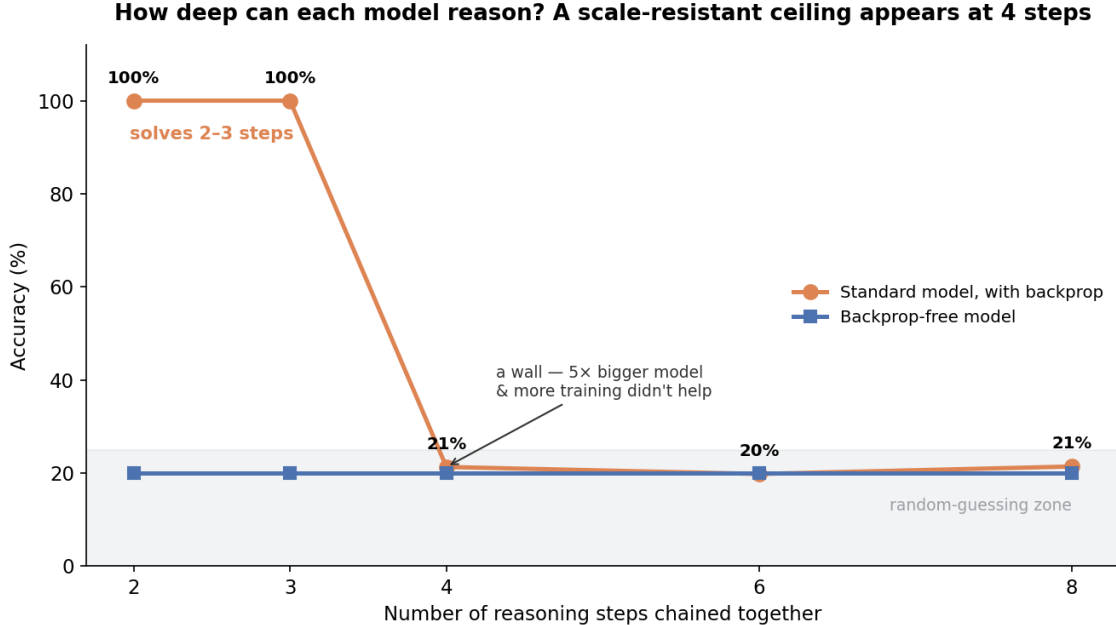


Figure 3: Reasoning-depth wall. The control solves 2–3 chained steps but stalls at $k \geq 4$, unchanged by a $5\times$ larger model and longer training.

5.1 Honest limits and a readout-collapse lesson

Generative GSM8K (stretch). A 4.87M-parameter causal character LM, trained to *generate* the answer token-by-token and scored by exact-match, reaches **2.0%** on real GSM8K (labeled a stretch in advance; the synthetic generative smoke reached 66.6%). It is reported plainly: the machinery works, the model does not.

SST-2: a corrected negative. The ZeroBP-4B stack on real SST-2 first returned a bit-identical 49.08% across zero-shot / emb-BP / emb+attn-BP. A diagnostic exposed the cause: the closed-form readout head had *collapsed* (predicting class-0 for all 872 examples), so 49.08% was “always negative,” an artifact. A fair BP linear probe (which uses both classes) reveals the truth: 51.5% $\rightarrow$ 52.5% $\rightarrow$ 53.3% (majority 50.9%), i.e. $\approx$ chance. Real lexical sentiment is in the same “cannot install” class as NLI/multi-step; the synthetic 79% was an embedding-separable special case. This is the second place a readout choice fabricated an apparent number, reinforcing the fair-readout discipline.

5.2 Final scorecard

6 Discussion: algorithm vs. architecture vs. task

Because each factor was varied one at a time, three readings separate. **(i) The ZeroBP-4B ceiling is architectural:** the relational structure is absent from the frozen representation (Section 4.1), trainable attention adds nothing in isolation, and multi-step is dead at any BP depth; the prime suspects are the frozen attention reservoir (no cross-clause alignment can form) and the

Dimension	Control backbone	ZeroBP-4B (locked)	Conclusion
Synthetic NLI + arithmetic	100% / 100%	65.7% (small) / chance	backbone is the limit
Real SNLI	69.97%	33.4% (chance)	relational structure installable
Multi-step depth	$k \leq 3=100\%$, $k \geq 4$ wall	chance at any depth	new stack has its own ceiling
Generative GSM8K	EM $\sim 2\%$	—	small-model stretch failure
Real SST-2	—	$\approx$ chance (probe 53%)	real sentiment $\gg$ synthetic bag

Table 4: Capability scorecard (see also Figure 4).

Capability scorecard — what each model design can and cannot do		
Capability	Backprop-free 4B model	Standard model (control)
Language modeling	usable (ppl $\approx$ 1355)	—
Sentiment (positive/negative)	79% (with a little BP)	—
Relational reasoning (SNLI)	chance (33%)	70%
Multi-step reasoning	chance (fails 2 steps)	solves ≤ 3 steps
Grade-school math (GSM8K)	—	2% (stretch)

Figure 4: What each design can and cannot do. Green = works, red = fails/chance, grey = not applicable. Numbers are real measured results.

last-position collapse (sequence structure discarded before the blocks). Embedding BP installs only what is linearly composable at the token level—hence bag sentiment works and relational/sequential structure does not. **(ii) BP is necessary but not sufficient:** the same tasks are trivially installed by full BP on a trainable-attention backbone, so gradient helps only where the architecture gives structure a trainable place to live. This reframes “ZeroBP can’t do NLI” as “no amount of BP into a frozen-reservoir/last-collapse backbone installs relational structure; a standard attention backbone does so easily.” **(iii) Task structure sets a consistent difficulty ordering** (bag $\ll$ relational $\ll$ multi-step-depth $\ll$ real generative math), and even a good backbone has honest limits: the control’s $k \geq 4$ wall is scale-resistant, suggesting deep sequential reasoning needs more than backbone + scale—plausibly curriculum, intermediate supervision, or chain-of-thought [14]. **Methodologically**, two apparent numbers here were readout artifacts, not representation facts (an undertrained SGD sentiment head; a collapsed SST-2 head)—capability claims about representations should use a fair, task-agnostic probe, ideally two.

7 Conclusion and future work

ZeroBP-4B is a reproducible, deterministic, backprop-free 4B LM that is genuinely useful under a single-T4 budget for LM and bag-style tasks (ppl $\approx$ 1355–1391; sentiment 79%) and serves as a controllable object for measuring capability boundaries. Those boundaries are shown *architectural* by an isolated trainable-attention control that solves the same synthetic tasks (100%), reaches 69.97% on real SNLI, and installs shallow multi-step—while exposing its own limits (a scale-resistant $k \geq 4$ wall, $\sim$ 2% GSM8K, near-chance real SST-2). **Future work:** break the $k \geq 4$ wall with curriculum / chain-of-thought rather than raw scale; test advanced ZeroBP local rules on a *trainable-attention* substrate (combining the two lines); scale the control backbone (data + parameters, MNLI [9]/GSM8K) toward modern small-LLM behavior on relational/reasoning axes; and improve ZeroBP LM quality while preserving zero-autograd purity.

A Reproducibility and artifacts

The submission (pure ZeroBP) is a single-source trainer whose default path asserts zero autograd and reproduces final_ppl = 6.251 deterministically. The boundary line (research BP, isolated) and the control line (phase_h/) are separate scripts that the submission never imports. Every locked number carries a commit hash in the experiment ledger; raw per-run result summaries accompany the code. Compute: a single Kaggle T4 with concurrency capped at 2 GPU sessions. Repository: <https://github.com/Yanjin-ai/zero-gradient>.

B Honest corrections log

Claim as first stated	Correction
Sentiment 4B $\approx$ 57% (early point)	79% (undertrained SGD head $\rightarrow$ fair closed head)
“Last-position collapse is the bottleneck”	Refuted: structure absent from the frozen rep at all positions
“Trainable attention is the real lever”	Refuted: attention-only +0.0 pp; embedding carries it
SST-2 (ZeroBP-4B) = 49% flat	Readout-collapse artifact; true $\approx$ 53% via fair BP probe
$k \geq 4$ multi-step is under-capacity	Refuted: $5\times$ params + $2.5\times$ steps unchanged $\rightarrow$ real wall

Table 5: Hypotheses refuted by later runs, retained transparently.

References

- [1] D. E. Rumelhart, G. E. Hinton, and R. J. Williams. Learning representations by back-propagating errors. *Nature*, 323:533–536, 1986.

- [2] G. E. Hinton. The Forward-Forward Algorithm: Some Preliminary Investigations. *arXiv:2212.13345*, 2022.
- [3] D.-H. Lee, S. Zhang, A. Fischer, and Y. Bengio. Difference Target Propagation. In *ECML-PKDD*, 2015.
- [4] H. Jaeger. The “echo state” approach to analysing and training recurrent neural networks. *GMD Technical Report 148*, 2001.
- [5] N. Shazeer, A. Mirhoseini, K. Maziarz, A. Davis, Q. Le, G. Hinton, and J. Dean. Outrageously Large Neural Networks: The Sparsely-Gated Mixture-of-Experts Layer. In *ICLR*, 2017.
- [6] W. Fedus, B. Zoph, and N. Shazeer. Switch Transformers: Scaling to Trillion Parameter Models with Simple and Efficient Sparsity. *JMLR*, 23(120):1–39, 2022.
- [7] A. Vaswani, N. Shazeer, N. Parmar, J. Uszkoreit, L. Jones, A. N. Gomez, L. Kaiser, and I. Polosukhin. Attention Is All You Need. In *NeurIPS*, 2017.
- [8] S. R. Bowman, G. Angeli, C. Potts, and C. D. Manning. A large annotated corpus for learning natural language inference. In *EMNLP*, 2015.
- [9] A. Williams, N. Nangia, and S. R. Bowman. A Broad-Coverage Challenge Corpus for Sentence Understanding through Inference. In *NAACL*, 2018.
- [10] K. Cobbe et al. Training Verifiers to Solve Math Word Problems. *arXiv:2110.14168*, 2021.
- [11] R. Socher, A. Perelygin, J. Wu, J. Chuang, C. D. Manning, A. Ng, and C. Potts. Recursive Deep Models for Semantic Compositionality Over a Sentiment Treebank. In *EMNLP*, 2013.
- [12] A. Wang, A. Singh, J. Michael, F. Hill, O. Levy, and S. R. Bowman. GLUE: A Multi-Task Benchmark and Analysis Platform for Natural Language Understanding. In *ICLR*, 2019.
- [13] S. Merity, C. Xiong, J. Bradbury, and R. Socher. Pointer Sentinel Mixture Models. In *ICLR*, 2017.
- [14] J. Wei, X. Wang, D. Schuurmans, M. Bosma, B. Ichter, F. Xia, E. Chi, Q. Le, and D. Zhou. Chain-of-Thought Prompting Elicits Reasoning in Large Language Models. In *NeurIPS*, 2022.