

Administration Linux - S8

TP NIS – Serveur et client sous WSL

1. Introduction	2
Architecture utilisée	2
2. Installation des services NFS (TP NFS précédent)	3
Côté serveur	3
Côté client	4
3. Préparation de l'environnement NIS	4
Changement des hostnames	4
Création du compte NIS	5
4. Configuration du serveur NIS	5
Installation des paquets	5
Vérification du service RPC	6
Définition du domaine NIS	6
Vérification du Makefile NIS	7
Génération des maps NIS	8
Démarrage des services NIS	8
5. Configuration du client NIS	9
Vérification des paquets	9
Définition du domaine NIS	10
Configuration de yp.conf	10
Configuration de nsswitch.conf	10
Démarrage du client NIS	11
6. Test root_squash	13
7. Test no_root_squash	13
8. Sécurisation par IP	15
9. Montage automatique via fstab	15
10. Conclusion	16

1. Introduction

Dans ce TP, nous avons mis en place un serveur NFS et un client NFS sous Windows en utilisant **WSL2 (Windows Subsystem for Linux)**.

Sous WSL2, les deux distributions partagent la même interface réseau virtuelle. Ainsi, `ip a` affiche la même adresse IP pour le serveur et le client. Cela ne correspond pas à deux machines physiques distinctes, mais à deux environnements Linux isolés partageant le même réseau virtuel.

Les commandes :

- `showmount`
- `mount`
- `exportfs`

fonctionnent correctement.

Architecture utilisée

Plutôt que d'utiliser Docker (qui pose des problèmes pour NFS côté serveur sous Windows), nous avons créé :

- Une distribution **Debian WSL** “**debian-nfs-server**”
- Une distribution **Debian WSL** “**debian-nfs-client**”

Chaque distribution fonctionne comme une machine Linux indépendante.

Les deux distributions ont été :

1. Installées via `wsl --install -d Debian`
2. Exportées

Importées sur le disque D: avec :

```
wsl --import debian-nfs-server D:\WSL\debian-nfs-server debian-base.tar
wsl --import debian-nfs-client D:\WSL\debian-nfs-client debian-base.tar
```

- 3.

Configurées avec systemd activé dans `/etc/wsl.conf` :

```
[boot]
systemd=true
```

- 4.

Les deux distros ont ensuite été ouvertes dans **deux fenêtres VSCode distinctes via Remote WSL**, simulant deux machines Linux.

```
PS C:\Users\Yann Renvoisé> wsl --list --verbose
NAME                STATE      VERSION
* Ubuntu            Stopped    2
docker-desktop      Stopped    2
debian-nfs-client    Running     2
debian-nfs-server    Running     2
```

- `wsl --list --verbose`
- Deux fenêtres VSCode ouvertes (server + client)

2. Installation des services NFS (TP NFS précédent)

Côté serveur

Installation :

```
sudo apt update
sudo apt install -y nfs-kernel-server rpcbind
```

Vérification :

```
systemctl status rpcbind
systemctl status nfs-server
```

```
PROBLEMS  OUTPUT  TERMINAL  PORTS  DEBUG CONSOLE

● root@LaptopYann:/# ls -l /srv/nfs/home
total 4
-rw-r--r-- 1 root root 22 Feb 12 19:20 test-nfs
● root@LaptopYann:/# sudo nano /etc/exports
● root@LaptopYann:/# sudo exportfs -ra
● root@LaptopYann:/# sudo exportfs -v
/srv/nfs/home <world>(sync,wdelay,hide,no_subtree_check,sec=sys,rw,secure,root_squash,no_all_squash)
● root@LaptopYann:/# sudo systemctl status rpcbind
● rpcbind.service - RPC bind portmap service
   Loaded: loaded (/usr/lib/systemd/system/rpcbind.service; enabled; preset: enabled)
   Active: active (running) since Thu 2026-02-12 19:12:36 CET; 11min ago
 Invocation: 861097535a09487681ab28ac3922b0fe
 TriggeredBy: ● rpcbind.socket
              Docs: man:rpcbind(8)
              Main PID: 1637 (rpcbind)
              Tasks: 1 (limit: 19049)
              Memory: 1.8M (peak: 2.3M)
              CPU: 10ms
              CGroup: /system.slice/rpcbind.service
                     └─1637 /usr/sbin/rpcbind -f -w

Feb 12 19:12:36 LaptopYann systemd[1]: Starting rpcbind.service - RPC bind portmap service...
Feb 12 19:12:36 LaptopYann systemd[1]: Started rpcbind.service - RPC bind portmap service.
```

- `status rpcbind`

```

• root@LaptopYann:/# sudo systemctl status nfs-server
• nfs-server.service - NFS server and services
   Loaded: loaded (/usr/lib/systemd/system/nfs-server.service; enabled; preset: enabled)
   Active: active (exited) since Thu 2026-02-12 19:12:40 CET; 11min ago
  Invocation: 04348fe3b35e44a0b58060ae25c101d2
     Docs: man:rpc.nfsd(8)
           man:exportfs(8)
   Main PID: 3983 (code=exited, status=0/SUCCESS)
  Mem peak: 1.9M
    CPU: 19ms

Feb 12 19:12:39 LaptopYann systemd[1]: Starting nfs-server.service - NFS server and services...
Feb 12 19:12:39 LaptopYann exportfs[3982]: exportfs: can't open /etc/exports for reading
Feb 12 19:12:39 LaptopYann sh[3985]: nfsdctl: lockd configuration failure
Feb 12 19:12:40 LaptopYann systemd[1]: Finished nfs-server.service - NFS server and services.
• root@LaptopYann:/# sudo showmount -e localhost
Export list for localhost:
/srv/nfs/home *

```

- status nfs-server

Côté client

Installation :

```

sudo apt update
sudo apt install -y nfs-common rpcbind

```

3. Préparation de l'environnement NIS

Changement des hostnames

On change les hostnames (qui sont les même à la base) par nfs-client et nfs-server

```

Administrateur : Windows PowerShell
GNU nano 8.4 /etc/hosts *
# This file was automatically generated by WSL. To stop automatic generation of this file, add the foll
# [network]
# generateHosts = false
127.0.0.1 localhost
127.0.1.1 nfs-client.localdomain nfs-client

172.27.3.231 nfs-server
172.27.3.231 nfs-client_

# The following lines are desirable for IPv6 capable hosts
::1 ip6-localhost ip6-loopback
fe00::0 ip6-localnet
ff00::0 ip6-mcastprefix
ff02::1 ip6-allnodes
ff02::2 ip6-allrouters

```

On vérifie que le client peut bien joindre le serveur (car on lui indique son adresse dans /etc/hosts) :

```
root@LaptopYann:/mnt/c/WINDOWS/system32# hostname -f
nfs-client.localdomain
root@LaptopYann:/mnt/c/WINDOWS/system32# ping -c 3 nfs-server
PING nfs-server (172.27.3.231) 56(84) bytes of data.
64 bytes from nfs-server (172.27.3.231): icmp_seq=1 ttl=64 time=0.029 ms
64 bytes from nfs-server (172.27.3.231): icmp_seq=2 ttl=64 time=0.039 ms
64 bytes from nfs-server (172.27.3.231): icmp_seq=3 ttl=64 time=0.032 ms

--- nfs-server ping statistics ---
3 packets transmitted, 3 received, 0% packet loss, time 2029ms
rtt min/avg/max/mdev = 0.029/0.033/0.039/0.004 ms
root@LaptopYann:/mnt/c/WINDOWS/system32#
```

Création du compte NIS

Dans le serveur, on crée le compte testNIS

```
root@LaptopYann:/mnt/c/WINDOWS/system32# grep testNIS /etc/passwd
root@LaptopYann:/mnt/c/WINDOWS/system32# sudo useradd -m testNIS
root@LaptopYann:/mnt/c/WINDOWS/system32# sudo passwd testNIS
New password:
Retype new password:
passwd: password updated successfully
```

4. Configuration du serveur NIS

Installation des paquets

Le serveur NIS nécessite les paquets suivants :

```
sudo apt update
sudo apt install -y ypserv rpcbind
```

Vérification :

```
dpkg -l | grep yp
```

```
root@LaptopYann:/mnt/c/WINDOWS/system32# dpkg -l | grep yp
ii  libcrypt1:amd64          1:4.4.38-1          amd64      libcrypt shared library
ii  libhogweed6t64:amd64    3.10.1-1            amd64      low level cryptographic library (public-key cryptos)
ii  libk5crypto3:amd64      1.21.3-5            amd64      MIT Kerberos runtime libraries - Crypto Library
ii  libnettle8t64:amd64     3.10.1-1            amd64      low level cryptographic library (symmetric and one-way cryptos)
ii  media-types              13.0.0              all        List of standard media types and their usual file extension
ii  ncurses-base             6.5+20250216-2      all        basic terminal type definitions
ii  openssl                 3.5.4-1~deb13u2     amd64      Secure Sockets Layer toolkit - cryptographic utility
ii  openssl-provider-legacy  3.5.4-1~deb13u2     amd64      Secure Sockets Layer toolkit - cryptographic utility
ii  yp-tools                 4.2.3-4+b2          amd64      Tools for working with Network Information System (NIS)
ii  ypbind-mt               2.7.2-3+b2          amd64      Client daemon for working with Network Information System (NIS)
ii  ypserv                  4.2-2+b2            amd64      Server daemon for working with Network Information System (NIS)
```

Vérification du service RPC

Le service RPC (rpcbind) est utilisé par NIS comme par NFS.

Vérification :

```
rpcinfo -p localhost
```

La présence du service `portmapper` confirme le bon fonctionnement de RPC.

```
root@LaptopYann:/mnt/c/WINDOWS/system32# rpcinfo -p localhost
program vers proto  port  service
100000    4    tcp    111   portmapper
100000    3    tcp    111   portmapper
100000    2    tcp    111   portmapper
100000    4    udp    111   portmapper
100000    3    udp    111   portmapper
100000    2    udp    111   portmapper
100024    1    udp   41842 status
100024    1    tcp   36245 status
100005    1    udp   36547 mountd
100005    1    tcp   34749 mountd
100005    2    udp   50687 mountd
100005    2    tcp   58703 mountd
100005    3    udp   49853 mountd
100005    3    tcp   34137 mountd
100003    3    tcp    2049 nfs
100003    4    tcp    2049 nfs
100227    3    tcp    2049 nfs_acl
100021    1    udp   42458 nlockmgr
100021    3    udp   42458 nlockmgr
100021    4    udp   42458 nlockmgr
100021    1    tcp   46481 nlockmgr
100021    3    tcp   46481 nlockmgr
100021    4    tcp   46481 nlockmgr
```

Définition du domaine NIS

Le domaine NIS utilisé dans ce TP est :

```
sudo domainname iut
```

Vérification :

```
domainname
```

Résultat attendu :

```
iut
```

```
root@LaptopYann:/mnt/c/WINDOWS/system32# sudo domainname iut
root@LaptopYann:/mnt/c/WINDOWS/system32# domainname
iut
```

Vérification du Makefile NIS

Le fichier :

`/var/yp/Makefile`

a été consulté afin de vérifier les fichiers qui seront transformés en maps NIS.

Les fichiers suivants ont été retenus :

- passwd
- shadow
- group
- hosts

Ces fichiers permettent de centraliser l'authentification et la résolution de noms.

```
#####
#                                                                    #
#  DON'T EDIT ANYTHING BELOW IF YOU DON'T KNOW WHAT YOU ARE DOING !!!  #
#                                                                    #
#####

DBLOAD = $(YPBINDIR)/makedbm -c -m `$(YPBINDIR)/yphelper --hostname`
MKNETID = $(YPBINDIR)/mknetid
YPPUSH = $(YPSBINDIR)/yppush $(YPPUSH_ARGS)
MERGER = $(YPBINDIR)/yphelper
DOMAIN = `basename \`pwd\``
LOCALDOMAIN = `/bin/domainname`
REVNETGROUP = $(YPBINDIR)/revnetgroup
CREATE_PRINTCAP = $(YPBINDIR)/create_printcap

ethers:      ethers.byname ethers.byaddr
hosts:       hosts.byname hosts.byaddr
networks:    networks.byaddr networks.byname
protocols:   protocols.bynumber protocols.byname
rpc:         rpc.byname rpc.bynumber
services:    services.byname services.byservicename
passwd:      passwd.byname passwd.byuid
group:       group.byname group.bygid
shadow:      shadow.byname
passwd.adjunct: passwd.adjunct.byname
netid:       netid.byname
netgrp:      netgroup netgroup.byhost netgroup.byuser
publickey:   publickey.byname
mail:        mail.aliases
timezone:    timezone.byname
locale:      locale.byname
netmasks:    netmasks.byaddr
autofs:      $(AUTO_MAPS)
```


Génération des maps NIS

Depuis le répertoire :

```
cd /var/yp
```

Les maps NIS ont été générées :

```
sudo make
```

Cette opération construit les bases NIS à partir des fichiers système du serveur.

```
root@LaptopYann:/mnt/c/WINDOWS/system32# cd /var/yp
root@LaptopYann:/var/yp# sudo make
gmake[1]: Entering directory '/var/yp/iut'
Updating passwd.byname...
failed to send 'clear' to local ypserv: RPC: Program not registeredUpdating passwd.byuid...
failed to send 'clear' to local ypserv: RPC: Program not registeredUpdating group.byname...
failed to send 'clear' to local ypserv: RPC: Program not registeredUpdating group.bygid...
failed to send 'clear' to local ypserv: RPC: Program not registeredUpdating hosts.byname...
failed to send 'clear' to local ypserv: RPC: Program not registeredUpdating hosts.byaddr...
failed to send 'clear' to local ypserv: RPC: Program not registeredUpdating rpc.byname...
failed to send 'clear' to local ypserv: RPC: Program not registeredUpdating rpc.bynumber...
failed to send 'clear' to local ypserv: RPC: Program not registeredUpdating services.byname...
failed to send 'clear' to local ypserv: RPC: Program not registeredUpdating services.byservicename...
failed to send 'clear' to local ypserv: RPC: Program not registeredUpdating netid.byname...
failed to send 'clear' to local ypserv: RPC: Program not registeredUpdating protocols.bynumber...
failed to send 'clear' to local ypserv: RPC: Program not registeredUpdating protocols.byname...
failed to send 'clear' to local ypserv: RPC: Program not registeredUpdating netgroup...
failed to send 'clear' to local ypserv: RPC: Program not registeredUpdating netgroup.byhost...
failed to send 'clear' to local ypserv: RPC: Program not registeredUpdating netgroup.byuser...
failed to send 'clear' to local ypserv: RPC: Program not registeredUpdating shadow.byname...
failed to send 'clear' to local ypserv: RPC: Program not registeredgmake[1]: Leaving directory '/var/yp/iut'
```

Démarrage des services NIS

Les services NIS ont été démarrés :

```
sudo systemctl start ypserv / sudo systemctl start yppasswdd
```

Vérification :

```
systemctl status ypserv / systemctl status yppasswdd
```

Les nouveaux services NIS doivent apparaître dans la liste RPC.

Statut de ypserv

```
root@LaptopYann:/# sudo systemctl daemon-reload
root@LaptopYann:/# sudo systemctl start ypserv
root@LaptopYann:/# systemctl status ypserv
● ypserv.service - NIS/YP (Network Information Service) Server
   Loaded: loaded (/usr/lib/systemd/system/ypserv.service; disabled; preset: enabled)
   Active: active (running) since Fri 2026-06-12 10:56:56 CEST; 11s ago
 Invocation: f406c4e6f9bd464abb916c3878f199b0
   Process: 2290 ExecStartPre=/bin/domainname -F /etc/defaultdomain (code=exited, status=0/SUCCESS)
   Process: 2291 ExecStart=/usr/sbin/ypserv $YPSERVARGS (code=exited, status=0/SUCCESS)
  Main PID: 2294 (ypserv)
    Tasks: 1 (limit: 19047)
   Memory: 1.3M (peak: 2.3M)
      CPU: 15ms
   CGroup: /system.slice/ypserv.service
           └─2294 /usr/sbin/ypserv

Jun 12 10:56:56 nfs-server systemd[1]: Starting ypserv.service - NIS/YP (Network Information Service) Server...
Jun 12 10:56:56 nfs-server systemd[1]: ypserv.service: Can't open PID file '/run/ypserv.pid' (yet?) after start: No such file or directory
Jun 12 10:56:56 nfs-server systemd[1]: Started ypserv.service - NIS/YP (Network Information Service) Server.
```


Statut de yppasswdd

```
root@LaptopYann:/# sudo systemctl start yppasswdd
root@LaptopYann:/# systemctl status yppasswdd
● yppasswdd.service - NIS Users Passwords Change Server
   Loaded: loaded (/usr/lib/systemd/system/yppasswdd.service; disabled; preset: enabled)
   Active: active (running) since Fri 2026-06-12 10:58:08 CEST; 14s ago
 Invocation: 6e1c71cdf19c45deb16949c89313f0ff
   Process: 2308 ExecStartPre=/bin/domainname -F /etc/defaultdomain (code=exited, status=0/SUCCESS)
   Process: 2310 ExecStart=/usr/sbin/rpc.yppasswdd -D $YPPWDDIR -e $YPCHANGEOK $YPPASSWDDARGS (code=exited, status=0/SUCCESS)
  Main PID: 2312 (rpc.yppasswdd)
    Tasks: 1 (limit: 19047)
   Memory: 1.1M (peak: 2.1M)
      CPU: 14ms
   CGroup: /system.slice/yppasswdd.service
           └─2312 /usr/sbin/rpc.yppasswdd -D /etc -e chsh

Jun 12 10:58:08 nfs-server systemd[1]: Starting yppasswdd.service - NIS Users Passwords Change Server...
Jun 12 10:58:08 nfs-server systemd[1]: yppasswdd.service: Can't open PID file '/run/yppasswdd.pid' (yet?) after start: No such file or directory
Jun 12 10:58:08 nfs-server systemd[1]: Started yppasswdd.service - NIS Users Passwords Change Server.
```

Sortie de rpcinfo

```
root@LaptopYann:/# rpcinfo -p localhost
program vers proto port service
100000 4 tcp 111 portmapper
100000 3 tcp 111 portmapper
100000 2 tcp 111 portmapper
100000 4 udp 111 portmapper
100000 3 udp 111 portmapper
100000 2 udp 111 portmapper
100024 1 udp 41842 status
100024 1 tcp 36245 status
100005 1 udp 36547 mountd
100005 1 tcp 34749 mountd
100005 2 udp 50687 mountd
100005 2 tcp 58703 mountd
100005 3 udp 49853 mountd
100005 3 tcp 34137 mountd
100003 3 tcp 2049 nfs
100003 4 tcp 2049 nfs
100227 3 tcp 2049 nfs_acl
100021 1 udp 42458 nlockmgr
100021 3 udp 42458 nlockmgr
100021 4 udp 42458 nlockmgr
100021 1 tcp 46481 nlockmgr
100021 3 tcp 46481 nlockmgr
100021 4 tcp 46481 nlockmgr
100004 2 udp 775 ypserv
100004 1 udp 775 ypserv
100004 2 tcp 775 ypserv
100004 1 tcp 775 ypserv
100009 1 udp 792 yppasswdd
100009 1 tcp 792 yppasswdd
```

5. Configuration du client NIS

Vérification des paquets

Sur le client :

```
dpkg -l | grep yp
```

Si nécessaire :

```
sudo apt update
```

```
sudo apt install -y ypbinding nis
```

(Debian regroupe souvent les outils `ypcat`, `ypwhich`, `yppasswd` dans le paquet `nis`.)

```
root@LaptopYann:/mnt/c/WINDOWS/system32# dpkg -l | grep yp
ii  libcrypt1:amd64      1:4.4.38-1      amd64      libcrypt shared library
ii  libhogweed6t64:amd64 3.10.1-1        amd64      low level cryptographic library (public-key cryptos)
ii  libk5crypto3:amd64   1.21.3-5        amd64      MIT Kerberos runtime libraries - Crypto Library
ii  libnettle8t64:amd64 3.10.1-1        amd64      low level cryptographic library (symmetric and one-way cryptos)
ii  media-types          13.0.0          all        List of standard media types and their usual file extension
ii  ncurses-base         6.5+20250216-2  all        basic terminal type definitions
ii  openssl              3.5.4-1~deb13u2 amd64      Secure Sockets Layer toolkit - cryptographic utility
ii  openssl-provider-legacy 3.5.4-1~deb13u2 amd64      Secure Sockets Layer toolkit - cryptographic utility
ii  yp-tools              4.2.3-4+b2      amd64      Tools for working with Network Information System (NIS)
ii  ypbinding             2.7.2-3+b2      amd64      Client daemon for working with Network Information System (NIS)
ii  ypserv               4.2-2+b2        amd64      Server daemon for working with Network Information System (NIS)
```

Définition du domaine NIS

Sur le client :

```
sudo domainname iut
```

```
root@LaptopYann:/mnt/c/WINDOWS/system32# sudo domainname iut
root@LaptopYann:/mnt/c/WINDOWS/system32# domainname
iut
root@LaptopYann:/mnt/c/WINDOWS/system32# echo "iut" | sudo tee /etc/defaultdomain
iut
root@LaptopYann:/mnt/c/WINDOWS/system32# domainname
iut
root@LaptopYann:/mnt/c/WINDOWS/system32#
```


Configuration de yp.conf

On ouvre le fichier :

```
sudo nano /etc/yp.conf
```

On ajoute :

```
domain iut server nfs-server ou domain iut server 172.27.3.231
```

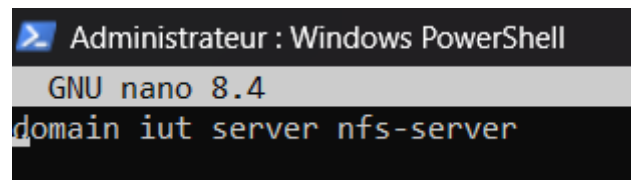

```
Administrateur : Windows PowerShell
GNU nano 8.4
domain iut server nfs-server
```

Configuration de nsswitch.conf

On ouvre le fichier :

```
sudo nano /etc/nsswitch.conf
```

Et on modifie :

```
passwd: files nis
```

```
group: files nis
```

```
hosts: files nis dns
```

```
Administrateur : Windows PowerShell
GNU nano 8.4
# /etc/nsswitch.conf
#
# Example configuration of GNU Name Service Switch functionality.
# If you have the `glibc-doc-reference' and `info' packages installed, try:
# `info libc "Name Service Switch"' for information about this file.

passwd:      files nis
group:       files nis
shadow:      files
gshadow:     files

hosts:       files nis dns_
networks:    files

protocols:   db files
services:    db files
ethers:      db files
rpc:         db files

netgroup:    nis
```

Démarrage du client NIS

Sous WSL, rpcbind répondait correctement à rpcinfo, mais systemd considérait rpcbind.service comme indisponible à cause d'un conflit sur le port 111. Le service ypbind dépendant strictement de rpcbind.service, une copie adaptée du service a été créée pour retirer cette dépendance systemd tout en conservant l'utilisation effective de RPC.

```
Administrateur : Windows PowerShell
GNU nano 8.4
[Unit]
Description=NIS Binding Service
Wants=network-online.target
After=network-online.target_
Before=systemd-user-sessions.service
Before=nss-user-lookup.target

[Service]
Type=forking
PIDFile=/run/ypbind.pid
Environment=YPBINDARGS=
EnvironmentFile=-/etc/default/nis
ExecStartPre=/bin/domainname -F /etc/defaultdomain
ExecStart=/usr/sbin/ypbind $YPBINDARGS

[Install]
WantedBy=multi-user.target
```

On lance le client :

```
sudo systemctl start ypbind
```

Puis on vérifie :

```
sudo systemctl status ypbind
```

```
root@LaptopYann:/mnt/c/WINDOWS/system32# sudo systemctl start ypbind-wsl
root@LaptopYann:/mnt/c/WINDOWS/system32# sudo systemctl status ypbind-wsl
● ypbind-wsl.service - NIS Binding Service
   Loaded: loaded (/etc/systemd/system/ypbind-wsl.service; disabled; preset: enabled)
   Active: active (running) since Fri 2026-06-12 11:31:41 CEST; 6s ago
     Invocation: 593ec44cf5ae4d6e88c3cf1930d581a4
   Process: 2059 ExecStartPre=/bin/domainname -F /etc/defaultdomain (code=exited, status=0/SUCCESS)
   Process: 2060 ExecStart=/usr/sbin/ypbind $YPBINDARGS (code=exited, status=0/SUCCESS)
   Main PID: 2063 (ypbind)
     Tasks: 3 (limit: 19047)
    Memory: 1.8M (peak: 2.1M)
       CPU: 15ms
    CGroup: /system.slice/ypbind-wsl.service
            └─2063 /usr/sbin/ypbind

Jun 12 11:31:41 nfs-client systemd[1]: Starting ypbind-wsl.service - NIS Binding Service...
Jun 12 11:31:41 nfs-client systemd[1]: ypbind-wsl.service: Can't open PID file '/run/ypbind.pid' (yet?) after start: No such file or directory
Jun 12 11:31:41 nfs-client systemd[1]: Started ypbind-wsl.service - NIS Binding Service.
```

6. Validation du fonctionnement de NIS

Vérification du serveur NIS utilisé

On essaye `ypwhich`

Puis `ypcat passwd`

```
root@LaptopYann:/mnt/c/WINDOWS/system32# ypwhich
ypwhich: Can't communicate with ypbind
root@LaptopYann:/mnt/c/WINDOWS/system32# ypcat passwd
testNIS:x:2002:2002:./home/testNIS:/bin/sh
temp:x:1000:1000:./home/temp:/bin/bash
nfsuser:x:2001:2001:./home/nfsuser:/bin/sh
nobody:x:65534:65534:nobody:/nonexistent:/usr/sbin/nologin
```