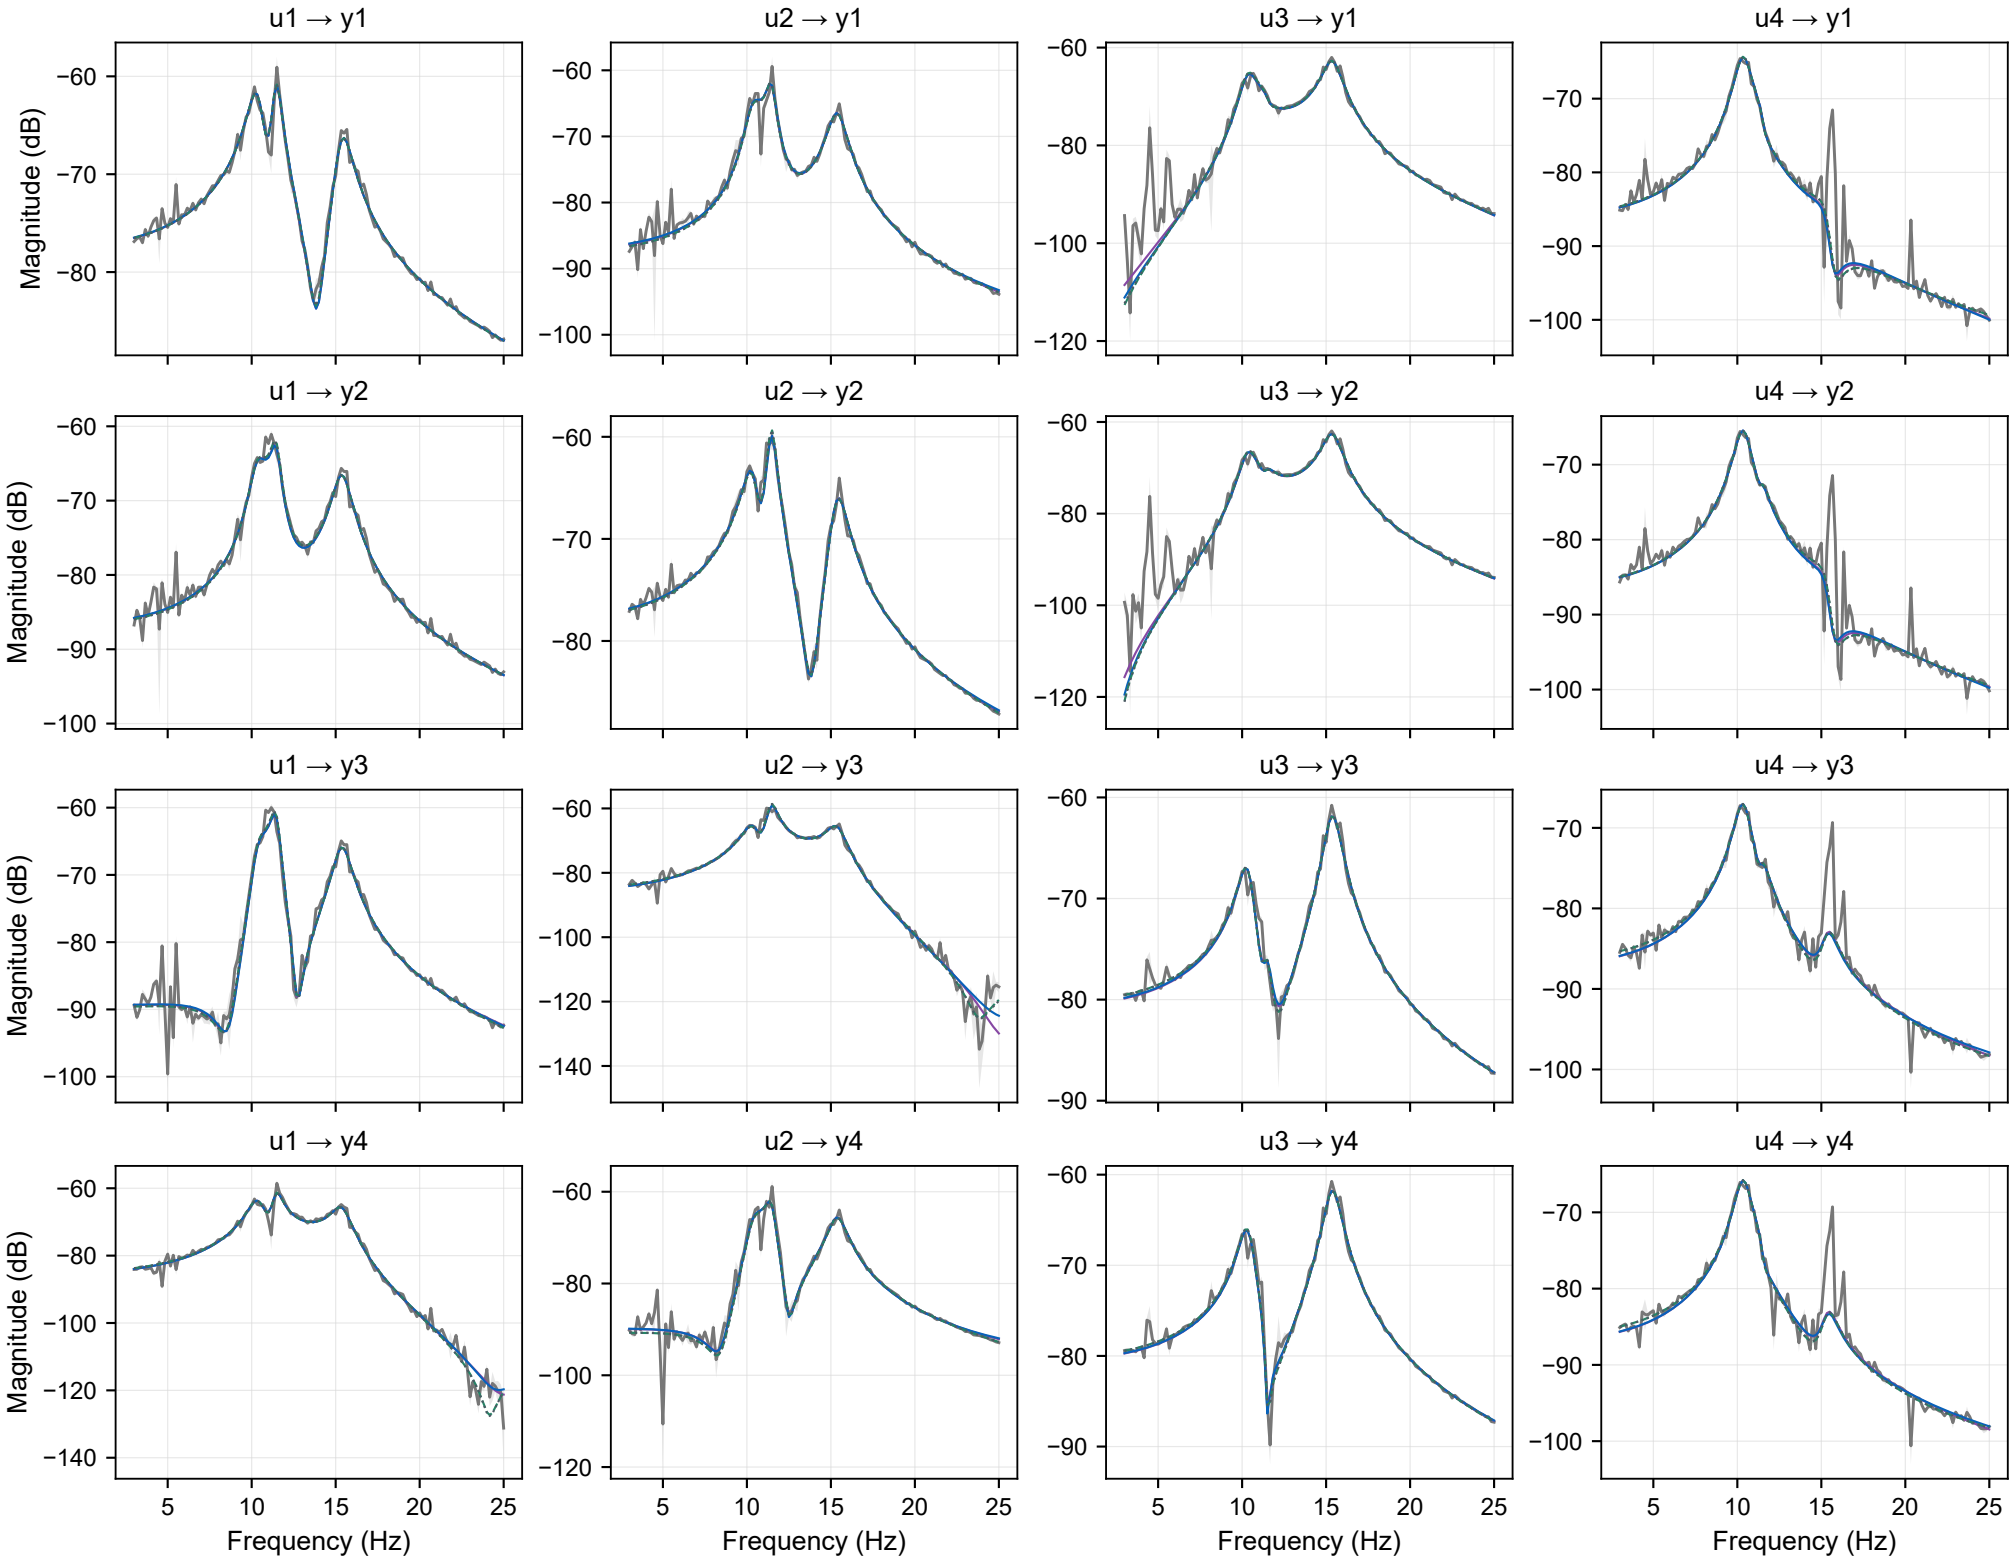

lowgain: independent A models vs C orthogonal FRF
All bins retained; finite-ratio and between-run biases not covered by bands
u1 → y1
u2 → y1
u3 → y1
u4 → y1
u1 → y2
u2 → y2
u3 → y2
u4 → y2
u1 → y3
u2 → y3
u3 → y3
u4 → y3
u1 → y4
u2 → y4
u3 → y4
u4 → y4
Magnitude (dB)
Frequency (Hz)
C orthogonal FRF (pointwise 95% bootstrap)
Direct, all bins
Reference IV
Weighted reference IV
Local-noise SML