


使用 PlantUML 绘制的 UML



PlantUML 语言参考指引

(Version 1.2019.3)

PlantUML 是一个开源项目，支持快速绘制：

- 时序图
- 用例图
- 类图
- 活动图
- 组件图
- 状态图
- 对象图
- 部署图
- 定时图

同时还支持以下非 UML 图：

- 线框图形界面
- 架构图
- 规范和描述语言 (SDL)
- Dita diagram
- 甘特图
- 以 AsciiMath 或 JLaTeXMath 符号的数学公式

通过简单直观的语言来定义这些示意图。

1 时序图

1.1 简单示例


你可以用 `->` 来绘制参与者之间传递的消息，而不必显式地声明参与者。

你也可以使用 `-->` 绘制一个虚线箭头。

另外，你还能用 `<-` 和 `<--`，这不影响绘图，但可以提高可读性。注意：仅适用于时序图，对于其它示意图，规则是不同的。

```
@startuml
Alice -> Bob: Authentication Request
Bob --> Alice: Authentication Response

Alice -> Bob: Another authentication Request
Alice <-- Bob: another authentication Response
@enduml
```

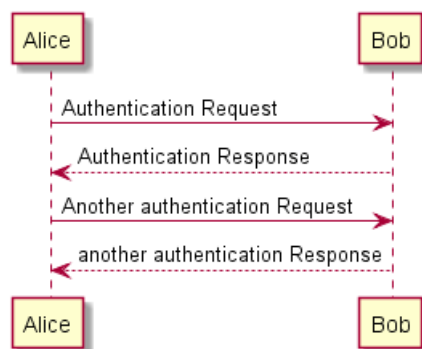

1.2 声明参与者


关键字 `participant` 用于改变参与者的先后顺序。

你也可以使用其它关键字来声明参与者：

- actor
- boundary
- control
- entity
- database

```
@startuml
actor Foo1
boundary Foo2
control Foo3
entity Foo4
database Foo5
collections Foo6
Foo1 -> Foo2 : To boundary
Foo1 -> Foo3 : To control
Foo1 -> Foo4 : To entity
Foo1 -> Foo5 : To database
Foo1 -> Foo6 : To collections
@enduml
```



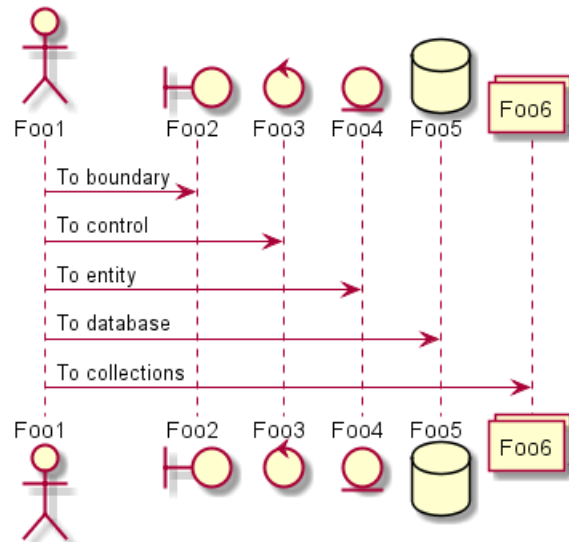


关键字 **as** 用于重命名参与者

你可以使用 RGB 值或者颜色名修改 actor 或参与者的背景颜色。

```
@startuml
actor Bob #red
' The only difference between actor
'and participant is the drawing
participant Alice
participant "I have a really\nlong name" as L #99FF99
/' You can also declare:
    participant L as "I have a really\nlong name" #99FF99
/'
```


```
Alice->Bob: Authentication Request
Bob->Alice: Authentication Response
Bob->L: Log transaction
@enduml
```

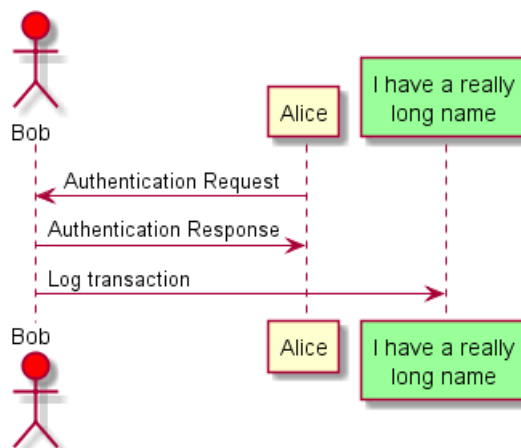

您可以使用关键字 **order** 自定义顺序来打印参与者。

```
@startuml
participant Last order 30
participant Middle order 20
participant First order 10
@enduml
```






1.3 在参与者中使用非字母符号

你可以使用引号定义参与者，还可以用关键字 `as` 给参与者定义别名。

```

@startuml
Alice -> "Bob()" : Hello
"Bob()" -> "This is very\nlong" as Long
' You can also declare:
' "Bob()" -> Long as "This is very\nlong"
Long --> "Bob()" : ok
@enduml
  
```

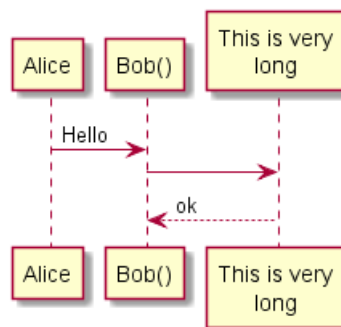


1.4 给自己发消息

参与者可以给自己发信息，
消息文字可以用 `\n` 来换行。

```

@startuml
Alice->>Alice: This is a signal to self.\nIt also demonstrates\nmultiline \ntext
@enduml
  
```



1.5 修改箭头样式

修改箭头样式的方式有以下几种：

- 表示一条丢失的消息：末尾加 `x`
- 让箭头只有上半部分或者下半部分：将 `<` 和 `>` 替换成 `\` 或者 `/`
- 细箭头：将箭头标记写两次 (如 `>>` 或 `//`)
- 虚线箭头：用 `--` 替代 `-`




- 箭头末尾加圈: `->o`
- 双向箭头: `<->`

```
@startuml
Bob ->x Alice
Bob -> Alice
Bob ->> Alice
Bob -\ Alice
Bob \\\- Alice
Bob //-- Alice

Bob ->o Alice
Bob o\\-- Alice


Bob <-> Alice
Bob <->o Alice
@enduml
```

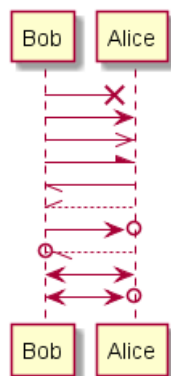

1.6 修改箭头颜色

你可以用以下记号修改箭头的颜色:

```
@startuml
Bob -[#red]> Alice : hello
Alice -[#0000FF]->Bob : ok
@enduml
```



1.7 对消息序列编号

关键字 `autonumber` 用于自动对消息编号。

```
@startuml
autonumber
Bob -> Alice : Authentication Request
Bob <- Alice : Authentication Response
@enduml
```





语句 `autonumber start` 用于指定编号的初始值，而 `autonumber start increment` 可以同时指定编号的初始值和每次增加的值。


```

@startuml
autonumber
Bob -> Alice : Authentication Request
Bob <- Alice : Authentication Response

autonumber 15
Bob -> Alice : Another authentication Request
Bob <- Alice : Another authentication Response

autonumber 40 10
Bob -> Alice : Yet another authentication Request
Bob <- Alice : Yet another authentication Response

@enduml
  
```

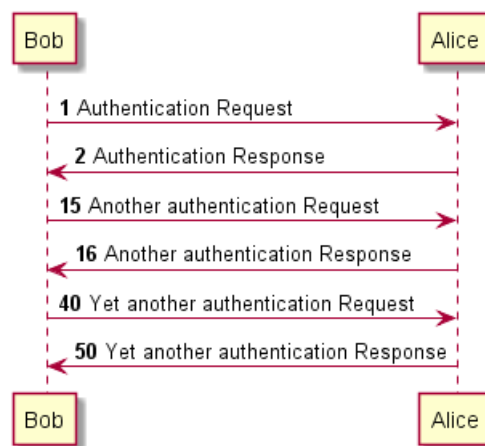

你可以在双引号内指定编号的格式。

格式是由 Java 的 `DecimalFormat` 类实现的：(0 表示数字；# 也表示数字，但默认为 0)。

你也可以用 HTML 标签来制定格式。

```


@startuml
autonumber "<b>[000]"
Bob -> Alice : Authentication Request
Bob <- Alice : Authentication Response

autonumber 15 "<b>(<u>##</u>)"
Bob -> Alice : Another authentication Request
Bob <- Alice : Another authentication Response

autonumber 40 10 "<font color=red><b>Message 0  "
Bob -> Alice : Yet another authentication Request
Bob <- Alice : Yet another authentication Response

@enduml
  
```



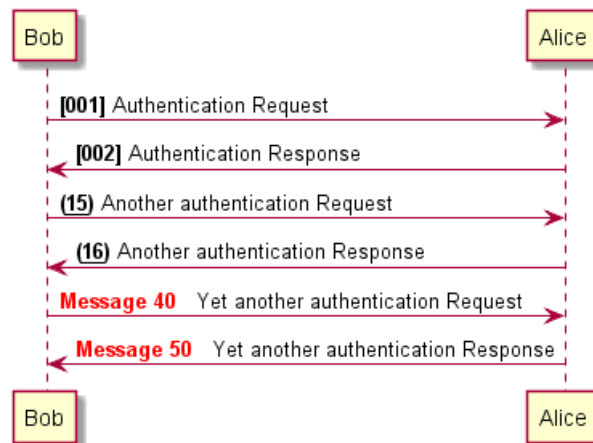

你还可以用语句 `autonumber stop` 和 `autonumber resume increment format` 来表示暂停或继续使用自动编号。

```


@startuml
autonumber 10 10 "<b>[000]"
Bob -> Alice : Authentication Request
Bob <- Alice : Authentication Response

autonumber stop
Bob -> Alice : dummy

autonumber resume "<font color=red><b>Message 0 "
Bob -> Alice : Yet another authentication Request
Bob <- Alice : Yet another authentication Response

autonumber stop
Bob -> Alice : dummy

autonumber resume 1 "<font color=blue><b>Message 0 "
Bob -> Alice : Yet another authentication Request
Bob <- Alice : Yet another authentication Response
@enduml
  
```

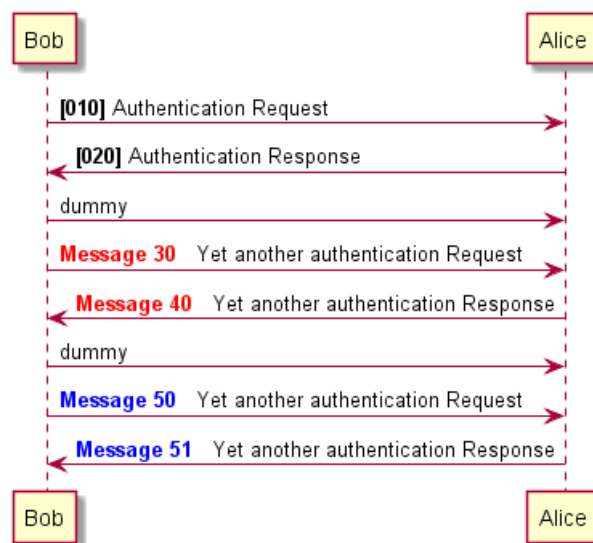

1.8 Page Title, Header and Footer

The title keyword is used to add a title to the page.



Pages can display headers and footers using header and footer.

```
@startuml
```

```
header Page Header
```


```
footer Page %page% of %lastpage%
```

```
title Example Title
```

```
Alice -> Bob : message 1
```

```
Alice -> Bob : message 2
```

```
@enduml
```

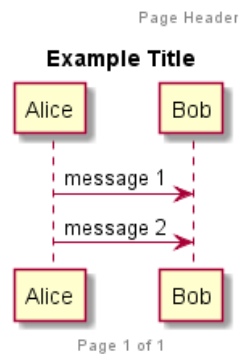

1.9 分割示意图

关键字 **newpage** 用于把一张图分割成多张。

在 **newpage** 之后添加文字，作为新的示意图的标题。

这样就能很方便地在 *Word* 中将长图分几页打印。

```
@startuml
```

```
Alice -> Bob : message 1
```

```
Alice -> Bob : message 2
```

```
newpage
```

```
Alice -> Bob : message 3
```


```
Alice -> Bob : message 4
```

```
newpage A title for the\nlast page
```

```
Alice -> Bob : message 5
```

```
Alice -> Bob : message 6
```

```
@enduml
```



1.10 组合消息

我们可以通过以下关键词将组合消息：

- alt/else
- opt
- loop
- par
- break
- critical
- group, 后面紧跟着消息内容

可以在标头 (header) 添加需要显示的文字 (group 除外)。

关键词 `end` 用来结束分组。

注意，分组可以嵌套使用。

```
@startuml
Alice -> Bob: Authentication Request

alt successful case

Bob -> Alice: Authentication Accepted


else some kind of failure

Bob -> Alice: Authentication Failure
group My own label
Alice -> Log : Log attack start
  loop 1000 times
    Alice -> Bob: DNS Attack
  end
Alice -> Log : Log attack end
end

else Another type of failure

  Bob -> Alice: Please repeat

end
@enduml
```

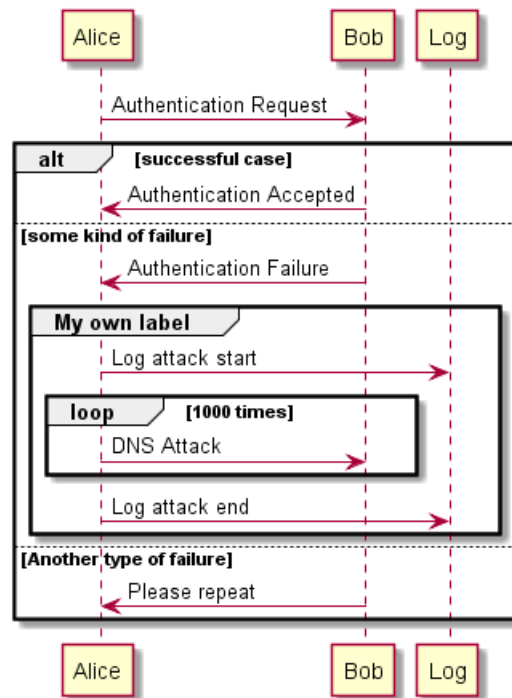

1.11 给消息添加注释

我们可以通过在消息后面添加 `note left` 或者 `note right` 关键词来给消息添加注释。你也可以通过使用 `end note` 来添加多行注释。


```

@startuml
Alice->>Bob : hello
note left: this is a first note

Bob->>Alice : ok
note right: this is another note

Bob->>Bob : I am thinking
note left
a note
can also be defined
on several lines
end note
@enduml

```

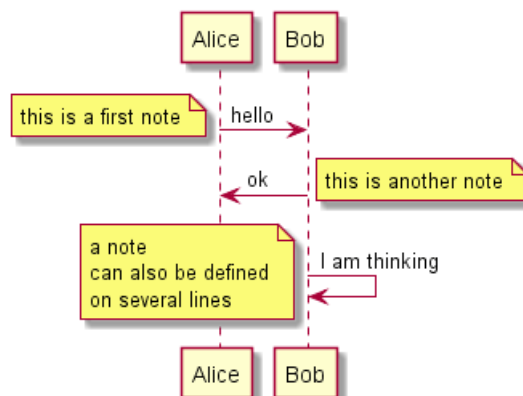

1.12 其他的注释

可以使用 `note left of`, `note right of` 或 `note over` 在节点 (participant) 的相对位置放置注释。

还可以通过修改背景色来高亮显示注释。

以及使用关键字 `end note` 来添加多行注释。


```
@startuml
participant Alice
participant Bob
note left of Alice #aqua
This is displayed
left of Alice.
end note
```

```
note right of Alice: This is displayed right of Alice.
```

```
note over Alice: This is displayed over Alice.
```

```
note over Alice, Bob #FFAAAA: This is displayed\n over Bob and Alice.
```

```
note over Bob, Alice
This is yet another
example of
a long note.
end note
@enduml
```

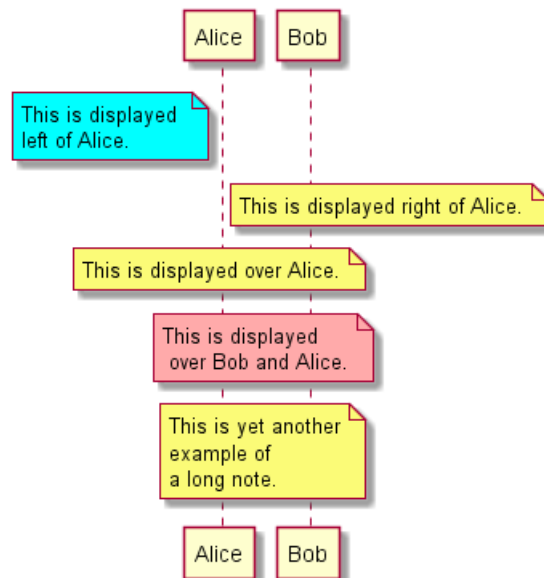


1.13 改变备注框的形状

你可以使用 `hnote` 和 `rnote` 这两个关键字来修改备注框的形状。

```
@startuml
caller -> server : conReq
hnote over caller : idle
caller <- server : conConf
rnote over server
  "r" as rectangle
  "h" as hexagon
endrnote
```



@enduml

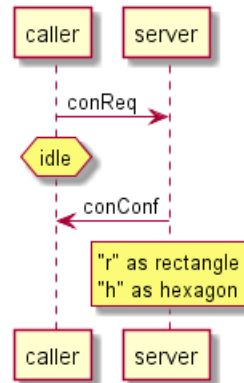

1.14 Creole 和 HTML

可以使用 creole 格式。


```

@startuml
participant Alice
participant "The Famous Bob" as Bob

Alice -> Bob : hello --there--
... Some ~~long delay~~ ...
Bob -> Alice : ok
note left
  This is bold
  This is italics
  This is "monospaced"
  This is --stroked--
  This is underlined
  This is ~~waved~~
end note

Alice -> Bob : A //well formatted// message
note right of Alice
  This is <back:cadetblue><size:18>displayed</size></back>
  __left of__ Alice.
end note
note left of Bob
  <u:red>This</u> is <color #118888>displayed</color>
  **<color purple>left of</color> <s:red>Alice</strike> Bob**.
end note
note over Alice, Bob
  <w:#FF33FF>This is hosted</w> by <img sourceforge.jpg>
end note
@enduml
  
```



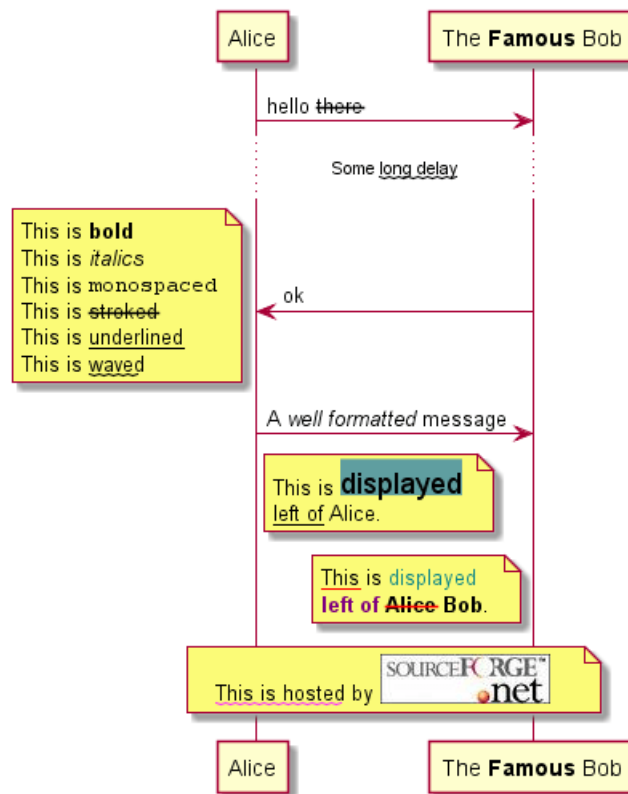

1.15 分隔符

你可以通过使用 == 关键词来将你的图表分割多个步骤。

```
@startuml
```

```
== Initialization ==
```

```
Alice -> Bob: Authentication Request
```


```
Bob --> Alice: Authentication Response
```

```
== Repetition ==
```

```
Alice -> Bob: Another authentication Request
```

```
Alice <-- Bob: another authentication Response
```

```
@enduml
```

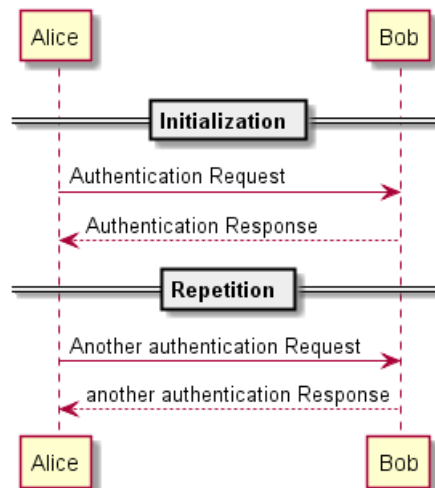

1.16 引用

你可以在图中通过使用 `ref over` 关键词来实现引用


```

@startuml
participant Alice
actor Bob

ref over Alice, Bob : init

Alice -> Bob : hello

ref over Bob
    This can be on
    several lines
end ref
@enduml
  
```

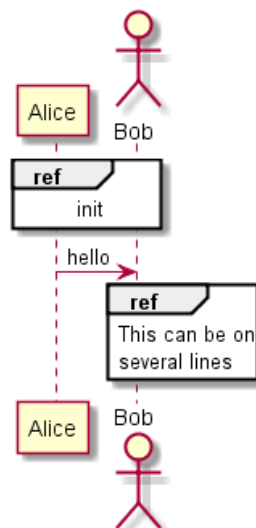

1.17 延迟

你可以使用 `...` 来表示延迟，并且还可以给延迟添加注释。

```

@startuml
  
```




```

Alice -> Bob: Authentication Request
...
Bob --> Alice: Authentication Response
...5 minutes latter...
Bob --> Alice: Bye !

```

```
@enduml
```

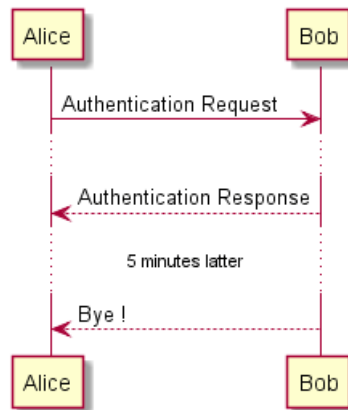

1.18 空间

你可以使用 `|||` 来增加空间。

还可以使用数字指定增加的像素的数量。

```
@startuml
```

```

Alice -> Bob: message 1
Bob --> Alice: ok
|||
Alice -> Bob: message 2
Bob --> Alice: ok
||45||
Alice -> Bob: message 3
Bob --> Alice: ok

```

```
@enduml
```



1.19 生命线的激活与撤销

关键字 `activate` 和 `deactivate` 用来表示参与者的生命活动。

一旦参与者被激活，它的生命线就会显示出来。

`activate` 和 `deactivate` 适用于以上情形。

`destroy` 表示一个参与者的生命线的终结。

```
@startuml
participant User

User -> A: DoWork
activate A


A -> B: << createRequest >>
activate B

B -> C: DoWork
activate C
C --> B: WorkDone
destroy C

B --> A: RequestCreated
deactivate B

A -> User: Done
deactivate A

@enduml
```

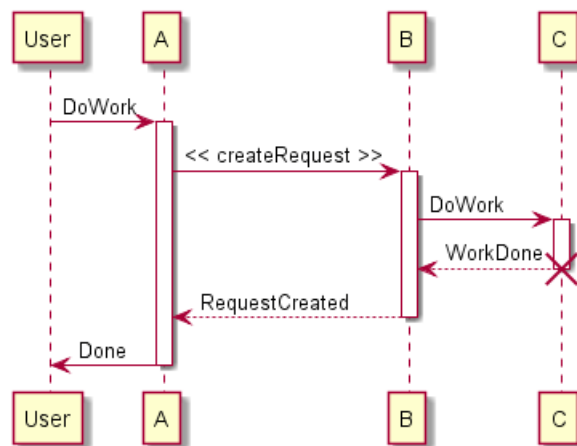

还可以使用嵌套的生命线，并且运行给生命线添加颜色。

```
@startuml
participant User

User -> A: DoWork
activate A #FFBBBB

A -> A: Internal call
activate A #DarkSalmon

A -> B: << createRequest >>
activate B

B --> A: RequestCreated
```




```


deactivate B
deactivate A
A -> User: Done
deactivate A

```

```

@enduml

```

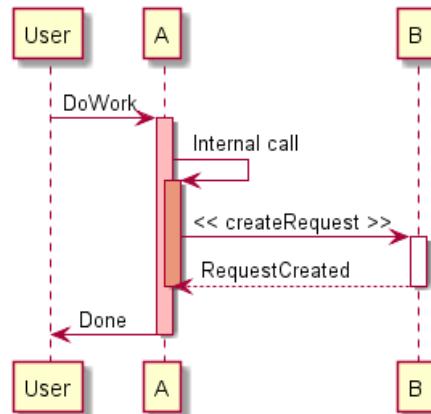


1.20 Return

A new command `return` for generating a return message with optional text label. The point returned to is the point that caused the most recently activated life-line. The syntax is simply `return label` where label, if provided, can be any string acceptable on conventional messages.

```

@startuml
Bob -> Alice : hello
activate Alice
Alice -> Alice : some action
return bye
@enduml

```



1.21 创建参与者

你可以把关键字 `create` 放在第一次接收到消息之前，以强调本次消息实际上是在创建新的对象。

```

@startuml
Bob -> Alice : hello

create Other
Alice -> Other : new


create control String
Alice -> String
note right : You can also put notes!

```



```
Alice --> Bob : ok
```

```
@enduml
```

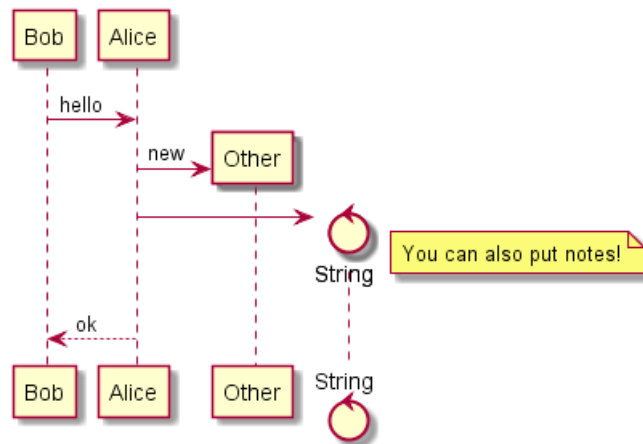

1.22 进入和发出消息

如果只想关注部分图示，你可以使用进入和发出箭头。

使用方括号 [和] 表示图示的左、右两侧。

```


@startuml
[-> A: DoWork

activate A

A -> A: Internal call
activate A

A ->] : << createRequest >>

A<--] : RequestCreated
deactivate A
[<- A: Done
deactivate A
@enduml
  
```

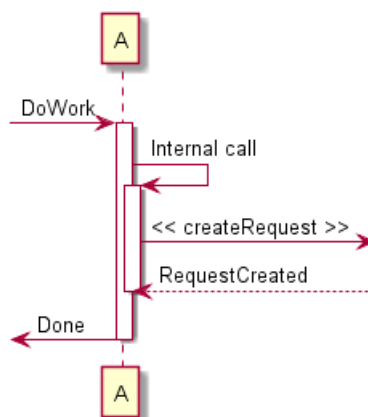

还可以使用下面的语法:

```

@startuml
[-> Bob
[o-> Bob
  
```



```

[o->> Bob
[x-> Bob

[<- Bob
[x<- Bob

Bob ->]
Bob ->>]
Bob o->>]
Bob ->x]

Bob <-]
Bob x<-]
@enduml

```



1.23 构造类型和圈点

可以使用 `<< 和 >>` 给参与者添加构造类型。

在构造类型中，你可以使用 `(X,color)` 格式的语法添加一个圆圈圈起来的字符。

```


@startuml

participant "Famous Bob" as Bob << Generated >>
participant Alice << (C,#ADD1B2) Testable >>

Bob->>Alice: First message

@enduml

```

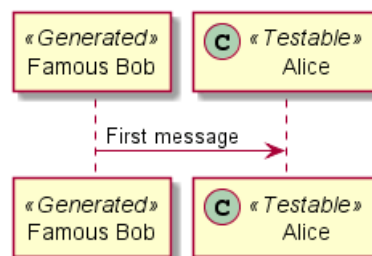

默认使用 *guillemet* 字符来显示构造类型。你可以使用外观参数 `guillemet` 来修改显示行为。

```

@startuml


skinparam guillemet false
participant "Famous Bob" as Bob << Generated >>
participant Alice << (C,#ADD1B2) Testable >>

```



Bob->Alice: First message

@enduml

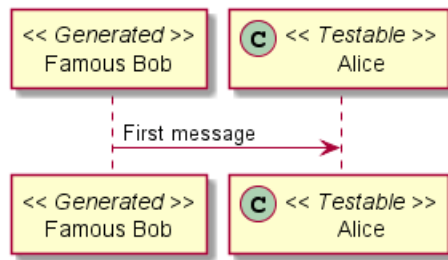


@startuml

participant Bob << (C,#ADD1B2) >>
 participant Alice << (C,#ADD1B2) >>

Bob->Alice: First message

@enduml



1.24 更多标题信息


你可以在标题中使用 creole 格式。

@startuml

title __Simple__ ****communication**** example

Alice -> Bob: Authentication Request
 Bob -> Alice: Authentication Response

@enduml

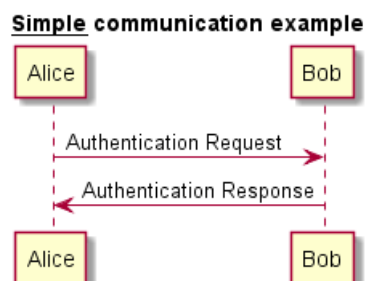

在标题描述中使用 \n 表示换行。

@startuml


title __Simple__ communication example\nnon several lines

Alice -> Bob: Authentication Request



```
Bob -> Alice: Authentication Response
```

```
@enduml
```

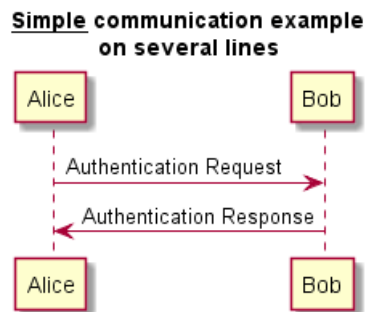

还可以使用关键字 `title` 和 `end title` 定义多行标题。

```
@startuml
```


```
title
```

```
<u>Simple</u> communication example  
on <i>several</i> lines and using <font color=red>html</font>  
This is hosted by <img:sourceforge.jpg>  
end title
```

```
Alice -> Bob: Authentication Request
```

```
Bob -> Alice: Authentication Response
```

```
@enduml
```

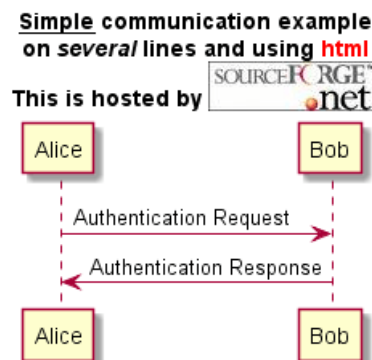

1.25 包裹参与者

可以使用 `box` 和 `end box` 画一个盒子将参与者包裹起来。

还可以在 `box` 关键字之后添加标题或者背景颜色。

```
@startuml
```


```
box "Internal Service" #LightBlue  
participant Bob  
participant Alice  
end box  
participant Other
```

```
Bob -> Alice : hello
```

```
Alice -> Other : hello
```



```
@enduml
```



1.26 移除脚注


使用 `hide footbox` 关键字移除脚注。

```
@startuml
```

```
hide footbox
title Footer removed
```

```
Alice -> Bob: Authentication Request
Bob --> Alice: Authentication Response
```

```
@enduml
```



1.27 外观参数 (skinparam)

用 `skinparam` 改变字体和颜色。

可以在如下场景中使用：

- 在图示的定义中，
- 在引入的文件中，
- 在命令行或者 ANT 任务提供的配置文件中。

你也可以修改其他渲染元素，如下示例：

```
@startuml
skinparam sequenceArrowThickness 2
skinparam roundcorner 20
skinparam maxmessagesize 60
skinparam sequenceParticipant underline
```

```
actor User
participant "First Class" as A
participant "Second Class" as B
participant "Last Class" as C
```

```
User -> A: DoWork
```



```

activate A

A -> B: Create Request
activate B


B -> C: DoWork
activate C
C --> B: WorkDone
destroy C

B --> A: Request Created
deactivate B

A --> User: Done
deactivate A

@enduml

```

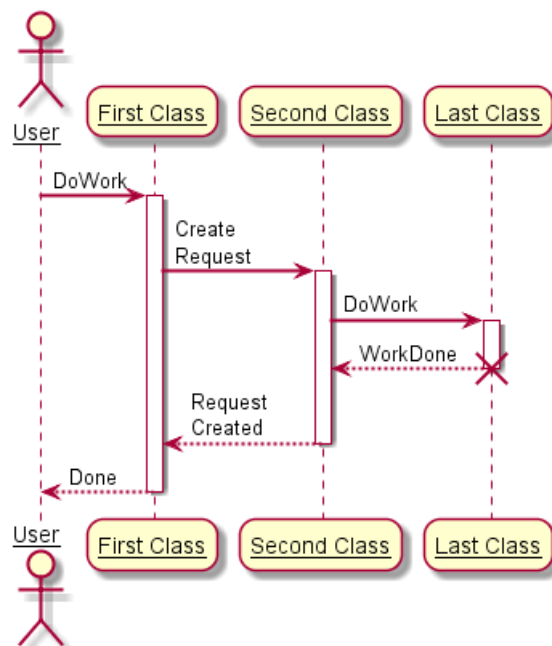

```

@startuml
skinparam backgroundColor #EEEEBD
skinparam handwritten true

skinparam sequence {
    ArrowColor DeepSkyBlue
    ActorBorderColor DeepSkyBlue
    LifeLineBorderColor blue
    LifeLineBackgroundColor #A9DCDF

    ParticipantBorderColor DeepSkyBlue
    ParticipantBackgroundColor DodgerBlue
    ParticipantFontName Impact
    ParticipantFontSize 17
    ParticipantFontColor #A9DCDF

    ActorBackgroundColor aqua
    ActorFontColor DeepSkyBlue
    ActorFontSize 17
    ActorFontName Aapex

```



```

}

actor User
participant "First Class" as A
participant "Second Class" as B
participant "Last Class" as C

User -> A: DoWork
activate A

A -> B: Create Request
activate B


B -> C: DoWork
activate C
C --> B: WorkDone
destroy C

B --> A: Request Created
deactivate B

A --> User: Done
deactivate A

@enduml

```

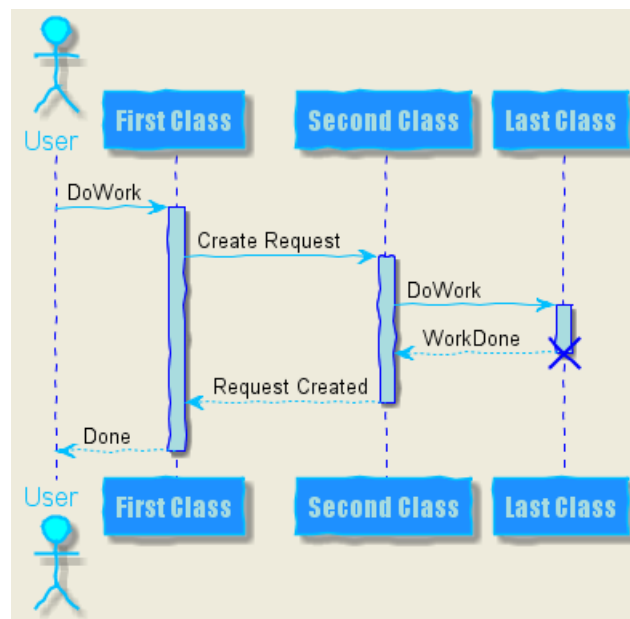

1.28 填充区设置

可以设定填充区的参数配置。

```


@startuml
skinparam ParticipantPadding 20
skinparam BoxPadding 10

box "Foo1"
participant Alice1
participant Alice2
end box

```




```
box "Foo2"  
participant Bob1  
participant Bob2  
end box  
Alice1 -> Bob1 : hello  
Alice1 -> Out : out  
@enduml
```

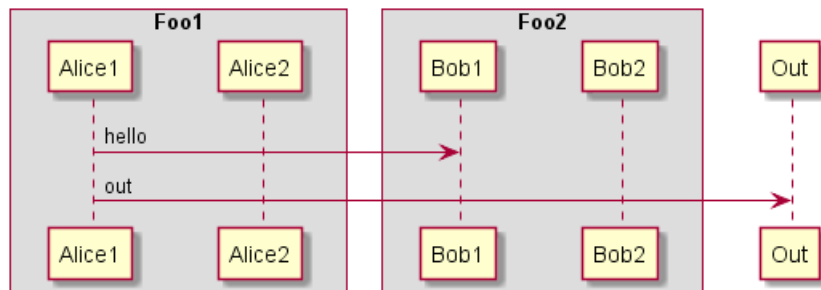

2 用例图

Let's have few examples :


Note that you can disable the shadowing using the skinparam shadowing false command.

2.1 用例

用例用圆括号括起来。

也可以用关键字 `usecase` 来定义用例。还可以用关键字 `as` 定义一个别名，这个别名可以在以后定义关系的时候使用。

```
@startuml
(First usecase)
(Another usecase) as (UC2)
usecase UC3
usecase (Last\nusecase) as UC4
@enduml
```

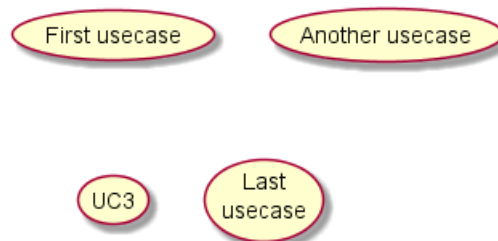

2.2 角色


角色用两个冒号包裹起来。

也可以用 `actor` 关键字来定义角色。还可以用关键字 `as` 来定义一个别名，这个别名可以在以后定义关系的时候使用。

后面我们会看到角色的定义是可选的。

```
@startuml
:First Actor:
:Another\nactor: as Men2
actor Men3
actor :Last actor: as Men4
@enduml
```



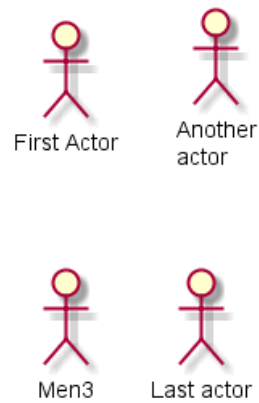

2.3 用例描述

如果想定义跨越多行的用例描述，可以用双引号将其裹起来。

还可以使用这些分隔符：-- .. == __。并且还可以在分隔符中间放置标题。

```
@startuml
```

```
usecase UC1 as "You can use
several lines to define your usecase.
You can also use separators.
```

```
--
```

```
Several separators are possible.
```


```
==
```

```
And you can add titles:
```

```
..Conclusion..
```

```
This allows large description."
```

```
@enduml
```

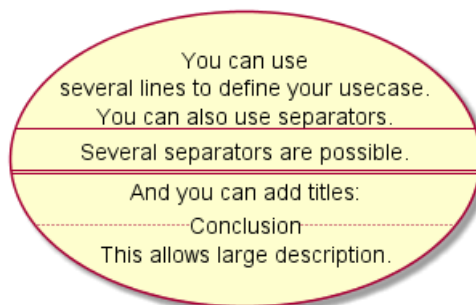

2.4 基础示例

用箭头 --> 连接角色和用例。

横杠 -越多，箭头越长。通过在箭头定义的后面加一个冒号及文字的方式来添加标签。

在这个例子中，*User* 并没有定义，而是直接拿来当做一个角色使用。

```
@startuml
```


```
User -> (Start)
```

```
User --> (Use the application) : A small label
```

```
:Main Admin: ---> (Use the application) : This is\nyet another\nlabel
```



@enduml

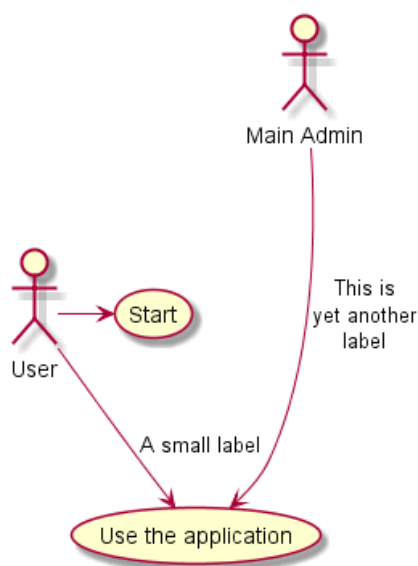

2.5 继承

如果一个角色或者用例继承于另一个，那么可以用 <|--符号表示。

```

@startuml
:Main Admin: as Admin
(Use the application) as (Use)


```

```

User <|-- Admin
(Start) <|-- (Use)

```

@enduml

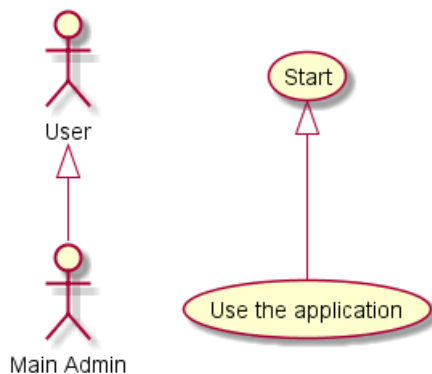

2.6 使用注释

可以用 `note left of`, `note right of`, `note top of`, `note bottom of` 等关键字给一个对象添加注释。注释还可以通过 `note` 关键字来定义，然后用 `..` 连接其他对象。

```

@startuml
:Main Admin: as Admin
(Use the application) as (Use)

```

```

User -> (Start)
User --> (Use)

```


```
Admin ---> (Use)
```

```
note right of Admin : This is an example.
```

```
note right of (Use)
```

```
  A note can also  
  be on several lines  
end note
```

```
note "This note is connected\nto several objects." as N2  
(Start) .. N2  
N2 .. (Use)  
@enduml
```

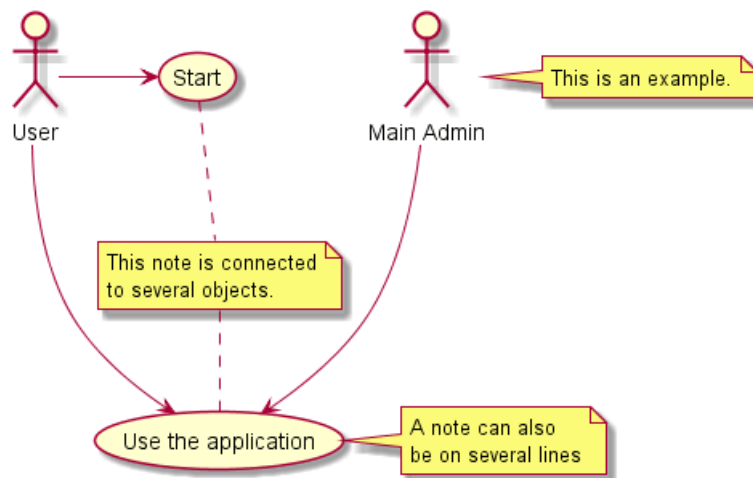

2.7 构造类型


用 << 和 >> 来定义角色或者用例的构造类型。

```
@startuml
User << Human >>
:Main Database: as MySql << Application >>
(Start) << One Shot >>
(Use the application) as (Use) << Main >>

User -> (Start)
User --> (Use)

MySql --> (Use)

@enduml
```

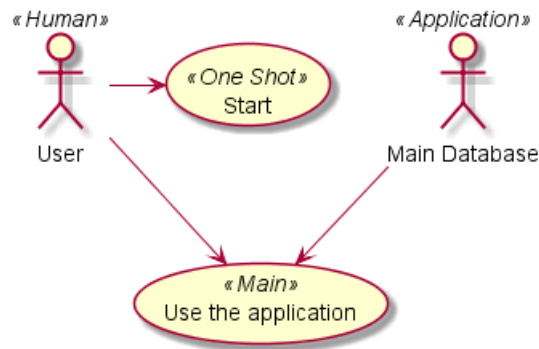


2.8 改变箭头方向

默认连接是竖直方向的，用 `--` 表示，可以用一个横杠或点来表示水平连接。

```


@startuml
:user: --> (Use case 1)
:user: -> (Use case 2)
@enduml
  
```



也可以通过翻转箭头来改变方向。

```


@startuml
(Use case 1) <.. :user:
(Use case 2) <- :user:
@enduml
  
```



还可以通过给箭头添加 `left`, `right`, `up` 或 `down` 等关键字来改变方向。

```

@startuml
:user: -left-> (dummyLeft)
:user: -right-> (dummyRight)
:user: -up-> (dummyUp)
:user: -down-> (dummyDown)
@enduml
  
```

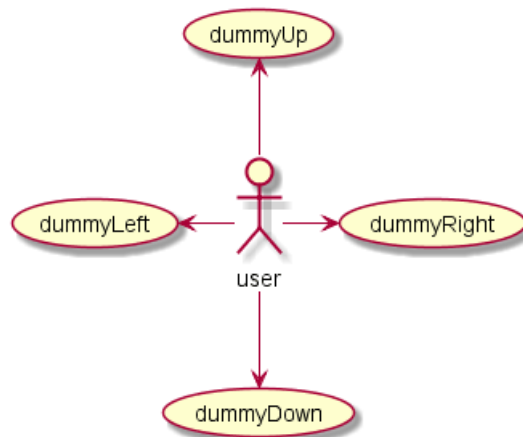


这些方向关键字也可以只是用首字母或者前两个字母的缩写来代替。
但是请注意，这样的缩写不要乱用，Graphviz 不喜欢这样。

2.9 分割图示

用 `newpage` 关键字将图示分解为多个页面。

```

@startuml
:actor1: --> (Usecase1)
newpage
:actor2: --> (Usecase2)
@enduml
  
```




2.10 从左向右方向

默认从上往下构建图示。

```


@startuml
'default
top to bottom direction
user1 --> (Usecase 1)
user2 --> (Usecase 2)
@enduml
  
```

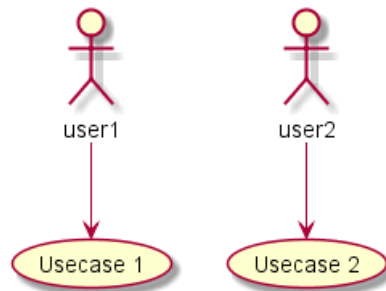

你可以用 `left to right direction` 命令改变图示方向。

```

@startuml
left to right direction
user1 --> (Usecase 1)
user2 --> (Usecase 2)
@enduml
  
```



2.11 显示参数

用 `skinparam` 改变字体和颜色。

可以在如下场景中使用：

- 在图示的定义中，
- 在引入的文件中，
- 在命令行或者 ANT 任务提供的配置文件中。

你也可以给构造的角色和用例指定特殊颜色和字体。

```

@startuml
skinparam handwritten true

skinparam usecase {
  BackgroundColor DarkSeaGreen
  BorderColor DarkSlateGray

  BackgroundColor<< Main >> YellowGreen
  BorderColor<< Main >> YellowGreen

  ArrowColor Olive
  ActorBorderColor black
  ActorFontName Courier

  ActorBackgroundColor<< Human >> Gold
}
  
```




```


User << Human >>
:Main Database: as MySql << Application >>
(Start) << One Shot >>
(Use the application) as (Use) << Main >>

User -> (Start)
User --> (Use)

MySql --> (Use)

@enduml

```

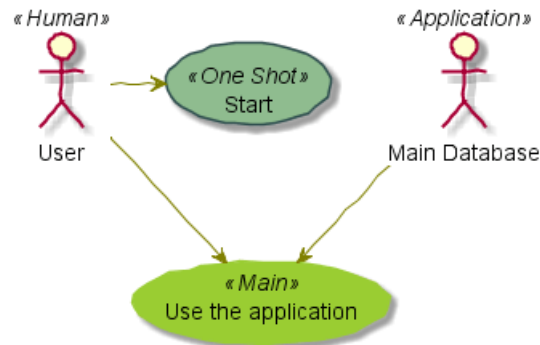


2.12 一个完整的例子

```

@startuml
left to right direction
skinparam packageStyle rectangle
actor customer
actor clerk
rectangle checkout {
    customer -- (checkout)
    (checkout) .> (payment) : include
    (help) .> (checkout) : extends
    (checkout) -- clerk
}
@enduml

```

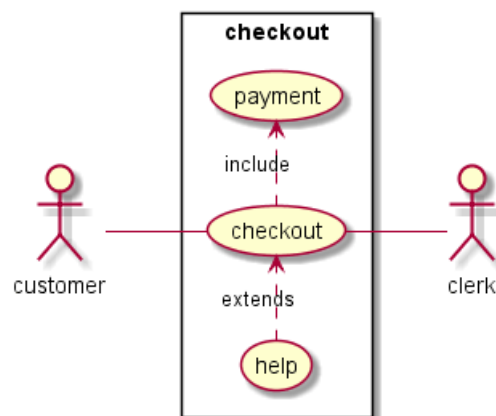

3 类图

3.1 类之间的关系


类之间的关系通过下面的符号定义:

Type	Symbol	Drawing
Extension	< --	
Composition	*--	
Aggregation	o--	


使用.. 来代替 -- 可以得到点线.

在这些规则下, 也可以绘制下列图形

```
@startuml
Class01 <|-- Class02
Class03 *-- Class04
Class05 o-- Class06
Class07 .. Class08
Class09 -- Class10
@enduml
```

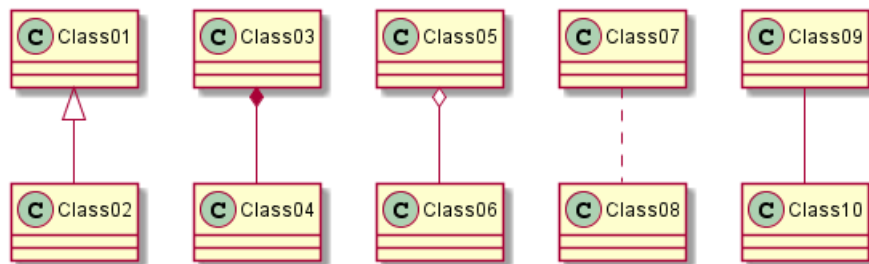


```
@startuml
Class11 <|.. Class12
Class13 --> Class14
Class15 ..> Class16
Class17 ..|> Class18
Class19 <--* Class20
@enduml
```

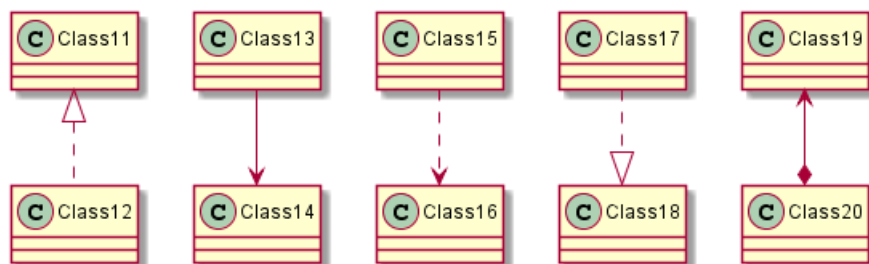

```
@startuml
Class21 #-- Class22
Class23 x-- Class24
Class25 }-- Class26
Class27 +-- Class28
Class29 ^-- Class30
@enduml
```



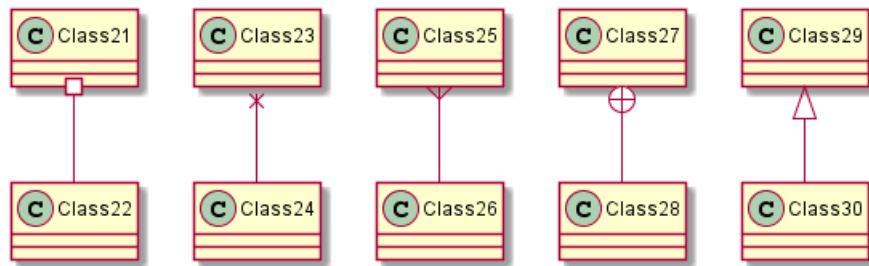

3.2 关系上的标识

在关系之间使用标签来说明时, 使用 : 后接标签文字。

对元素的说明, 你可以在每一边使用 "" 来说明。


```
@startuml
```

```
Class01 "1" *-- "many" Class02 : contains
```

```
Class03 o-- Class04 : aggregation
```

```
Class05 --> "1" Class06
```

```
@enduml
```

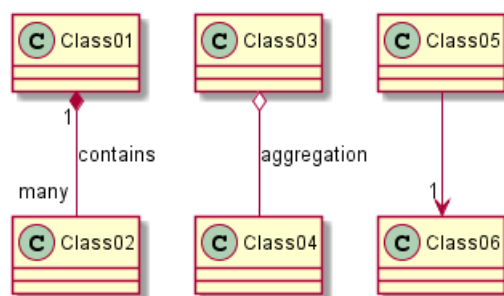

在标签的开始或结束位置添加 < 或 > 以表明是哪个对象作用到哪个对象上。

```
@startuml
```


```
class Car
```

```
Driver - Car : drives >
```

```
Car *- Wheel : have 4 >
```

```
Car -- Person : < owns
```

```
@enduml
```

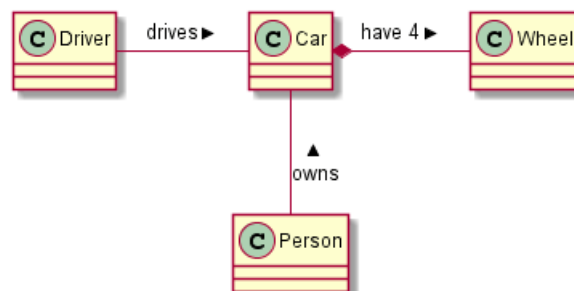

3.3 添加方法


为了声明域或者方法，你可以使用后接域名或方法名。

系统检查是否有括号来判断是方法还是域。

```
@startuml
Object <|-- ArrayList

Object : equals()
ArrayList : Object[] elementData
ArrayList : size()

@enduml
```




也可以使用 {} 把域或者方法括起来

注意，这种语法对于类型/名字的顺序是非常灵活的。

```
@startuml
class Dummy {
    String data
    void methods()
}

class Flight {
    flightNumber : Integer
    departureTime : Date
}


@enduml
```



You can use {field} and {method} modifiers to override default behaviour of the parser about fields and methods.





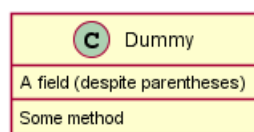



```
@startuml
class Dummy {
    {field} A field (despite parentheses)
    {method} Some method
}

@enduml
```



3.4 定义可访问性


一旦你定义了域或者方法，你可以定义相应条目的可访问性质。

Character	Icon for field	Icon for method	Visibility
-			private
#			protected
~			package private
+			public

```
@startuml
```

```
class Dummy {
    -field1
    #field2
    ~method1()
    +method2()
}
```


```
@enduml
```



你可以采用以下命令停用这些特性 `skinparam classAttributeIconSize 0` :

```
@startuml
skinparam classAttributeIconSize 0
class Dummy {
    -field1
    #field2
    ~method1()
    +method2()
}
```

```
@enduml
```




3.5 抽象与静态

通过修饰符 `{static}` 或者 `{abstract}`，可以定义静态或者抽象的方法或者属性。

这些修饰符可以写在行的开始或者结束。也可以使用 `{classifier}` 这个修饰符来代替 `{static}`。

```
@startuml
class Dummy {
    {static} String id
    {abstract} void methods()
}
@enduml
```





3.6 高级类体


PlantUML 默认自动将方法和属性重新分组，你可以自己定义分隔符来重排方法和属性，下面的分隔符都是可用的：-- .. == __.

还可以在分隔符中添加标题：

```
@startuml
class Foo1 {
    You can use
    several lines
    ..
    as you want
    and group
    ==
    things together.
    --
    You can have as many groups
    as you want
    --
    End of class
}

class User {
    .. Simple Getter ..
    + getName()
    + getAddress()
    .. Some setter ..
    + setName()
    __ private data __
    int age
    -- encrypted --
    String password
}

@enduml
```

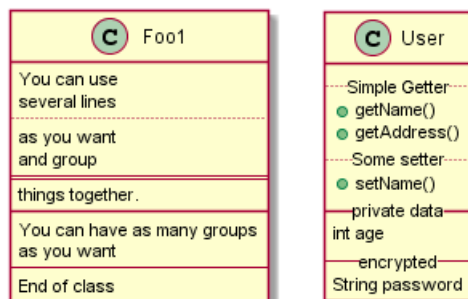

3.7 备注和模板

模板通过类关键字 ("<<" 和 ">>") 来定义

你可以使用 `note left of`, `note right of`, `note top of`, `note bottom of` 这些关键字来添加备注。



你还可以在类的声明末尾使用 `note left`, `note right`, `note top`, `note bottom` 来添加备注。

此外，单独用 `note` 这个关键字也是可以的，使用 `..` 符号可以作出一条连接它与其它对象的虚线。


```
@startuml
class Object << general >>
Object <|--- ArrayList

note top of Object : In java, every class\nextends this one.

note "This is a floating note" as N1
note "This note is connected\nto several objects." as N2
Object .. N2
N2 .. ArrayList

class Foo
note left: On last defined class

@enduml
```

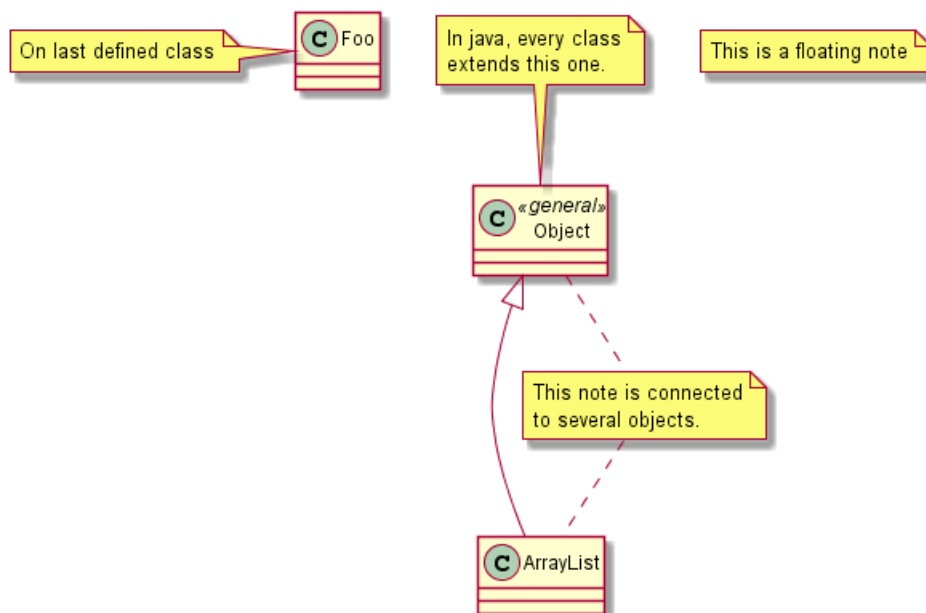

3.8 更多注释

可以在注释中使用部分 html 标签：

- ``
- `<u>`
- `<i>`
- `<s>`, ``, `<strike>`
- `` or ``
- `<color:#AAAAAA>` or `<color:colorName>`
- `<size:nn>` to change font size
- `` or `<img:file>`: the file must be accessible by the filesystem

你也可以在注释中展示多行。

你也可以在定义的 class 之后直接使用 `note left`, `note right`, `note top`, `note bottom` 来定义注释。



```

@startuml


class Foo
note left: On last defined class

note top of Object
  In java, <size:18>every</size> <u>class</u>
  <b>extends</b>
  <i>this</i> one.
end note

note as N1
  This note is <u>also</u>
  <b><color:royalBlue>on several</color>
  <s>words</s> lines
  And this is hosted by <img:sourceforge.jpg>
end note

@enduml

```

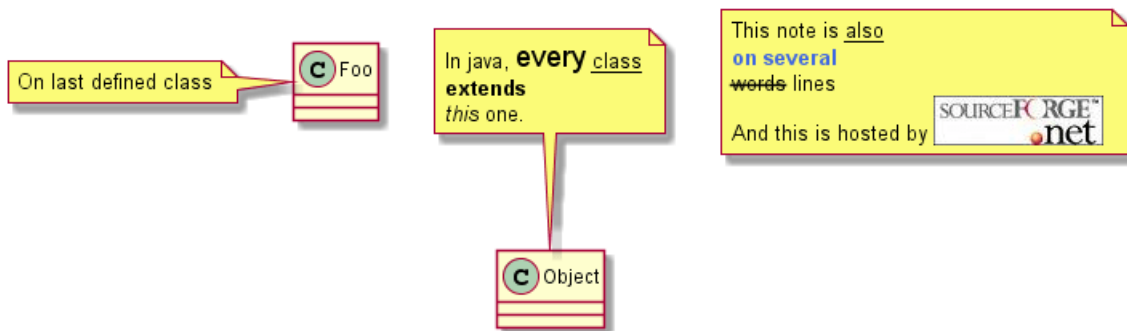

3.9 链接的注释

在定义链接之后，你可以用 `note on link` 给链接添加注释

如果想要改变注释相对于标签的位置，你也可以用 `note left on link`, `note right on link`, `note bottom on link`。（对应位置分别在 label 的左边，右边，下边）

```


@startuml

class Dummy
Dummy --> Foo : A link
note on link #red: note that is red

Dummy --> Foo2 : Another link
note right on link #blue
this is my note on right link
and in blue
end note

@enduml

```

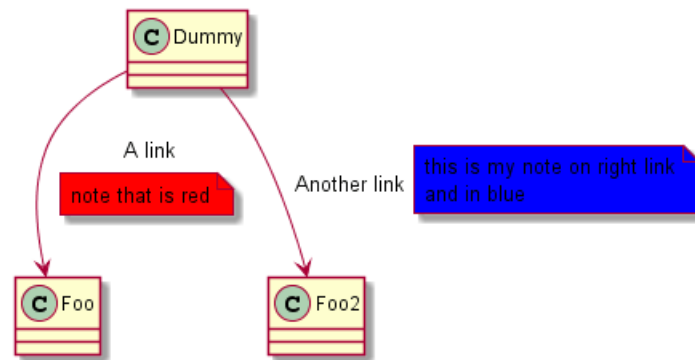3.10 抽象类和接口

用关键字 `abstract` 或 `abstract class` 来定义抽象类。抽象类用斜体显示。也可以使用 `interface`, `annotation` 和 `enum` 关键字。

@startuml

```

abstract class AbstractList
abstract AbstractCollection
interface List
interface Collection

```

```

List <|-- AbstractList
Collection <|-- AbstractCollection

```

```

Collection <|-- List
AbstractCollection <|-- AbstractList
AbstractList <|-- ArrayList

```

```

class ArrayList {
    Object[] elementData
    size()
}

```

```

enum TimeUnit {
    DAYS
    HOURS
    MINUTES
}

```


```

annotation SuppressWarnings

```

@enduml



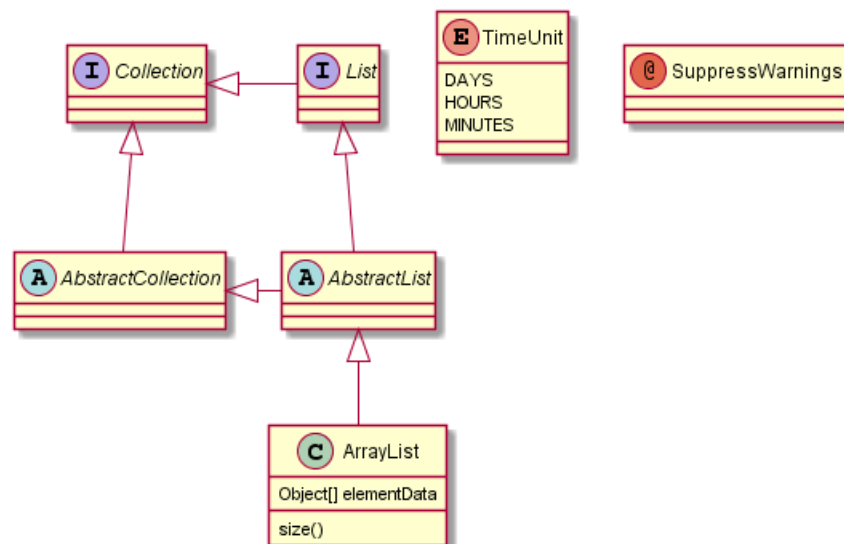

3.11 使用非字母字符

如果你想在类（或者枚举）的显示中使用非字母符号，你可以：


- 在类的定义中使用 `as` 关键字
- 在类名旁边加上 `""`

```

@startuml
class "This is my class" as class1
class class2 as "It works this way too"

class2 *-- "foo/dummy" : use
@enduml

```

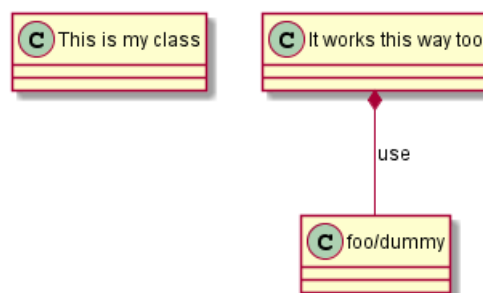

3.12 隐藏属性、函数等

通过使用命令 `“hide/show”`，你可以用参数表示类的显示方式。

基础命令是: `hide empty members`. 这个命令会隐藏空白的方法和属性。

除 `empty members` 外，你可以用：

- `empty fields` 或者 `empty attributes` 空属性，
- `empty methods` 空函数，
- `fields` 或 `attributes` 隐藏字段或属性，即使是被定义了
- `methods` 隐藏方法，即使是被定义了
- `members` 隐藏字段 和 方法，即使是被定义了
- `circle` 类名前带圈的，



- stereotype 原型。

同样可以使用 `hide` 或 `show` 关键词，对以下内容进行设置：

- `class` 所有类，
- `interface` 所有接口，
- `enum` 所有枚举，
- `<<foo1>>` 实现 *foo1* 的类，
- 一个既定的类名。

你可以使用 `show/hide` 命令来定义相关规则和例外。


```
@startuml
class Dummy1 {
    +myMethods()
}

class Dummy2 {
    +hiddenMethod()
}

class Dummy3 <<Serializable>> {
    String name
}

hide members
hide <<Serializable>> circle
show Dummy1 methods
show <<Serializable>> fields

@enduml
```

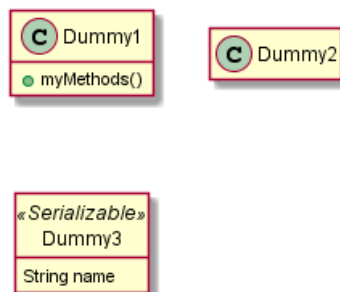

3.13 隐藏类

你也可以使用 `show/hide` 命令来隐藏类

如果你定义了一个大的 `!included` 文件，且想在文件包含之后隐藏部分类，该功能会很有帮助。


```
@startuml
class Foo1
class Foo2

Foo2 *-- Foo1

hide Foo2

@enduml
```






3.14 泛型 (generics)

你可以用 < 和 > 来定义类的泛型。

@startuml

```
class Foo<? extends Element> {
    int size()
}
Foo *- Element
```

@enduml



It is possible to disable this drawing using skinparam genericDisplay old command.


3.15 指定标记 (Spot)

通常标记字符 (C, I, E or A) 用于标记类 (classes), 接口 (interface), 枚举 (enum) 和抽象类 (abstract classes) .

但是当你想定义原型时, 可以增加对应的单个字符及颜色, 来定义自己的标记 (spot), 就像下面一样:

@startuml

```
class System << (S,#FF7700) Singleton >>
class Date << (D,orchid) >>
@enduml
```



3.16 包

你可以通过关键词 package 声明包, 同时可选的来声明对应的背景色 (通过使用 html 色彩代码或名称)。

注意: 包可以被定义为嵌套。

@startuml

```
package "Classic Collections" #DDDDDD {
    Object <|-- ArrayList
}
```

```
package net.sourceforge.plantuml {
```




```

Object <|-- Demo1
Demo1 *- Demo2
}

@enduml

```

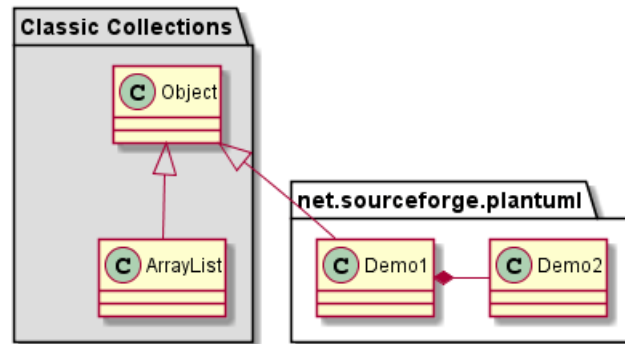

3.17 包样式

包可以定义不同的样式。

你可以通过以下的命令来设置默认样式: `skinparam packageStyle`, 或者对包使用对应的模板:

```

@startuml
scale 750 width
package foo1 <<Node>> {
    class Class1
}

package foo2 <<Rectangle>> {
    class Class2
}

package foo3 <<Folder>> {
    class Class3
}


package foo4 <<Frame>> {
    class Class4
}

package foo5 <<Cloud>> {
    class Class5
}

package foo6 <<Database>> {
    class Class6
}

@enduml

```

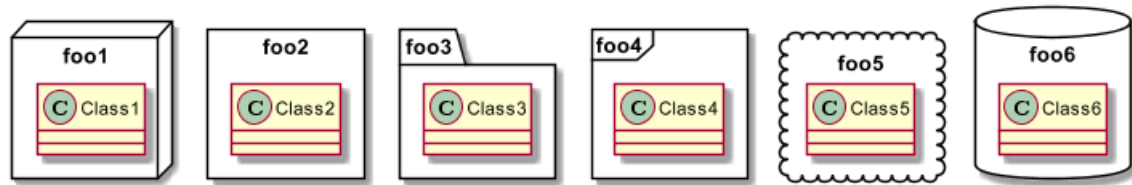

你也可以参考下面的示例来定义包之间的连线:


```
@startuml
skinparam packageStyle rectangle

package foo1.foo2 {
}

package foo1.foo2.foo3 {
    class Object
}

foo1.foo2 +-- foo1.foo2.foo3

@enduml
```



3.18 命名空间 (Namespaces)

In packages, the name of a class is the unique identifier of this class. It means that you cannot have two classes with the very same name in different packages.

In that case, you should use namespaces instead of packages.

You can refer to classes from other namespaces by fully qualify them. Classes from the default namespace are qualified with a starting dot.

Note that you don't have to explicitly create namespace : a fully qualified class is automatically put in the right namespace.

```
@startuml
class BaseClass

namespace net.dummy #DDDDDD {
    .BaseClass <|-- Person
    Meeting o-- Person

    .BaseClass <|-- Meeting
}

namespace net.foo {
```



```


net.dummy.Person <|-- Person
.BaseClass <|-- Person

net.dummy.Meeting o-- Person
}

BaseClass <|-- net.unused.Person

@enduml

```

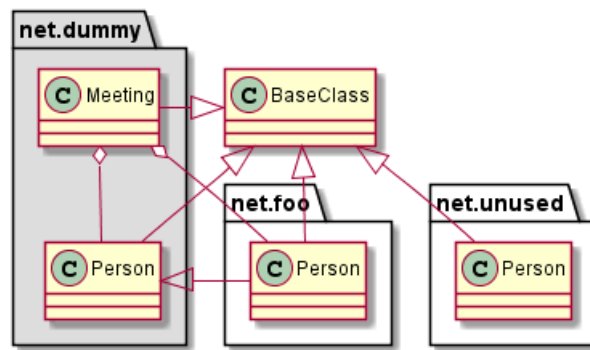

3.19 自动创建命名空间

使用命令 `set namespaceSeparator ???` 你可以自定义命名空间分隔符（为“.”以外的字符）。


```

@startuml

set namespaceSeparator ::
class X1::X2::foo {
    some info
}

@enduml

```



禁止自动创建包则可以使用 `set namespaceSeparator none`。


```

@startuml

set namespaceSeparator none
class X1.X2.foo {
    some info
}

@enduml

```




3.20 棒棒糖接口

需要定义棒棒糖样式的接口时可以遵循以下语法:

- bar ()- foo
- bar ()-- foo
- foo -() bar


```
@startuml
class foo
bar ()- foo
@enduml
```



3.21 改变箭头方向


类之间默认采用两个破折号 -- 显示出垂直方向的线. 要得到水平方向的可以像这样使用单破折号 (或者点):

```
@startuml
Room o- Student
Room *-- Chair
@enduml
```



你也可以通过改变倒置链接来改变方向


```
@startuml
Student -o Room
Chair --* Room
@enduml
```



也可通过在箭头内部使用关键字, 例如 left, right, up 或者 down, 来改变方向

```
@startuml
foo -left-> dummyLeft
foo -right-> dummyRight
foo -up-> dummyUp
foo -down-> dummyDown
@enduml
```



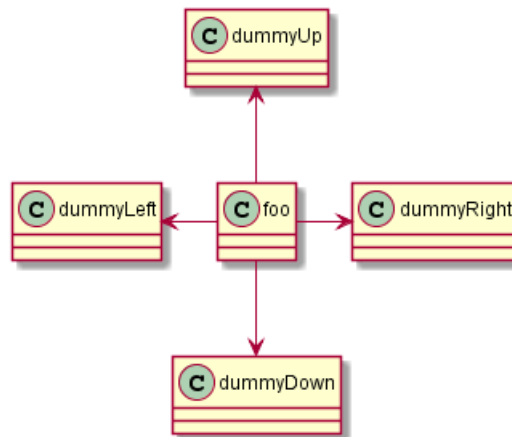

You can shorten the arrow by using only the first character of the direction (for example, `-d-` instead of `-down-`) or the two first characters (`-do-`).

Please note that you should not abuse this functionality : *Graphviz* gives usually good results without tweaking.


3.22 “关系”类

你可以在定义了两个类之间的关系后定义一个 关系类 *association class* 例如:

```

@startuml
class Student {
    Name
}
Student "0..*" -- "1..*" Course
(Student, Course) .. Enrollment

class Enrollment {
    drop()
    cancel()
}
@enduml
  
```

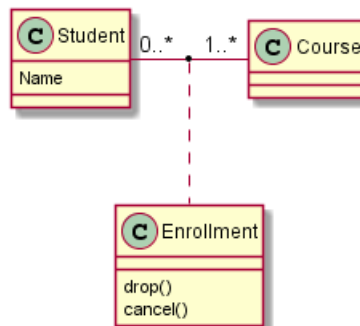

也可以用另一种方式:

```

@startuml
class Student {
    Name
}
Student "0..*" -- "1..*" Course
(Student, Course) . Enrollment


class Enrollment {
    drop()
    cancel()
}
@enduml
  
```



```

}
@enduml

```

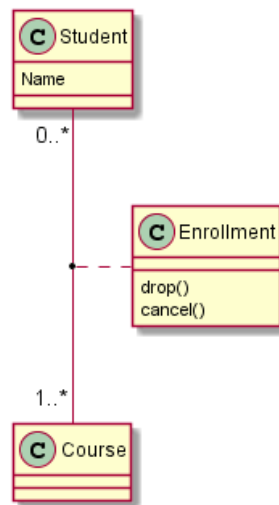

3.23 皮肤参数

用 `skinparam` 改变字体和颜色。

可以在如下场景中使用：

- 在图示的定义中，
- 在引入的文件中，
- 在命令行或者 ANT 任务提供的配置文件中。

```
@startuml
```

```


skinparam class {
  BackgroundColor PaleGreen
  ArrowColor SeaGreen
  BorderColor SpringGreen
}
skinparam stereotypeCBackgroundColor YellowGreen

```

```
Class01 "1" *-- "many" Class02 : contains
```

```
Class03 o-- Class04 : aggregation
```

```
@enduml
```

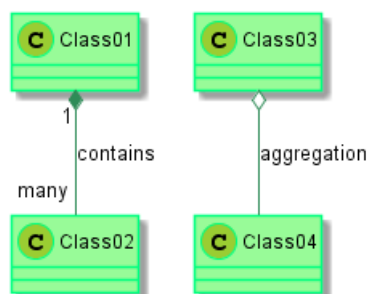

3.24 Skinned Stereotypes

You can define specific color and fonts for stereotyped classes.



```

@startuml


skinparam class {
  BackgroundColor PaleGreen
  ArrowColor SeaGreen
  BorderColor SpringGreen
  BackgroundColor<<Foo>> Wheat
  BorderColor<<Foo>> Tomato
}
skinparam stereotypeCBackgroundColor YellowGreen
skinparam stereotypeCBackgroundColor<< Foo >> DimGray

Class01 <<Foo>>
Class03 <<Foo>>
Class01 "1" *-- "many" Class02 : contains

Class03 o-- Class04 : aggregation

@enduml

```

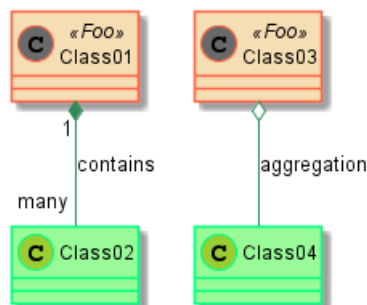

3.25 Color gradient

It's possible to declare individual color for classes or note using the # notation.

You can use either standard color name or RGB code.

You can also use color gradient in background, with the following syntax: two colors names separated either by:

- |,
- /,
- \,
- or -

depending the direction of the gradient.

For example, you could have:

```

@startuml

skinparam backgroundcolor AntiqueWhite/Gold
skinparam classBackgroundColor Wheat|CornflowerBlue

class Foo #red-green
note left of Foo #blue\9932CC
  this is my
  note on this class
end note

package example #GreenYellow/LightGoldenRodYellow {

```




```

class Dummy
}

@enduml

```

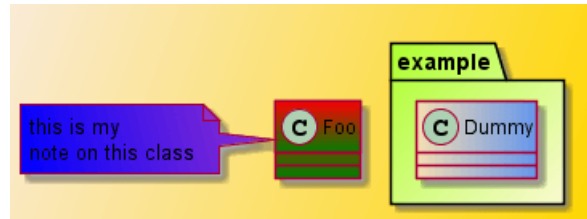

3.26 Help on layout

Sometimes, the default layout is not perfect...

You can use `together` keyword to group some classes together : the layout engine will try to group them (as if they were in the same package).

You can also use `hidden` links to force the layout.


```

@startuml

class Bar1
class Bar2
together {
    class Together1
    class Together2
    class Together3
}
Together1 - Together2
Together2 - Together3
Together2 -[hidden]--> Bar1
Bar1 -[hidden]> Bar2

@enduml

```

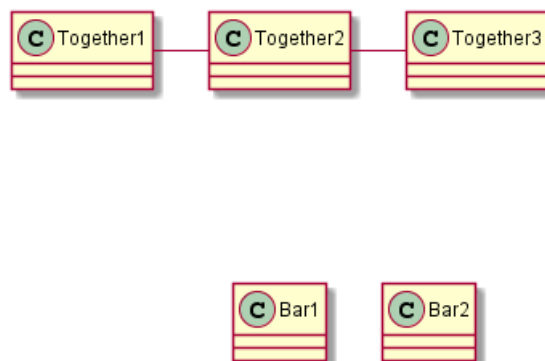

3.27 拆分大文件

有些情况下，会有一些很大的图片文件。

可以用 `page (hpages)x(vpages)` 这个命令把生成的图片文件拆分成若干个文件。

`hpages` 用来表示水平方向页面数，and `vpages` 用来表示垂直方面页面数。



你也可以使用特定的皮肤设定来给分页添加边框（见例子）

```
@startuml
' Split into 4 pages
page 2x2
skinparam pageMargin 10
skinparam pageExternalColor gray
skinparam pageBorderColor black

class BaseClass


namespace net.dummy #DDDDDD {
.BaseClass <|-- Person
Meeting o-- Person

.BaseClass <|-- Meeting
}

namespace net.foo {
  net.dummy.Person <|-- Person
  .BaseClass <|-- Person

  net.dummy.Meeting o-- Person
}

BaseClass <|-- net.unused.Person
@enduml
```

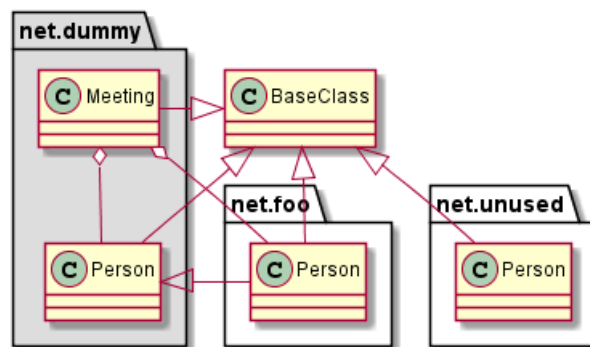

4 活动图

4.1 简单活动

使用 (*) 作为活动图的开始点和结束点。

有时，你可能想用 (*top) 强制开始点位于图示的顶端。

使用 --> 绘制箭头。

```
@startuml
(*) --> "First Activity"
"First Activity" --> (*)
@enduml
```




4.2 箭头上的标签

默认情况下，箭头开始于最接近的活动。

可以用 [和] 放在箭头定义的后面来添加标签。

```
@startuml
(*) --> "First Activity"
-->[You can put also labels] "Second Activity"
--> (*)
@enduml
```

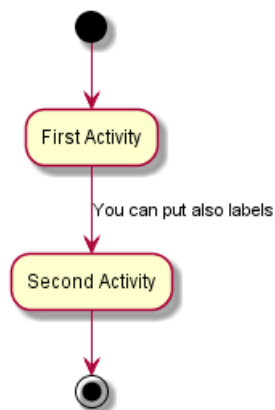

4.3 改变箭头方向

你可以使用 -> 定义水平方向箭头，还可以使用下列语法强制指定箭头的方向：

- -down-> (default arrow)




- -right-> or ->
- -left->
- -up->

```
@startuml
```

```
(*) -up-> "First Activity"
-right-> "Second Activity"
--> "Third Activity"
-left-> (*)
```

```
@enduml
```



4.4 分支

你可以使用关键字 `if/then/else` 创建分支。

```
@startuml
```

```
(*) --> "Initialization"
```

```
if "Some Test" then
```

```
-->[true] "Some Activity"
```

```
--> "Another activity"
```

```
-right-> (*)
```


```
else
```

```
->[false] "Something else"
```

```
-->[Ending process] (*)
```

```
endif
```

```
@enduml
```

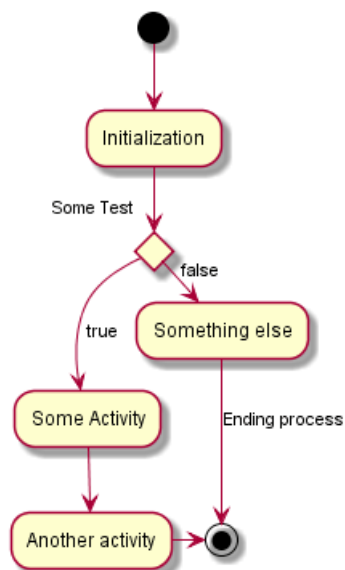


不过，有时你可能需要重复定义同一个活动：



```

@startuml
(*) --> "check input"
If "input is verbose" then
--> [Yes] "turn on verbosity"
--> "run command"
else
--> "run command"
Endif
-->(*)
@enduml

```

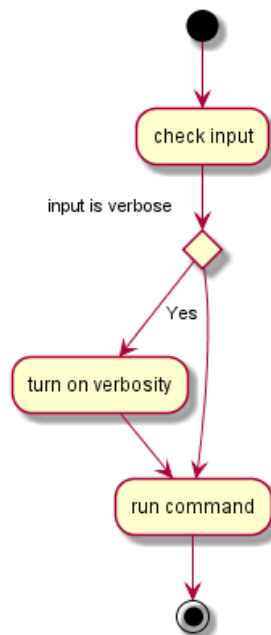

4.5 更多分支

默认情况下，一个分支连接上一个最新的活动，但是也可以使用 `if` 关键字进行连接。还可以嵌套定义分支。

```

@startuml
(*) --> if "Some Test" then

    -->[true] "activity 1"

    if "" then
-> "activity 3" as a3
    else
if "Other test" then
    -left-> "activity 5"
else
    --> "activity 6"
endif
endif

else

    -->[false] "activity 2"

endif

```





```

a3 --> if "last test" then
  --> "activity 7"
else
  --> "activity 8"
endif

@enduml

```

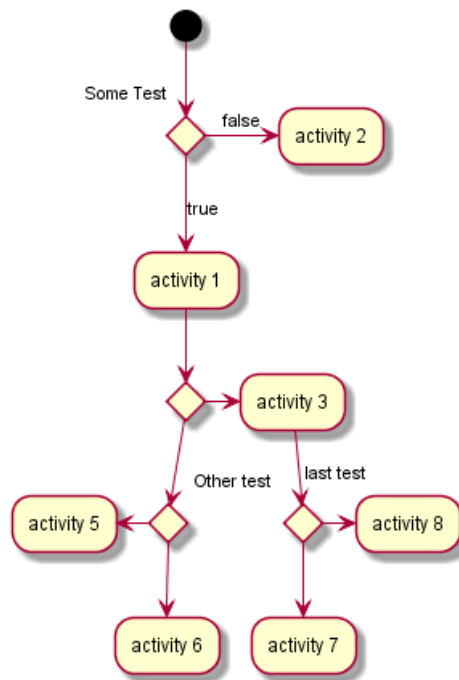

4.6 同步

你可以使用 `=== code ===` 来显示同步条。

```

@startuml

(*) --> ===B1===
--> "Parallel Activity 1"
--> ===B2===


===B1=== --> "Parallel Activity 2"
--> ===B2===

--> (*)

@enduml

```



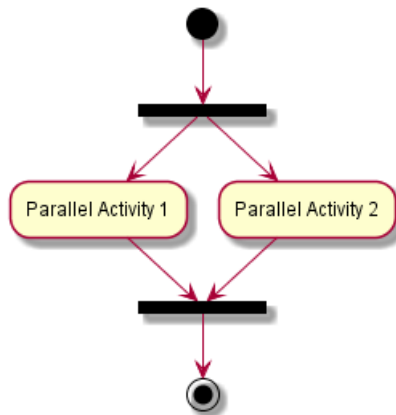

4.7 长的活动描述

定义活动时可以用 \n 来定义跨越多行的描述。


还可以用 as 关键字给活动起一个短的别名。这个别名可以在接下来的图示定义中使用。

```

@startuml
(*) -left-> "this <size:20>activity</size>
is <b>very</b> <color:red>long2</color>
and defined on several lines
that contains many <i>text</i>" as A1

-up-> "Another activity\n on several lines"

A1 --> "Short activity <img:sourceforge.jpg>"
@enduml
  
```

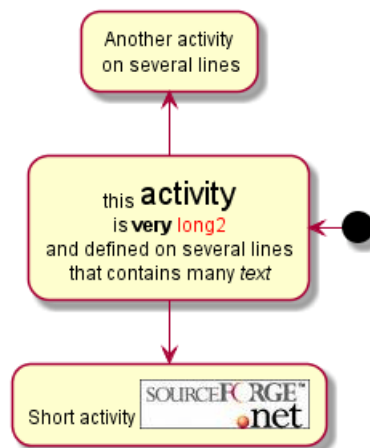

4.8 注释

你可以在活动定义之后用 `note left`, `note right`, `note top` or `note bottom`, 命令给活动添加注释。

如果想给开始点添加注释，只需把注释的定义放在活动图最开始的地方即可。

也可以用关键字 `endnote` 定义多行注释。

```

@startuml

(*) --> "Some Activity"
note right: This activity has to be defined
"Some Activity" --> (*)
  
```




```

note left
  This note is on
  several lines
end note

```

```
@enduml
```

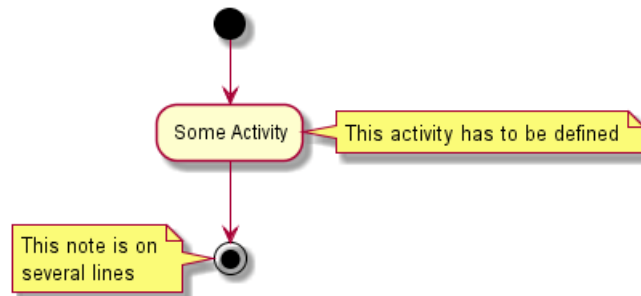

4.9 分区

用关键字 `partition` 定义分区，还可以设置背景色 (用颜色名或者颜色值)。

定义活动的时候，它自动被放置到最新的分区中。

用 `}` 结束分区的定义。

```
@startuml
```

```

partition Conductor {
  (*) --> "Climbs on Platform"
  --> === S1 ===
  --> Bows
}

```

```

partition Audience #LightSkyBlue {
  === S1 === --> Applauds
}

```

```

partition Conductor {
  Bows --> === S2 ===
  --> WavesArmes
  Applauds --> === S2 ===
}

```


```

partition Orchestra #CCCCEE {
  WavesArmes --> Introduction
  --> "Play music"
}

```

```
@enduml
```



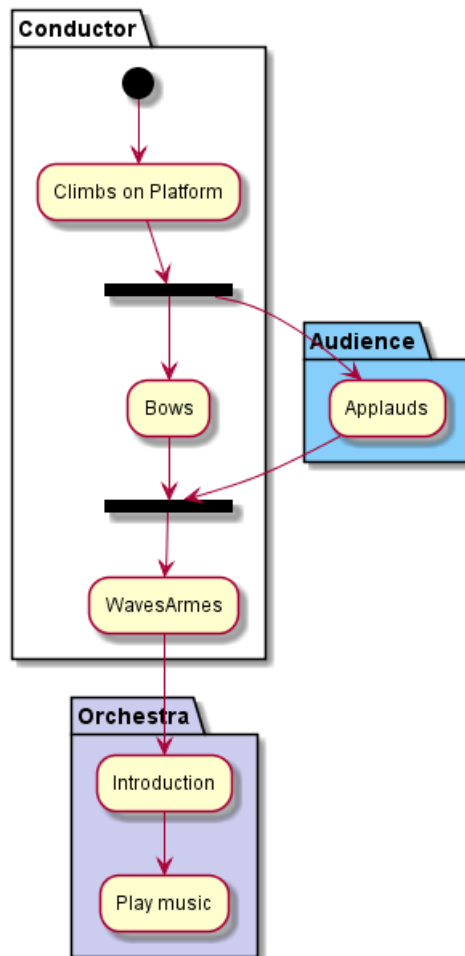

4.10 显示参数

用 `skinparam` 命令修改字体和颜色。

如下场景可用：

- 在图示定义中
- 在引入的文件中
- 在命令行或 ANT 任务提供的配置文件中。

还可以为构造类型指定特殊颜色和字体。

@startuml

```

skinparam backgroundColor #AAFFFF
skinparam activity {
  StartColor red
  BarColor SaddleBrown
  EndColor Silver
  BackgroundColor Peru
  BackgroundColor<< Begin >> Olive
  BorderColor Peru
  FontName Impact
}


```

(*) --> "Climbs on Platform" << Begin >>



```
--> === S1 ===
--> Bows
--> === S2 ===
--> WavesArmes
--> (*)
```

```
@enduml
```

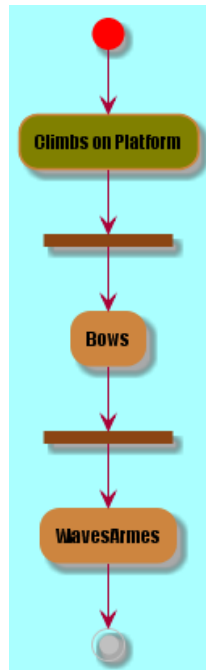

4.11 八边形活动

可用用 `skinparam activityShape octagon` 命令将活动的外形改为八边形。

```
@startuml
'Default is skinparam activityShape roundBox
skinparam activityShape octagon
```

```
(*) --> "First Activity"
"First Activity" --> (*)
```

```
@enduml
```



4.12 一个完整的例子

```
@startuml
title Servlet Container

(*) --> "ClickServlet.handleRequest()"
```



```

--> "new Page"

if "Page.onSecurityCheck" then
  ->[true] "Page.onInit()"

  if "isForward?" then
    ->[no] "Process controls"

    if "continue processing?" then
      -->[yes] ===RENDERING===
    else
      -->[no] ===REDIRECT_CHECK===
    endif

  else
    -->[yes] ===RENDERING===
  endif

  if "is Post?" then
    -->[yes] "Page.onPost()"
    --> "Page.onRender()" as render
    --> ===REDIRECT_CHECK===
  else
    -->[no] "Page.onGet()"
    --> render
  endif

else
  -->[false] ===REDIRECT_CHECK===
endif


if "Do redirect?" then
  ->[yes] "redirect request"
  --> ==BEFORE_DESTROY==
else
  if "Do Forward?" then
    -left->[yes] "Forward request"
    --> ==BEFORE_DESTROY==
  else
    -right->[no] "Render page template"
    --> ==BEFORE_DESTROY==
  endif
endif

--> "Page.onDestroy()"
-->(*)

@enduml

```



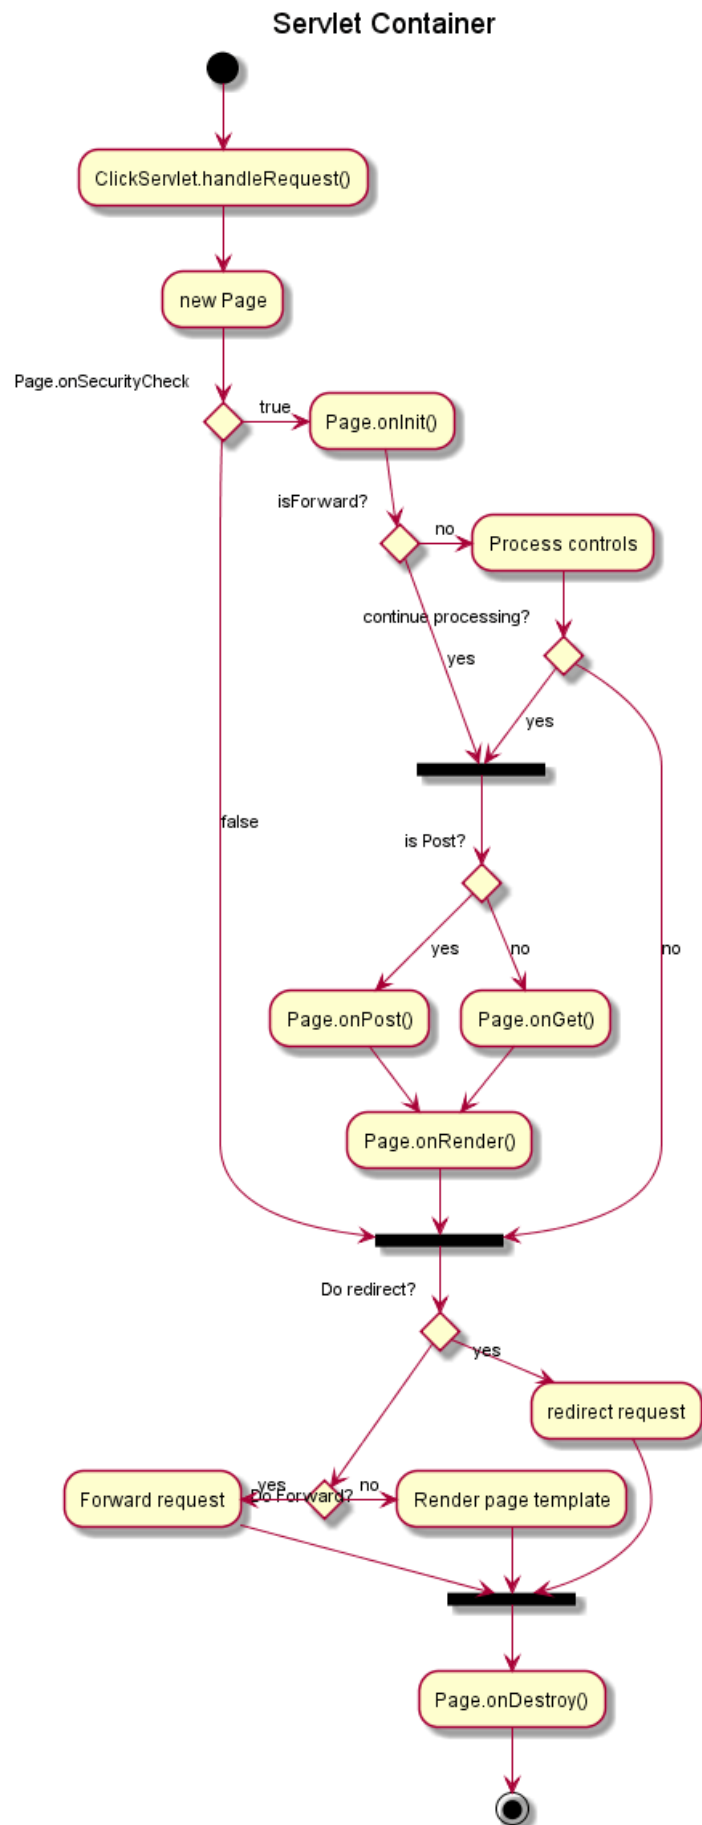

5 活动图 (新语法)

当前活动图 (activity diagram) 的语法有诸多限制和缺点，比如代码难以维护。

所以从 V7947 开始提出一种全新的、更好的语法格式和软件实现供用户使用 (beta 版)。

就像序列图一样，新的软件实现的另一个优点是它不再依赖与 Graphviz。

新的语法将会替换旧的语法。然而考虑到兼容性，旧的语法仍被能够使用以确保向前兼容。

但是我们鼓励用户使用新的语法格式。


5.1 简单活动图

活动标签 (activity label) 以冒号开始，以分号结束。

文本格式支持 creole wiki 语法。

活动默认安装它们定义的顺序就行连接。


```
@startuml
:Hello world;
:This is on defined on
several lines;
@enduml
```



5.2 开始/结束

你可以使用关键字 `start` 和 `stop` 表示图示的开始和结束。

```
@startuml
start
:Hello world;
:This is on defined on
several lines;
stop
@enduml
```




也可以使用 `end` 关键字。

```
@startuml
start
:Hello world;
:This is on defined on
several lines;
end
@enduml
```





```
end
@enduml
```



5.3 条件语句

在图示中可以使用关键字 `if`, `then` 和 `else` 设置分支测试。标注文字则放在括号中。

```
@startuml
start
if (Graphviz installed?) then (yes)
  :process all\ndiagrams;
else (no)
  :process only
  __sequence__ and __activity__ diagrams;
endif
stop
@enduml
```

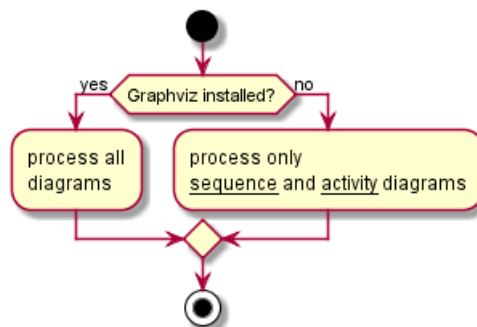


也可以使用关键字 `elseif` 设置多个分支测试。

```
@startuml
start
if (condition A) then (yes)
  :Text 1;
elseif (condition B) then (yes)
  :Text 2;
  stop
elseif (condition C) then (yes)
  :Text 3;
elseif (condition D) then (yes)
  :Text 4;
else (nothing)
  :Text else;
endif
```




```
endif
stop
@enduml
```

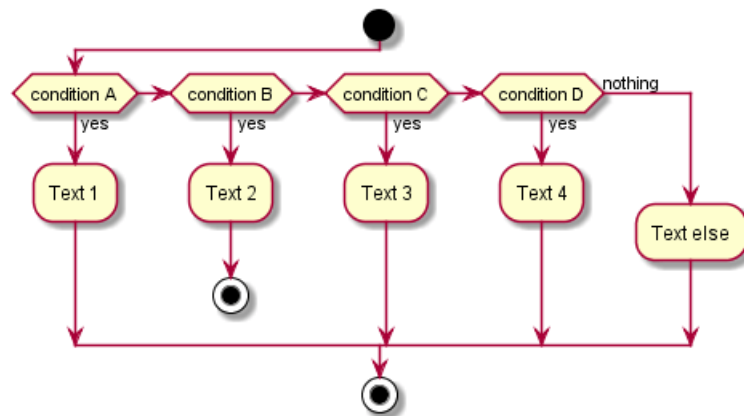

5.4 重复循环

你可以使用关键字 `repeat` 和 `repeatwhile` 进行重复循环。

```
@startuml
start
repeat
    :read data;
    :generate diagrams;
repeat while (more data?)
stop
@enduml
```

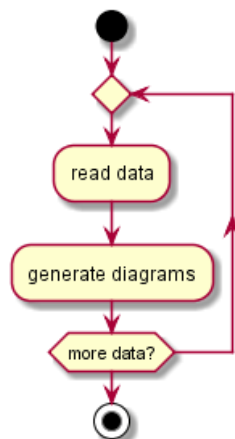

5.5 while 循环

可以使用关键字 `while` 和 `end while` 进行 while 循环。

```
@startuml
start
```




```

while (data available?)
  :read data;
  :generate diagrams;
endwhile

stop

@enduml

```




还可以在关键字 `endwhile` 后添加标注，还有一种方式是使用关键字 `is`。

```

@startuml
while (check filesize ?) is (not empty)
  :read file;
endwhile (empty)
:close file;
@enduml

```



5.6 并行处理

你可以使用关键字 `fork`, `fork again` 和 `end fork` 表示并行处理。

```

@startuml


start

if (multiprocessor?) then (yes)
  fork
  :Treatment 1;
  fork again
  :Treatment 2;
  end fork
else (monoproc)
  :Treatment 1;
  :Treatment 2;
endif

```



@enduml

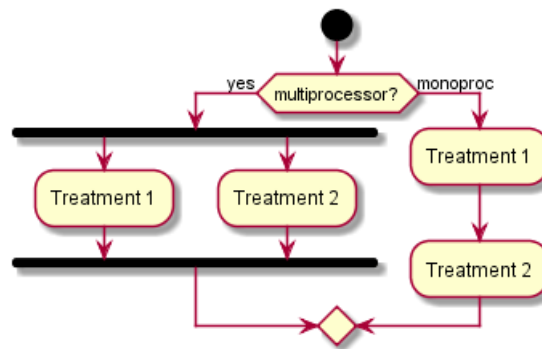

5.7 注释

文本格式支持 creole wiki 语法。

A note can be floating, using floating keyword.


@startuml

```

start
:foo1;
floating note left: This is a note
:foo2;
note right
  This note is on several
  //lines// and can
  contain <b>HTML</b>
  ====
  * Calling the method ""foo()"" is prohibited
end note
stop

```

@enduml

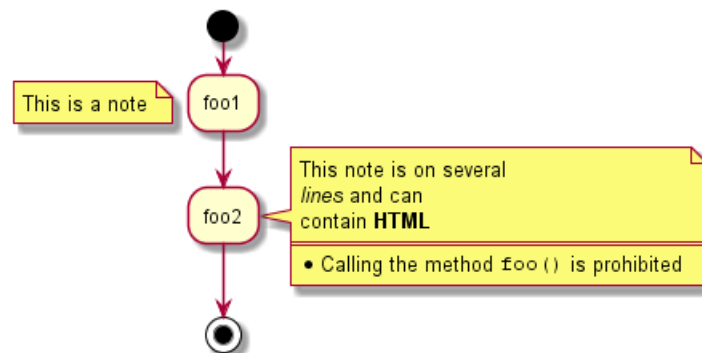

5.8 颜色

你可以为活动 (activity) 指定一种颜色。

@startuml

```

start
:starting progress;
#HotPink:reading configuration files

```




```

These files should edited at this point!;
#AAAAAA:ending of the process;

@enduml

```

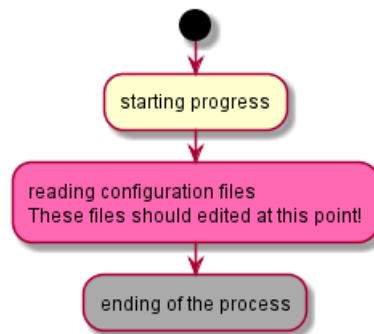

5.9 箭头


使用 -> 标记, 你可以给箭头添加文字或者修改箭头颜色。

同时, 你也可以选择点状 (dotted), 条状 (dashed), 加粗或者是隐式箭头

```

@startuml
:foo1;
-> You can put text on arrows;
if (test) then
  -[#blue]->
  :foo2;
  -[#green,dashed]-> The text can
    also be on several lines
    and very long...;
  :foo3;
else
  -[#black,dotted]->
  :foo4;
endif
-[#gray,bold]->
:foo5;
@enduml


```

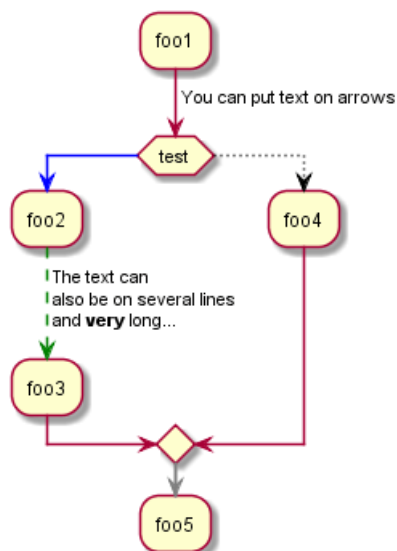

5.10 连接器 (Connector)

你可以使用括号定义连接器。

```
@startuml
start
:Some activity;
(A)
detach
(A)
:Other activity;
@enduml
```




5.11 组合 (grouping)

通过定义分区 (partition)，你可以把多个活动组合 (group) 在一起。

```
@startuml
start
partition Initialization {
:read config file;
:init internal variable;
}
partition Running {
:wait for user interaction;
:print information;
}

stop
@enduml
```

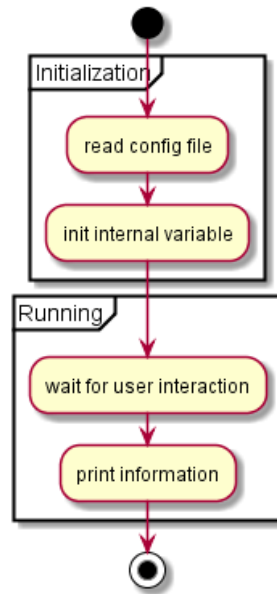


5.12 泳道 (Swimlanes)

你可以使用管道符 | 来定义泳道。

还可以改变泳道的颜色。

```

@startuml
|Swimlane1|
start
:foo1;
|#AntiqueWhite|Swimlane2|
:foo2;
:foo3;
|Swimlane1|
:foo4;
|Swimlane2|
:foo5;
stop
@enduml
  
```

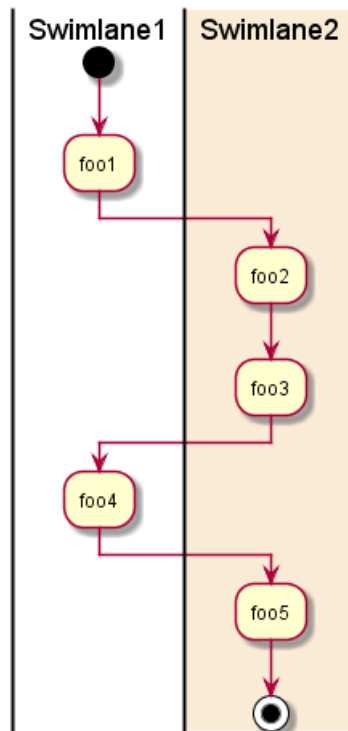


5.13 分离 (detach)

可以使用关键字 `detach` 移除箭头。

```

@startuml
: start;
fork
: foo1;
: foo2;
fork again
: foo3;
detach
endfork
if (foo4) then
: foo5;
detach
endif
: foo6;
detach
: foo7;
stop
@enduml
  
```

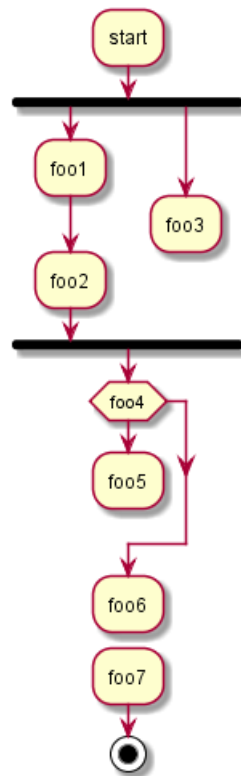5.14 特殊领域语言 (SDL)

通过修改活动标签最后的分号分隔符 (;), 可以为活动设置不同的形状。

- |
- <
- >
- /
-]
- }

```


@startuml
:Ready;
:next(o)|
:Receiving;
split
:nak(i)<
:ack(o)>
split again
:ack(i)<
:next(o)
on several line|
:i := i + 1]
:ack(o)>
split again
:err(i)<
:nak(o)>
split again
:foo/
split again
:i > 5}
  
```



```

stop
end split
:finish;
@enduml

```

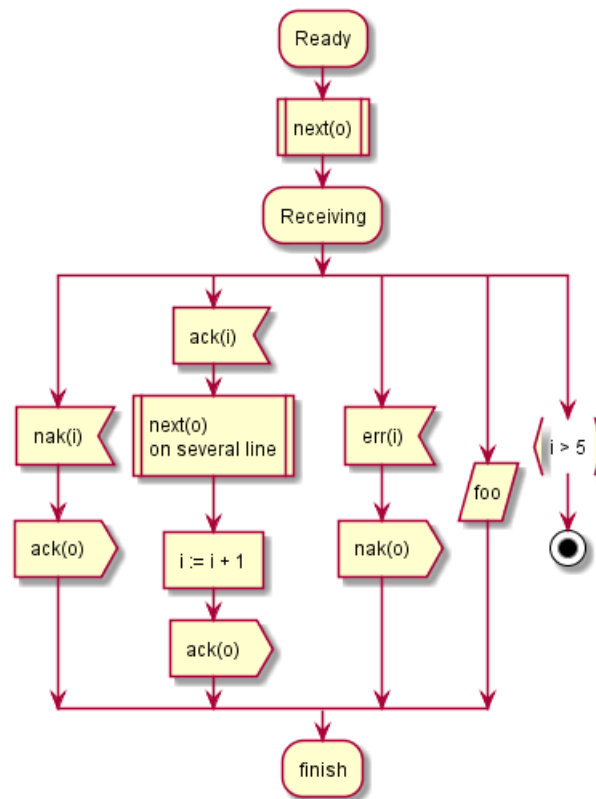

5.15 一个完整的例子

```

@startuml

start
:ClickServlet.handleRequest();
:new page;
if (Page.onSecurityCheck) then (true)
    :Page.onInit();
    if (isForward?) then (no)
        :Process controls;
        if (continue processing?) then (no)
            stop
        endif
    endif

    if (isPost?) then (yes)
        :Page.onPost();
    else (no)
        :Page.onGet();
    endif
    :Page.onRender();
endif
else (false)
endif

if (do redirect?) then (yes)

```




```

:redirect process;
else
  if (do forward?) then (yes)
:Forward request;
  else (no)
:Render page template;
  endif
endif
endif

stop

@enduml

```

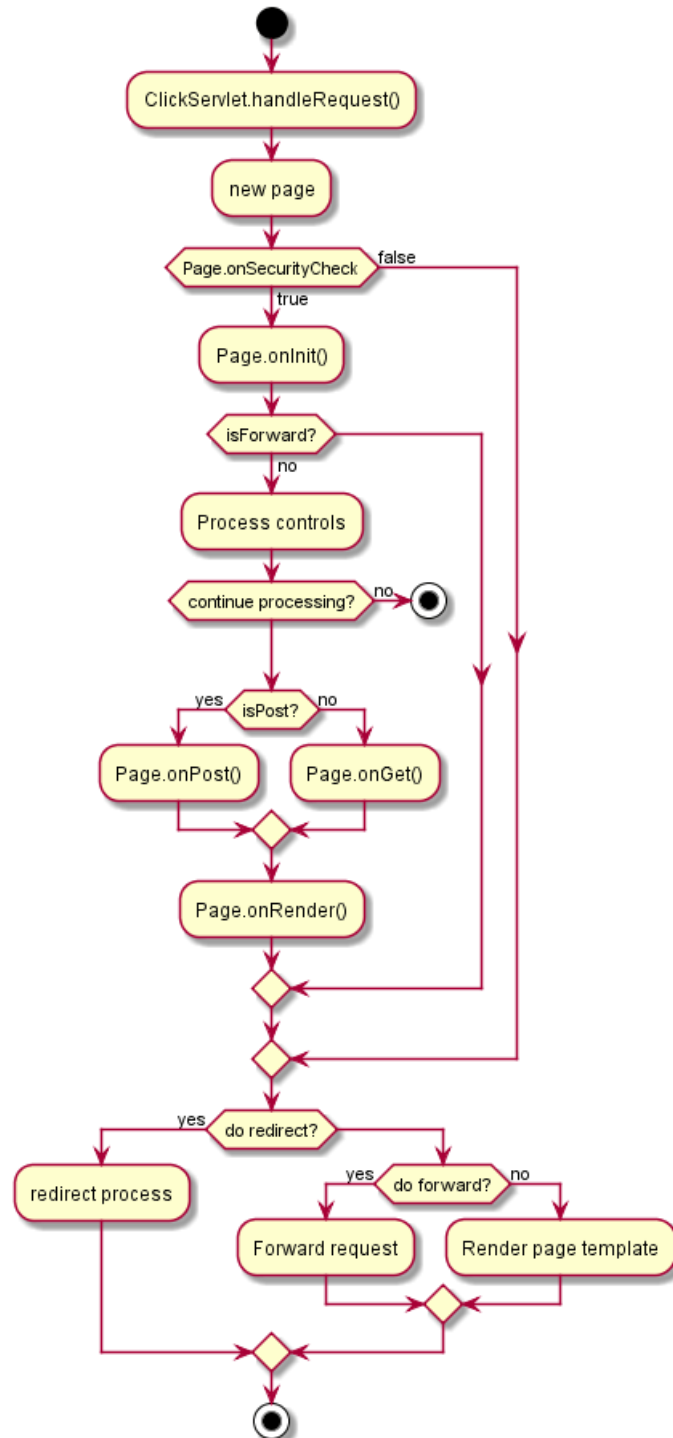

6 组件图


Let's have few examples :

6.1 组件

组件必须用中括号括起来。

还可以使用关键字 `component` 定义一个组件。并且可以用关键字 `as` 给组件定义一个别名。这个别名可以在稍后定义关系的时候使用。

```
@startuml
[First component]
[Another component] as Comp2
component Comp3
component [Last\ncomponent] as Comp4
@enduml
```

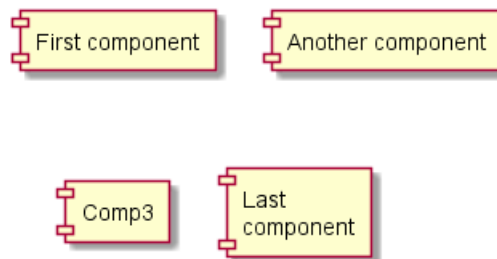


6.2 接口

接口可以使用 `()` 来定义 (因为这个看起来像个圆)。

还可以使用关键字 `interface` 关键字来定义接口。并且还可以使用关键字 `as` 定义一个别名。这个别名可以在稍后定义关系的时候使用。

我们稍后可以看到，接口的定义是可选的。

```
@startuml
() "First Interface"
() "Another interface" as Interf2
interface Interf3
interface "Last\ninterface" as Interf4
@enduml
```

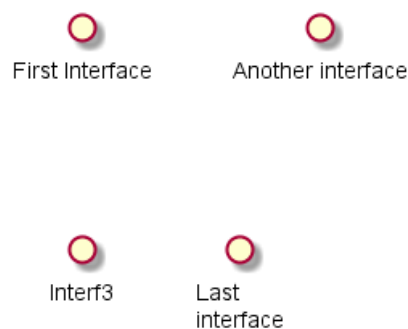


6.3 基础的示例

元素之间可以使用虚线 (..)、直线 (--)、箭头 (-->) 进行连接。

```
@startuml
```

```
DataAccess - [First Component]
[First Component] ..> HTTP : use
```

```
@enduml
```



6.4 使用注释

你可以使用 `note left of`, `note right of`, `note top of`, `note bottom of` 等关键字定义相对于对象位置的注释。

也可以使用关键字 `note` 单独定义注释，然后使用虚线 (..) 将其连接到其他对象。

```
@startuml
```


```
interface "Data Access" as DA
```

```
DA - [First Component]
[First Component] ..> HTTP : use
```

```
note left of HTTP : Web Service only
```

```
note right of [First Component]
  A note can also
  be on several lines
end note
```

```
@enduml
```

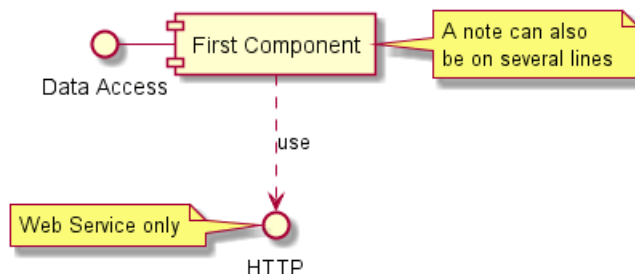

6.5 组合组件

你可以使用多个关键字将组件和接口组合在一起。

- `package`



```
• node
• folder
• frame
• cloud
• database

@startuml

package "Some Group" {
    HTTP - [First Component]
    [Another Component]
}


node "Other Groups" {
    FTP - [Second Component]
    [First Component] --> FTP
}

cloud {
    [Example 1]
}

database "MySql" {
    folder "This is my folder" {
        [Folder 3]
    }
    frame "Foo" {
        [Frame 4]
    }
}

[Another Component] --> [Example 1]
[Example 1] --> [Folder 3]
[Folder 3] --> [Frame 4]

@enduml
```

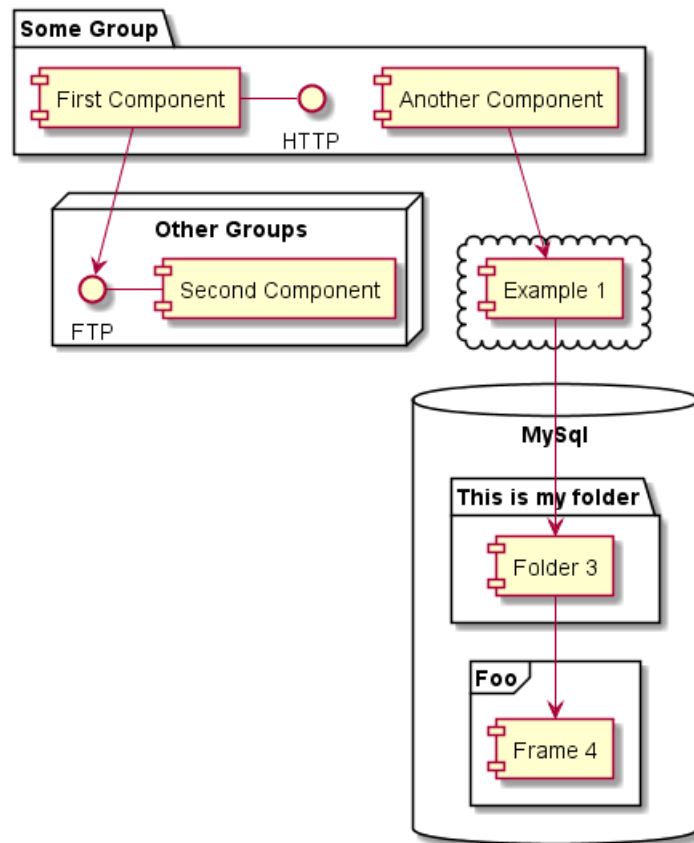


6.6 改变箭头方向

默认情况下，对象之间用 `--` 连接，并且连接是竖直的。不过可以使用一个横线或者点设置水平方向的连接，就行这样：

```

@startuml
[Component] --> Interface1
[Component] -> Interface2
@enduml

```




也可以使用反向连接：

```


@startuml
Interface1 <-- [Component]
Interface2 <- [Component]
@enduml

```



还可以使用关键字 `left`, `right`, `up` or `down` 改变箭头方向。

```
@startuml
[Component] -left-> left
[Component] -right-> right
[Component] -up-> up
[Component] -down-> down
@enduml
```

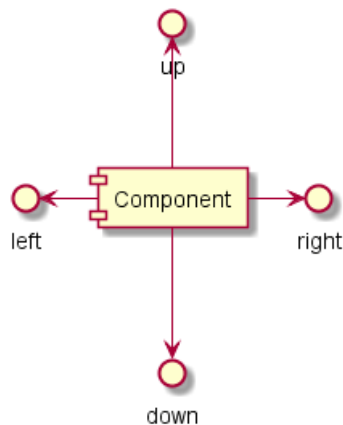

允许使用方向单词的首字母或者前两个字母表示方向 (例如 `-d-`, `-do-`, `-down-` 都是等价的)。请不要乱用这些功能: *Graphviz*(PlantUML 的后端引擎) 不喜欢这个样子。

6.7 使用 UML2 标记符

命令 `skinparam componentStyle uml2` 可以切换到 UML2 标记符。


```
@startuml
skinparam componentStyle uml2

interface "Data Access" as DA

DA - [First Component]
[First Component] ..> HTTP : use

@enduml
```



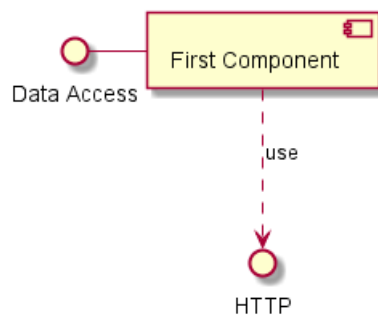


6.8 Long description

It is possible to put description on several lines using square brackets.

```

@startuml
component comp1 [
This component
has a long comment
on several lines
]
@enduml
  
```



6.9 不同的颜色表示

你可以在声明一个组件时加上颜色的声明。

```

@startuml
component [Web Server] #Yellow
@enduml
  
```



6.10 Using Sprite in Stereotype

You can use sprites within stereotype components.

```

@startuml
sprite $businessProcess [16x16/16] {
FFFFFFFFFFFFFFFF
FFFFFFFFFFFFFFFF
FFFFFFFFFFFFFFFF
FFFFFFFFFFFFFFFF
FFFFFFFFF0FFFFF
FFFFFFFFF0FFFFF
FF000000000000FF
FF000000000000FF
FF000000000000FF
FFFFFFFFF0FFFFF
FFFFFFFFF0FFFFF
}
  
```




```

FFFFFFFFFFFFFFFFF
FFFFFFFFFFFFFFFFF
FFFFFFFFFFFFFFFFF
FFFFFFFFFFFFFFFFF
FFFFFFFFFFFFFFFFF
}

rectangle " End to End\nbusiness process" <<$businessProcess>> {
  rectangle "inner process 1" <<$businessProcess>> as src
  rectangle "inner process 2" <<$businessProcess>> as tgt
  src -> tgt
}
@enduml

```

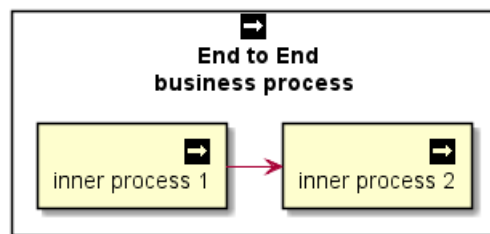

6.11 显示参数

用 `skinparam` 改变字体和颜色。

可以在如下场景中使用：

- 在图示的定义中，
- 在引入的文件中，
- 在命令行或者 ANT 任务提供的配置文件中。

可以为构造类型和接口定义特殊的颜色和字体。

```

@startuml

skinparam interface {
  backgroundColor RosyBrown
  borderColor orange
}

skinparam component {
  FontSize 13
  BackgroundColor<<Apache>> Red
  BorderColor<<Apache>> #FF6655
  FontName Courier
  BorderColor black
  BackgroundColor gold
  ArrowFontName Impact
  ArrowColor #FF6655
  ArrowFontColor #777777
}

() "Data Access" as DA


DA - [First Component]
[First Component] ..> () HTTP : use

```



HTTP - [Web Server] << Apache >>

@enduml

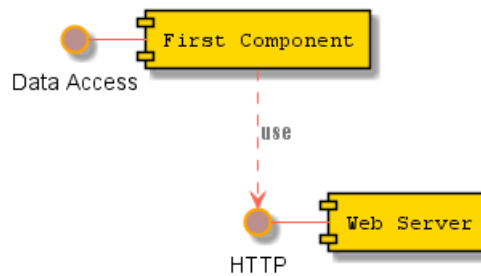

@startuml

[AA] <<static lib>>

[BB] <<shared lib>>

[CC] <<static lib>>

node node1

node node2 <<shared node>>

database Production

```

skinparam component {
  backgroundColor<<static lib>> DarkKhaki
  backgroundColor<<shared lib>> Green
}
  
```


```

skinparam node {
  borderColor Green
  backgroundColor Yellow
  backgroundColor<<shared node>> Magenta
}
  
```

```

skinparam databaseBackgroundColor Aqua
  
```

@enduml

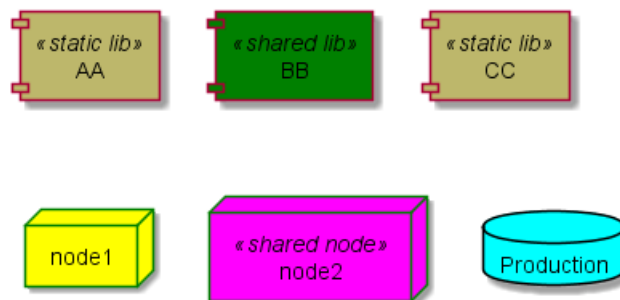

7 状态图

7.1 简单状态


使用 ([*]) 开始和结束状态图。

使用 --> 添加箭头。

```
@startuml
[*] --> State1
State1 --> [*]
State1 : this is a string
State1 : this is another string

State1 -> State2
State2 --> [*]

@enduml
```

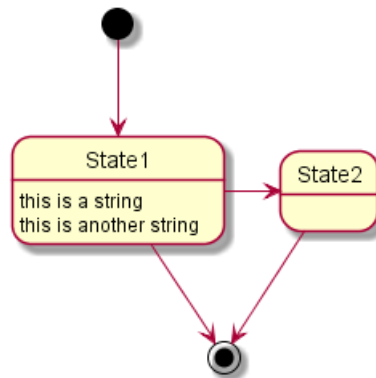


7.2 Change state rendering

You can use `hide empty description` to render state as simple box.

```
@startuml
hide empty description
[*] --> State1
State1 --> [*]
State1 : this is a string
State1 : this is another string

State1 -> State2
State2 --> [*]

@enduml
```

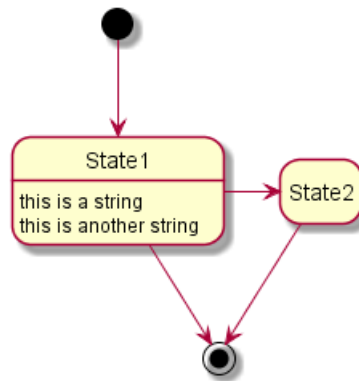

7.3 合成状态

一个状态也可能是合成的，必须使用关键字 `state` 和花括号来定义合成状态。

```


@startuml
scale 350 width
[*] --> NotShooting

state NotShooting {
    [*] --> Idle
    Idle --> Configuring : EvConfig
    Configuring --> Idle : EvConfig
}

state Configuring {
    [*] --> NewValueSelection
    NewValueSelection --> NewValuePreview : EvNewValue
    NewValuePreview --> NewValueSelection : EvNewValueRejected
    NewValuePreview --> NewValueSelection : EvNewValueSaved

    state NewValuePreview {
        State1 -> State2
    }
}

@enduml
  
```

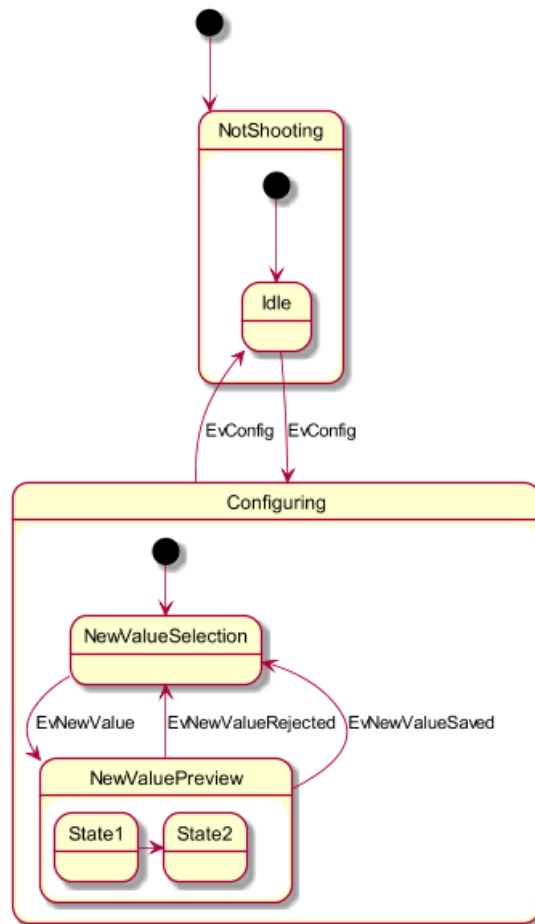

7.4 长名字

也可以使用关键字 `state` 定义长名字状态。

```


@startuml
scale 600 width

[*] -> State1
State1 --> State2 : Succeeded
State1 --> [*] : Aborted
State2 --> State3 : Succeeded
State2 --> [*] : Aborted
state State3 {
    state "Accumulate Enough Data\nLong State Name" as long1
    long1 : Just a test
    [*] --> long1
    long1 --> long1 : New Data
    long1 --> ProcessData : Enough Data
}
State3 --> State3 : Failed
State3 --> [*] : Succeeded / Save Result
State3 --> [*] : Aborted

@enduml

```



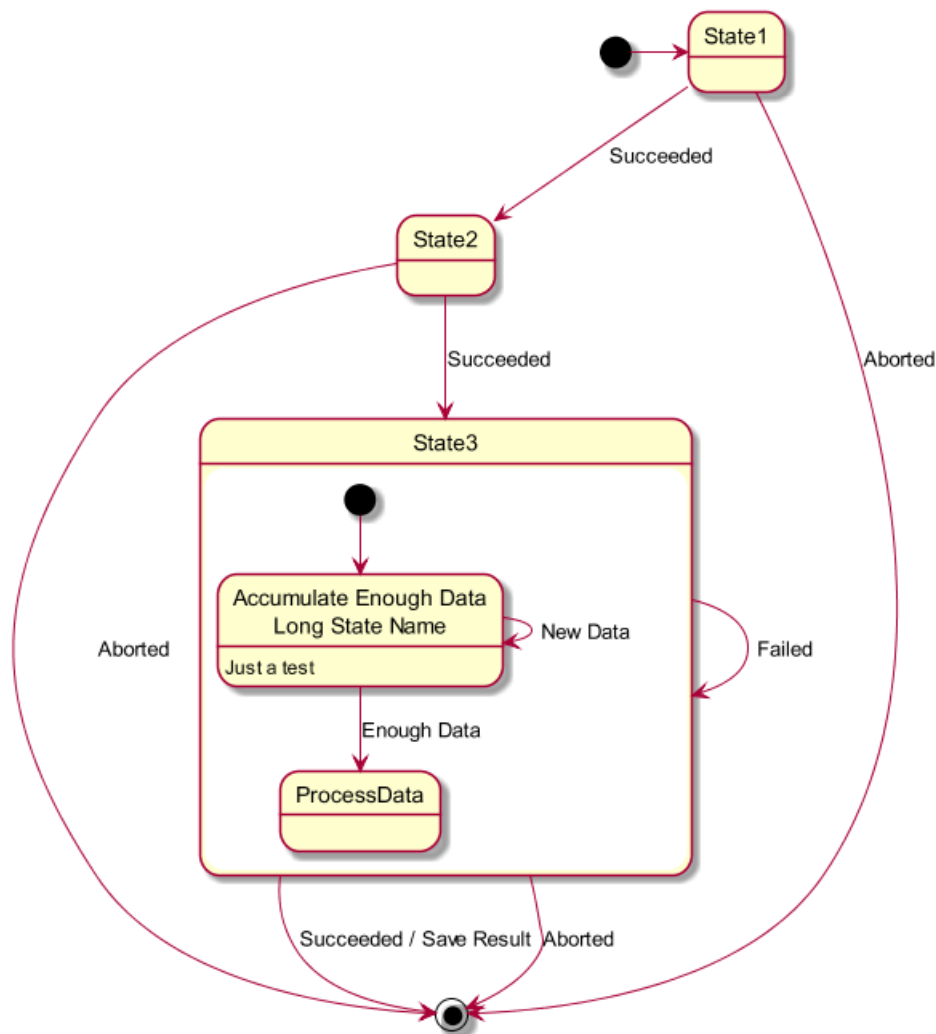

7.5 并发状态

用 `-- or ||` 作为分隔符来合成并发状态。


```

@startuml
[*] --> Active

state Active {
    [*] -> NumLockOff
    NumLockOff --> NumLockOn : EvNumLockPressed
    NumLockOn --> NumLockOff : EvNumLockPressed
    --
    [*] -> CapsLockOff
    CapsLockOff --> CapsLockOn : EvCapsLockPressed
    CapsLockOn --> CapsLockOff : EvCapsLockPressed
    --
    [*] -> ScrollLockOff
    ScrollLockOff --> ScrollLockOn : EvCapsLockPressed
    ScrollLockOn --> ScrollLockOff : EvCapsLockPressed
}

@enduml
  
```



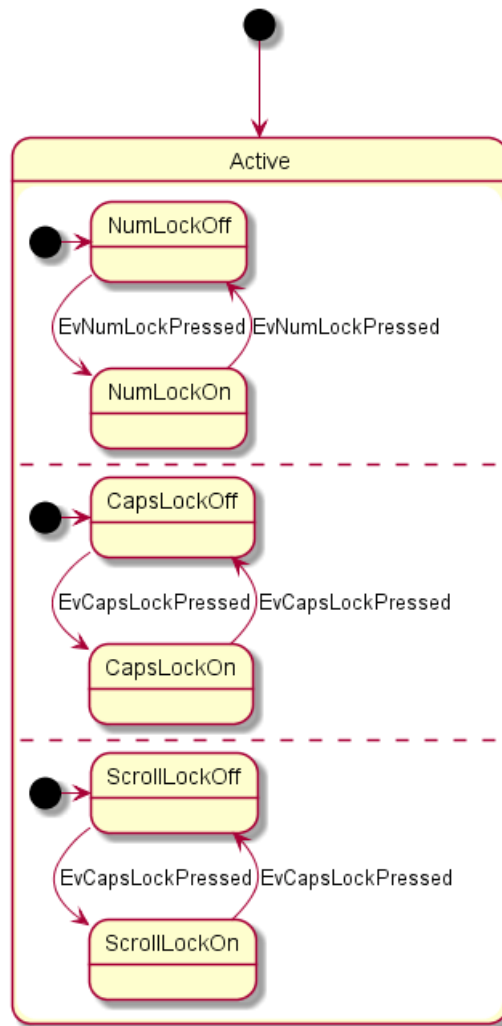

7.6 箭头方向


使用 -> 定义水平箭头，也可以使用下列格式强制设置箭头方向：

- -down-> (default arrow)
- -right-> or ->
- -left->
- -up->

```
@startuml
```

```
[*] -up-> First
First -right-> Second
Second --> Third
Third -left-> Last
```

```
@enduml
```

可以用首字母缩写或者开始的两个字母定义方向 (如, -d-, -down-和 -do-是完全等价的)。请不要滥用这些功能, *Graphviz* 不喜欢这样。

7.7 注释

可以用 `note left of`, `note right of`, `note top of`, `note bottom of` 关键字来定义注释。还可以定义多行注释。


```
@startuml
```

```
[*] --> Active
Active --> Inactive
```

```
note left of Active : this is a short\nnote
```

```
note right of Inactive
  A note can also
  be defined on
  several lines
end note
```

```
@enduml
```

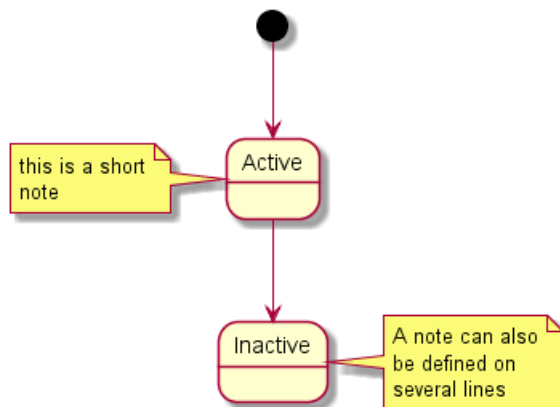

以及浮动注释。

```
@startuml
```

```
state foo
note "This is a floating note" as N1
```

```
@enduml
```



7.8 更多注释


可以在合成状态中放置注释。

```
@startuml
[*] --> NotShooting

state "Not Shooting State" as NotShooting {
    state "Idle mode" as Idle
    state "Configuring mode" as Configuring
    [*] --> Idle
    Idle --> Configuring : EvConfig
    Configuring --> Idle : EvConfig
}

note right of NotShooting : This is a note on a composite state

@enduml
```

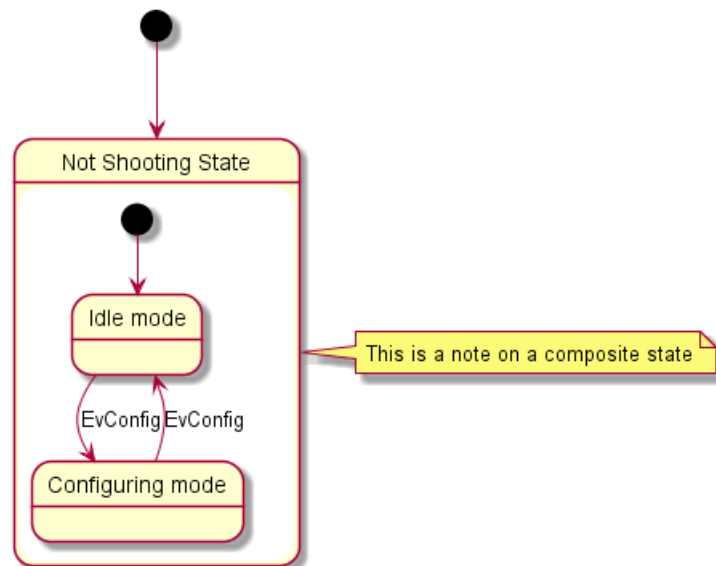

7.9 显示参数

用 `skinparam` 改变字体和颜色。

可以在如下场景中使用：

- 在图示的定义中，
- 在引入的文件中，
- 在命令行或者 ANT 任务提供的配置文件中。

还可以为状态的构造类型指定特殊的字体和颜色。

```
@startuml
skinparam backgroundColor LightYellow
skinparam state {
    StartColor MediumBlue
    EndColor Red
    BackgroundColor Peru
    BackgroundColor<<Warning>> Olive
    BorderColor Gray
    FontName Impact
}
```




```
}
```

```
[*] --> NotShooting
```

```
state "Not Shooting State" as NotShooting {
  state "Idle mode" as Idle <<Warning>>
  state "Configuring mode" as Configuring
  [*] --> Idle
  Idle --> Configuring : EvConfig
  Configuring --> Idle : EvConfig
}
```

```
NotShooting --> [*]
@enduml
```

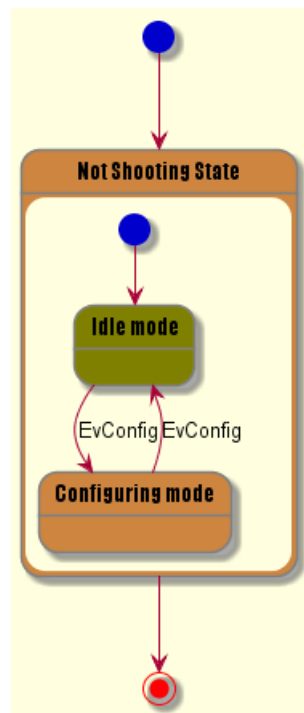

8 对象图

8.1 对象的定义

使用关键字 `object` 定义实例。

```
@startuml
object firstObject
object "My Second Object" as o2
@enduml
```



8.2 对象之间的关系

对象之间的关系用如下符号定义：

Type	Symbol	Image
Extension	< --	
Composition	*--	
Aggregation	o--	

也可以用 `..` 来代替 `--` 以使用点线。


知道了这些规则，就可以画下面的图：

可以用冒号给关系添加标签，标签内容紧跟在冒号之后。

用双引号在关系的两边添加基数。

```
@startuml
object Object01
object Object02
object Object03
object Object04
object Object05
object Object06
object Object07
object Object08
```


```
Object01 <|-- Object02
Object03 *-- Object04
Object05 o-- "4" Object06
Object07 .. Object08 : some labels
@enduml
```

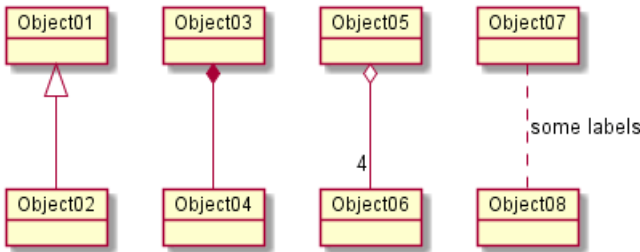

8.3 添加属性


用冒号加属性名的形式声明属性。

```
@startuml  
  
object user  
  
user : name = "Dummy"  
user : id = 123  
  
@enduml
```



也可以用大括号批量声明属性。

```
@startuml  
  
object user {  
    name = "Dummy"  
    id = 123  
}  
  
@enduml
```



8.4 类图中的通用特性

- 可见性
- 定义注释
- 使用包
- 美化输出内容

9 时序图

这只是个提案，主题和内容可能改变。

非常欢迎您参与这个新特性的讨论。您的反馈、创意和建议可以帮助我们找寻适合的解决方案。

9.1 声明参与者

使用 `concise` or `robust` 关键字声明参与者, 选择哪个取决于所需的显示样式。


通过 `@` 标注, 和 `is` 动词定义状态。

```
@startuml
robust "Web 浏览器" as WB
concise "Web 用户" as WU
```

```
@0
WU is 空闲
WB is 空闲
```

```
@100
WU is 等待中
WB is 处理中
```

```
@300
WB is 等待中
@enduml
```

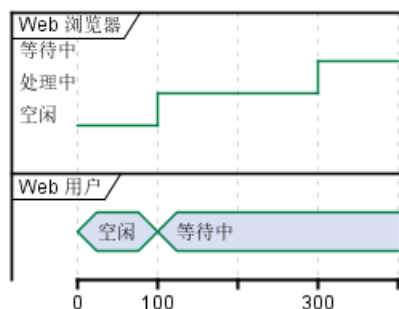

9.2 增加消息

使用下述的语法增加对消息的描述。


```
@startuml
robust "Web 浏览器" as WB
concise "Web 用户" as WU
```

```
@0
WU is 空闲
WB is 空闲
```

```
@100
WU -> WB : URL
WU is 等待中
WB is 处理中
```

```
@300
WB is 等待中
@enduml
```



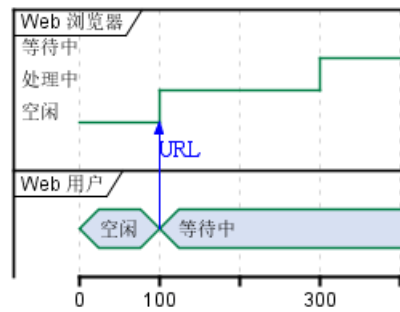

9.3 相对时间

It is possible to use relative time with @.

```

@startuml
robust "DNS Resolver" as DNS
robust "Web Browser" as WB
concise "Web User" as WU
  
```

```

@0
WU is Idle
WB is Idle
DNS is Idle
  
```

```

@+100
WU -> WB : URL
WU is Waiting
WB is Processing
  
```

```


@+200
WB is Waiting
WB -> DNS@+50 : Resolve URL
  
```

```

@+100
DNS is Processing
  
```

```

@+300
DNS is Idle
@enduml
  
```

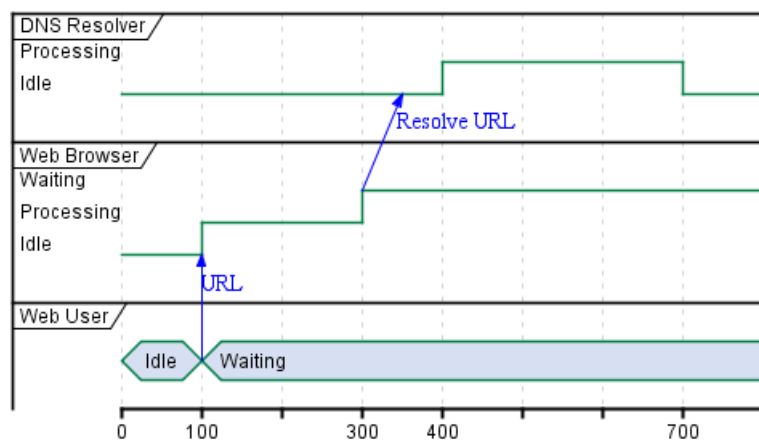


9.4 Participant oriented

Rather than declare the diagram in chronological order, you can define it by participant.

```
@startuml
robust "Web Browser" as WB
concise "Web User" as WU
```

```
@WB
0 is idle
+200 is Proc.
+100 is Waiting
```

```
@WU
0 is Waiting
+500 is ok
@enduml
```

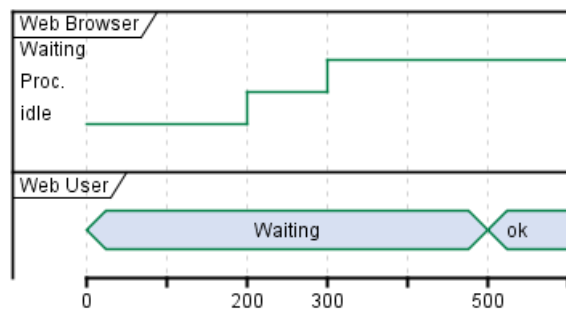


9.5 Setting scale

You can also set a specific scale.

```
@startuml
concise "Web User" as WU
scale 100 as 50 pixels
```

```
@WU
0 is Waiting
+500 is ok
@enduml
```

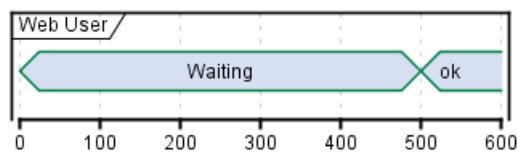

9.6 Initial state

You can also define an initial state.

```
@startuml
robust "Web Browser" as WB
concise "Web User" as WU
```

```
WB is Initializing
WU is Absent
```





```

@WB
0 is idle
+200 is Processing
+100 is Waiting

@WU
0 is Waiting
+500 is ok
@enduml

```

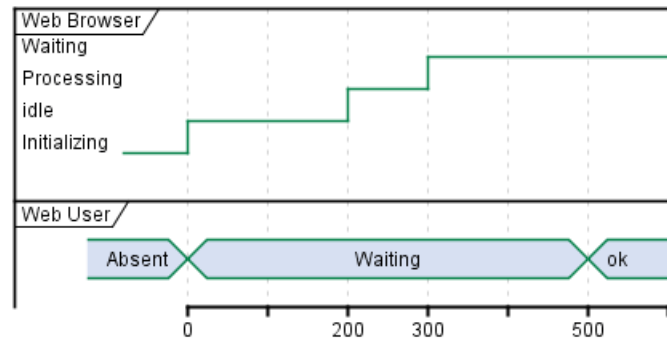


9.7 Intricated state

A signal could be in some undefined state.

```

@startuml
robust "Signal1" as S1
robust "Signal2" as S2
S1 has 0,1,2,hello
S2 has 0,1,2
@0
S1 is 0
S2 is 0
@100
S1 is {0,1} #SlateGrey
S2 is {0,1}
@200
S1 is 1
S2 is 0
@300
S1 is hello
S2 is {0,2}
@enduml

```

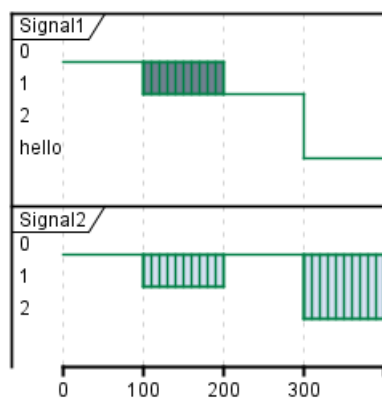

9.8 Hidden state

It is also possible to hide some state.

```
@startuml
concise "Web User" as WU
```

```
@0
WU is {-}
```


```
@100
WU is A1
```

```
@200
WU is {-}
```

```
@300
WU is {hidden}
```

```
@400
WU is A3
```

```
@500
WU is {-}
@enduml
```

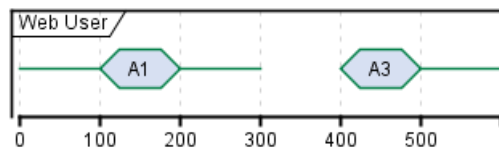

9.9 Adding constraint

It is possible to display time constraints on the diagrams.


```
@startuml
robust "Web Browser" as WB
concise "Web User" as WU
```

```
WB is Initializing
WU is Absent
```

```
@WB
0 is idle
+200 is Processing
+100 is Waiting
WB@0 <-> @50 : {50 ms lag}
```

```
@WU
0 is Waiting
+500 is ok
@200 <-> @+150 : {150 ms}
@enduml
```



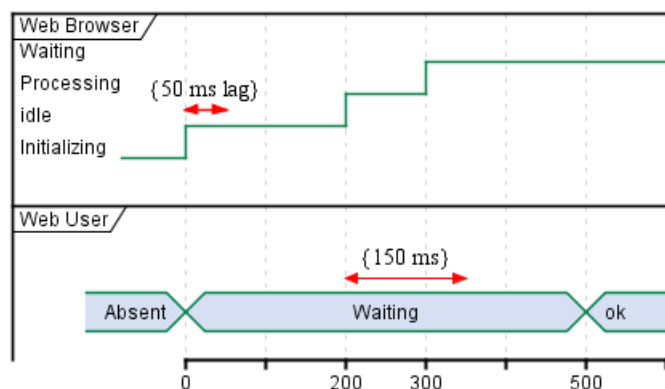

9.10 Adding texts

You can optionally add a title, a header, a footer, a legend and a caption:

```

@startuml
Title this is my title
header: some header
footer: some footer
legend
Some legend
end legend
caption some caption


robust "Web Browser" as WB
concise "Web User" as WU

@0
WU is Idle
WB is Idle

@100
WU is Waiting
WB is Processing

@300
WB is Waiting
@enduml

```

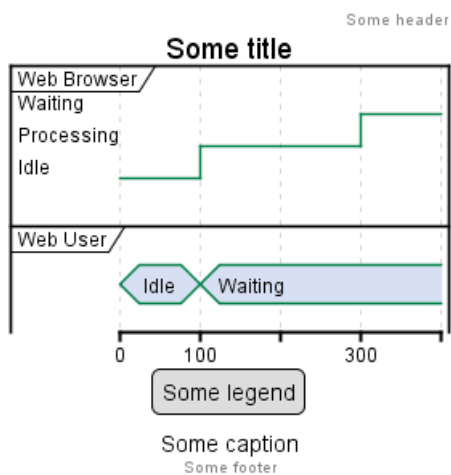

10 Gantt Diagram

This is only a proposal and subject to change.


You are very welcome to create a new discussion on this future syntax. Your feedbacks, ideas and suggestions help us to find the right solution.

The Gantt is described in *natural* language, using very simple sentences (subject-verb-complement).

10.1 Declaring tasks

Tasks defined using square bracket. Their durations are defined using the last verb:


```
@startgantt
[Prototype design] lasts 15 days
[Test prototype] lasts 10 days
@endgantt
```



10.2 Adding constraints

It is possible to add constraints between task.

```
@startgantt
[Prototype design] lasts 15 days
[Test prototype] lasts 10 days
[Test prototype] starts at [Prototype design]'s end
@endgantt
```




```
@startgantt
[Prototype design] lasts 10 days
[Code prototype] lasts 10 days
[Write tests] lasts 5 days
[Code prototype] starts at [Prototype design]'s end
[Write tests] starts at [Code prototype]'s start
@endgantt
```



10.3 Short names

It is possible to define short name for tasks with the as keyword.


```
@startgantt
[Prototype design] as [D] lasts 15 days
[Test prototype] as [T] lasts 10 days
[T] starts at [D]'s end
@endgantt
```



10.4 Customize colors

It also possible to customize colors.


```
@startgantt
[Prototype design] lasts 13 days
[Test prototype] lasts 4 days
[Test prototype] starts at [Prototype design]'s end
[Prototype design] is colored in Fuchsia/FireBrick
[Test prototype] is colored in GreenYellow/Green
@endgantt
```



10.5 Milestone

You can define Milestones using the happens verb.

```
@startgantt
[Test prototype] lasts 10 days
[Prototype completed] happens at [Test prototype]'s end
[Setup assembly line] lasts 12 days
[Setup assembly line] starts at [Test prototype]'s end
@endgantt
```



10.6 Calendar

You can specify a starting date for the whole project. By default, the first task starts at this date.

```
@startgantt
Project starts the 20th of september 2017
[Prototype design] as [TASK1] lasts 13 days
[TASK1] is colored in Lavender/LightBlue
@endgantt
```




10.7 Close day

It is possible to close some day.

```
@startgantt
project starts the 2018/04/09
saturday are closed
sunday are closed
2018/05/01 is closed
2018/04/17 to 2018/04/19 is closed
[Prototype design] lasts 14 days
[Test prototype] lasts 4 days
[Test prototype] starts at [Prototype design]'s end
[Prototype design] is colored in Fuchsia/FireBrick
[Test prototype] is colored in GreenYellow/Green
```




```
@endgantt
```



10.8 Simplified task succession


It's possible to use the then keyword to denote consecutive tasks.

```
@startgantt
[Prototype design] lasts 14 days
then [Test prototype] lasts 4 days
then [Deploy prototype] lasts 6 days
@endgantt
```



You can also use arrow ->


```
@startgantt
[Prototype design] lasts 14 days
[Build prototype] lasts 4 days
[Prepare test] lasts 6 days
[Prototype design] -> [Build prototype]
[Prototype design] -> [Prepare test]
@endgantt
```



10.9 Separator

You can use -- to separate sets of tasks.

```
@startgantt
[Task1] lasts 10 days
then [Task2] lasts 4 days
-- Phase Two --
then [Task3] lasts 5 days
then [Task4] lasts 6 days
@endgantt
```

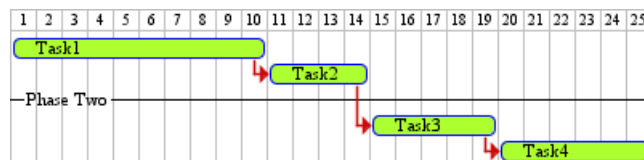

10.10 Working with resources

You can affect tasks on resources using the on keyword and brackets for resource name.


```
@startgantt
[Task1] on {Alice} lasts 10 days
[Task2] on {Bob:50%} lasts 2 days
```



```

then [Task3] on {Alice:25%} lasts 1 days
@endgant

```



10.11 Complex example

It also possible to use the and conjunction.

You can also add delays in constraints.

```

@startgant
[Prototype design] lasts 13 days and is colored in Lavender/LightBlue
[Test prototype] lasts 9 days and is colored in Coral/Green and starts 3 days after [Prototype design]'s e
[Write tests] lasts 5 days and ends at [Prototype design]'s end
[Hire tests writers] lasts 6 days and ends at [Write tests]'s start
[Init and write tests report] is colored in Coral/Green
[Init and write tests report] starts 1 day before [Test prototype]'s start and ends at [Test prototype]'s
@endgant


```



11 = 简介 =


您可以在 PlantUML 中用 AsciiMath 或 JLaTeXMath 符号:

```
@startuml
: <math>\int_0^1 f(x) dx</math>;
: <math>x^2 + y_1 + z_{12}^{34}</math>;
note right
Try also
<math>\frac{d}{dx} f(x) = \lim_{h \rightarrow 0} \frac{f(x+h) - f(x)}{h}</math>
<latex>P(y|\mathbf{x}) \ \mbox{ or } \ f(\mathbf{x}) + \epsilon</latex>
end note
@enduml
```

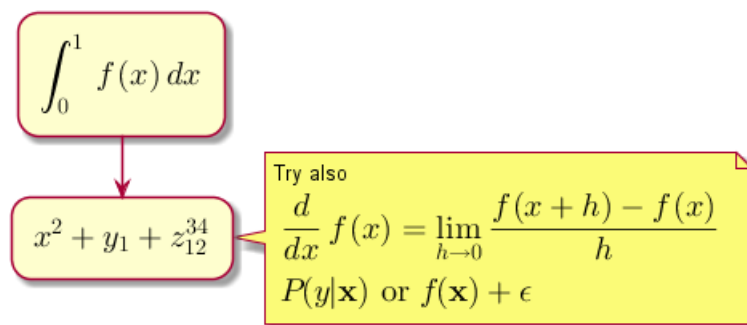

或:

```
@startuml
Bob -> Alice : Can you solve: <math>ax^2+bx+c=0</math>
Alice --> Bob: <math>x = \frac{-b \pm \sqrt{b^2 - 4ac}}{2a}</math>
@enduml
```

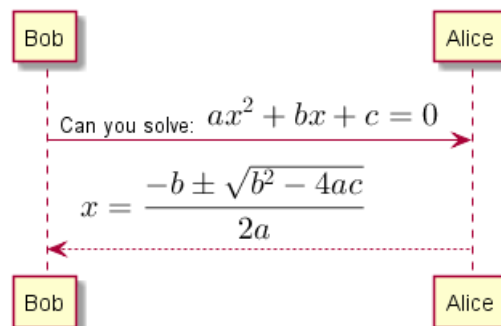

11.1 独立图

您也可以使用 @startmath/@endmath 来创建独立的 AsciiMath 公式。

```
@startmath
f(t) = (a_0)/2 + \sum_{n=1}^{\infty} a_n \cos\left(\frac{n\pi t}{L}\right) + \sum_{n=1}^{\infty} b_n \sin\left(\frac{n\pi t}{L}\right)
@endmath
```

$$f(t) = \frac{a_0}{2} + \sum_{n=1}^{\infty} a_n \cos\left(\frac{n\pi t}{L}\right) + \sum_{n=1}^{\infty} b_n \sin\left(\frac{n\pi t}{L}\right)$$

或用 @startlatex/@endlatex 来创建独立的 JLaTeXMath 公式。

```
@startlatex
\sum_{i=0}^{n-1} (a_i + b_i^2)
@endlatex
```



$$\sum_{i=0}^{n-1} (a_i + b_i^2)$$

11.2 这是如何工作的?

要绘制这此公式, PlantUML 使用了两个开源项目:

- AsciiMath 转换 AsciiMath 符号为 LaTeX 表达式。
- JLatexMath 来显示 LaTeX 数学公式。JLaTeXMath 是最好的显示 LaTeX 代码的 Java 类库。

ASCIIMathTeXImg.js 是一个小到足以集成到 PlantUML 标准发版的。

由于 JLatexMath 太大, 您要单独到下载它, 然后解压 4 jar 文件 (*batik-all-1.7.jar*, *jlatexmath-minimal-1.0.3.jar*, *jlm_cyrillic.jar* 和 *jlm_greek.jar*) 到 PlantUML.jar 同一目录下。



12 Common commands

12.1 Comments

Everything that starts with `simple quote ' is a comment.`

You can also put comments on several lines using `/' to start and ' / to end.`

12.2 Footer and header

You can use the commands `header` or `footer` to add a footer or a header on any generated diagram.

You can optionally specify if you want a `center`, `left` or `right` footer/header, by adding a keyword.

As for title, it is possible to define a header or a footer on several lines.


It is also possible to put some HTML into the header or footer.

```
@startuml
Alice -> Bob: Authentication Request
```

```
header
<font color=red>Warning:</font>
Do not use in production.
endheader
```

```
center footer Generated for demonstration
```

```
@enduml
```

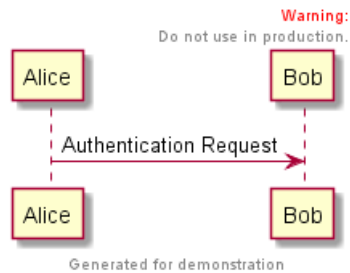

12.3 缩放


You can use the `scale` command to zoom the generated image.

You can use either a number or a fraction to define the scale factor. You can also specify either width or height (in pixel). And you can also give both width and height : the image is scaled to fit inside the specified dimension.

- `scale 1.5`
- `scale 2/3`
- `scale 200 width`
- `scale 200 height`
- `scale 200*100`
- `scale max 300*200`
- `scale max 1024 width`
- `scale max 800 height`



```
@startuml
scale 180*90
Bob->Alice : hello
@enduml
```



12.4 Title

The title keywords is used to put a title. You can add newline using \n in the title description.


Some skinparam settings are available to put borders on the title.

```
@startuml
skinparam titleBorderRoundCorner 15
skinparam titleBorderThickness 2
skinparam titleBorderColor red
skinparam titleBackgroundColor Aqua-CadetBlue

title Simple communication\nexample

Alice -> Bob: Authentication Request
Bob --> Alice: Authentication Response

@enduml
```



You can use creole formatting in the title.

You can also define title on several lines using title and end title keywords.

```
@startuml


title
  <u>Simple</u> communication example
  on <i>several</i> lines and using <back:cadetblue>creole tags</back>
end title

Alice -> Bob: Authentication Request
Bob -> Alice: Authentication Response

@enduml
```



**Simple communication example
on several lines and using creole tags**




12.5 Caption

There is also a caption keyword to put a caption under the diagram.

```
@startuml
```

```
caption figure 1
Alice -> Bob: Hello
```

```
@enduml
```



12.6 Legend the diagram


The legend and end legend are keywords is used to put a legend.

You can optionally specify to have left, right or center alignment for the legend.

```
@startuml
```

```
Alice -> Bob : Hello
legend right
  Short
  legend
endlegend
```

```
@enduml
```



13 Salt

Salt 是 PlantUML 下面的子项目用来帮助用户来设计图形接口。

可以用 `@startsalt` 关键字，或者使用 `@startuml` 紧接着下一行使用 `salt` 关键字。

13.1 基本部件

一个窗口必须以中括号开头和结尾。接着可以这样定义：

- 按钮用 `[和]`。
- 单选按钮用 `(和)`。
- 复选框用 `[和]`。
- 用户文字域用 `"`。

```
@startuml
salt
{
  Just plain text
  [This is my button]
  ( ) Unchecked radio
  (X) Checked radio
  [] Unchecked box
  [X] Checked box
  "Enter text here  "
  ^This is a droplist^
}
@enduml
```



这个工具是用来讨论简单的示例窗口。


13.2 使用表格

当在输入关键词 `{` 后，会自动建立一个表格

当输入 `|` 说明一个单元格

例子如下

```
@startsalt
{
  Login    | "MyName  "
  Password | "****   "
  [Cancel] | [ OK   ]
}
@endsalt
```



在启用关键词后，你可以使用以下字符来绘制表格中的线及列:

Symbol	Result
#	显示所有垂直水平线
!	显示所有垂直线
-	显示所有水平线
+	显示外框线

```
@startsalt
{+
  Login    | "MyName  "
  Password | "****   "
  [Cancel] | [ OK   ]
}
@endsalt
```

13.3 Group box

more info

```
@startsalt
{~"My group box"
  Login    | "MyName  "
  Password | "****   "
  [Cancel] | [ OK   ]
}
@endsalt
```

13.4 使用分隔符

你可以使用几条横线表示分隔符

```
@startsalt
{
  Text1
  ..
  "Some field"
  ==
  Note on usage
  ~~
  Another text
  --
  [Ok]
}
@endsalt
```



Text1

Some field

Note on usage

Another text

Ok

13.5 树形外挂

使用树结构，你必须要以 {T 进行起始，然后使用 + 定义层次。

```
@startsalt
{
{T
+ World
++ America
+++ Canada
+++ USA
++++ New York
++++ Boston
+++ Mexico
++ Europe
+++ Italy
+++ Germany
++++ Berlin
++ Africa
}
}
@endsalt
```



13.6 Enclosing brackets

You can define subelements by opening a new opening bracket.

```
@startsalt
{
Name          | "          "
Modifiers:    | { (X) public | () default | () private | () protected
              | [] abstract | [] final   | [] static }
Superclass:   | { "java.lang.Object " | [Browse...] }
}
@endsalt
```

Name

Modifiers: ☒ public ☐ default ☐ private ☐ protected
☐ abstract ☐ final ☐ static


Superclass: **Browse...**



13.7 添加选项卡


你可以通过 {/ 标记增加对应的选项卡。注意：可以使用 HTML 代码来增加粗体效果。

```
@startsalt
{+
{/ <b>General | Fullscreen | Behavior | Saving }
{
{ Open image in: | ^Smart Mode^ }
[X] Smooth images when zoomed
[X] Confirm image deletion
[ ] Show hidden images
}
[Close]
}
@endsalt
```

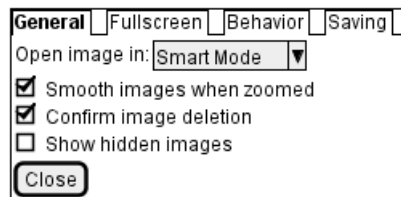

可以定义垂直选项卡，如下：

```
@startsalt
{+
{/ <b>General
Fullscreen
Behavior
Saving } |
{
{ Open image in: | ^Smart Mode^ }
[X] Smooth images when zoomed
[X] Confirm image deletion
[ ] Show hidden images
[Close]
}
}
@endsalt
```

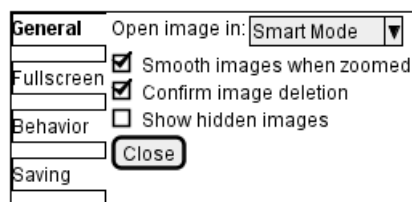


13.8 使用菜单

你可以使用记号 {* 来添加菜单。

```
@startsalt
{+
{* File | Edit | Source | Refactor }
{/ General | Fullscreen | Behavior | Saving }
{
{ Open image in: | ^Smart Mode^ }
[X] Smooth images when zoomed
}
```





```
[X] Confirm image deletion
[ ] Show hidden images
}
[Close]
}
@endsalt
```

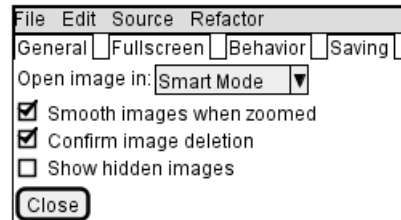

你也可以打开一个菜单:

```
@startsalt
{+
{* File | Edit | Source | Refactor
  Refactor | New | Open File | - | Close | Close All }
{/ General | Fullscreen | Behavior | Saving }
{
{ Open image in: | ^Smart Mode^ }
[X] Smooth images when zoomed
[X] Confirm image deletion
[ ] Show hidden images
}
[Close]
}
@endsalt
```

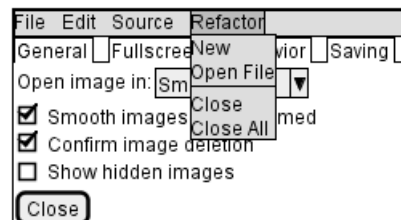

13.9 高级表格

对于表格有两种特殊的标记:

- * 单元格同时具备 span 和 left 两个属性
- . 是空白单元格

```
@startsalt
{#
. | Column 2 | Column 3
Row header 1 | value 1 | value 2
Row header 2 | A long cell | *
}
@endsalt
```

	Column 2	Column 3
Row header 1	value 1	value 2
Row header 2	A long cell	



13.10 OpenIconic

OpenIconic is an very nice open source icon set. Those icons have been integrated into the creole parser, so you can use them out-of-the-box.

You can use the following syntax: `<&ICON_NAME>`.

```
@startsalt
{
  Login<&person> | "MyName   "
  Password<&key> | "****    "
  [Cancel <&circle-x>] | [OK <&account-login>]
}
@endsalt
```



The complete list is available on OpenIconic Website, or you can use the following special diagram:

```
@startuml
listopeniconic
@enduml
```

List Open Iconic

Credit to
<https://useiconic.com/open>

➤ account-login	🔔 bell	☁ cloud	≡ excerpt	≡ justify-right	🎵 musical-note	★ star
➤ account-logout	📶 bluetooth	☁ cloudy	⌵ expand-down	🔑 key	📎 paperclip	☀ sun
↶ action-redo	🔤 bold	📄 code	⌵ expand-left	💻 laptop	📱 pencil	📱 tablet
↷ action-undo	⚡ bolt	⚙ cog	⌵ expand-right	📁 layers	👤 people	🏷 tag
≡ align-center	📖 book	⌵ collapse-down	⌵ expand-up	💡 lightbulb	👤 person	🏷 tags
≡ align-left	🔖 bookmark	⌵ collapse-left	🔗 external-link	🔗 link-broken	📞 phone	🎯 target
≡ align-right	📦 box	⌵ collapse-right	👁 eye	🔗 link-intact	📊 pie-chart	📋 task
🔍 aperture	📁 briefcase	⌵ collapse-up	👁 eyedropper	≡ list-rich	📌 pin	🖨 terminal
↓ arrow-bottom	£ british-pound	≡ command	📁 file	≡ list	🎮 play-circle	📄 text
🕒 arrow-circle-bottom	🌐 browser	■ comment-square	🔥 fire	📍 location	➕ plus	👎 thumb-down
🕒 arrow-circle-left	🖌 brush	🧭 compass	🚩 flag	🔒 lock-locked	🔌 power-standby	👍 thumb-up
🕒 arrow-circle-right	🐛 bug	🕒 contrast	⚡ flash	🔓 lock-unlocked	🖨 print	⌚ timer
↶ arrow-left	📣 bullhorn	≡ copywriting	📁 folder	🔄 loop-circular	📁 project	⇄ transfer
→ arrow-right	📊 calculator	≡ credit-card	🍴 fork	📐 loop-square	⚡ pulse	🗑 trash
↓ arrow-thick-bottom	📅 calendar	📏 crop	🖥 fullscreen-enter	≡ loop	🧩 puzzle-piece	📏 underline
↶ arrow-thick-left	📷 camera-slr	📊 dashboard	🖥 fullscreen-exit	🔍 magnifying-glass	❓ question-mark	📏 vertical-align-bottom
↶ arrow-thick-right	⏮ caret-bottom	⬇ data-transfer-download	🌐 globe	📍 map-marker	🎲 random	📏 vertical-align-center
↶ arrow-thick-top	⏮ caret-left	⬆ data-transfer-upload	📊 graph	📍 map	🔄 reload	📏 vertical-align-top
↶ arrow-thick-top	⏮ caret-right	🗑 delete	📊 grid-four-up	⏸ media-pause	➡ resize-both	📺 video
↶ arrow-thick-top	⏮ caret-top	📄 dial	📊 grid-three-up	▶ media-play	➡ resize-height	🔊 volume-high
↶ arrow-thick-top	📄 cart	📄 document	📊 grid-two-up	⏮ media-record	↔ resize-width	🔊 volume-low
↶ arrow-thick-top	💬 chat	💵 dollar	💾 hard-drive	⏮ media-skip-backward	➡ sort-ascending	⬇ volume-off
↶ arrow-thick-top	✓ check	🗑 double-quote-sans-left	📄 header	▶ media-skip-forward	📡 rss-alt	⚠ warning
↶ arrow-thick-top	⏮ chevron-bottom	🗑 double-quote-sans-right	🎧 headphones	⏮ media-step-backward	📡 rss	📶 wifi
🔊 audio-spectrum	⏮ chevron-left	🗑 double-quote-serif-left	❤ heart	▶ media-step-forward	📄 script	🔧 wrench
🔊 audio	⏮ chevron-right	🗑 double-quote-serif-right	🏠 home	■ media-stop	📦 share-boxed	✂ x
🏷 badge	⏮ chevron-top	💧 droplet	🖼 image	⚕ medical-cross	➡ share	¥ yen
📅 ban	⏮ circle-check	🚀 eject	📧 inbox	≡ menu	🛡 shield	🔍 zoom-in
📊 bar-chart	⏮ circle-x	🚶 elevator	∞ infinity	🎤 microphone	📶 signal	🔍 zoom-out
📋 basket	📄 clipboard	⋯ ellipses	🔍 info	➡ minus	📍 signpost	
🔋 battery-empty	🕒 clock	📁 envelope-closed	📄 italic	📺 monitor	📊 sort-ascending	
🔋 battery-full	☁ cloud-download	📁 envelope-open	≡ justify-center	🌙 moon	📊 sort-descending	
🥼 beaker	☁ cloud-upload	€ euro	≡ justify-left	➡ move	📊 spreadsheet	

13.11 Include Salt

see: <http://forum.plantuml.net/2427/salt-with-minimum-flowchat-capabilities?show=2427#q2427>

```
@startuml
(*) --> "
{{
salt
{+
<b>an example
choose one option
```




```

()one
()two
[ok]
}
}}
" as choose

choose -right-> "
{{
salt
{+
<b>please wait
operation in progress
<&clock>
[cancel]
}
}}
" as wait
wait -right-> "
{{
salt
{+
<b>success
congratulations!
[ok]
}
}}
" as success

wait -down-> "
{{
salt
{+
<b>error
failed, sorry
[ok]
}
}}
"
@enduml

```

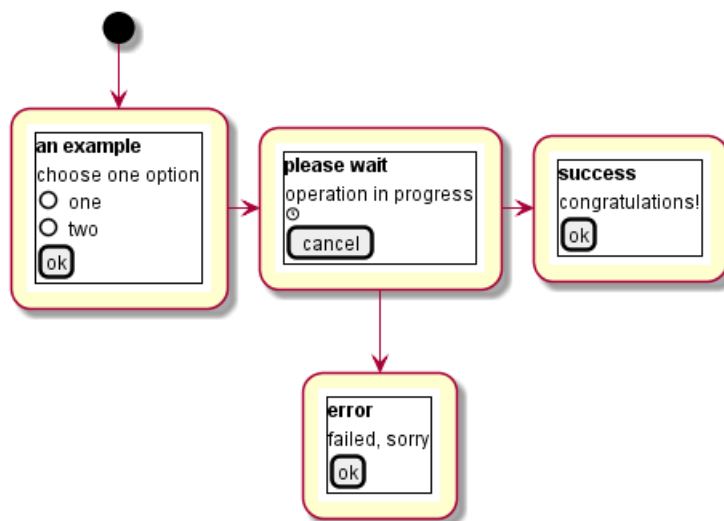

It can also be combined with define macro.

```

@startuml
!definelong SALT(x)
"{{
salt
_##x
}}"
" as x
!enddefinelong

!definelong _choose
{+
<b>an example
choose one option
()one
()two
[ok]
}
!enddefinelong

!definelong _wait
{+
<b>please wait
operation in progress
<&clock>
[cancel]
}
!enddefinelong


!definelong _success
{+
<b>success
congratulations!
[ok]
}
!enddefinelong

!definelong _error
{+
<b>error
failed, sorry
[ok]
}
!enddefinelong

(*) --> SALT(choose)
-right-> SALT(wait)
wait -right-> SALT(success)
wait -down-> SALT(error)

@enduml

```

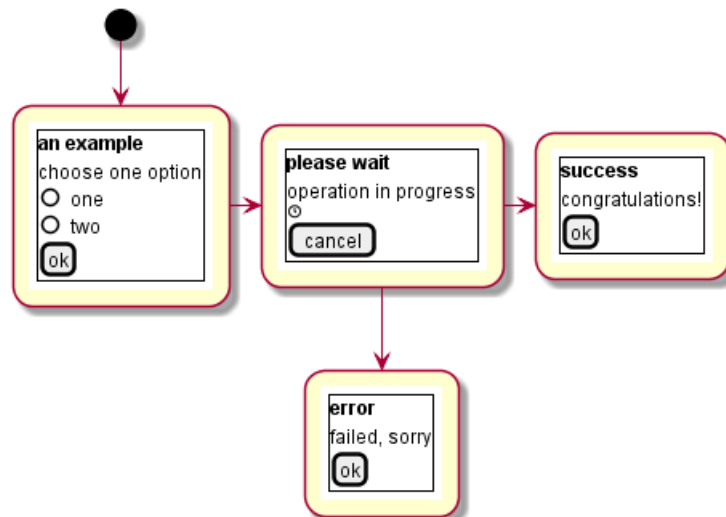

13.12 Scroll Bars

You can use "S" as scroll bar like in following examples:

```
@startsalt
{S
Message
.
.
.
.
}
@endsalt
```




```
@startsalt
{SI
Message
.
.
.
.
}
@endsalt
```



```
@startsalt
{S-
Message
.
.
.

```

```
.  
}  
@endsalt
```



14 Creole


A light Creole engine has been integrated into PlantUML to have a standardized way of defining text style.

All diagrams are now supporting this syntax.

Note that ascending compatibility with HTML syntax is preserved.

14.1 Emphasized text

```
@startuml
Alice -> Bob : hello --there--
... Some ~~long delay~~ ...
Bob -> Alice : ok
note left
  This is bold
  This is //italics//
  This is "monospaced"
  This is --stroked--
  This is underlined
  This is ~~~waved~~~
end note
@enduml
```

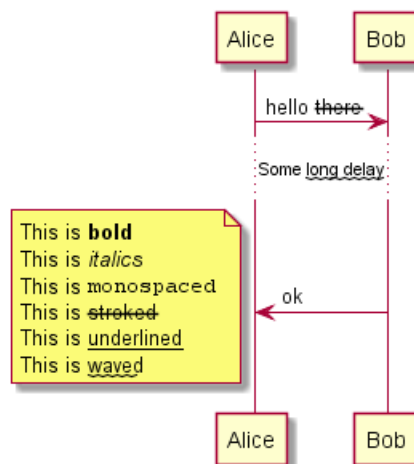


14.2 List

```
@startuml
object demo {
  * Bullet list
  * Second item
}
note left
  * Bullet list
  * Second item
  ** Sub item
end note

legend
  # Numbered list
  # Second item
  ## Sub item
  ## Another sub item
end
```




```
# Third item
end legend
@enduml
```

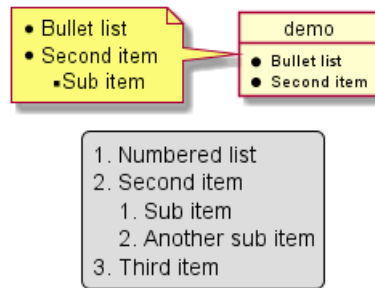

14.3 Escape character

You can use the tilde ~ to escape special creole characters.


```
@startuml
object demo {
  This is not ~___underscored___.
  This is not ~""monospaced"".
}
@enduml
```



14.4 Horizontal lines


```
@startuml
database DB1 as "
You can have horizontal line
----
Or double line
====
Or strong line
----
Or dotted line
..My title..
Enjoy!
"
note right
  This is working also in notes
  You can also add title in all these lines
  ==Title==
  --Another title--
end note
@enduml
```



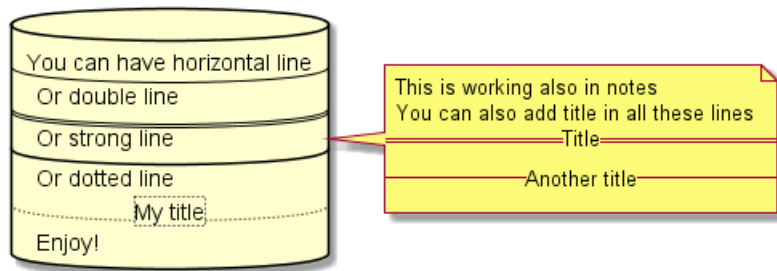

14.5 Headings

```
@startuml
usecase UC1 as "
= Extra-large heading
Some text
== Large heading
Other text
=== Medium heading
Information
....
==== Small heading"
@enduml
```

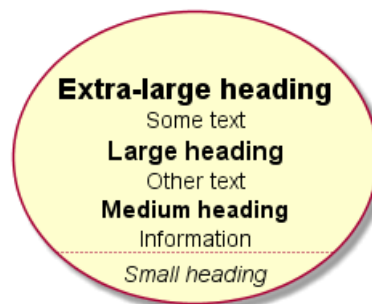

14.6 Legacy HTML

Some HTML tags are also working:

- `` for bold text
- `<u>` or `<u:#AAAAAA>` or `<u:colorName>` for underline
- `<i>` for italic
- `<s>` or `<s:#AAAAAA>` or `<s:colorName>` for strike text
- `<w>` or `<w:#AAAAAA>` or `<w:colorName>` for wave underline text
- `<color:#AAAAAA>` or `<color:colorName>`
- `<back:#AAAAAA>` or `<back:colorName>` for background color
- `<size:nn>` to change font size
- `<img:file>` : the file must be accessible by the filesystem
- `<img:http://plantuml.com/logo3.png>` : the URL must be available from the Internet

```
@startuml
:* You can change <color:red>text color</color>
* You can change <back:cadetblue>background color</back>
* You can change <size:18>size</size>
```



```

* You use <u>legacy</u> <b>HTML <i>tag</i></b>
* You use <u:red>color</u> <s:green>in HTML</s> <w:#0000FF>tag</w>
----
* Use image : <img:http://plantuml.com/logo3.png>
;
@enduml

```



14.7 Table

It is possible to build table.


```

@startuml
skinparam titleFontSize 14
title
  Example of simple table
  | = | = table | = header |
  | a | table | row |
  | b | table | row |
end title
[*] --> State1
@enduml

```

Example of simple table

	table	header
a	table	row
b	table	row




You can specify background colors for cells and lines.

```

@startuml
start
:Here is the result
| = | = table | = header |
| a | table | row |
|<#FF8080> red |<#80FF80> green |<#8080FF> blue |
<#yellow>| b | table | row |;
@enduml

```






14.8 Tree

You can use |_ characters to build a tree.

```
@startuml
skinparam titleFontSize 14
title
    Example of Tree
    |_ First line
    |_ **Bom(Model)**
|_ prop1
|_ prop2
|_ prop3
    |_ Last line
end title
[*] --> State1
@enduml
```

```
Example of Tree
|_ First line
|_ Bom(Model)
    |_ prop1
    |_ prop2
    |_ prop3
    |_ Last line
```



14.9 Special characters

It's possible to use any unicode characters with &# syntax or <U+XXXX>

```
@startuml
usecase foo as "this is &#8734; long"
usecase bar as "this is also <U+221E> long"
@enduml
```



14.10 OpenIconic

OpenIconic is an very nice open source icon set. Those icons have been integrated into the creole parser, so you can use them out-of-the-box.



You can use the following syntax: `<&ICON_NAME>`.

```
@startuml
title: <size:20><&heart>Use of OpenIconic<&heart></size>
class Wifi
note left
    Click on <&wifi>
end note
@enduml
```

♥Use of OpenIconic♥



The complete list is available on OpenIconic Website, or you can use the following special diagram:

```
@startuml
listopeniconic
@enduml
```

List Open Iconic

Credit to
<https://useiconic.com/open>

→ account-login	🔔 bell	☁ cloud	📄 excerpt	⏏ justify-right	🎵 musical-note	★ star
→ account-logout	📶 bluetooth	☁️ cloudy	⏏ expand-down	🔑 key	📄 paperclip	☀ sun
↶ action-redo	⚙ bolt	🔌 code	⏏ expand-left	💻 laptop	✎ pencil	📱 tablet
↷ action-undo	📖 book	⚙ cog	⏏ expand-right	📷 layers	👤 people	🏷 tag
≡ align-center	📁 bookmark	⏏ collapse-down	⏏ expand-up	💡 lightbulb	👤 person	🏷 tags
≡ align-left	📦 box	⏏ collapse-left	🔗 external-link	🔗 link-broken	📱 phone	🎯 target
≡ align-right	📅 briefcase	⏏ collapse-right	👁 eye	🔗 link-intact	📊 pie-chart	📋 task
⚙ aperture	£ british-pound	⏏ collapse-up	👉 eyedropper	📋 list-rich	📌 pin	💻 terminal
↓ arrow-bottom	📄 browser	⚙ command	📁 file	📋 list	🎮 play-circle	📄 text
🕒 arrow-circle-bottom	📄 brush	📄 comment-square	🔥 fire	📍 location	➕ plus	👉 thumb-down
🕒 arrow-circle-left	🐛 bug	📄 compass	🚩 flag	🔒 lock-locked	🔌 power-standby	👍 thumb-up
🕒 arrow-circle-right	📄 calculator	📄 contrast	⚡ flash	🔓 lock-unlocked	🖨 print	⌚ timer
🕒 arrow-circle-top	📅 calendar	📄 copywriting	📁 folder	🔄 loop-circular	📁 project	➡ transfer
↶ arrow-left	📷 camera-slr	📄 credit-card	🔧 fork	📁 loop-square	★ pulse	🗑 trash
→ arrow-right	↶ caret-bottom	📄 crop	🖥 fullscreen-enter	📁 loop	🧩 puzzle-piece	📄 underline
↓ arrow-thick-bottom	↶ caret-left	📄 dashboard	🔌 fullscreen-exit	🔍 magnifying-glass	❓ question-mark	📄 vertical-align-bottom
↶ arrow-thick-left	↶ caret-right	📄 data-transfer-download	🌐 globe	📍 map-marker	🌧 rain	📄 vertical-align-center
→ arrow-thick-right	↶ caret-top	📄 data-transfer-upload	📊 graph	📄 map	🎲 random	📄 vertical-align-top
↑ arrow-thick-top	📄 cart	🗑 delete	📊 grid-four-up	⏏ media-pause	🔄 reload	📄 video
↑ arrow-top	📄 chat	📄 dial	📊 grid-three-up	▶ media-play	↔ resize-both	🔊 volume-high
🔊 audio-spectrum	✓ check	📄 document	📊 grid-two-up	🎵 media-record	↕ resize-height	🔊 volume-low
🔊 badge	↶ chevron-bottom	💵 dollar	💾 hard-drive	⏏ media-skip-backward	↔ resize-width	🔊 volume-off
🚫 ban	↶ chevron-left	📄 double-quote-sans-left	📄 header	▶ media-skip-forward	📡 rss-alt	⚠ warning
📊 bar-chart	↶ chevron-right	📄 double-quote-sans-right	🎧 headphones	⏏ media-step-backward	📡 rss	📶 wifi
📊 basket	↶ chevron-top	📄 double-quote-serif-left	♥ heart	▶ media-step-forward	📄 script	🔧 wrench
🔋 battery-empty	↶ circle-check	📄 double-quote-serif-right	🏠 home	⏏ media-stop	📄 share-boxed	✕ x
🔋 battery-full	📄 circle-x	💧 droplet	🖼 image	🏥 medical-cross	➦ share	¥ yen
🧴 beaker	📄 clipboard	🚪 eject	📁 inbox	☰ menu	🛡 shield	📶 zoom-in
	🕒 clock	🚶 elevator	∞ infinity	🎤 microphone	📶 signal	🔍 zoom-out
	🕒 cloud-download	📄 ellipses	📄 info	➖ minus	📶 signpost	
	📄 cloud-upload	📄 envelope-closed	📄 italic	📄 monitor	📶 sort-ascending	
		📄 envelope-open	≡ justify-center	🌙 moon	📶 sort-descending	
		€ euro	≡ justify-left	➡ move	📄 spreadsheet	



15 Defining and using sprites


A *Sprite* is a small graphic element that can be used in diagrams.

In PlantUML, sprites are monochrome and can have either 4, 8 or 16 gray level.

To define a sprite, you have to use a hexadecimal digit between 0 and F per pixel.


Then you can use the sprite using <\$XXX> where XXX is the name of the sprite.

```
@startuml
sprite $foo1 {
  FFFFFFFFFFFFFFFF
  F0123456789ABCF
  F0123456789ABCF
  F0123456789ABCF
  F0123456789ABCF
  F0123456789ABCF
  F0123456789ABCF
  F0123456789ABCF
  F0123456789ABCF
  F0123456789ABCF
  FFFFFFFFFFFFFFFF
}
Alice -> Bob : Testing <$foo1>
@enduml
```



You can scale the sprite.

```
@startuml
sprite $foo1 {
  FFFFFFFFFFFFFFFF
  F0123456789ABCF
  F0123456789ABCF
  F0123456789ABCF
  F0123456789ABCF
  F0123456789ABCF
  F0123456789ABCF
  F0123456789ABCF
  F0123456789ABCF
  F0123456789ABCF
  FFFFFFFFFFFFFFFF
}
Alice -> Bob : Testing <$foo1{scale=3}>
@enduml
```



15.1 Encoding Sprite

To encode sprite, you can use the command line like:

```
java -jar plantuml.jar -encodesprite 16z foo.png
```

where `foo.png` is the image file you want to use (it will be converted to gray automatically).

After `-encodesprite`, you have to specify a format: 4, 8, 16, 4z, 8z or 16z.

The number indicates the gray level and the optional `z` is used to enable compression in sprite definition.

15.2 Importing Sprite


You can also launch the GUI to generate a sprite from an existing image.

Click in the menubar then on File/Open Sprite Window.

After copying an image into you clipboard, several possible definitions of the corresponding sprite will be displayed : you will just have to pickup the one you want.

15.3 Examples

```
@startuml
sprite $printer [15x15/8z] N0tH3W0W208HxFz_kMAhj7lHWpa1XC716sz0Pq4MVPEWfBHIuxP3L6kbTcizR8tAhzaqFvXwvF
start
:click on <$printer> to print the page;
@enduml
```



```
@startuml
sprite $bug [15x15/16z] PKzR2i0m2BFMi15p__FEjQEqB1z27aeqCqixa8S40T7C53cKpsHpaYPDJY_12MHM-BLRyywPhrrlw
sprite $printer [15x15/8z] N0tH3W0W208HxFz_kMAhj7lHWpa1XC716sz0Pq4MVPEWfBHIuxP3L6kbTcizR8tAhzaqFvXwvF
sprite $disk {
  444445566677881
  436000000009991
  43600000000ACA1
  53700000001A7A1
  53700000012B8A1
  53800000123B8A1
  63800001233C9A1
  634999AABBC99B1
  744566778899AB1
  7456AAAAA99AAB1
  8566AFC228AABB1
  8567AC8118BBBB1
  867BD4433BBBBB1
  39AAAAABBBBBBC1
}

```

title Use of sprites (<\$printer>, <\$bug>...)


```
class Example {
  Can have some bug : <$bug>
  Click on <$disk> to save
}
```



```
note left : The printer <$printer> is available
```

```
@enduml
```

Use of sprites (🖨️, 🐛...)



16 Skinparam command

You can change colors and font of the drawing using the `skinparam` command.

Example:

```
skinparam backgroundColor transparent
```

16.1 Usage

You can use this command :

- In the diagram definition, like any other commands,
- In an included file,
- In a configuration file, provided in the command line or the ANT task.

16.2 Nested

To avoid repetition, it is possible to nest definition. So the following definition :

```
skinparam xxxxParam1 value1
skinparam xxxxParam2 value2
skinparam xxxxParam3 value3
skinparam xxxxParam4 value4
```

is strictly equivalent to:

```
skinparam xxxx {
    Param1 value1
    Param2 value2
    Param3 value3
    Param4 value4
}
```

16.3 List

Since the documentation is not always up to date, you can have the complete list of parameters using this command:

```
java -jar plantuml.jar -language
```

16.4 Black and White

You can force the use of a black&white output using `skinparam monochrome true` command.

```
@startuml
```

```
skinparam monochrome true
```

```
actor User
participant "First Class" as A
participant "Second Class" as B
participant "Last Class" as C
```

```
User -> A: DoWork
activate A
```

```
A -> B: Create Request
activate B
```




```


B -> C: DoWork
activate C
C --> B: WorkDone
destroy C

B --> A: Request Created
deactivate B

A --> User: Done
deactivate A

@enduml

```

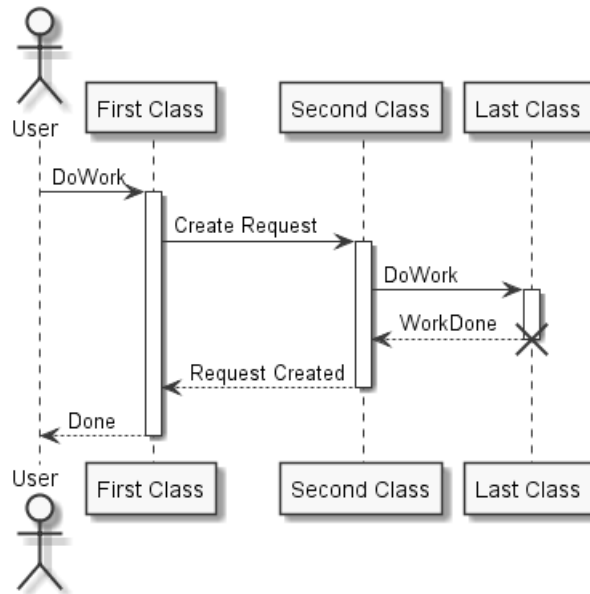

16.5 Reverse colors

You can force the use of a black&white output using `skinparam monochrome reverse` command. This can be useful for black background environment.

```

@startuml

skinparam monochrome reverse

actor User
participant "First Class" as A
participant "Second Class" as B
participant "Last Class" as C

User -> A: DoWork
activate A

A -> B: Create Request
activate B

B -> C: DoWork
activate C
C --> B: WorkDone
destroy C

B --> A: Request Created


```



```
deactivate B
```

```
A --> User: Done
deactivate A
```

```
@enduml
```

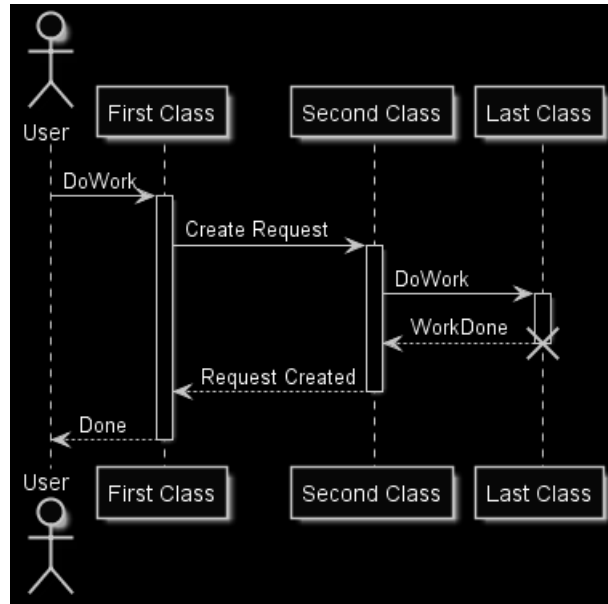

16.6 Colors

You can use either standard color name or RGB code.

APPLICATION	Crimson	DeepPink	Indigo	LightYellow	Navy	RoyalBlue	Turquoise
AliceBlue	Cyan	DeepSkyBlue	Ivory	Lime	OldLace	STRATEGY	Violet
AntiqueWhite	DarkBlue	DimGray	Khaki	LimeGreen	Olive	SaddleBrown	Wheat
Aqua	DarkCyan	DimGrey	Lavender	Linen	OliveDrab	Salmon	White
Aquamarine	DarkGoldenRod	DodgerBlue	LavenderBlush	MOTIVATION	Orange	SandyBrown	WhiteSmoke
Azure	DarkGray	FireBrick	LawnGreen	Magenta	OrangeRed	SeaGreen	Yellow
BUSINESS	DarkGreen	FloralWhite	LemonChiffon	Maroon	Orchid	SeaShell	YellowGreen
Beige	DarkGrey	ForestGreen	LightBlue	MediumAquaMarine	PHYSICAL	Sienna	
Bisque	DarkKhaki	Fuchsia	LightCoral	MediumBlue	PaleGoldenRod	Silver	
Black	DarkMagenta	Gainsboro	LightCyan	MediumOrchid	PaleGreen	SkyBlue	
BlanchedAlmond	DarkOliveGreen	GhostWhite	LightGoldenRodYellow	MediumPurple	PaleTurquoise	SlateBlue	
Blue	DarkOrchid	Gold	LightGray	MediumSeaGreen	PaleVioletRed	SlateGray	
BlueViolet	DarkRed	GoldenRod	LightGreen	MediumSlateBlue	PapayaWhip	SlateGrey	
Brown	DarkSalmon	Gray	LightGrey	MediumSpringGreen	PeachPuff	Snow	
BurlyWood	DarkSeaGreen	Green	LightPink	MediumTurquoise	Peru	SpringGreen	
CadetBlue	DarkSlateBlue	GreenYellow	LightSalmon	MediumVioletRed	Pink	SteelBlue	
Chartreuse	DarkSlateGray	Grey	LightSeaGreen	MidnightBlue	Plum	TECHNOLOGY	
Chocolate	DarkSlateGrey	HoneyDew	LightSkyBlue	MintCream	PowderBlue	Tan	
Coral	DarkTurquoise	HotPink	LightSlateGray	MistyRose	Purple	Teal	
CornflowerBlue	DarkViolet	IMPLEMENTATION	LightSlateGrey	Moccasin	Red	Thistle	
Cornsilk	Darkorange	IndianRed	LightSteelBlue	NavajoWhite	RosyBrown	Tomato	

transparent can only be used for background of the image.

16.7 Font color, name and size

You can change the font for the drawing using xxxFontColor, xxxFontSize and xxxFontName parameters.

Example:



```
skinparam classFontColor red
skinparam classFontSize 10
skinparam classFontName Aapex
```

You can also change the default font for all fonts using `skinparam defaultFontName`.

Example:

```
skinparam defaultFontName Aapex
```

Please note the fontname is highly system dependent, so do not over use it, if you look for portability. Helvetica and Courier should be available on all system.

A lot of parameters are available. You can list them using the following command:


```
java -jar plantuml.jar -language
```

16.8 Text Alignment

Text alignment can be set up to left, right or center. You can also use `direction` or `reverseDirection` values for `sequenceMessageAlign` which align text depending on arrow direction.

Param name	Default value	Comment
<code>sequenceMessageAlign</code>	left	Used for messages in sequence diagrams
<code>sequenceReferenceAlign</code>	center	Used for ref over in sequence diagrams

```
@startuml
skinparam sequenceMessageAlign center
Alice -> Bob : Hi
Alice -> Bob : This is very long
@enduml
```



16.9 Examples

```
@startuml
skinparam backgroundColor #EEEBDC
skinparam handwritten true

skinparam sequence {
    ArrowColor DeepSkyBlue
    ActorBorderColor DeepSkyBlue
    LifeLineBorderColor blue
    LifeLineBackgroundColor #A9DCDF

    ParticipantBorderColor DeepSkyBlue
    ParticipantBackgroundColor DodgerBlue
    ParticipantFontName Impact
    ParticipantFontSize 17
    ParticipantFontColor #A9DCDF

    ActorBackgroundColor aqua
    ActorFontColor DeepSkyBlue
    ActorFontSize 17
}
```



```

ActorFontName Apex
}

actor User
participant "First Class" as A
participant "Second Class" as B
participant "Last Class" as C

User -> A: DoWork
activate A

A -> B: Create Request
activate B


B -> C: DoWork
activate C
C --> B: WorkDone
destroy C

B --> A: Request Created
deactivate B

A --> User: Done
deactivate A

@enduml

```

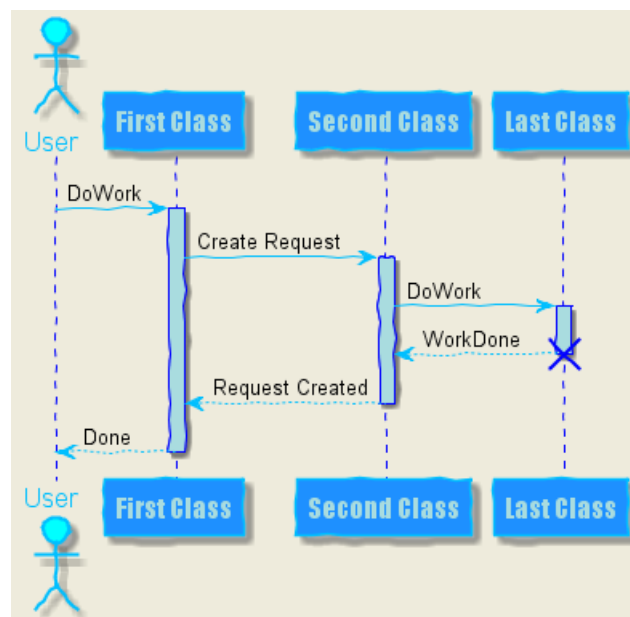

```

@startuml
skinparam handwritten true

skinparam actor {
  BorderColor black
  FontName Courier
  BackgroundColor<< Human >> Gold
}

skinparam usecase {
  BackgroundColor DarkSeaGreen
  BorderColor DarkSlateGray

```



```

BackgroundColor<< Main >> YellowGreen
BorderColor<< Main >> YellowGreen


ArrowColor Olive
}

User << Human >>
:Main Database: as MySql << Application >>
(Start) << One Shot >>
(Use the application) as (Use) << Main >>

User -> (Start)
User --> (Use)

MySql --> (Use)
@enduml

```

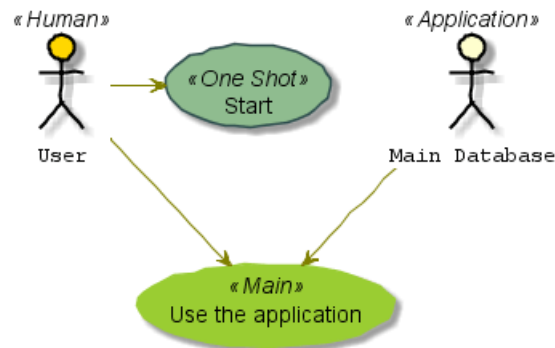

```


@startuml
skinparam roundcorner 20
skinparam class {
  BackgroundColor PaleGreen
  ArrowColor SeaGreen
  BorderColor SpringGreen
}
skinparam stereotypeCBackgroundColor YellowGreen

```

```
Class01 "1" *-- "many" Class02 : contains
```

```
Class03 o-- Class04 : aggregation
```

```
@enduml
```

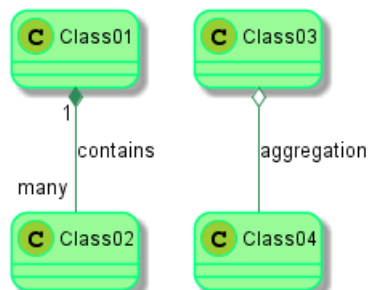

```
@startuml
```

```

skinparam interface {
  backgroundColor RosyBrown
  borderColor orange
}

```

```


}

skinparam component {
  FontSize 13
  BackgroundColor<<Apache>> Red
  BorderColor<<Apache>> #FF6655
  FontName Courier
  BorderColor black
  BackgroundColor gold
  ArrowFontName Impact
  ArrowColor #FF6655
  ArrowFontColor #777777
}

() "Data Access" as DA

DA - [First Component]
[First Component] ..> () HTTP : use
HTTP - [Web Server] << Apache >>
@enduml

```

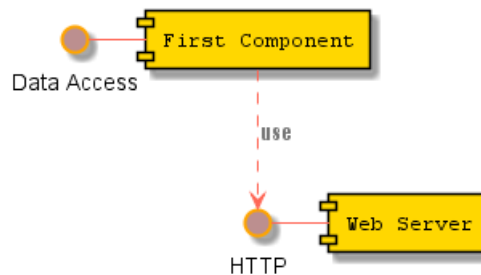

```


@startuml
[AA] <<static lib>>
[BB] <<shared lib>>
[CC] <<static lib>>

node node1
node node2 <<shared node>>
database Production

skinparam component {
  backgroundColor<<static lib>> DarkKhaki
  backgroundColor<<shared lib>> Green
}

skinparam node {
  borderColor Green
  backgroundColor Yellow
  backgroundColor<<shared node>> Magenta
}
skinparam databaseBackgroundColor Aqua
@enduml

```

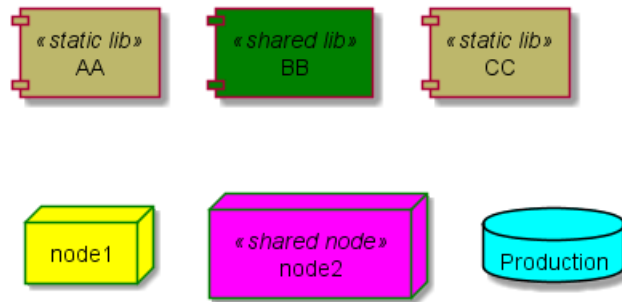

17 Preprocessing

Some minor preprocessing capabilities are included in **PlantUML**, and available for *all* diagrams.


Those functionalities are very similar to the C language preprocessor, except that the special character # has been changed to the exclamation mark !.

17.1 Including files

Use the `!include` directive to include file in your diagram.

Imagine you have the very same class that appears in many diagrams. Instead of duplicating the description of this class, you can define a file that contains the description.

```
@startuml
!include List.iuml
List <|.. ArrayList
@enduml
```



File List.iuml

```
interface List
List : int size()
List : void clear()
```

The file `List.iuml` can be included in many diagrams, and any modification in this file will change all diagrams that include it.

A file can be only be included once. If you want to include several times the very same file, you have to use the directive `!include_many` instead of `!include`.

You can also put several `@startuml/@enduml` text block in an included file and then specify which block you want to include adding `!0` where 0 is the block number.

For example, if you use `!include foo.txt!1`, the second `@startuml/@enduml` block within `foo.txt` will be included.

You can also put an id to some `@startuml/@enduml` text block in an included file using `@startuml(id=MY_OWN_ID)` syntax and then include the block adding `!MY_OWN_ID` when including the file, so using something like `!include foo.txt!MY_OWN_ID`.

17.2 Including URL

Use the `!includeurl` directive to include file from Internet/Intranet in your diagram.

You can also use `!includeurl http://someurl.com/mypath!0` to specify which `@startuml/@enduml` block from `http://someurl.com/mypath` you want to include. The `!0` notation denotes the first diagram.

17.3 Constant definition

You can define constant using the `!define` directive. As in C language, a constant name can only use alphanumeric and underscore characters, and cannot start with a digit.





```

@startuml

!define SEQUENCE (S,#AAAAAA) Database Sequence
!define TABLE (T,#FFAAAA) Database Table

class USER << TABLE >>
class ACCOUNT << TABLE >>
class UID << SEQUENCE >>
USER "1" -- "*" ACCOUNT
USER -> UID
@enduml

```

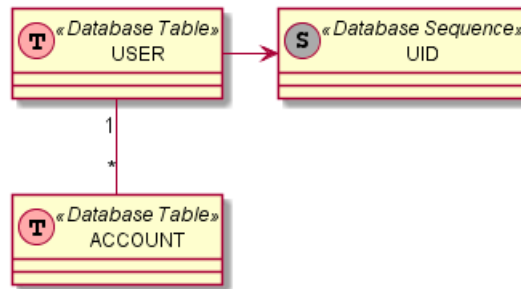

Of course, you can use the `!include` directive to define all your constants in a single file that you include in your diagram.

Constant can be undefined with the `!undef XXX` directive.

You can also specify constants within the command line, with the `-D` flags.

```
java -jar plantuml.jar -DTITLE="My title" atest1.txt
```

Note that the `-D` flag must be put after the `"-jar plantuml.jar"` section.

17.4 Macro definition


You can also define macro with arguments.

```

@startuml

!define module(x) component x <<module>>
module(ABC)
module(XYZ)
@enduml

```




Macro can have several arguments.

```

@startuml
!define send(a,b,c) a->b : c
send(Alice, Bob, Hello)
send(Bob, Alice, ok)
@enduml

```





17.5 Adding date and time


You can also expand current date and time using the special variable `%date%`.

Date format can be specified using format specified in SimpleDataFormat documentation.

```

@startuml
!define ANOTHER_DATE %date[yyyy.MM.dd 'at' HH:mm]%
Title Generated %date% or ANOTHER_DATE
alice -> bob
@enduml
  
```

Generated Sun Mar 10 12:14:18 CET 2019 or 2019.03.10 at 12:14



17.6 Other special variables

You can also use the following special variables:

Variable	Content
<code>%dirpath%</code>	Path of the current file
<code>%filename%</code>	Name of the current file

17.7 Macro on several lines


You can also define macro on several lines using `!definelong` and `!enddefinelong`.

```

@startuml
!define DOUBLE(x) x x
!definelong AUTHEN(x,y)
x -> y : DOUBLE(hello)
y -> x : ok
!enddefinelong
  
```

```


AUTHEN(Bob,Alice)
@enduml
  
```



17.8 Default values for macro parameters

It is possible to assign default values to macro parameters.

```
@startuml
!define some_macro(x, y = "some default" , z = 'another default' ) x and y and z
class foo {
    some_macro(Z1, Z2, Z3)
    some_macro(Z1, Z2)
    some_macro(A)
}
@enduml
```



17.9 Conditions

You can use `!ifdef XXX` and `!endif` directives to have conditionnal drawings.

The lines between those two directives will be included only if the constant after the `!ifdef` directive has been defined before.

You can also provide a `!else` part which will be included if the constant has **not** been defined.

```
@startuml
!include ArrayList.iuml
@enduml
```




File ArrayList.iuml:

```
class ArrayList
!ifdef SHOW_METHODS
class ArrayList {
    int size()
    void clear()
}
!endif
```

You can then use the `!define` directive to activate the conditionnal part of the diagram.

```
@startuml
!define SHOW_METHODS
!include ArrayList.iuml
@enduml
```



You can also use the `!ifndef` directive that includes lines if the provided constant has NOT been defined.

You can use boolean expression with parenthesis, operators `&&` and `||` in the test.


```
@startuml
!define SHOW_FIELDS
```



```

!undef SHOW_METHODS
class foo {
!ifdef SHOW_FIELDS || SHOW_METHODS
This is shown
!endif
!ifdef SHOW_FIELDS && SHOW_METHODS
This is NOT shown
!endif
}
@enduml

```



17.10 Building custom library

It's possible to package a set of included files into a single .zip or .jar archive. This single zip/jar can then be imported into your diagram using !import directive.

Once the library has been imported, you can !include file from this single zip/jar.

Example:

```

@startuml
!import /path/to/customLibrary.zip
' This just adds "customLibrary.zip" in the search path

!include myFolder/myFile.iuml
' Assuming that myFolder/myFile.iuml is located somewhere
' either inside "customLibrary.zip" or on the local filesystem

...

```

17.11 Search path

You can specify the java property plantuml.include.path in the command line.

For example:

```
java -Dplantuml.include.path="c:/mydir" -jar plantuml.jar atest1.txt
```

Note the this -D option has to put before the -jar option. -D options after the -jar option will be used to define constants within plantuml preprocessor.

17.12 Advanced features


It is possible to append text to a macro argument using the ## syntax.

```

@startuml
!definelong COMP_TEXTGENCOMP(name)
[name] << Comp >>
interface Ifc << IfcType >> AS name##Ifc
name##Ifc - [name]
!enddefinelong
COMP_TEXTGENCOMP(dummy)
@enduml

```






A macro can be defined by another macro.

```


@startuml
!define DOUBLE(x) x x
!definelong AUTHEN(x,y)
x -> y : DOUBLE(hello)
y -> x : ok
!enddefinelong
AUTHEN(Bob,Alice)
@enduml
  
```



A macro can be polymorphic with argument count.

```

@startuml
!define module(x) component x <<module>>
!define module(x,y) component x as y <<module>>
module(foo)
module(bar, barcode)
@enduml
  
```



You can use system environment variable or constant definition when using include:

```

!include %windir%/test1.txt
!define PLANTUML_HOME /home/foo
!include PLANTUML_HOME/test1.txt
  
```

18 Unicode

The PlantUML language use *letters* to define actor, usecase and soon.

But *letters* are not only A-Z latin characters, it could be *any kind of letter from any language*.

18.1 Examples

```
@startuml
skinparam handwritten true
skinparam backgroundColor #EEEBDC

actor 使用者
participant "頭等艙" as A
participant "第二類" as B
participant "最後一堂課" as 別的東西
```


```
使用者 -> A: 完成這項工作
activate A
```

```
A -> B: 創建請求
activate B
```

```
B -> 別的東西: 創建請求
activate 別的東西
別的東西 --> B: 這項工作完成
destroy 別的東西
```

```
B --> A: 請求創建
deactivate B
```

```
A --> 使用者: 做完
deactivate A
@enduml
```

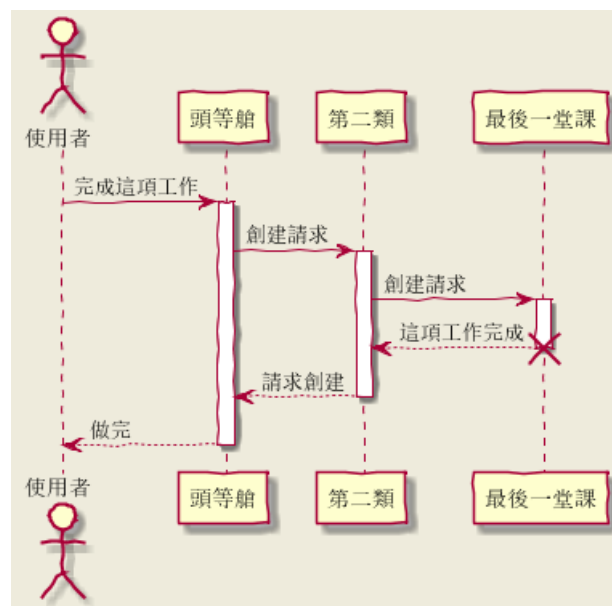

```
@startuml

(*) --> "膩平台"
--> == S1 ==
```



```
--> 鞠躬向公眾
--> === S2 ===
--> 這傢伙波武器
--> (*)
```

```
skinparam backgroundColor #AAFFFF
skinparam activityStartColor red
skinparam activityBarColor SaddleBrown
skinparam activityEndColor Silver
skinparam activityBackgroundColor Peru
skinparam activityBorderColor Peru
@enduml
```




```
@startuml
skinparam usecaseBackgroundColor DarkSeaGreen
skinparam usecaseArrowColor Olive
skinparam actorBorderColor black
skinparam usecaseBorderColor DarkSlateGray
```

```
使用者 << 人類 >>
"主數據庫" as 數據庫 << 應用程式 >>
(草創) << 一桿 >>
"主数据燕" as (贏余) << 基本的 >>
```

```
使用者 -> (草創)
使用者 --> (贏余)
```

```
數據庫 --> (贏余)
@enduml
```



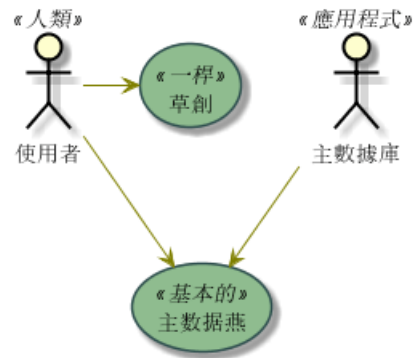


@startuml

() "Σωκράτης ψεύτης" as Σωκράτης

Σωκράτης - [Πτηνά πολεμοχαρές]

[Πτηνά πολεμοχαρές] ..> () Αθήνα : Αυτές οι φράσεις σημαίνουν τίποτα

@enduml

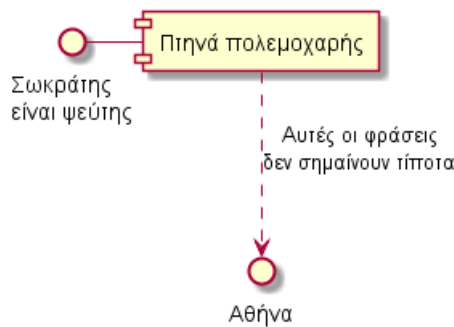

18.2 Charset

The default charset used when *reading* the text files containing the UML text description is system dependent.

Normally, it should just be fine, but in some case, you may want to use another charset. For example, with the command line:

```
java -jar plantuml.jar -charset UTF-8 files.txt
```

Or, with the ant task:

```
<!-- Put images in c:/images directory -->
<target name="main">
<plantuml dir="./src" charset="UTF-8" />
```

Depending of your Java installation, the following charset should be available: ISO-8859-1, UTF-8, UTF-16BE, UTF-16LE, UTF-16.



19 Standard Library

This page explains the official Standard Library for PlantUML. This Standard Library is now included in official releases of PlantUML. Including files follows the C convention for "C standard library" (see https://en.wikipedia.org/wiki/C_standard_library)

Contents of the library come from third party contributors. We thank them for their useful contribution!

19.1 AWS library

<https://github.com/milo-minderbinder/AWS-PlantUML>

The AWS library consists of Amazon AWS icons, it provides icons of two different sizes.


Use it by including the file that contains the sprite, eg: `!include <aws/Storage/AmazonS3/AmazonS3>`. When imported, you can use the sprite as normally you would, using `<$sprite_name>`.

You may also include the `common.puml` file, eg: `!include <aws/common>`, which contains helper macros defined. With the `common.puml` imported, you can use the `NAME_OF_SPRITE(parameters...)` macro.

Example of usage:

```
@startuml
!include <aws/common>
!include <aws/Storage/AmazonS3/AmazonS3>
!include <aws/Storage/AmazonS3/bucket/bucket>
```

```
AMAZONS3(s3_internal)
AMAZONS3(s3_partner,"Vendor's S3")
s3_internal <- s3_partner
@enduml
```

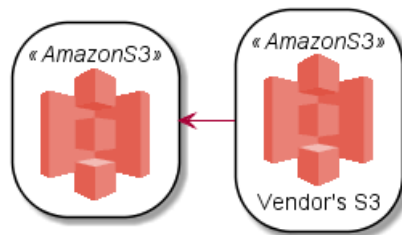

19.2 Cloud Insight

<https://github.com/rabelenda/cicon-plantuml-sprites>

This repository contains PlantUML sprites generated from Cloudinsight icons, which can easily be used in PlantUML diagrams for nice visual representation of popular technologies.

```
@startuml
!include <cloudinsight/tomcat>
!include <cloudinsight/kafka>
!include <cloudinsight/java>
!include <cloudinsight/cassandra>

title Cloudinsight sprites example

skinparam monochrome true


rectangle "<$tomcat>\nwebapp" as webapp
queue "<$kafka>" as kafka
rectangle "<$java>\ndaemon" as daemon
database "<$cassandra>" as cassandra
```



```

webapp -> kafka
kafka -> daemon
daemon --> cassandra
@enduml

```

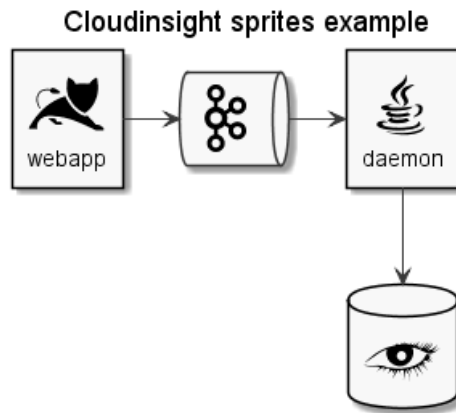

19.3 Devicons and Font Awesome library

<https://github.com/tupadr3/plantuml-icon-font-sprites>

These two library consists respectively of Devicons and Font Awesome libraries of icons.

Use it by including the file that contains the sprite, eg: `!include <font-awesome/align_center>`. When imported, you can use the sprite as normally you would, using `<$sprite_name>`.

You may also include the `common.puml` file, eg: `!include <font-awesome/common>`, which contains helper macros defined. With the `common.puml` imported, you can use the `NAME_OF_SPRITE(parameters...)` macro.

Example of usage:

```

@startuml
!include <tupadr3/common>
!include <tupadr3/font-awesome/server>
!include <tupadr3/font-awesome/database>

title Styling example

FA_SERVER(web1,web1) #Green
FA_SERVER(web2,web2) #Yellow
FA_SERVER(web3,web3) #Blue
FA_SERVER(web4,web4) #YellowGreen


FA_DATABASE(db1,LIVE,database,white) #RoyalBlue
FA_DATABASE(db2,SPARE,database) #Red

db1 <--> db2

web1 <--> db1
web2 <--> db1
web3 <--> db1
web4 <--> db1
@enduml

```



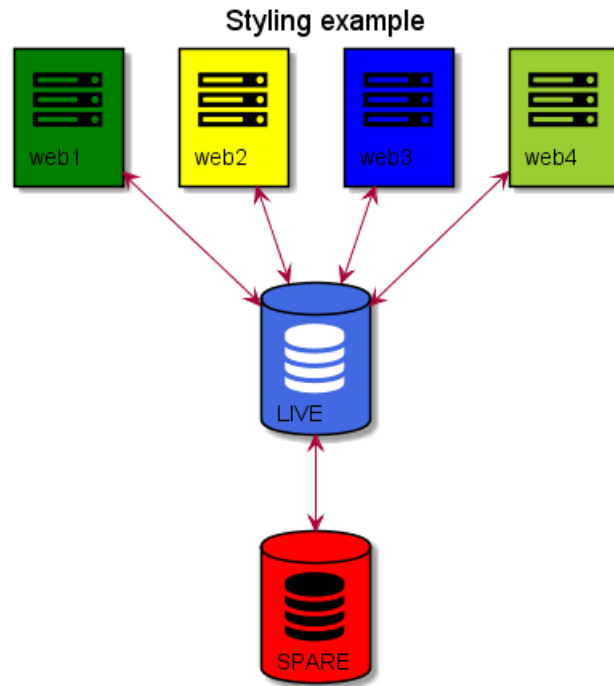


```

@startuml
!include <tupadr3/common>
!include <tupadr3/devicons/mysql>

DEV_MYSQL(db1)
DEV_MYSQL(db2,label of db2)
DEV_MYSQL(db3,label of db3,database)
DEV_MYSQL(db4,label of db4,database,red) #DeepSkyBlue
@enduml

```

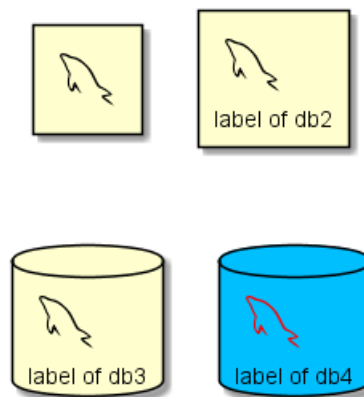

19.4 Google Material Icons

<https://github.com/Templarian/MaterialDesign>

This library consists of a free Material style icons from Google and other artists.

Use it by including the file that contains the sprite, eg: `!include <material/ma_folder_move>`. When imported, you can use the sprite as normally you would, using `<$ma_sprite_name>`. Notice that this library requires an `ma_` prefix on sprites names, this is to avoid clash of names if multiple sprites have the same name on different libraries.

You may also include the `common.puml` file, eg: `!include <material/common>`, which contains helper macros defined. With the `common.puml` imported, you can use the `MA_NAME_OF_SPRITE(parameters...)` macro, note




again the use of the prefix MA_.

Example of usage:

```
@startuml
!include <material/common>
' To import the sprite file you DON'T need to place a prefix!
!include <material/folder_move>

MA_FOLDER_MOVE(Red, 1, dir, rectangle, "A label")
@enduml
```



Notes


When mixing sprites macros with other elements you may get a syntax error if, for example, trying to add a rectangle along with classes. In those cases, add { and } after the macro to create the empty rectangle.

Example of usage:

```
@startuml
!include <material/common>
' To import the sprite file you DON'T need to place a prefix!
!include <material/folder_move>

MA_FOLDER_MOVE(Red, 1, dir, rectangle, "A label") {

class foo {
bar
}
}
@enduml
```

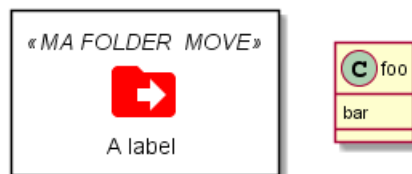

19.5 Office

<https://github.com/Roemer/plantuml-office>

There are sprites (*.puml) and colored png icons available. Be aware that the sprites are all only monochrome even if they have a color in their name (due to automatically generating the files). You can either color the sprites with the macro (see examples below) or directly use the fully colored pngs. See the following examples on how to use the sprites, the pngs and the macros.

Example of usage:

```
@startuml
!include <tupadr3/common>

!include <office/Servers/database_server>
!include <office/Servers/application_server>
!include <office/Concepts/firewall_orange>
!include <office/Clouds/cloud_disaster_red>
```




```
title Office Icons Example
```

```
package "Sprites" {
  OFF_DATABASE_SERVER(db,DB)
  OFF_APPLICATION_SERVER(app,App-Server)
  OFF_FIREWALL_ORANGE(fw,Firewall)
  OFF_CLOUD_DISASTER_RED(cloud,Cloud)
  db <-> app
  app <--> fw
  fw <.left.> cloud
}
```

```
@enduml
```

Office Icons Example

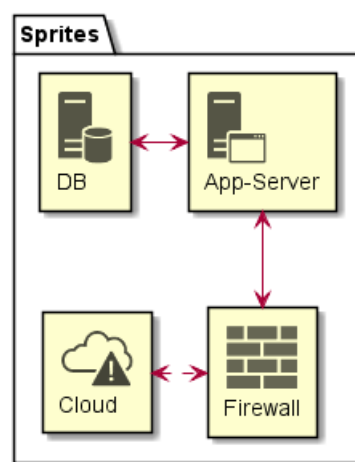

```
@startuml
```

```
!include <tupadr3/common>
```

```
!include <office/servers/database_server>
!include <office/servers/application_server>
!include <office/Concepts/firewall_orange>
!include <office/Clouds/cloud_disaster_red>
```

```
' Used to center the label under the images
skinparam defaultTextAlignment center
```

```
title Extended Office Icons Example
```


```
package "Use sprite directly" {
  [Some <$cloud_disaster_red> object]
}
```

```
package "Different makro usages" {
  OFF_CLOUD_DISASTER_RED(cloud1)
  OFF_CLOUD_DISASTER_RED(cloud2,Default with text)
  OFF_CLOUD_DISASTER_RED(cloud3,Other shape,Folder)
  OFF_CLOUD_DISASTER_RED(cloud4,Even another shape,Database)
  OFF_CLOUD_DISASTER_RED(cloud5,Colored,Rectangle, red)
  OFF_CLOUD_DISASTER_RED(cloud6,Colored background) #red
}
```

```
@enduml
```



Extended Office Icons Example

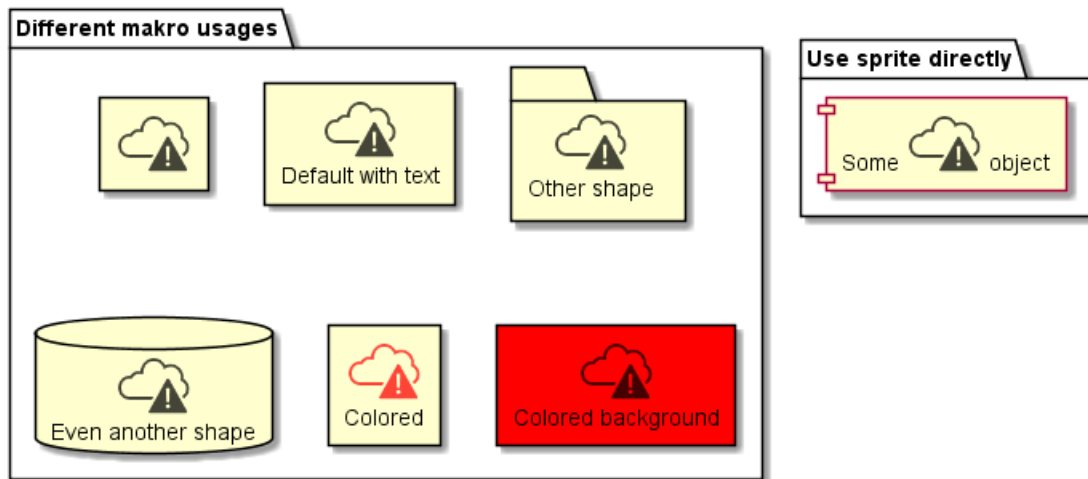

19.6 ArchiMate

<https://github.com/ebbypeter/ArchiMate-PlantUML>

This repository contains ArchiMate PlantUML macros and other includes for creating Archimate Diagrams easily and consistantly.

@startuml Internet Browser Example

!includeurl <https://raw.githubusercontent.com/ebbypeter/ArchiMate-PlantUML/master/ArchiMate.puml>

title Archimate Sample - Internet Browser

' Elements

Business_Object(businessObject, "A Business Object")

Business_Process(someBusinessProcess,"Some Business Process")

Business_Service(itSupportService, "IT Support for Business (Application Service)")

Application_DataObject(dataObject, "Web Page Data \n 'on the fly'")

Application_Function(webpageBehaviour, "Web page behaviour")

Application_Component(ActivePartWebPage, "Active Part of the web page \n 'on the fly'")

Technology_Artifact(inMemoryItem,"in memory / 'on the fly' html/javascript")

Technology_Service(internetBrowser, "Internet Browser Generic & Plugin")

Technology_Service(internetBrowserPlugin, "Some Internet Browser Plugin")

Technology_Service(webServer, "Some web server")

'Relationships

Rel_Flow_Left(someBusinessProcess, businessObject, "")

Rel_Serving_Up(itSupportService, someBusinessProcess, "")

Rel_Specilization_Up(webpageBehaviour, itSupportService, "")

Rel_Flow_Right(dataObject, webpageBehaviour, "")

Rel_Specilization_Up(dataObject, businessObject, "")

Rel_Assignment_Left(ActivePartWebPage, webpageBehaviour, "")

Rel_Specilization_Up(inMemoryItem, dataObject, "")

Rel_Realization_Up(inMemoryItem, ActivePartWebPage, "")

Rel_Specilization_Right(inMemoryItem,internetBrowser, "")

Rel_Serving_Up(internetBrowser, webpageBehaviour, "")

Rel_Serving_Up(internetBrowserPlugin, webpageBehaviour, "")


Rel_Aggregation_Right(internetBrowser, internetBrowserPlugin, "")

Rel_Access_Up(webServer, inMemoryItem, "")



```
Rel_Serving_Up(webServer, internetBrowser, "")
```

```
@enduml
```

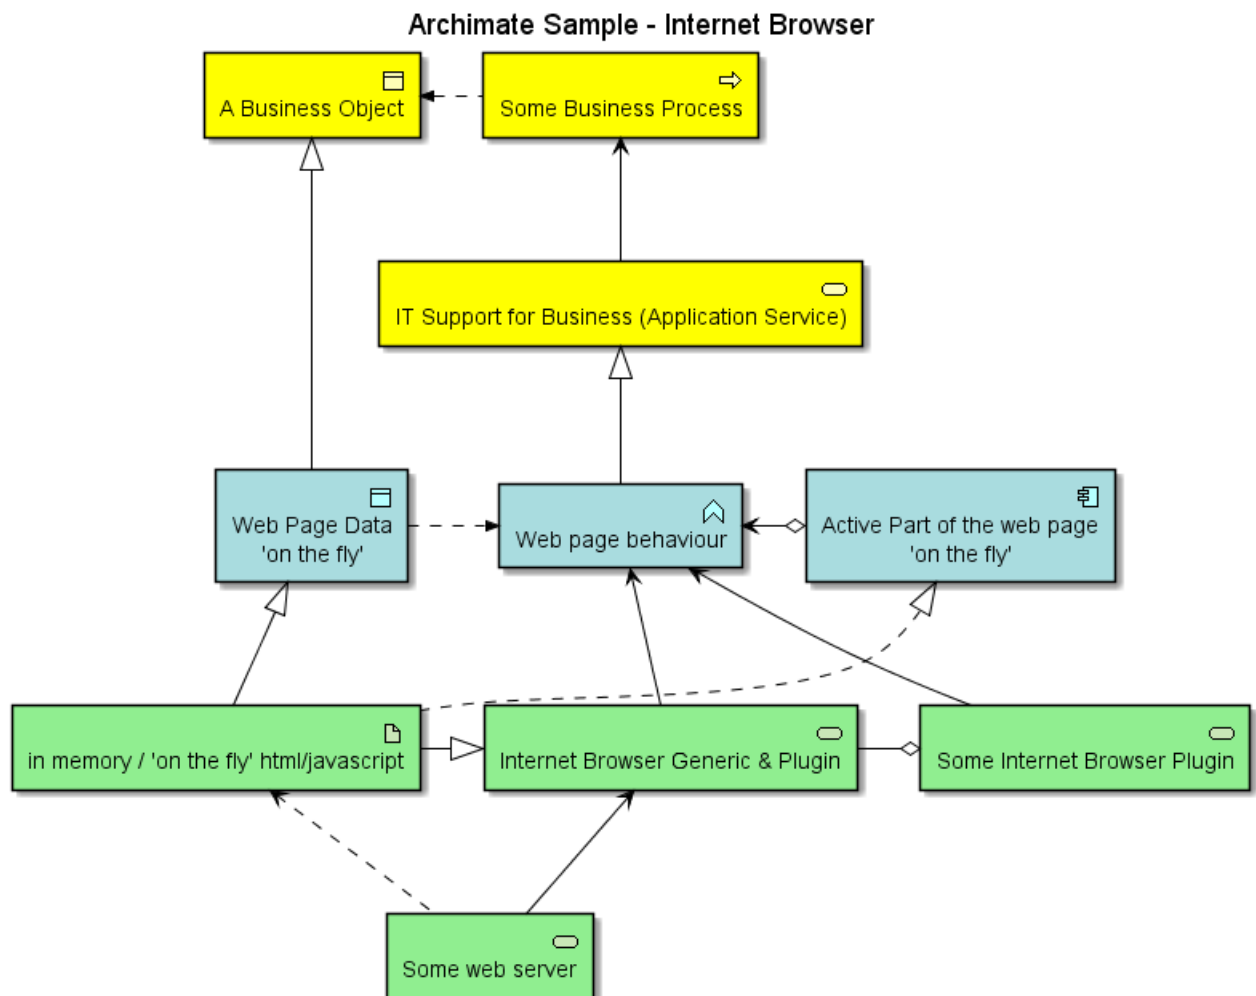

19.7 Miscellaneous

You can list standard library folders using the special diagram:

```
@startuml
stdlib
@enduml
```

aws

Version 18.02.22

Delivered by <https://github.com/milo-minderbinder/AWS-PlantUML>**azure**

Version 0.0.1

Delivered by <https://github.com/RicardoNiepel/Azure-PlantUML>**c4**

Version 1.0.0

Delivered by <https://github.com/RicardoNiepel/C4-PlantUML>**cloudinsight**

Version 0.0.1

Delivered by <https://github.com/rabelenda/cicon-plantuml-sprites/>**cloudogu**

Version 0.0.1

Delivered by <https://github.com/cloudogu/plantuml-cloudogu-sprites>**material**

Version 0.0.1

Delivered by <https://github.com/Templarian/MaterialDesign>**office**

Version 0.0.1

Delivered by <https://github.com/Roemer/plantuml-office>**tupadr3**

Version 2.0.0

Delivered by <https://github.com/tupadr3/plantuml-icon-font-sprites>

It is also possible to use the command line `java -jar plantuml.jar -stdlib` to display the same list.

Finally, you can extract the full standard library sources using `java -jar plantuml.jar -extractstdlib`. All files will be extracted in the folder `stdlib`.

Sources used to build official PlantUML releases are hosted here <https://github.com/plantuml/plantuml-stdlib>. You can create Pull Request to update or add some library if you find it relevant.



Contents

1	时序图	1
1.1	简单示例	1
1.2	声明参与者	1
1.3	在参与者中使用非字母符号	3
1.4	给自己发消息	3
1.5	修改箭头样式	3
1.6	修改箭头颜色	4
1.7	对消息序列编号	4
1.8	Page Title, Header and Footer	6
1.9	分割示意图	7
1.10	组合消息	8
1.11	给消息添加注释	9
1.12	其他的注释	10
1.13	改变备注框的形状	10
1.14	Creole 和 HTML	11
1.15	分隔符	12
1.16	引用	13
1.17	延迟	13
1.18	空间	14
1.19	生命线的激活与撤销	15
1.20	Return	16
1.21	创建参与者	16
1.22	进入和发出消息	17
1.23	构造类型和圈点	18
1.24	更多标题信息	19
1.25	包裹参与者	20
1.26	移除脚注	21
1.27	外观参数 (skinparam)	21
1.28	填充区设置	23
2	用例图	25
2.1	用例	25
2.2	角色	25
2.3	用例描述	26
2.4	基础示例	26
2.5	继承	27
2.6	使用注释	27
2.7	构造类型	28
2.8	改变箭头方向	29
2.9	分割图示	30
2.10	从左向右方向	30
2.11	显示参数	31
2.12	一个完整的例子	32
3	类图	33
3.1	类之间的关系	33
3.2	关系上的标识	34
3.3	添加方法	35
3.4	定义可访问性	36
3.5	抽象与静态	36
3.6	高级类体	37
3.7	备注和模板	37
3.8	更多注释	38
3.9	链接的注释	39
3.10	抽象类和接口	40
3.11	使用非字母字符	41
3.12	隐藏属性、函数等	41



3.13	隐藏类	42
3.14	泛型 (generics)	43
3.15	指定标记 (Spot)	43
3.16	包	43
3.17	包样式	44
3.18	命名空间 (Namespaces)	45
3.19	自动创建命名空间	46
3.20	棒棒糖接口	47
3.21	改变箭头方向	47
3.22	“关系”类	48
3.23	皮肤参数	49
3.24	Skinned Stereotypes	49
3.25	Color gradient	50
3.26	Help on layout	51
3.27	拆分大文件	51
4	活动图	53
4.1	简单活动	53
4.2	箭头上的标签	53
4.3	改变箭头方向	53
4.4	分支	54
4.5	更多分支	55
4.6	同步	56
4.7	长的活动描述	57
4.8	注释	57
4.9	分区	58
4.10	显示参数	59
4.11	八边形活动	60
4.12	一个完整的例子	60
5	活动图 (新语法)	63
5.1	简单活动图	63
5.2	开始/结束	63
5.3	条件语句	64
5.4	重复循环	65
5.5	while 循环	65
5.6	并行处理	66
5.7	注释	67
5.8	颜色	67
5.9	箭头	68
5.10	连接器 (Connector)	69
5.11	组合 (grouping)	69
5.12	泳道 (Swimlanes)	70
5.13	分离 (detach)	71
5.14	特殊领域语言 (SDL)	72
5.15	一个完整的例子	73
6	组件图	75
6.1	组件	75
6.2	接口	75
6.3	基础的示例	76
6.4	使用注释	76
6.5	组合组件	76
6.6	改变箭头方向	78
6.7	使用 UML2 标记符	79
6.8	Long description	80
6.9	不同的颜色表示	80
6.10	Using Sprite in Stereotype	80
6.11	显示参数	81



7	状态图	83
7.1	简单状态	83
7.2	Change state rendering	83
7.3	合成状态	84
7.4	长名字	85
7.5	并发状态	86
7.6	箭头方向	87
7.7	注释	88
7.8	更多注释	89
7.9	显示参数	89
8	对象图	91
8.1	对象的定义	91
8.2	对象之间的关系	91
8.3	添加属性	91
8.4	类图中的通用特性	92
9	时序图	93
9.1	声明参与者	93
9.2	增加消息	93
9.3	相对时间	94
9.4	Participant oriented	95
9.5	Setting scale	95
9.6	Initial state	95
9.7	Intricated state	96
9.8	Hidden state	97
9.9	Adding constraint	97
9.10	Adding texts	98
10	Gantt Diagram	99
10.1	Declaring tasks	99
10.2	Adding constraints	99
10.3	Short names	99
10.4	Customize colors	100
10.5	Milestone	100
10.6	Calendar	100
10.7	Close day	100
10.8	Simplified task succession	101
10.9	Separator	101
10.10	Working with resources	101
10.11	Complex example	102
11	= 简介 =	103
11.1	独立图	103
11.2	这是如何工作的?	104
12	Common commands	105
12.1	Comments	105
12.2	Footer and header	105
12.3	缩放	105
12.4	Title	106
12.5	Caption	107
12.6	Legend the diagram	107
13	Salt	108
13.1	基本部件	108
13.2	使用表格	108
13.3	Group box	109
13.4	使用分隔符	109



13.5 树形外挂	110
13.6 Enclosing brackets	110
13.7 添加选项卡	111
13.8 使用菜单	111
13.9 高级表格	112
13.10OpenIconic	113
13.11 Include Salt	113
13.12Scroll Bars	116
14 Creole	118
14.1 Emphasized text	118
14.2 List	118
14.3 Escape character	119
14.4 Horizontal lines	119
14.5 Headings	120
14.6 Legacy HTML	120
14.7 Table	121
14.8 Tree	122
14.9 Special characters	122
14.10OpenIconic	122
15 Defining and using sprites	124
15.1 Encoding Sprite	125
15.2 Importing Sprite	125
15.3 Examples	125
16 Skinparam command	127
16.1 Usage	127
16.2 Nested	127
16.3 List	127
16.4 Black and White	127
16.5 Reverse colors	128
16.6 Colors	129
16.7 Font color, name and size	129
16.8 Text Alignment	130
16.9 Examples	130
17 Preprocessing	135
17.1 Including files	135
17.2 Including URL	135
17.3 Constant definition	135
17.4 Macro definition	136
17.5 Adding date and time	137
17.6 Other special variables	137
17.7 Macro on several lines	137
17.8 Default values for macro parameters	138
17.9 Conditions	138
17.10Building custom library	139
17.11 Search path	139
17.12Advanced features	139
18 Unicode	141
18.1 Examples	141
18.2 Charset	143
19 Standard Library	144
19.1 AWS library	144
19.2 Cloud Insight	144
19.3 Devicons and Font Awesome library	145



19.4 Google Material Icons	146
19.5 Office	147
19.6 ArchiMate	149
19.7 Miscellaneous	150

