

```
In [1]: # Import Libraries
import numpy as np
import pandas as pd
from sklearn.datasets import load_iris
from sklearn.model_selection import train_test_split
import matplotlib.pyplot as plt
```

```
In [2]: # Load dataset
data = load_iris()

# Get features and target
X=data.data
y=data.target
```

```
In [3]: # Get dummy variable
y = pd.get_dummies(y).values

y[:3]
```

```
Out[3]: array([[1, 0, 0],
               [1, 0, 0],
               [1, 0, 0]], dtype=uint8)
```

```
In [4]: #Split data into train and test data
X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=20, random
```

```
In [5]: # Initialize variables
learning_rate = 0.1
iterations = 5000
N = y_train.size

# number of input features
input_size = 4

# number of hidden layers neurons
hidden_size = 2

# number of neurons at the output layer
output_size = 3

results = pd.DataFrame(columns=["mse", "accuracy"])
```

```
In [6]: # Initialize weights
np.random.seed(10)

# initializing weight for the hidden layer
W1 = np.random.normal(scale=0.5, size=(input_size, hidden_size))

# initializing weight for the output layer
W2 = np.random.normal(scale=0.5, size=(hidden_size , output_size))
```

```
In [7]: def sigmoid(x):
        return 1 / (1 + np.exp(-x))

def mean_squared_error(y_pred, y_true):
    return ((y_pred - y_true)**2).sum() / (2*y_pred.size)

def accuracy(y_pred, y_true):
    acc = y_pred.argmax(axis=1) == y_true.argmax(axis=1)
    return acc.mean()
```

```

In [26]: for itr in range(iterations):

    # feedforward propagation
    # on hidden layer
    Z1 = np.dot(X_train, W1)
    A1 = sigmoid(Z1)

    # on output layer
    Z2 = np.dot(A1, W2)
    A2 = sigmoid(Z2)

    # Calculating error
    mse = mean_squared_error(A2, y_train)
    acc = accuracy(A2, y_train)
    results=results.append({"mse":mse, "accuracy":acc},ignore_index=True )

    # backpropagation
    E1 = A2 - y_train
    dW1 = E1 * A2 * (1 - A2)

    E2 = np.dot(dW1, W2.T)
    dW2 = E2 * A1 * (1 - A1)

    # weight updates
    W2_update = np.dot(A1.T, dW1) / N
    W1_update = np.dot(X_train.T, dW2) / N

    W2 = W2 - learning_rate * W2_update
    W1 = W1 - learning_rate * W1_update

```

C:\Users\SIT\AppData\Local\Temp\ipykernel_12564\548591417.py:16: FutureWarning: The frame.append method is deprecated and will be removed from pandas in a future version. Use pandas.concat instead.

```
results=results.append({"mse":mse, "accuracy":acc},ignore_index=True )
```

C:\Users\SIT\AppData\Local\Temp\ipykernel_12564\548591417.py:16: FutureWarning: The frame.append method is deprecated and will be removed from pandas in a future version. Use pandas.concat instead.

```
results=results.append({"mse":mse, "accuracy":acc},ignore_index=True )
```

C:\Users\SIT\AppData\Local\Temp\ipykernel_12564\548591417.py:16: FutureWarning: The frame.append method is deprecated and will be removed from pandas in a future version. Use pandas.concat instead.

```
results=results.append({"mse":mse, "accuracy":acc},ignore_index=True )
```


C:\Users\SIT\AppData\Local\Temp\ipykernel_12564\548591417.py:16: FutureWarning: The frame.append method is deprecated and will be removed from pandas in a future version. Use pandas.concat instead.

```
results=results.append({"mse":mse, "accuracy":acc},ignore_index=True )
```

C:\Users\SIT\AppData\Local\Temp\ipykernel_12564\548591417.py:16: FutureWarning: The frame.append method is deprecated and will be removed from pandas in a future version. Use pandas.concat instead.


```
In [27]: results.mse.plot(title="Mean Squared Error")
```

```
Out[27]: <AxesSubplot:title={'center':'Mean Squared Error'}>
```

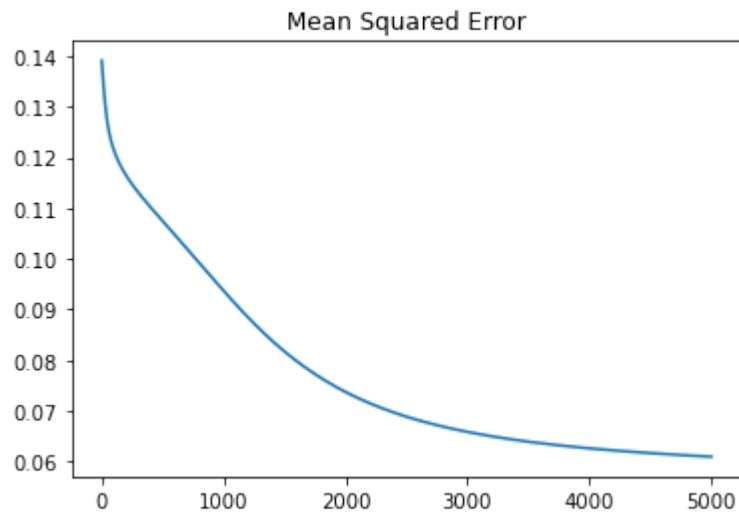

```
In [28]: results.accuracy.plot(title="Accuracy")
```

```
Out[28]: <AxesSubplot:title={'center':'Accuracy'}>
```

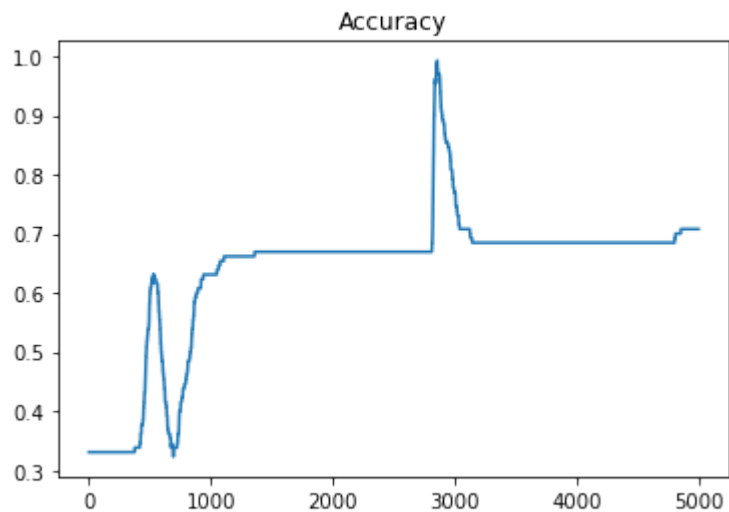

```
In [29]: # feedforward
Z1 = np.dot(X_test, W1)
A1 = sigmoid(Z1)

Z2 = np.dot(A1, W2)
A2 = sigmoid(Z2)

acc = accuracy(A2, y_test)
print("Accuracy: {}".format(acc))
```

Accuracy: 0.8

In []: