


Please read this before operating the api:

I have stored scope in the authorization token

For each request, the auth-token must be placed in the header with key:x-auth-token  
for example:

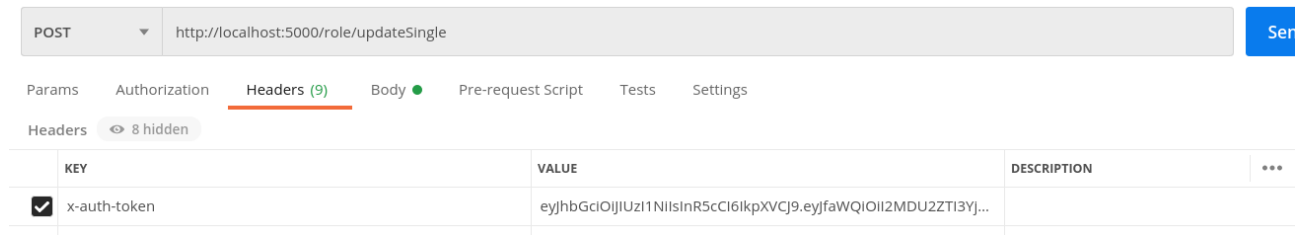

This auth token will be received in the header when a new user is created in signup

Or will be received in data when a user signs in.

I have provided validation of User model using joi package.

As requested, passwords are hashed and compared when user/signin is called.

Create roles first, then create users, then schools and finally profiles

Profiles can be created using the userIds and schoolIds, from which the first\_name,last\_name will be retrieved.

All error messages are displayed via the errorMessage function in /commons

I have used .env to store the atlas\_URI as a temporary solution so that testers may also get access to the cluster when operating the server.

Thank you. Please reach out to me at 7738822962 for any queries.