

STUDENT NAME: **YASH CHAUHAN**

STUDENT ROLL NUMBER: **28**

SECTION: **CSE C-1**

STUDENT REG NUMBER: **230905194**

WEEK NO: **8**

DATE: **18 TH March 2026**

Lab No. 8 – Form Proessing using Django – Part-2

Q1. Create a Register page and Success page with the following requirements:

- i. Register page should contain four input TextBoxes for UserName, Password, Email id and Contact Number and also a button to submit. Make the username as compulsory field and other fields as optional.
 - ii. On button click, Success page is displayed with message "Welcome {UserName}" and also his Email and Contact Number has to be displayed.
 - iii. Use secure technique to send details to the Success page (Hint: use csrftoken) 4)
- Design a website with two pages.

Urls.py

```
from django.urls import path

from .views import register_view, success_view

urlpatterns = [
    path('', register_view, name='register'),
    path('success/', success_view, name='success'),
]
```

Urls.py

```
from django.contrib import admin
from django.urls import include, path

urlpatterns = [
    path('admin/', admin.site.urls),
    path('', include('accounts.urls')),
]
```

Views.py

```
from django.shortcuts import redirect, render

from .forms import RegisterForm


def register_view(request):
    form = RegisterForm(request.POST or None)
    return render(request, 'accounts/register.html', {'form': form})


def success_view(request):
    if request.method != 'POST':
        return redirect('register')

    form = RegisterForm(request.POST)
    if not form.is_valid():
        return render(request, 'accounts/register.html', {'form': form})

    context = {
        'username': form.cleaned_data['username'],
        'email': form.cleaned_data.get('email', ''),
        'contact_number': form.cleaned_data.get('contact_number', ''),
    }
    return render(request, 'accounts/success.html', context)
```

Changes in setting.py

```
INSTALLED_APPS = [
    'django.contrib.admin',
    'django.contrib.auth',
    'django.contrib.contenttypes',
    'django.contrib.sessions',
    'django.contrib.messages',
    'django.contrib.staticfiles',
    'accounts',
]
```

Forms.py

```
from django import forms

class RegisterForm(forms.Form):
    username = forms.CharField(label='UserName', max_length=100, required=True)
    password = forms.CharField(
        label='Password',
        required=False,
        widget=forms.PasswordInput(render_value=True),
    )
    email = forms.EmailField(label='Email id', required=False)
    contact_number = forms.CharField(label='Contact Number', required=False, max_length=20)
```

Register.html

```
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Register</title>
<style>
body {
font-family: Arial, sans-serif;
margin: 20px;
}

.box {
width: 360px;
border: 1px solid #999;
padding: 12px;
}

.row {
margin-bottom: 10px;
}

label {
display: inline-block;
width: 120px;
vertical-align: top;
```

```
}

input {
width: 210px;
padding: 4px;
font-size: 14px;
box-sizing: border-box;
}

.errorlist {
color: #b00020;
margin: 4px 0;
padding-left: 18px;
font-size: 13px;
}

button {
padding: 4px 10px;
font-size: 14px;
}
</style>
</head>
<body>
<div class="box">
<form method="post" action="{% url 'success' %}">
{% csrf_token %}

<div class="row">
<label for="id_username">UserName</label>
{{ form.username }}
{{ form.username.errors }}
</div>

<div class="row">
<label for="id_password">Password</label>
{{ form.password }}
{{ form.password.errors }}
</div>

<div class="row">
<label for="id_email">Email id</label>
{{ form.email }}
{{ form.email.errors }}
```

```
</div>

<div class="row">
<label for="id_contact_number">Contact Number</label>
{{ form.contact_number }}
{{ form.contact_number.errors }}
</div>

<button type="submit">Submit</button>
</form>
</div>
</body>
</html>
```

Success.html


```
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Success</title>
<style>
body {
font-family: Arial, sans-serif;
margin: 20px;
}

.box {
width: 360px;
border: 1px solid #999;
padding: 12px;
line-height: 1.8;
}

.title {
font-weight: bold;
}

a {
display: inline-block;
margin-top: 8px;
font-size: 14px;
```

```
}  
</style>  
</head>  
<body>  
<div class="box">  
<div class="title">Welcome {{ username }}</div>  
<div>Email: {% if email %}{{ email }}{% else %}Not provided{% endif %}</div>  
<div>Contact Number: {% if contact_number %}{{ contact_number }}{% else %}Not provided{%  
endif %}</div>  
<a href="{% url 'register' %}">Back</a>  
</div>  
</body>  
</html>
```

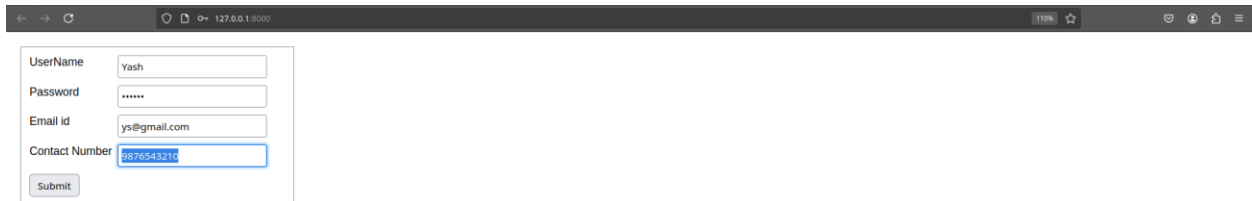

A screenshot of a web browser displaying a registration form. The browser's address bar shows the URL "127.0.0.1:8000". The form is titled "register" and contains four input fields: "UserName" with the value "Yash", "Password" with masked characters "*****", "Email id" with the value "ys@gmail.com", and "Contact Number" with the value "8876543210". A "Submit" button is located at the bottom left of the form.

UserName	Yash
Password	*****
Email id	ys@gmail.com
Contact Number	8876543210
Submit	



Q2. How is the book ASP.NET with c# by Vipul Prakashan?" Give the user three choice: i)Good ii)Satisfactory iii)Bad. Provide a VOTE button. After user votes, present the result in percentage using labels next to the choices

Urls.py

```
from django.contrib import admin
from django.urls import include, path

urlpatterns = [
    path("admin/", admin.site.urls),
    path("", include("voting.urls")),
]
```

Urls.py

```
from django.urls import path

from .views import result_view, vote_view

urlpatterns = [
    path("", vote_view, name="vote"),
]
```

```
path("result/", result_view, name="result"),
]
```

Settings changed in setting .py

```
INSTALLED_APPS = [
    "django.contrib.admin",
    "django.contrib.auth",
    "django.contrib.contenttypes",
    "django.contrib.sessions",
    "django.contrib.messages",
    "django.contrib.staticfiles",
    "voting",
]
```

Forms.py

```
from django import forms

class VoteForm(forms.Form):
    choice = forms.ChoiceField(
        label="How is the book ASP.NET with c# by Vipul Prakashan?",
        choices=[
            ("good", "Good"),
            ("satisfactory", "Satisfactory"),
            ("bad", "Bad"),
        ],
        widget=forms.RadioSelect,
    )
```

Views.py

```
from django.db.models import F
from django.shortcuts import redirect, render

from .forms import VoteForm
from .models import VoteCounter

def _get_counter() -> VoteCounter:
    counter, _ = VoteCounter.objects.get_or_create(pk=1)
```



```

return counter

def vote_view(request):
    if request.method == "POST":
        form = VoteForm(request.POST)
        if form.is_valid():
            selected = form.cleaned_data["choice"]
            VoteCounter.objects.get_or_create(pk=1)
            VoteCounter.objects.filter(pk=1).update(**{selected: F(selected) + 1})
            return redirect("result")
        else:
            form = VoteForm()

    return render(request, "voting/vote.html", {"form": form})

def result_view(request):
    counter = _get_counter()
    total = counter.total_votes()

    if total == 0:
        percentages = {"good": 0, "satisfactory": 0, "bad": 0}
    else:
        percentages = {
            "good": round(counter.good * 100 / total, 2),
            "satisfactory": round(counter.satisfactory * 100 / total, 2),
            "bad": round(counter.bad * 100 / total, 2),
        }

    context = {
        "good_percent": percentages["good"],
        "satisfactory_percent": percentages["satisfactory"],
        "bad_percent": percentages["bad"],
        "total_votes": total,
    }
    return render(request, "voting/result.html", context)

```

Result.html

```
<!DOCTYPE html>
```

```
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Vote Result</title>
<style>
:root {
--bg1: #f0f9ff;
--bg2: #ecfeff;
--card: #ffffff;
--text: #0f172a;
--muted: #475569;
--row: #f8faff;
--border: #cbd5e1;
--btn: #0f766e;
--btn-hover: #0d5f59;
}

body {
margin: 0;
min-height: 100vh;
display: grid;
place-items: center;
font-family: "Trebuchet MS", Verdana, sans-serif;
color: var(--text);
background: linear-gradient(135deg, var(--bg1), var(--bg2));
padding: 24px;
}

.card {
width: min(94vw, 540px);
background: var(--card);
border-radius: 14px;
box-shadow: 0 18px 40px rgba(15, 23, 42, 0.12);
padding: 24px;
}

h1 {
margin: 0 0 8px;
font-size: 1.4rem;
color: #0f766e;
}
```

```
.subtitle {
margin: 0 0 16px;
color: var(--muted);
}

.row {
display: flex;
justify-content: space-between;
align-items: center;
margin-bottom: 10px;
padding: 10px 12px;
border: 1px solid var(--border);
border-radius: 8px;
background: var(--row);
}

.label {
font-weight: 700;
}

.value {
font-variant-numeric: tabular-nums;
font-weight: 700;
}

.meta {
margin-top: 10px;
color: var(--muted);
}

a {
display: inline-block;
margin-top: 14px;
background: var(--btn);
color: #fff;
padding: 10px 14px;
border-radius: 8px;
text-decoration: none;
font-weight: 700;
}

a:hover {
background: var(--btn-hover);
}
```

```

}
</style>
</head>
<body>
<main class="card">
<h1>Vote Result</h1>
<p class="subtitle">How is the book ASP.NET with c# by Vipul Prakashan?</p>

<div class="row"><span class="label">Good</span><span
class="value">{{ good_percent }}%</span></div>
<div class="row"><span class="label">Satisfactory</span><span
class="value">{{ satisfactory_percent }}%</span></div>
<div class="row"><span class="label">Bad</span><span
class="value">{{ bad_percent }}%</span></div>

<p class="meta">Total votes: {{ total_votes }}</p>
<a href="{% url 'vote' %}">Vote Again</a>
</main>
</body>
</html>

```

Vote.html

```

<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Book Vote</title>
<style>
:root {
--bg1: #f7fbff;
--bg2: #fef6f0;
--card: #ffffff;
--primary: #1e40af;
--primary-hover: #1e3a8a;
--text: #111827;
--muted: #4b5563;
--border: #d1d5db;
}

body {
margin: 0;

```

```
min-height: 100vh;
display: grid;
place-items: center;
font-family: "Trebuchet MS", Verdana, sans-serif;
color: var(--text);
background: radial-gradient(circle at top left, var(--bg1), var(--bg2));
padding: 24px;
}
```

```
.card {
width: min(94vw, 520px);
background: var(--card);
border-radius: 14px;
box-shadow: 0 18px 40px rgba(15, 23, 42, 0.12);
padding: 24px;
}
```

```
h1 {
margin: 0 0 8px;
font-size: 1.3rem;
}
```

```
.question {
margin-bottom: 16px;
color: var(--muted);
}
```

```
.choices {
border: 1px solid var(--border);
border-radius: 10px;
padding: 12px 14px;
margin-bottom: 14px;
}
```

```
.choices p {
margin: 0 0 10px;
font-weight: 700;
}
```

```
.choices label {
display: block;
margin-bottom: 10px;
cursor: pointer;
}
```

```

}

.choices input {
margin-right: 8px;
}


.errorlist {
margin: 0 0 10px;
color: #b91c1c;
padding-left: 18px;
}

button {
background: var(--primary);
color: #fff;
border: 0;
border-radius: 8px;
padding: 10px 16px;
font-weight: 700;
cursor: pointer;
}

button:hover {
background: var(--primary-hover);
}
</style>
</head>
<body>
<main class="card">
<h1>Book Feedback</h1>
<p class="question">How is the book ASP.NET with c# by Vipul Prakashan?</p>

<form method="post">
{% csrf_token %}
<div class="choices">
{{ form.choice.errors }}
{{ form.choice }}
</div>
<button type="submit">VOTE</button>
</form>
</main>
</body>
</html>

```

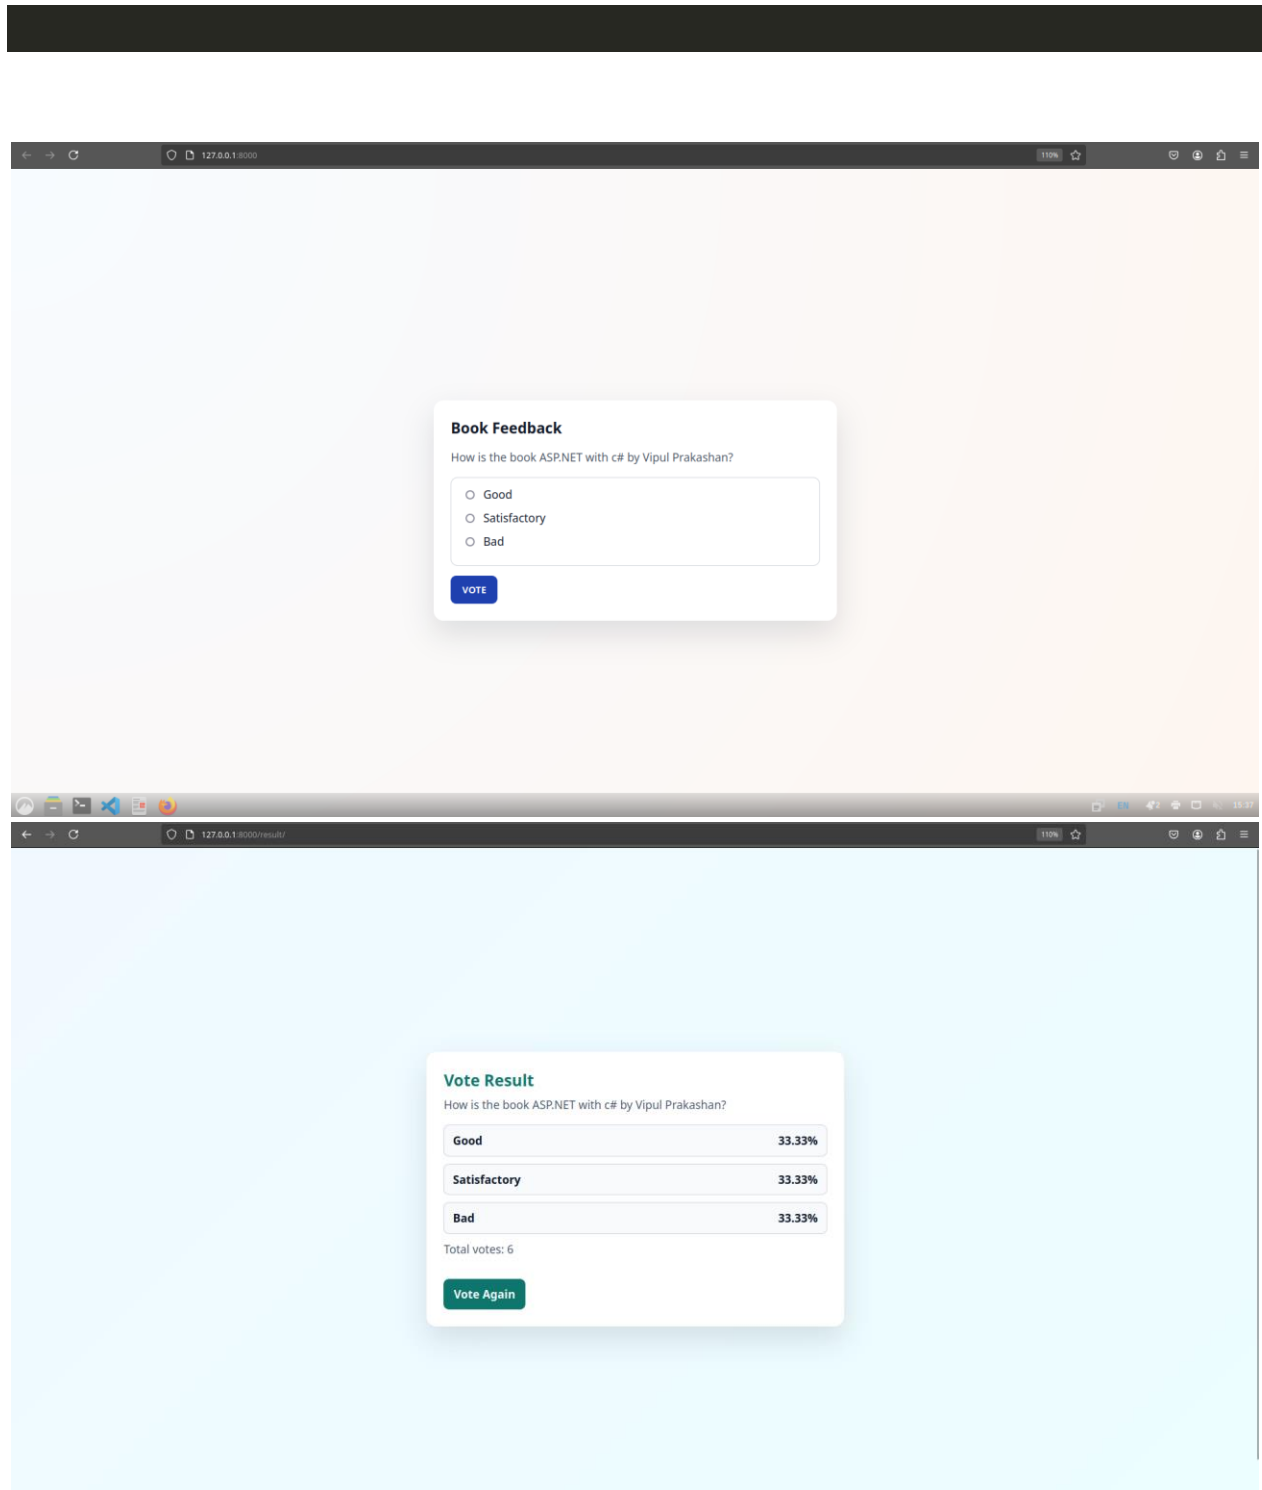

Q3. Create a website with two pages. Page 1 has two TextBoxes (name and total marks) and one 'Calculate' Button as shown in the figure. On clicking the 'Calculate' Button, CGPA (total marks/50) along with the name should be displayed in the Page 2. Use Django sessions to store the information.

Urls.py

```
from django.urls import path

from .views import input_view, result_view

urlpatterns = [
    path('', input_view, name='input'),
    path('result/', result_view, name='result'),
]
```

Urls.py

```
from django.contrib import admin
from django.urls import include, path

urlpatterns = [
    path('admin/', admin.site.urls),
    path('', include('cgpa.urls')),
]
```

Setting changed in setting.py

```
INSTALLED_APPS = [
    'django.contrib.admin',
    'django.contrib.auth',
    'django.contrib.contenttypes',
    'django.contrib.sessions',
    'django.contrib.messages',
    'django.contrib.staticfiles',
    'cgpa',
]
```

Forms.py

```
from django import forms

class CgpaForm(forms.Form):
    name = forms.CharField(label='Name', max_length=100)
```



```
total_marks = forms.FloatField(label='Total Marks', min_value=0)
```

Views.py

```
from django.shortcuts import redirect, render

from .forms import CgpaForm


def input_view(request):
    if request.method == 'POST':
        form = CgpaForm(request.POST)
        if form.is_valid():
            name = form.cleaned_data['name']
            total_marks = form.cleaned_data['total_marks']
            cgpa = round(total_marks / 50, 2)

            request.session['name'] = name
            request.session['total_marks'] = total_marks
            request.session['cgpa'] = cgpa
            return redirect('result')
        else:
            form = CgpaForm()

    return render(request, 'cgpa/input.html', {'form': form})


def result_view(request):
    name = request.session.get('name')
    total_marks = request.session.get('total_marks')
    cgpa = request.session.get('cgpa')

    if name is None or total_marks is None or cgpa is None:
        return redirect('input')

    return render(
        request,
        'cgpa/result.html',
        {'name': name, 'total_marks': total_marks, 'cgpa': cgpa},
    )
```

Input.html

```
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>CGPA Calculator</title>
<style>
body {
font-family: Arial, sans-serif;
margin: 30px;
}

.box {
width: 320px;
border: 1px solid #999;
padding: 14px;
}

.row {
margin-bottom: 10px;
}

label {
display: inline-block;
width: 95px;
font-size: 14px;
}

input {
width: 190px;
padding: 4px;
font-size: 14px;
}

button {
padding: 5px 12px;
font-size: 14px;
}
```

```

.errorlist {
color: #b00020;
margin: 0 0 8px 0;
padding-left: 18px;
font-size: 13px;
}
</style>
</head>
<body>
<div class="box">
<form method="post">
{% csrf_token %}
{{ form.non_field_errors }}

<div class="row">
<label for="id_name">Name</label>
{{ form.name }}
{{ form.name.errors }}
</div>

<div class="row">
<label for="id_total_marks">Total Marks</label>
{{ form.total_marks }}
{{ form.total_marks.errors }}
</div>

<button type="submit">Calculate</button>
</form>
</div>
</body>
</html>

```

Result.html

```

<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>CGPA Result</title>
<style>
body {

```

```
font-family: Arial, sans-serif;
margin: 30px;
}

.box {
width: 320px;
border: 1px solid #999;
padding: 14px;
font-size: 15px;
line-height: 1.6;
}

.name {
font-weight: bold;
}

a {
display: inline-block;
margin-top: 10px;
font-size: 14px;
}
</style>
</head>
<body>
<div class="box">
<div><span class="name">Name:</span> {{ name }}</div>
<div><span class="name">Total Marks:</span> {{ total_marks }}</div>
<div><span class="name">CGPA:</span> {{ cgpa }}</div>
<a href="{% url 'input' %}">Back</a>
</div>
</body>
</html>
```



The screenshot shows a web browser window with the address bar displaying '127.0.0.1:8000'. The page content includes a form with two input fields: 'Name' and 'Total Marks'. Below these fields is a 'Calculate' button. The 'Total Marks' field has a small downward arrow icon on its right side, indicating a dropdown menu.



← → 127.0.0.1:8000/result/ [120] ☆

Name: Yash

Total Marks: 475.0

CGPA: 9.5

[Back](#)