



An edynamic company

Document Control and Modification History

Document No		Document Name	Version No	Classification
1		Getting Started	1.0	Confidential
Date	Version	Author/Reviewer	Reason for Change	Approver
03-12-2024	1.0	Mahesh Kambhampati		

Getting Started

Prerequisites	
Local Sitecore XM Cloud Setup Using Docker Container	
Serialization setup	
FED setup	

Softwares:

The Project uses the following software versions.

Software	Versions
Visual Studio	2022
Node JS	LTS (Latest Standard Version)
Windows PowerShell	5.1
.Net Core SDK	8.0
.Net Framework SDK	4.8
Docker for Windows	LTS
GitHub for Desktop	LTS

✓
✓
✓
9.0.101 ✓
4.8.1 ✓
Node - 22.13.0
Have installed 8.0.405

Location and Settings:

The Project assumes the following settings


Settings	Values
Source Location	C:\projects\kroll\code

Prerequisites


1. Clone the github repo inside the source location "C:\projects\kroll\code" from the below repo URL:
Need to update the repo link here. As of now please use the zip code.

Note: Make sure the code is cloned inside the source location without creating a subfolder Kroll inside the code folder.


2. Create a folder "license" inside "C:\projects\kroll" folder
3. Copy and paste valid sitecore license.xml file inside the license folder
4. Install Node JS (LTS) version in your machine from the below link
<https://nodejs.org/en/download>
5. Install [Download .NET 8.0 \(Linux, macOS, and Windows\)](#) and [.NET Framework 4.8 SDK](#)
6. Open the "Services" app from the windows search
7. Search for the Solr Services
8. Stop the Solr services by right clicking on the running services

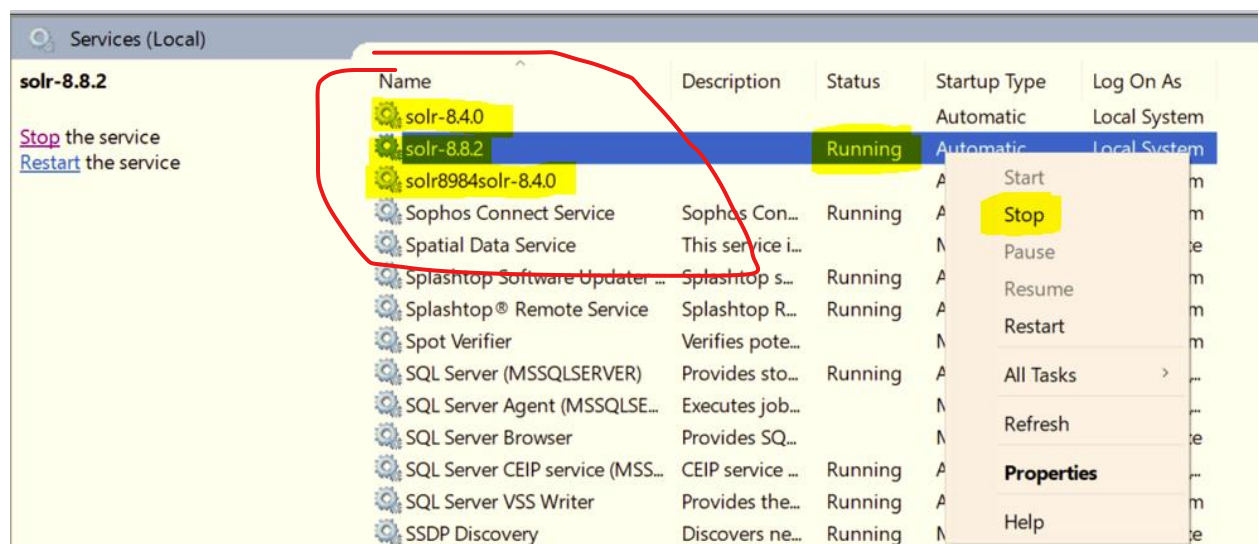

9. Open "Internet Information Services Manger"
10. Select your Machine name and stop the server by right clicking on it

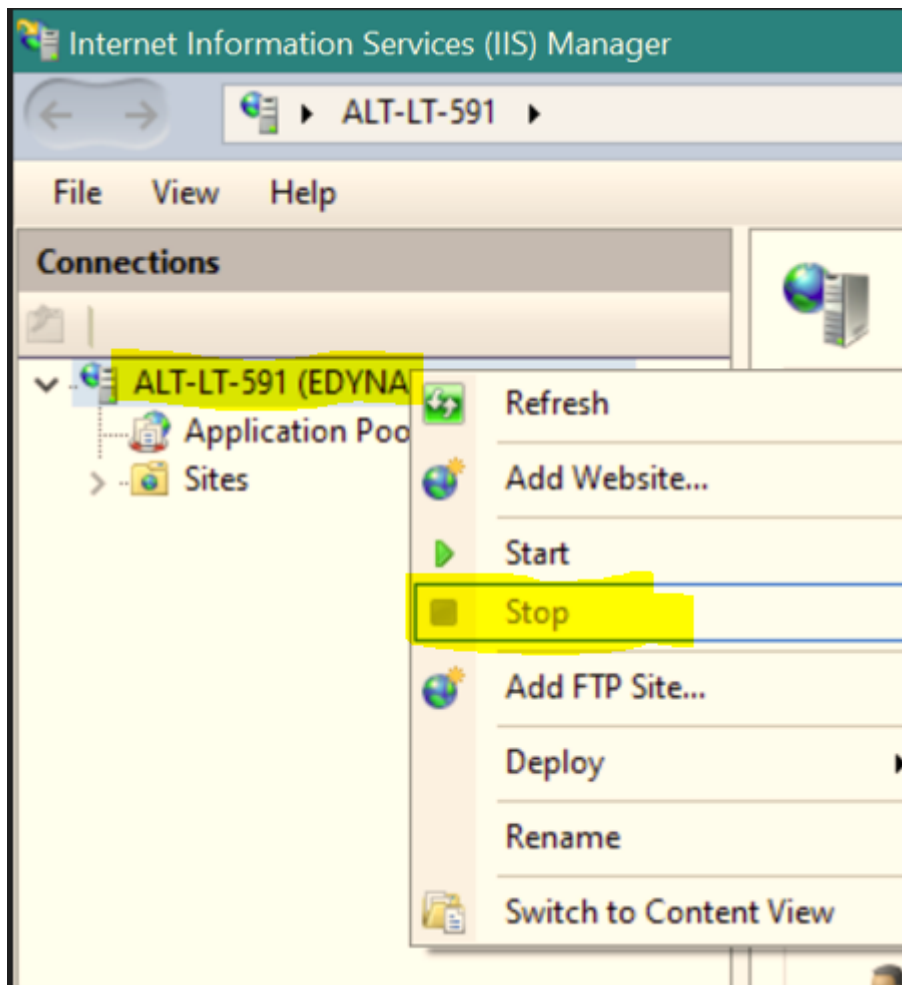

11. Open Task Manager and Select Performance Tab
12. Check "Virtualization" setting is enabled in your system.

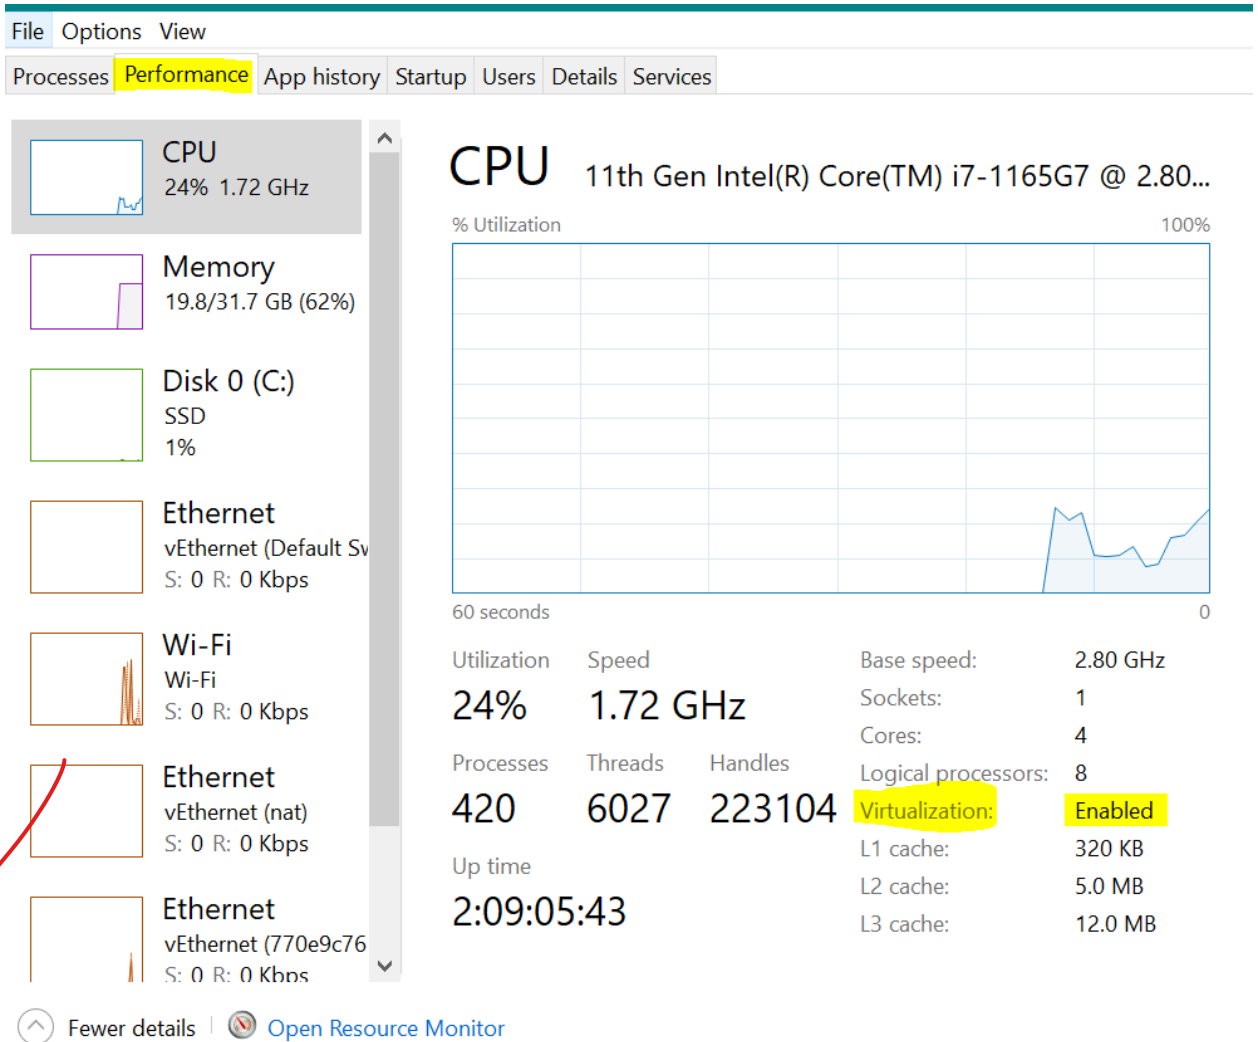

If not, please get it enabled for docker to work
Need to Enable couple of windows features "Microsoft-Hyper-V and Containers"

```
PS C:\WorkStation\Steris-Ast> Enable-WindowsOptionalFeature -Online -FeatureName $("Microsoft-Hyper-V", "Containers") -All
```

Command – "Enable-WindowsOptionalFeature -Online -FeatureName \$("Microsoft-Hyper-V", "Containers") -All"

13. Download Docker for Desktop and install on your machine

14. After the installation is complete, please open system tray icon and right click on Docker icon.

15. If the option to "Switch to Linux Container" is available, it indicates that Docker is currently running on Windows Container mode. Conversely, if the option to "Switch to Windows Container" is displayed, it implies that Docker is currently running on Linux Container mode.

Action: Click on the "Switch to Windows Container" option and verify if the option changes to "Switch to Linux Container."

Local Sitecore XM Cloud Setup Using Docker Container

1. Open Windows PowerShell in Administrator mode
2. Run the below command
>> `cd C:\projects\kroll\code`
3. Run the below command to prepare the Sitecore Container Environment
>> `.\init.ps1 -InitEnv -LicenseXmlPath "C:\projects\kroll\license\license.xml" -AdminPassword "b"`
4. To download the Sitecore Docker images, install and configure the containers and client application

Note: Make sure you opened the Docker for Desktop and running on Windows containers

Run the below command:

>> `.\up.ps1`

Errors and steps to resolve:

Error 1: Access issue for the files under the project folder

```
File C:\code\XM\xmcloud-foundation-head-staging-main\.config\dotnet-tools.json came from another computer and might be b
locked to help protect this computer. For more information, including how to unblock, see https://aka.ms/motw
Installing Sitecore CLI Plugins...
File C:\code\XM\xmcloud-foundation-head-staging-main\.config\dotnet-tools.json came from another computer and might be b
locked to help protect this computer. For more information, including how to unblock, see https://aka.ms/motw
C:\code\XM\xmcloud-foundation-head-staging-main\up.ps1 : Unexpected error installing Sitecore CLI Plugins
```

Solution:

Run the below command

>> `dir -Path . -Recurse | Unblock-File`

Run the up script again to proceed with the setup

Error 2: Error Response from daemon: network xxxxxx not found

```

Error response from daemon: network d914f8ccd594e7c8c0e4ffa4b70e811954fcf1f8589a25a9ac1870c071a5d06c not found
Waiting for CM to become available...
Invoke-RestMethod : Unable to connect to the remote server
At C:\code\XM\xmcloud-foundation-head-staging-main\up.ps1:59 char:19
+ ... $status = Invoke-RestMethod "http://localhost:8079/api/http/routers ...
+ ~~~~~
+ CategoryInfo          : InvalidOperation: (System.Net.HttpWebRequest:HttpWebRequest) [Invoke-RestMethod], WebException
+ FullyQualifiedErrorId : WebCmdletWebResponseException,Microsoft.PowerShell.Commands.InvokeRestMethodCommand

```

Solution:

Run the following commands on Command Prompt

```
>> cd C:\Program Files\Docker\Docker
```

```
>> .\DockerCli.exe -SwitchDaemon
```

```
>> .\DockerCli.exe -SwitchDaemon
```

Run the up script again to proceed with the setup

Error 3: Curl: (6) Could not resolve host: nodejs.org

```

Successfully tagged sxastarter-xmcloud-cm:1.0.1
curl: (6) Could not resolve host: nodejs.org
The command 'cmd /S /C curl.exe -sS -L -o node.zip https://nodejs.org/dist/v%NODEJS_VERSION%/node-v%NODEJS_VERSION%-win-x64.zip' returned a non-zero code: 6
C:\code\XM\gowlg\up.ps1 : Container build failed, see errors above.
At line:1 char:1
+ .\up.ps1
+ ~~~~~
+ CategoryInfo          : NotSpecified: (:) [Write-Error], WriteErrorException
+ FullyQualifiedErrorId : Microsoft.PowerShell.Commands.WriteErrorException,up.ps1

```

Solution:

Add the below dns in the Docker daemon configuration file or in the docker engine

- "dns":["8.8.8.8"]

Run the up script again to proceed with the setup

Error 4: Error response from daemon: failed to create endpoint xxxxx-solr-1 on network xxxxxx_default: failed during hnsCallRawResponse: hnsCall failed in Win32: The process cannot access the file because it is being used by another process. (0x20)

```

Error response from daemon: failed to create endpoint sxastarter-solr-1 on network sxastarter_default: failed during hnsCallRawResponse: hnsCall failed in Win32: The process cannot access the file because it is being used by another process. (0x20)
Waiting for CM to become available...
Invoke-RestMethod : Unable to connect to the remote server
At C:\code\XM\gowlg\up.ps1:59 char:19
+ ... $status = Invoke-RestMethod "http://localhost:8079/api/http/routers ...
+ ~~~~~
+ CategoryInfo          : InvalidOperation: (System.Net.HttpWebRequest:HttpWebRequest) [Invoke-RestMethod], WebException
+ FullyQualifiedErrorId : WebCmdletWebResponseException,Microsoft.PowerShell.Commands.InvokeRestMethodCommand

```

Solution:

Stop the solr services running on the 8984 port and run the up script again

Run the up script again to proceed with the setup

Error 5: Error response from daemon: failed to create endpoint xxxxx—traefik-1 on network xxxxxx_default: failed during hnsCallRawResponse: hnsCall failed in Win32: The process cannot access the file because it is being used by another process. (0x20)

```
- Container sxastarter-traefik-1 Starting
Error response from daemon: failed to create endpoint sxastarter-traefik-1 on network sxastarter_default: failed during hnsCallRawResponse: hnsCall failed in Win32: The process cannot access the file because it is being used by another process. (0x20)
Waiting for CM to become available...
Invoke-RestMethod : Unable to connect to the remote server
At C:\code\XM\gowlg\up.ps1:59 char:19
+ ... $status = Invoke-RestMethod "http://localhost:8079/api/http/routers ...
+ ~~~~~
+ CategoryInfo          : InvalidOperation: (System.Net.HttpWebRequest:HttpWebRequest) [Invoke-RestMethod], WebException
+ FullyQualifiedErrorId : WebCmdletWebResponseException,Microsoft.PowerShell.Commands.InvokeRestMethodCommand
```

Solution:

Stop IIS, it might be due the port usage and run the up script again.

If the issue persists, run the following commands

```
>> Stop-Service docker
>> Stop-service hns
>> Start-service hns
>> Start-Service docker
```

Run the up script again to proceed with the setup

Error 6: hcsshim::ExpandScratchSize issue

Solution:

- Delete all the containers, images and networks inside the Docker for Desktop app
- Uninstall Docker for Desktop app
- Delete all the files inside "C:\ProgramData\Docker"
- Delete all the files inside "C:\Program Files\Docker"
- Re-Install the Docker for Desktop and Follow "Local XM Sitecore Cloud Setup Using Docker Container" again
- Run the up script again to proceed with the setup

Error 7: Dependency failed to start: container kroll-cm-1 is unhealthy

```
dependency failed to start: container gowlingwg-cm-1 is unhealthy
Waiting for CM to become available...
Invoke-RestMethod : Unable to connect to the remote server
At C:\projects\gowlingwg\code\up.ps1:59 char:19
+ ... $status = Invoke-RestMethod "http://localhost:8079/api/http/routers ...
+ ~~~~~
+ CategoryInfo          : InvalidOperation: (System.Net.HttpWebRequest:HttpWebRequest) [Invoke-RestMethod], WebException
+ FullyQualifiedErrorId : WebCmdletWebResponseException,Microsoft.PowerShell.Commands.InvokeRestMethodCommand
```

Error 8: ERROR: for traefik Container "xxxxxxx" is unhealthy.


```
ERROR: for traefik Container "6f44870609c5" is unhealthy.  
ERROR: Encountered errors while bringing up the project.
```

Solution for error 7 & 8:

Run the following commands

```
>> docker-compose stop  
>> docker-compose down  
>> iisreset /stop  
>> docker-compose up -d
```

Run the up script again to proceed with the setup

TO KNOW ISSUE PRESENT IN OUR XM CLOUD INSTANCE,

```
docker container exec -it c5cc8726606d3823d8744e3268f99c24d57958fd8911226a14fbee7ebd36e8 powershell  
then  
iwr localhost
```

Try the following steps if you couldn't resolve the issues


```
>> .\down.ps1  
>> cd docker  
>> ./clean.ps1  
>> cd..  
>> Stop-Service docker  
>> Stop-service hns  
>> Start-service hns  
>> Start-Service docker  
>> docker network prune
```

switch the docker from to linux then to windows on the system tray icons

```
>> .\up.ps1
```

Error -9:

While running .\init.ps1. Here, I got an error for PowerShell script is not digitally signed.

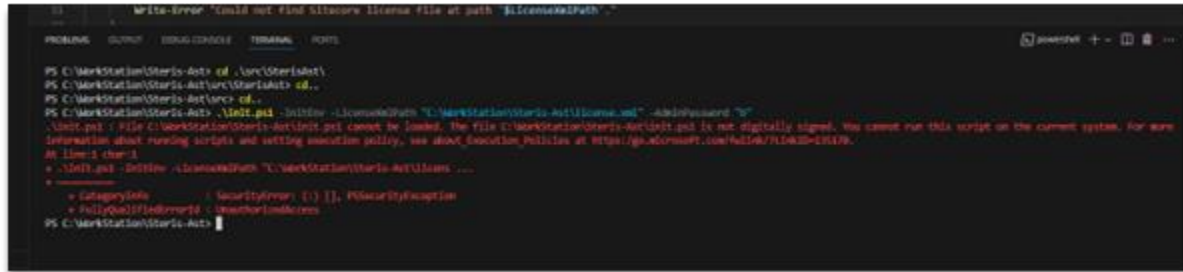

```
PS C:\WorkStation\Steris-Auto> cd .\src\SterisAuto\
PS C:\WorkStation\Steris-Auto\src\SterisAuto> cd ..
PS C:\WorkStation\Steris-Auto\src> cd ..
PS C:\WorkStation\Steris-Auto> .\init.ps1 -InitDir -LicensePath "C:\WorkStation\Steris-Auto\License.txt" -AddPassword "B"
.\init.ps1 : File C:\WorkStation\Steris-Auto\init.ps1 cannot be loaded. The file C:\WorkStation\Steris-Auto\init.ps1 is not digitally signed. You cannot run this script on the current system. For more information about running scripts and setting execution policy, see about_Execution_Policies at https://go.microsoft.com/fwlink/?LinkID=135179.
At line:1 char:1
+ .\init.ps1 -InitDir -LicensePath "C:\WorkStation\Steris-Auto\License ...
+ ~~~~~
+ CategoryInfo          : SecurityError: (:) [], PSSecurityException
+ FullyQualifiedErrorId : UnauthorizedAccess
PS C:\WorkStation\Steris-Auto>
```



```
PS C:\WorkStation\Steris-Auto> cd .\src\SterisAuto\
PS C:\WorkStation\Steris-Auto\src\SterisAuto> cd ..
PS C:\WorkStation\Steris-Auto\src> cd ..
PS C:\WorkStation\Steris-Auto> .\init.ps1 -InitDir -LicensePath "C:\WorkStation\Steris-Auto\License.txt" -AddPassword "B"
.\init.ps1 : File C:\WorkStation\Steris-Auto\init.ps1 cannot be loaded. The file C:\WorkStation\Steris-Auto\init.ps1 is not digitally signed. You cannot run this script on the current system. For more information about running scripts and setting execution policy, see about_Execution_Policies at https://go.microsoft.com/fwlink/?LinkID=135179.
At line:1 char:1
+ .\init.ps1 -InitDir -LicensePath "C:\WorkStation\Steris-Auto\License ...
+ ~~~~~
+ CategoryInfo          : SecurityError: (:) [], PSSecurityException
+ FullyQualifiedErrorId : UnauthorizedAccess
PS C:\WorkStation\Steris-Auto> Set-ExecutionPolicy Unrestricted
PS C:\WorkStation\Steris-Auto>
```

Solution:

To Resolve this, you need to execute the command **Set-ExecutionPolicy Unrestricted**

Once this is done, you can go ahead with the process


Then it will ask if you wanted PowerShellGet to install and import the NuGet provider now?

You need to allow here.



```
PS C:\WorkStation\Steris-Auto> cd .\src\SterisAuto\
PS C:\WorkStation\Steris-Auto\src\SterisAuto> cd ..
PS C:\WorkStation\Steris-Auto\src> cd ..
PS C:\WorkStation\Steris-Auto> .\init.ps1 -InitDir -LicensePath "C:\WorkStation\Steris-Auto\License.txt" -AddPassword "B"
.\init.ps1 : File C:\WorkStation\Steris-Auto\init.ps1 cannot be loaded. The file C:\WorkStation\Steris-Auto\init.ps1 is not digitally signed. You cannot run this script on the current system. For more information about running scripts and setting execution policy, see about_Execution_Policies at https://go.microsoft.com/fwlink/?LinkID=135179.
At line:1 char:1
+ .\init.ps1 -InitDir -LicensePath "C:\WorkStation\Steris-Auto\License ...
+ ~~~~~
+ CategoryInfo          : SecurityError: (:) [], PSSecurityException
+ FullyQualifiedErrorId : UnauthorizedAccess
PS C:\WorkStation\Steris-Auto> Set-ExecutionPolicy Unrestricted
PS C:\WorkStation\Steris-Auto> .\init.ps1 -InitDir -LicensePath "C:\WorkStation\Steris-Auto\License.txt" -AddPassword "B"
Preparing your Silacore Containers environment!
Adding Silacore PowerShell Gallery...

NuGet provider is required to continue
PowerShellGet requires NuGet provider version '2.8.5.201' or newer to interact with NuGet-based repositories. The NuGet provider must be available in 'C:\Program Files\PackageManagement\ProviderInstallers\
or 'C:\Users\kayur.nay\AppData\Local\PackageManagement\ProviderInstallers\'. You can also install the NuGet provider by running 'Install-PackageProvider -Name NuGet -MinimumVersion 2.8.5.201 -Force'. Do
you want PowerShellGet to install and import the NuGet provider now?
[Y] Yes [N] No [S] Suspend [?] Help (default is "Y"):
```

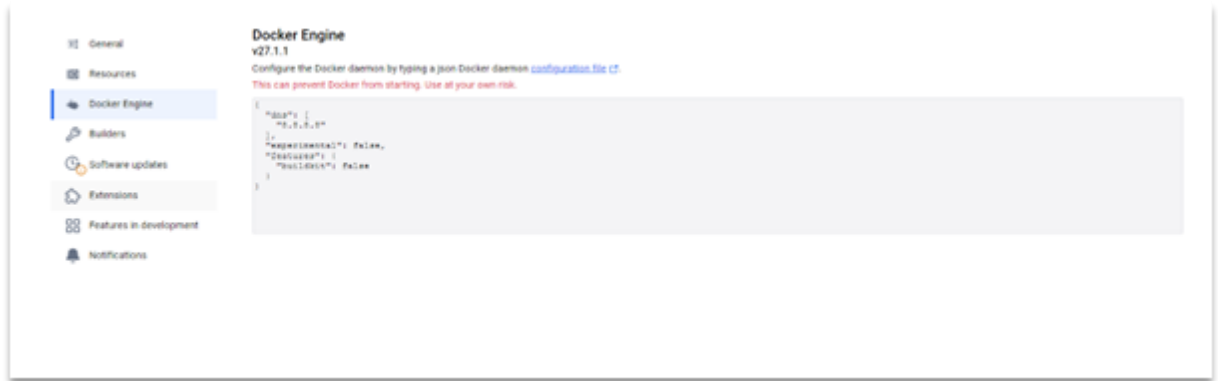Here, I added dns settings and buildkit feature as false.

```
{
  "dns": [
    "8.8.8.8"
  ],
  "experimental": false,
  "features": {
    "buildkit": false
  }
}
```

Now re-enter the command and it will continue.

Error –11:

I got another issue regarding authorized access, incorrect username or password.

```
Starting Sitecore environment...
time="2024-11-05T20:54:24.05:30" level=warning msg="The \"DN\" variable is not set. Defaulting to a blank string."
time="2024-11-05T20:54:24.05:30" level=warning msg="The \"V\" variable is not set. Defaulting to a blank string."
time="2024-11-05T20:54:24.05:30" level=warning msg="The \"PA\" variable is not set. Defaulting to a blank string."
time="2024-11-05T20:54:24.05:30" level=warning msg="The \"DN\" variable is not set. Defaulting to a blank string."
time="2024-11-05T20:54:24.05:30" level=warning msg="The \"V\" variable is not set. Defaulting to a blank string."
time="2024-11-05T20:54:24.05:30" level=warning msg="The \"PA\" variable is not set. Defaulting to a blank string."
time="2024-11-05T20:54:24.05:30" level=warning msg="The \"DN\" variable is not set. Defaulting to a blank string."
time="2024-11-05T20:54:24.05:30" level=warning msg="The \"V\" variable is not set. Defaulting to a blank string."
time="2024-11-05T20:54:24.05:30" level=warning msg="The \"PA\" variable is not set. Defaulting to a blank string."
time="2024-11-05T20:54:24.05:30" level=warning msg="The \"DN\" variable is not set. Defaulting to a blank string."
time="2024-11-05T20:54:24.05:30" level=warning msg="The \"V\" variable is not set. Defaulting to a blank string."
time="2024-11-05T20:54:24.05:30" level=warning msg="The \"PA\" variable is not set. Defaulting to a blank string."
time="2024-11-05T20:54:24.05:30" level=warning msg="The \"SITECORE_xcloud_dot_tenantid\" variable is not set. Defaulting to a blank string."
[+] Running 5/5
X solr-init Error context canceled
X traefik Error Head "https://registry-1.docker.io/v2/library/traefik/manifests/v2.5.3-windowsservercore-1809": unauthorized: incorrect username or password
X solr Error context canceled
X msqldb-init Error context canceled
X msqldb Error context canceled
Error response from daemon: Head "https://registry-1.docker.io/v2/library/traefik/manifests/v2.5.3-windowsservercore-1809": unauthorized: incorrect username or password
Waiting for OM to become available...
Invoke-WebRequest : Unable to connect to the remote server.
at C:\Workstation\DevOps-Setup-pa167\devops19
+ ... $status = Invoke-WebRequest "http://localhost:8070/api/http/routers ..."
+ ~~~~~
+ CategoryInfo          : (Error) (System.Net.HttpWebRequest:HttpWebRequest) [Invoke-WebRequest], WebException
+ FullyQualifiedErrorId : WebCmdletWebResponseException,Microsoft.PowerShell.Commands.InvokeWebRequestCommand
```

Solution:



To resolve this, we need to log-out from the docker, docker credential will cause this issue here.

Note: Please refer the below link if you are facing an error which is not listed above.

<https://doc.sitecore.com/xp/en/developers/100/developer-tools/troubleshooting-docker.html>


5. Once up command executed, then all containers will be created.

Now, you will be asked for Device confirmation, you need to provide click confirm select Kroll to set-up local XMC of their XMC's replica and provide the Sitecore credentials of your XMC portal.

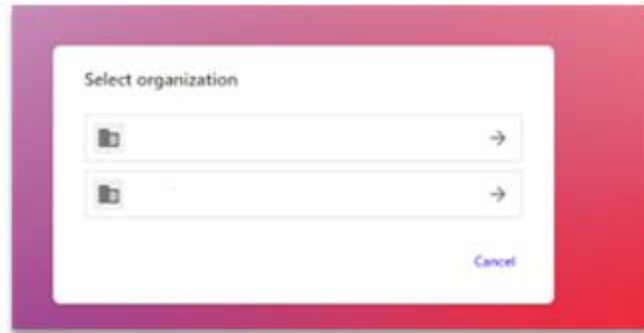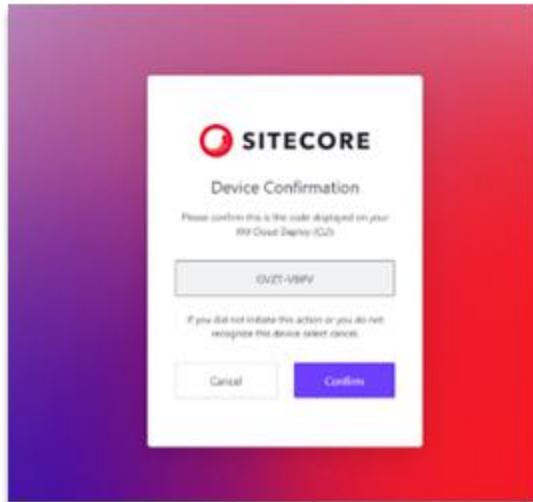

When you got “Congratulations you’re all set!” Then you need to wait till the process finishes. Once it’s done you are going to see the up and running xmcloud local host under the URL.

https://xmcloud.localhost/sitecore/client/Applications/Launchpad?sc_lang=en.

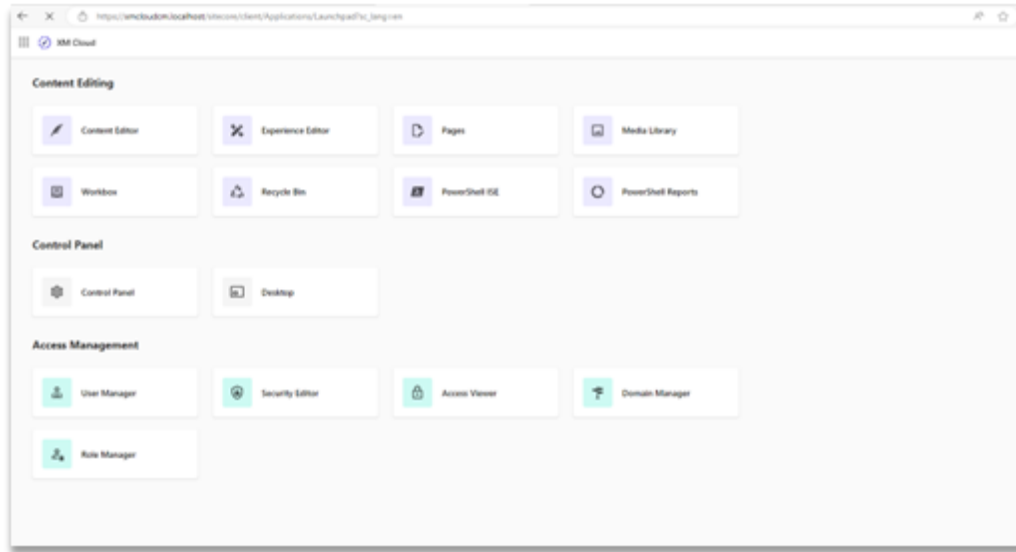

Serialization Setup

From Dev to Local

1. Open PowerShell in Administrator mode
2. Run the following command to login into the XM Cloud Instance
>> dotnet sitecore cloud login
3. Run the following command to push the contents to the Local XM instance
>> dotnet sitecore ser push -n "local"

Local host Setup

Cd C:\projects\kroll\code\src\kroll

Check for env.local file

Run

npm run build

To host

npm run start:connected

If components are not registeted or missing during build, run this command


npm run bootstrap

Running experience editor locally

On Content Editor need to set values in sitecore/System/Settings/Services/Rendering Hosts/Default

- Server side rendering engine endpoint URL: <http://rendering:3000/api/editing/render>
- Server side rendering engine application URL: <http://rendering:3000>
- Application name: kroll

Save changes.

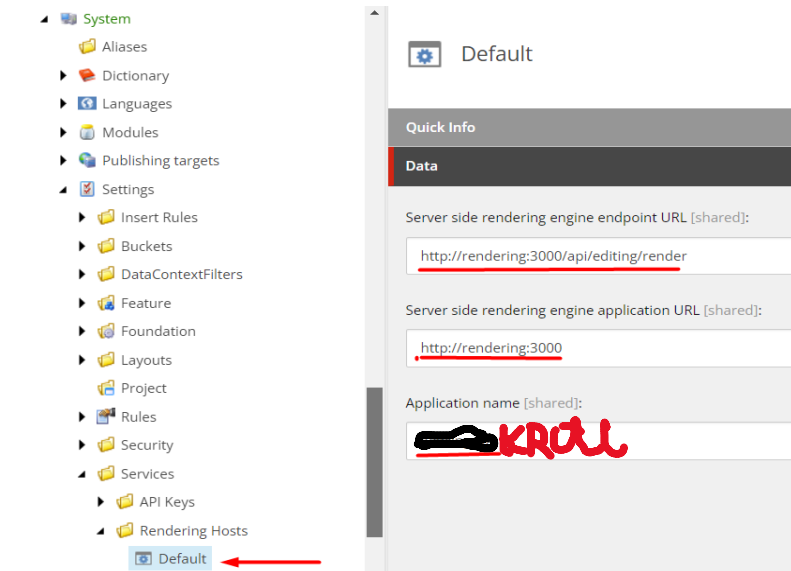

On Content Editor need to set value in sitecore/Content/Kroll XM Cloud/Kroll Website/Settings/Site Grouping/Kroll item scroll to “Settings” group and select “Default” from dropdown menu of “Predefined application rendering host” field. Save the changes. Restart experience editor.

