


AWS S3 PUBLIC ASSIGNMENT 2

AWS S3 BUCKET SETUP AND FILE UPLOAD


Step 1: Introduction to Amazon S3

AWS console shows Amazon S3 as an object storage service with scalability, availability, and performance. Users must create a bucket to store objects.

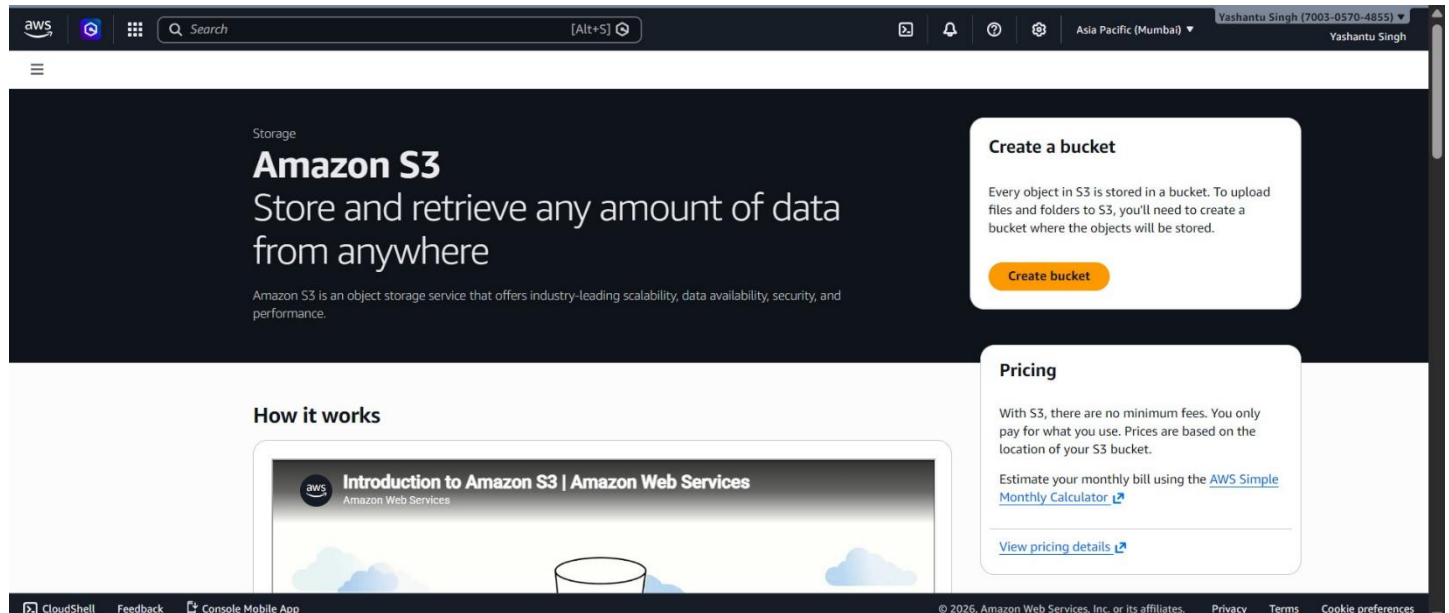

Step 2: Creating a Bucket

The console allows choosing region (Asia Pacific Mumbai), bucket type (general purpose), namespace (global or regional), and bucket name (amzn-s3-yashantu-2).

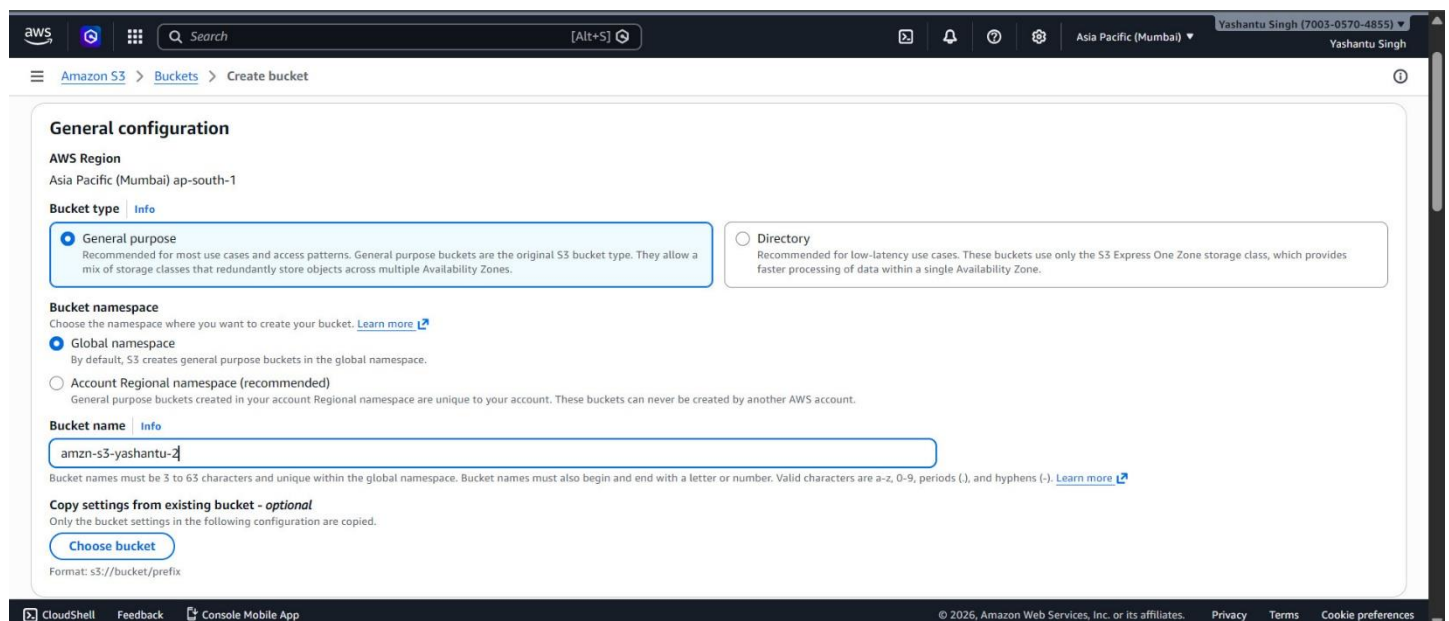

Step 3: Configuring Public Access

Options to block public access via ACLs, bucket policies, or access point policies. AWS recommends enabling 'Block all public access' unless hosting a public website.

The screenshot shows the 'Create bucket' page in the AWS Management Console. The 'Block Public Access settings for this bucket' section is active. It explains that public access is granted through ACLs, bucket policies, or access point policies. The settings are as follows:

- ☐ **Block all public access**
Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.
- ☐ **Block public access to buckets and objects granted through new access control lists (ACLs)**
S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.
- ☐ **Block public access to buckets and objects granted through any access control lists (ACLs)**
S3 will ignore all ACLs that grant public access to buckets and objects.
- ☐ **Block public access to buckets and objects granted through new public bucket or access point policies**
S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.
- ☐ **Block public and cross-account access to buckets and objects through any public bucket or access point policies**
S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

A warning box states: "Turning off block all public access might result in this bucket and the objects within becoming public. AWS recommends that you turn on block all public access, unless public access is required for specific and verified use cases such as static website hosting." A checkbox "I acknowledge that the current settings might result in this bucket and the objects within becoming public." is checked.

Step 4: Bucket Creation Confirmation


The bucket 'amzn-s3-yashantu-2' is successfully created, initially empty.

The screenshot shows the AWS Management Console after the bucket 'amzn-s3-yashantu-2' has been created. A green notification bar at the top states: "Successfully created bucket 'amzn-s3-yashantu-2'".

The bucket's details page is shown, with tabs for Objects, Metadata, Properties, Permissions, Metrics, Management, and Access Points. The 'Objects' tab is selected, showing 'Objects (0)'. A message states: "No objects. You don't have any objects in this bucket." with an 'Upload' button.


Step 5: Uploading Files

A file (thumb-1920-1401922.jpg, 275.3 KB) is selected for upload to the bucket.

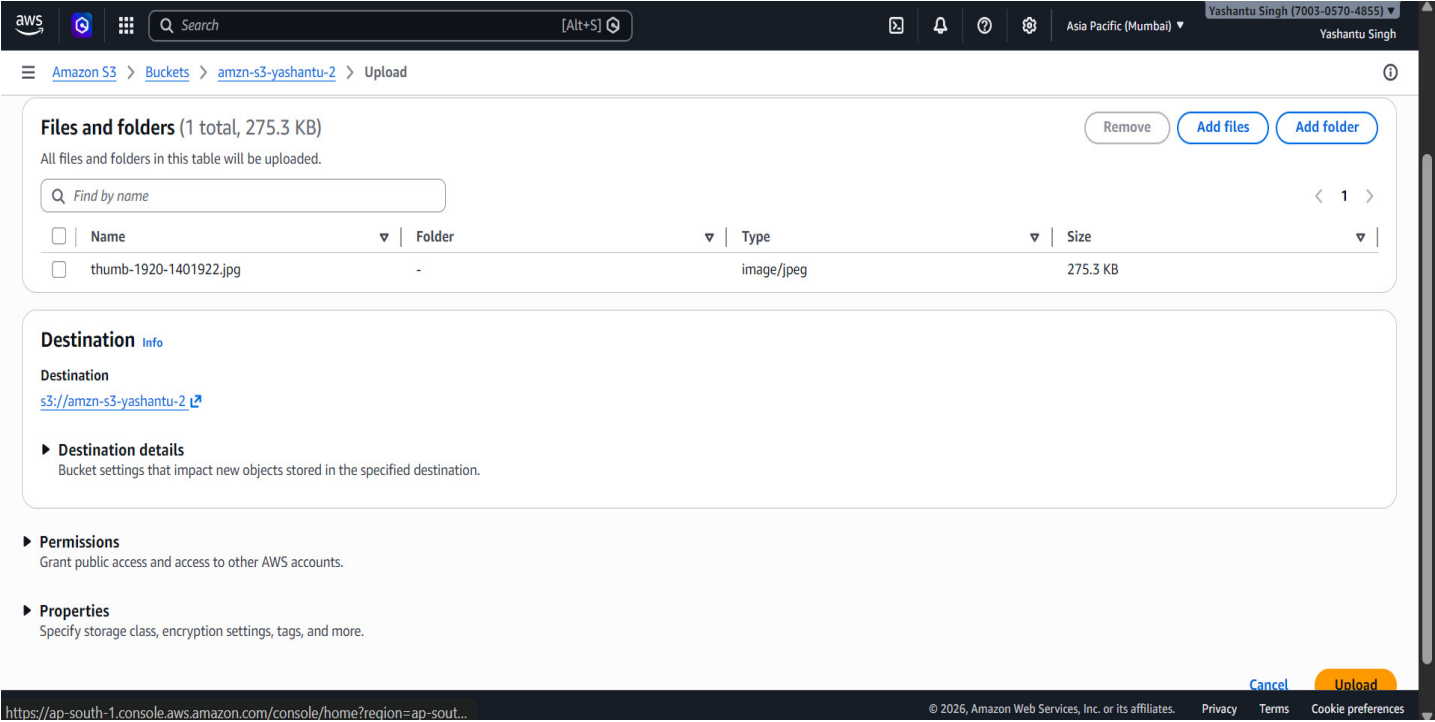


Step 6: Upload Success

Console confirms upload succeeded with details of the file.

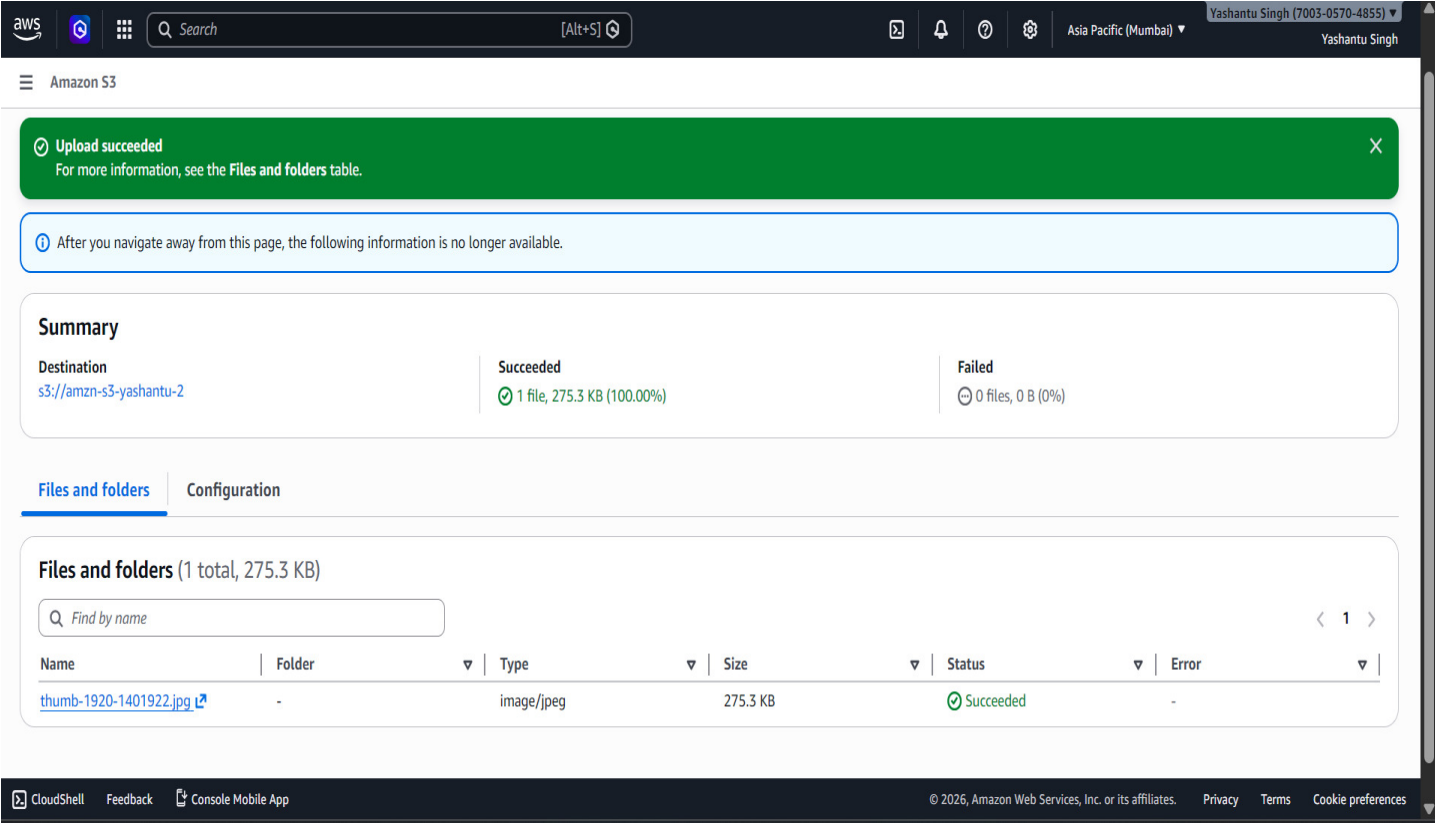


Step 7: Object Overview

Metadata of the uploaded file is displayed: owner, region, size, type, S3 URI, ARN, and Object URL.

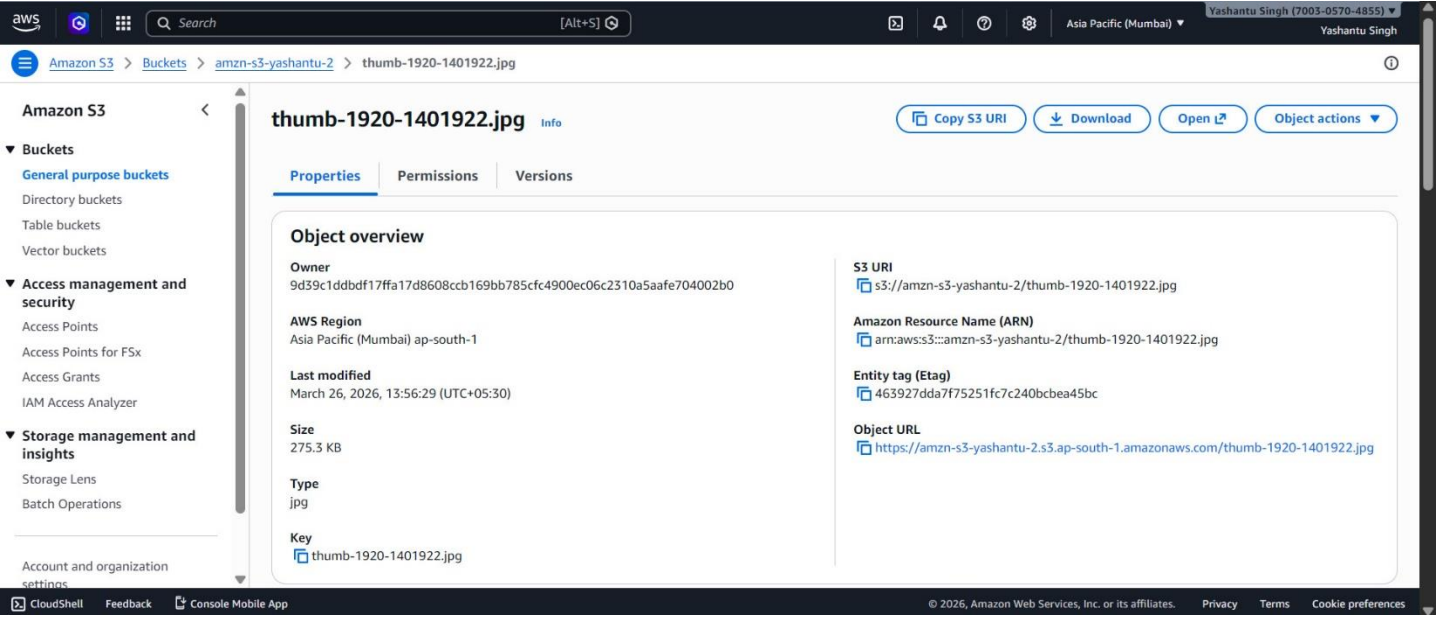

Step 8: Bucket Contents

The bucket now contains the uploaded file with details like last modified, size, and storage class.

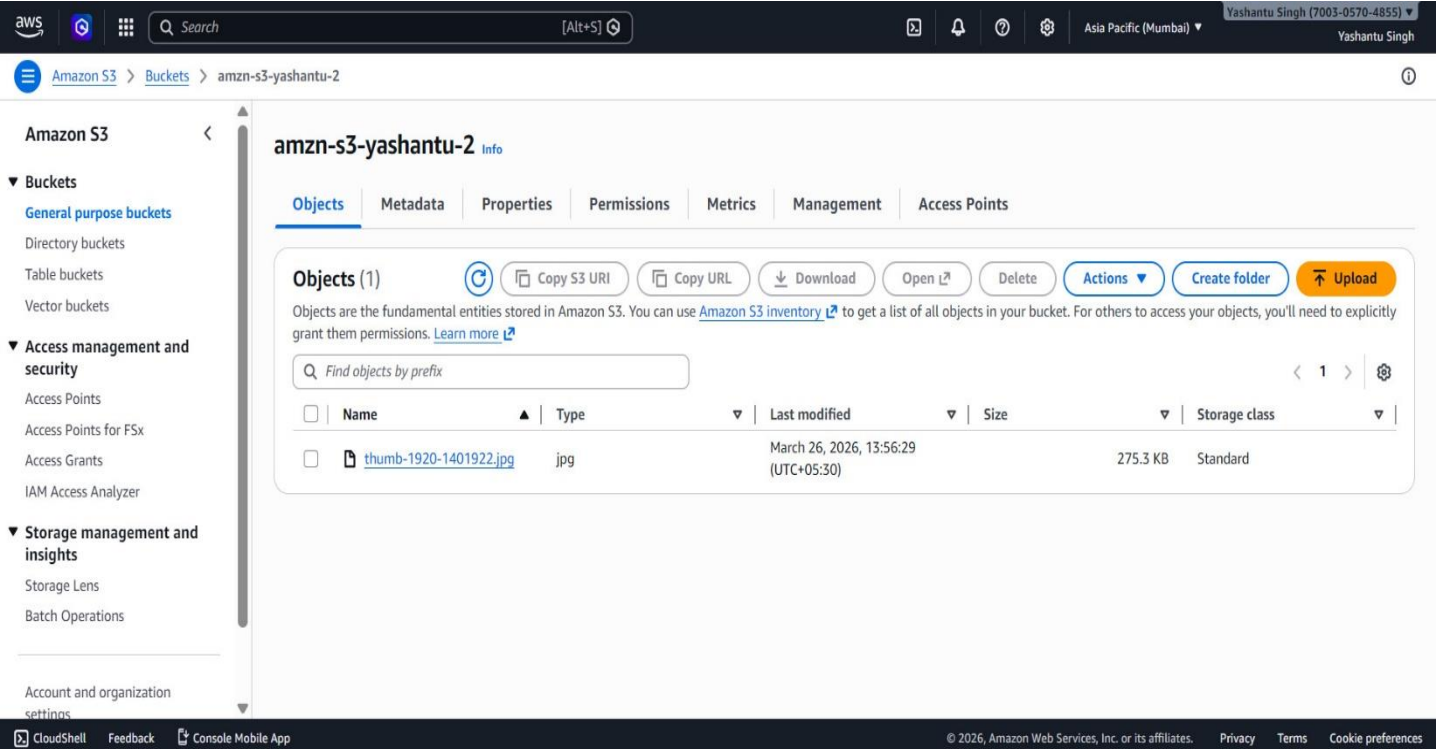

Step 9: Bucket Policy

JSON policy editor allows defining permissions. Example policy grants 's3:*' actions on the bucket.

The screenshot shows the AWS IAM console interface for editing a bucket policy. The left sidebar contains navigation links for Amazon S3, Buckets, and various access management and storage management tools. The main content area is titled 'Bucket policy' and includes a description of bucket policies. Below this, the 'Bucket ARN' is listed as 'arn:aws:s3:::amzn-s3-yashantu-2'. The 'Policy' section displays a JSON policy document with the following content:

```
1 {
2   "Version": "2012-10-17",
3   "Statement": [
4     {
5       "Sid": "Statement1",
6       "Principal": {},
7       "Effect": "Allow",
8       "Action": "s3:*",
9       "Resource": [
10        "arn:aws:s3:::amzn-s3-yashantu-2"
11      ]
12    }
13  ]
14 }
```

On the right side, there is a 'Policy examples' link, an 'Edit statement' section for 'Statement1', and an 'Add actions' section. The 'Add actions' section shows 'All services > S3' and a search bar. Below the search bar, 'All actions (s3:*)' is selected, and a list of actions is shown, including 'ListAccessGrants' and 'ListAccessGrantsInstances'.


Step 10: Object Ownership

Settings allow choosing ACLs disabled (recommended) or enabled, and ownership preference (bucket owner or object writer).

The screenshot shows the AWS IAM console interface for creating a bucket. The left sidebar contains navigation links for Amazon S3, Buckets, and various access management and storage management tools. The main content area is titled 'Create bucket' and includes a 'Choose bucket' button. Below this, the 'Object Ownership' section is highlighted. It contains a description of object ownership and two radio button options: 'ACLs disabled (recommended)' and 'ACLs enabled'. The 'ACLs enabled' option is selected. Below these options, there is a warning message: 'We recommend disabling ACLs, unless you need to control access for each object individually or to have the object writer own the data they upload. Using a bucket policy instead of ACLs to share data with users outside of your account simplifies permissions management and auditing.' Below the warning, there is another section for 'Object Ownership' with two radio button options: 'Bucket owner preferred' and 'Object writer'. The 'Object writer' option is selected. At the bottom, there is a section for 'Block Public Access settings for this bucket' with a description: 'Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access.'

Step 11: Properties Tab

Displays metadata and configuration details of the uploaded object.

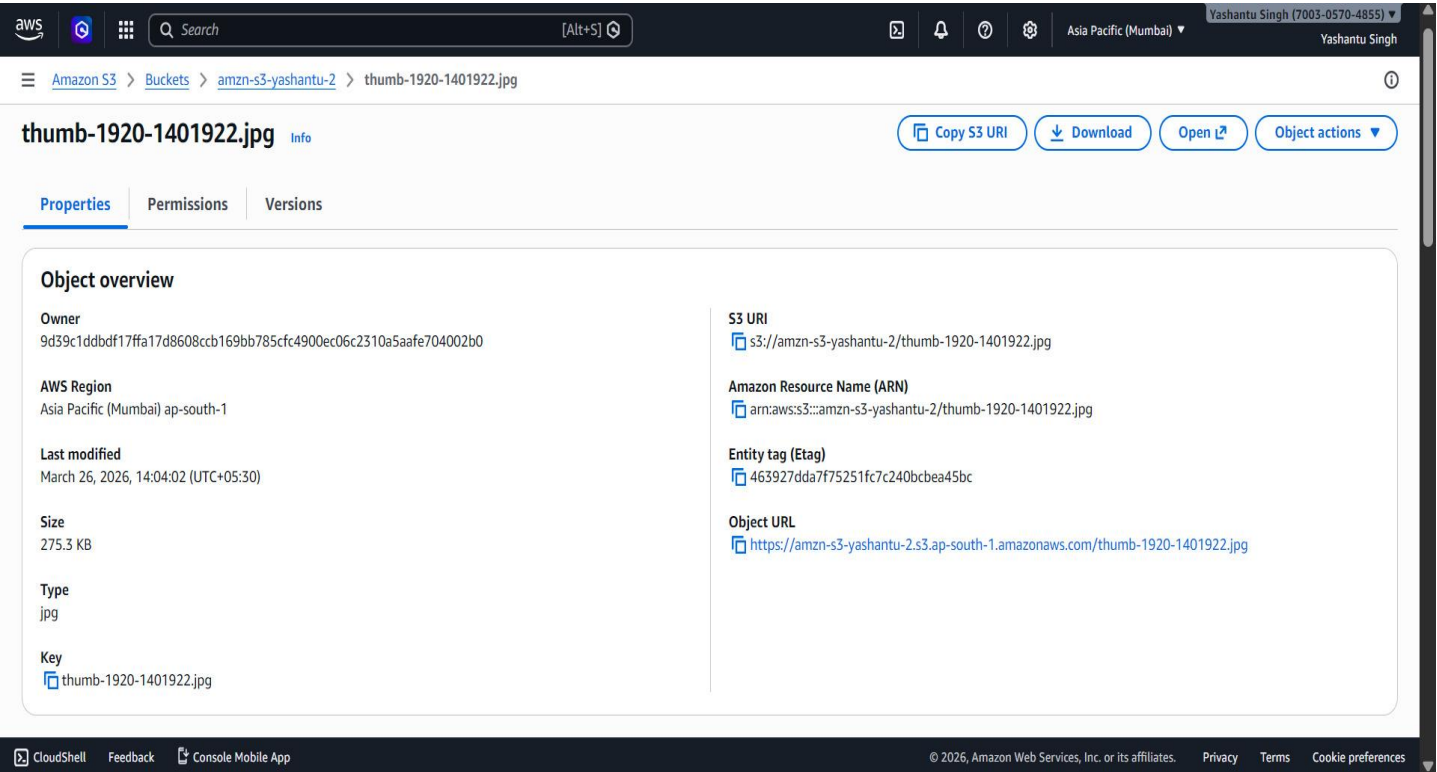

Final Note

These steps illustrate the complete workflow of creating an S3 bucket, configuring access, uploading a file, and managing its properties and policies.

