

EXPERIMENT 15

Name : Yashwardhan Chourasia

PRN : 25070521167

ALGORITHM:

Step 1: Start

Step 2: Define a base class Car

- Declare attributes: brand, price, model, color

Step 3: Define constructor `__init__()`

- Initialize all attributes using input values

Step 4: Define method `display_details()`

- Print brand, price, model, and color (each on separate line)

Step 5: Define derived class Car1

- Inherit from class Car
- Override method `display_details()` to print details

Step 6: Define derived class Car2

- Inherit from class Car
- Override method `display_details()` to print details

Step 7: Read input for first car

- Store values: brand1, price1, model1, color1

Step 8: Read input for second car

- Store values: brand2, price2, model2, color2

Step 9: Create object car1 of class Car1

- Pass first car details

Step 10: Create object car2 of class Car2

- Pass second car details

Step 11: Call `display_details()` for car1


- Print first car details

Step 12: Call `display_details()` for car2

- Print second car details

Step 13: Stop

Flowchart :

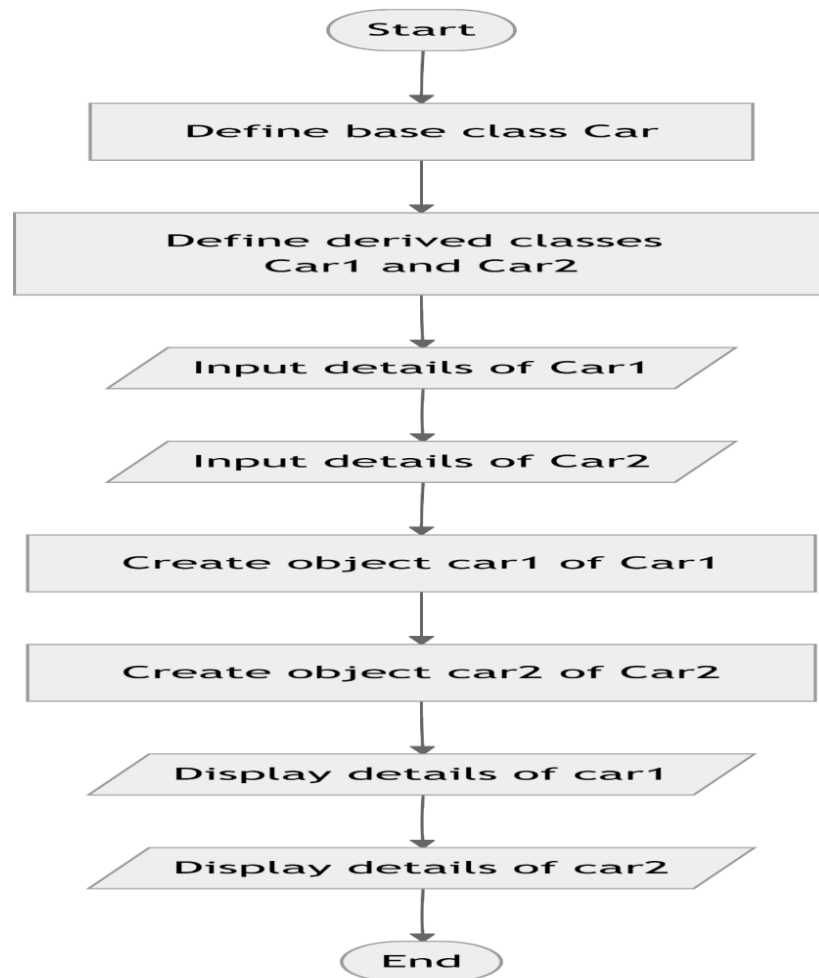

CODETANTRA:

CODETANTRA Home yashwardhan.chourasia.batch2025@sitnagpur.siu.edu.in Support Logout

15.1.1. Car Dealership Sales System

Write a Python program to model a car dealership sales system using object-oriented programming. Create a base class **Car** and two derived classes **Car1** and **Car2** to represent different car types.

Class Structure

- Base Class **Car**:
 - Attributes: **brand**, **price**, **model**, **color**.
 - Method: **display_details()** to print all car attributes.
- Derived Classes **Car1** and **Car2**:
 - Inherit from **Car** class.
 - Override **display_details()** method to display car information in the specified format.

Input Format:

- The first line contains **Car1's brand** (string), **price** (float), **model** (string), and **color** (string) separated by spaces.
- The second line contains **Car2's brand** (string), **price** (float), **model** (string), and **color** (string) separated by spaces.

Output Format:

- First four lines: **Car1 details (brand, price, model, color - each on separate line)**
- Next four lines: **Car2 details (brand, price, model, color - each on separate line)**

Sample Test Cases

```
class Car:
    def __init__(self, brand, price, model, color):
        self.brand = brand
        self.price = price
        self.model = model
        self.color = color
    def display_details(self):
        pass

class Car1(Car):
    def display_details(self):
        print(self.brand)
        print(self.price)
        print(self.model)
        print(self.color)

class Car2(Car):
    def display_details(self):
        print(self.brand)
        print(self.price)
        print(self.model)
        print(self.color)
```

Average time: 0.003 s, Maximum time: 0.005 s, 2.83 ms, 5.00 ms

3 out of 3 shown test case(s) passed
3 out of 3 hidden test case(s) passed

Test case 1

Expected output	Actual output
Toyota 25000.50 Camry White	Toyota 25000.50 Camry White
Honda 22000.00 Accord Black	Honda 22000.00 Accord Black
Toyota	Toyota
25000.50	25000.50
Camry	Camry
White	White

Terminal Test cases

Prev Reset Submit

