POSTMAN API

Prepared By: Yashraj Bhasin

REGISTER API: This screenshot demonstrates the user registration endpoint using the POST method. The request is sent to /api/auth/register with user details such as name, email, and password in JSON format. Upon successful execution, the server returns a 201 Created status. The response includes user information along with a generated authentication token. This confirms that the user has been successfully registered in the system.

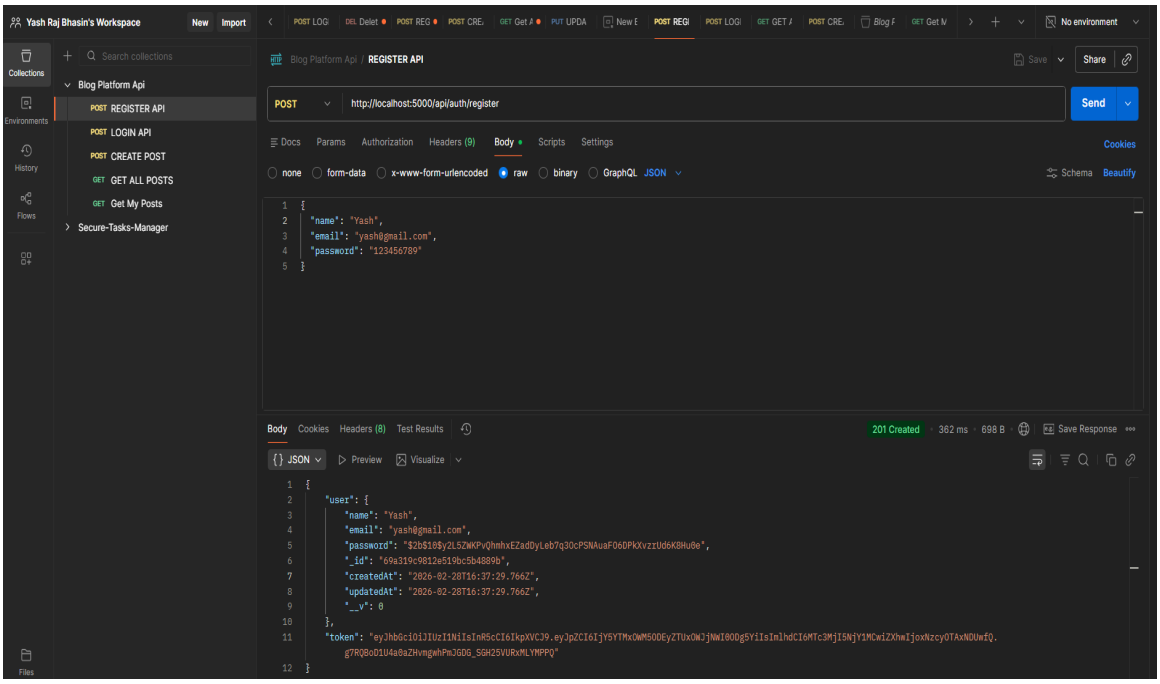

LOGIN API: This image shows the login endpoint where existing users authenticate themselves. The POST request is sent to /api/auth/login with email and password credentials. On successful authentication, the server returns a 200 OK status. The response contains user details and a JWT token used for authorization. This token is required to access protected routes in the application.

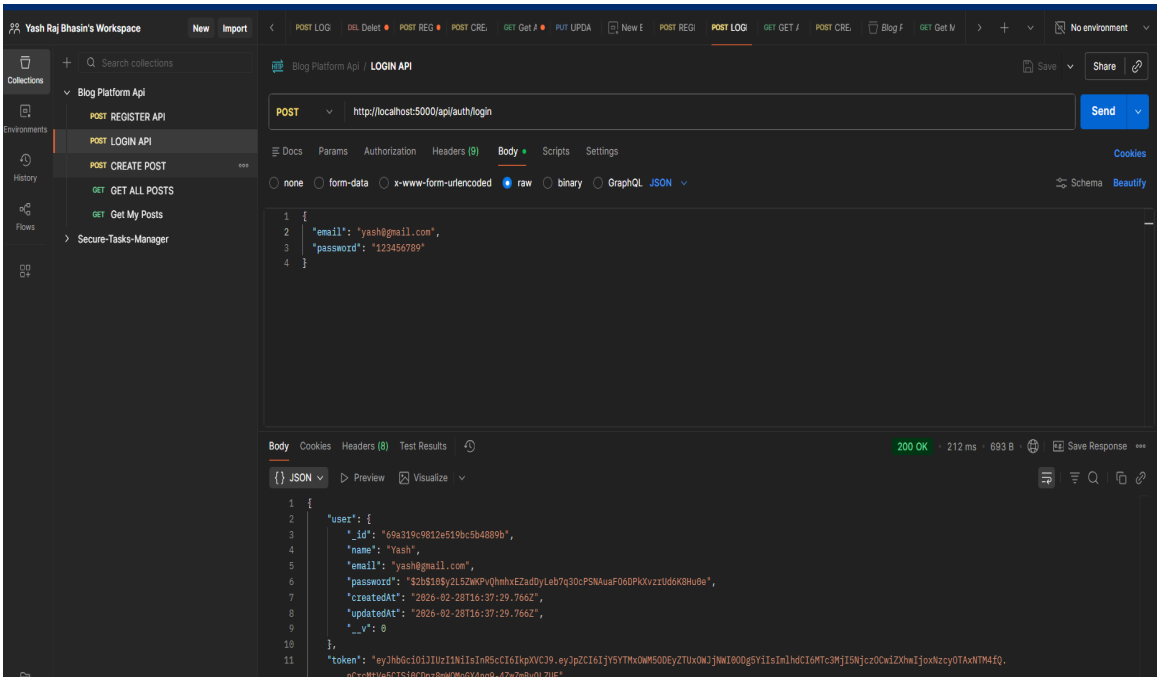

CREATE POST API: This screenshot represents the creation of a new blog post using the POST method. The request is sent to /api/posts with proper Authorization header containing Bearer token. The response shows a 201 Created status indicating successful blog creation. The server returns the post title, content, author ID, and timestamps. This verifies that authenticated users can create blog posts securely.

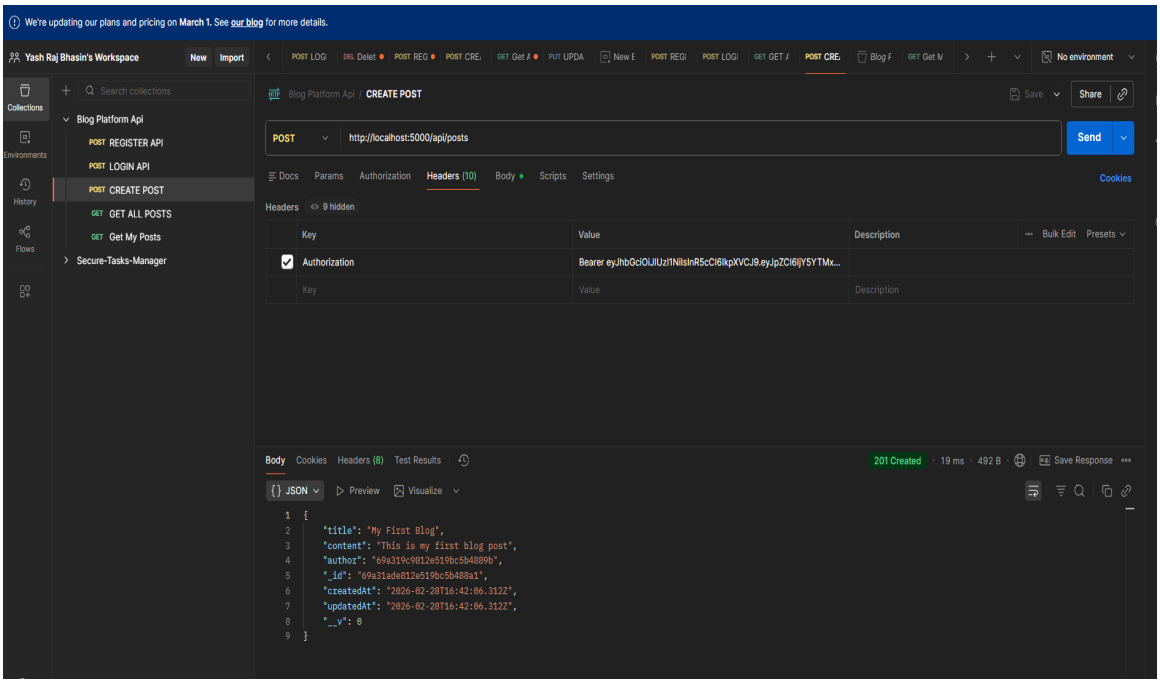

GET ALL POSTS API: This image displays the GET request used to retrieve all blog posts. The endpoint /api/posts returns a 200 OK response. The response body contains an array of blog

objects including title, content, author details, and timestamps. This endpoint helps users view all available blog posts in the system. It confirms that data retrieval from the database is functioning correctly.

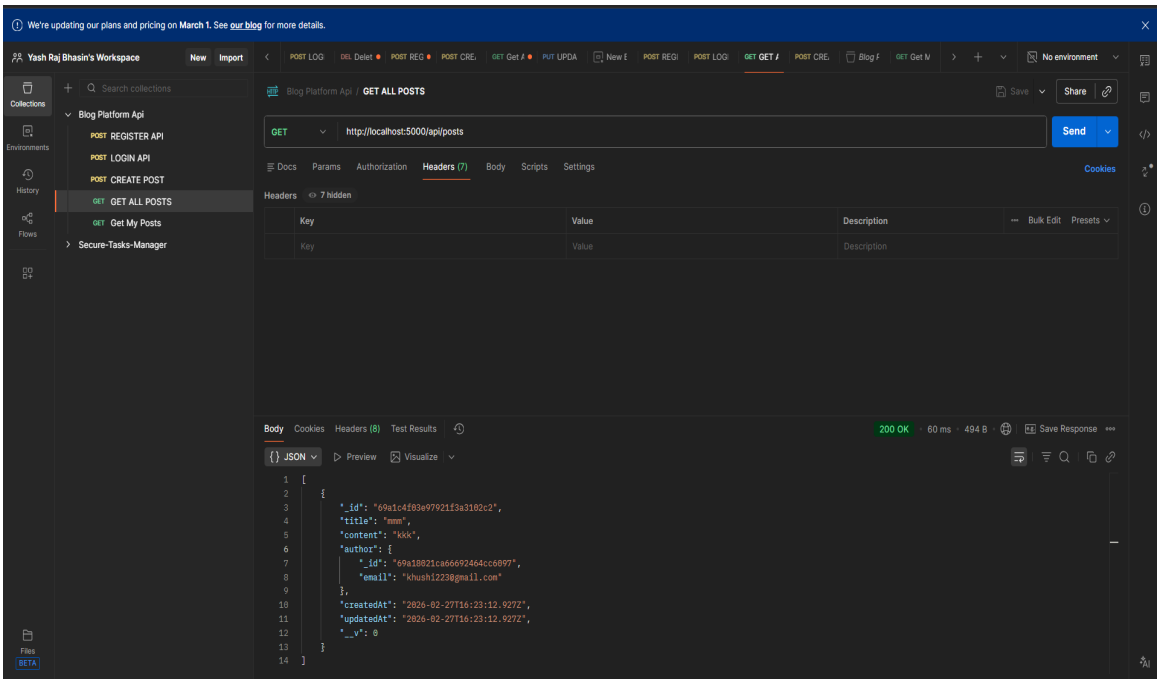
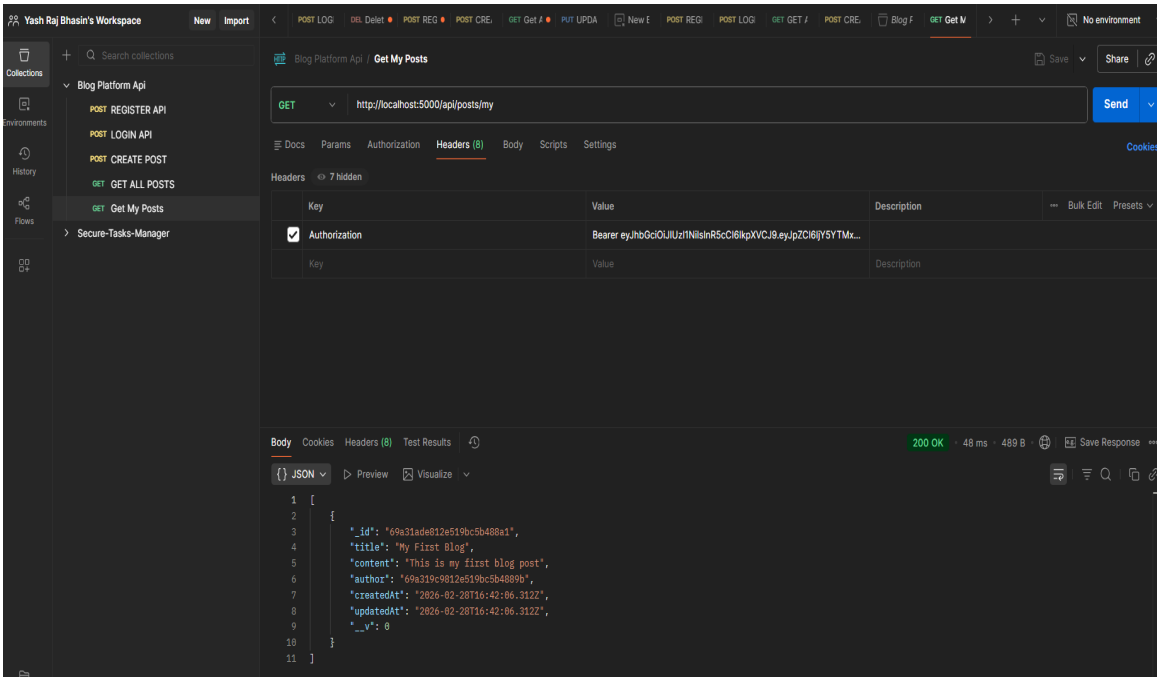
GET MY POSTS API: This screenshot demonstrates fetching posts created by the logged-in user. The GET request is sent to /api/posts/my with Authorization header. The server validates the JWT token before returning data. A 200 OK status confirms successful retrieval of user-specific posts. This ensures secure access to personalized content within the application.