


Execute shell commands in subprocess

COMMAND LINE AUTOMATION IN PYTHON

Noah Gift

Lecturer, Northwestern & UC Davis & UC
Berkeley | Founder, Pragmatic AI Labs



Using subprocess.run

- Simplest way to run shell commands using Python 3.5+
- Takes a list of strings

```
subprocess.run(["ls", "-l"])
```

Dealing with Byte Strings

- Byte Strings are default in subprocess

```
res = b'repl          24  0.0  0.0  36072  3144 pts/0    R+   03:15   0:00 ps aux\n'
print(type(res))
```

```
bytes
```

- Byte Strings decode

```
regular_string = res.decode("utf-8")
'repl          24  0.0  0.0  36072  3144 pts/0    R+   03:15   0:00 ps aux\n'
print(type(regular_string))
```

Unix status codes

- Successful completion returns 0

```
ls -l  
echo $?  
0
```

- Unsuccessful commands return non-zero values

```
ls --bogus-flag  
echo $?  
1
```

Checking status codes

- Run shell command and assign output

```
out = run(["ls", "-l"])
```

- CompletedProcess object

```
subprocess.CompletedProcess
```

- Check status code

```
print(out.returncode)
```

```
0
```

Non-zero status codes in subprocess.run

- Successful status code

```
out = run(["ls", "-l"])
print(out.returncode)
```

- Unsuccessful status code

```
bad_out = run(["ls", "--turbo"])
print(bad_out.returncode)
1
```

Control flow for status codes

- Handling user input

```
good_user_input = "-l"  
out = run(["ls", good_user_input])
```

- Controlling flow based on response

```
if out.returncode == 0:  
    print("Your command was a success")  
else:  
    print("Your command was unsuccessful")
```

Practicing executing shell commands

COMMAND LINE AUTOMATION IN PYTHON

Capture output of shell commands

COMMAND LINE AUTOMATION IN PYTHON



Noah Gift

Lecturer, Northwestern & UC Davis & UC
Berkeley | Founder, Pragmatic AI Labs

Using the subprocess.Popen module

- Captures the output of shell commands
- In bash a directory listing using `ls`

```
bash-3.2$ ls
some_file.txt      some_other_file.txt
```

- In Python output can be captured with `Popen`

```
with Popen(["ls"], stdout=PIPE) as proc:
    out = proc.readlines()
print(out)

['some_file.txt', 'some_other_file.txt']
```

"with" statement

- Context manager handles closing file

```
with open("somefile.txt", "r") as output:
```

```
# uses context manager
with Popen(["ls", "/tmp"], stdout=PIPE) as proc:
    # perform file operations
```

- Simplifies using Popen
- Also simplifies other Python statements like reading files.

Breaking down a real example

```
# import Popen and PIPE to manage subprocesses
from subprocess import (Popen, PIPE)
```

```
with Popen(["ls", "/tmp"], stdout=PIPE) as proc:
    result = proc.stdout.readlines()
```


Using communicate

- `communicate` : A way of communicating with streams of a process, including waiting.

```
proc = subprocess.Popen(...)
# Attempt to communicate for up to 30 seconds
try:
    out, err = proc.communicate(timeout=30)
except TimeoutExpired:
    # kill the process since a timeout was triggered
    proc.kill()
    # capture both standard output and standard error
    out, error = proc.communicate()
```

Using PIPE

- **PIPE** : Connects a standard stream (stdin, stderr, stdout)
- One intuition about **PIPE** is to think of it as tube that connect to other tubes

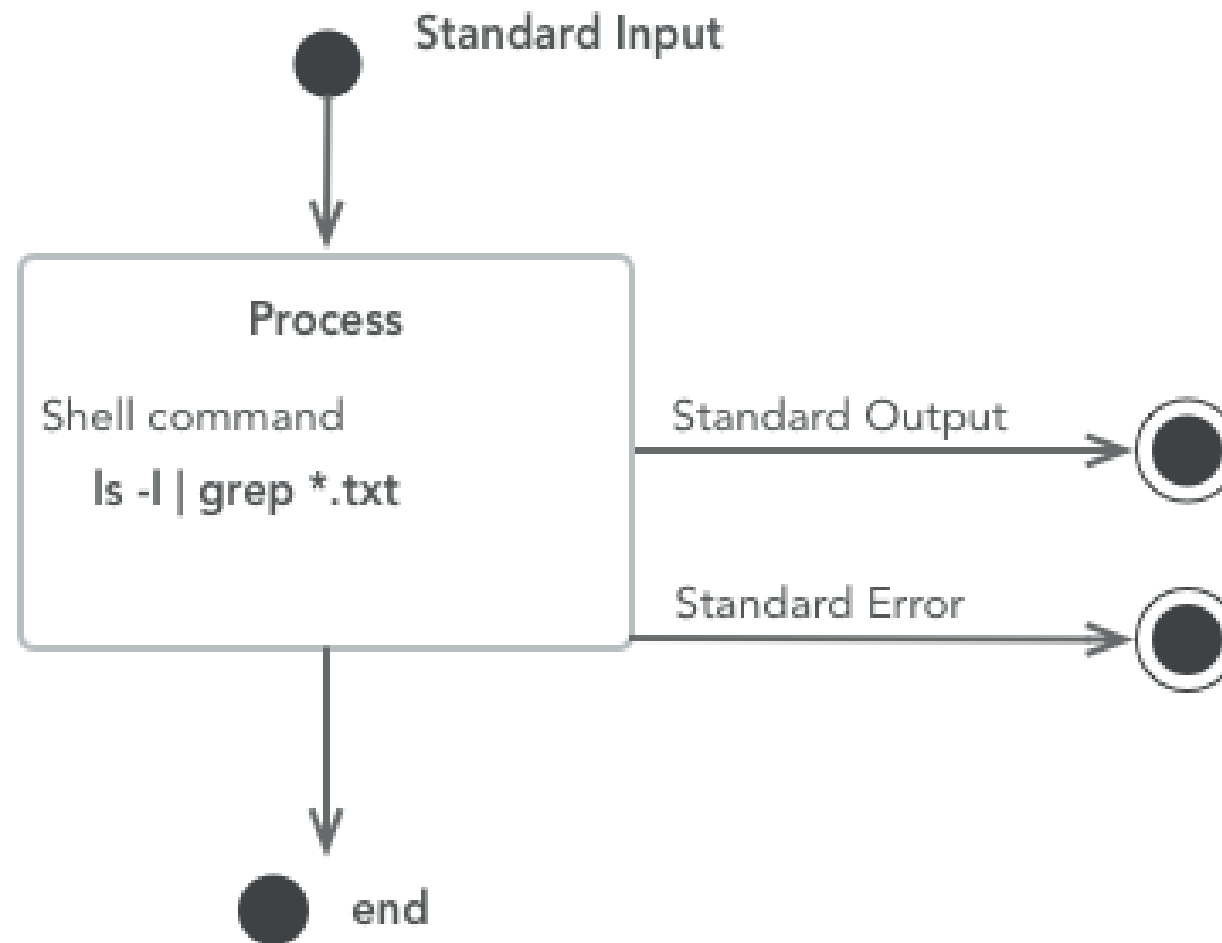

Required components of subprocess.Popen

- `stdout` : Captures output of command
- `stdout.read()` : returns output as a string
- `stdout.readlines()` : returns outputs as an iterator
- `shell=False`
 - is default and recommended

```
# Unsafe!
```

```
with Popen("ls -l /tmp", shell=True, stdout=PIPE) as proc:
```

Using stderr

- stderr: Captures shell stderr (error output)

```
with Popen(["ls", "/a/bad/path"], stdout=PIPE, stderr=PIPE) as proc:  
    print(proc.stderr.read())
```

stderr output

```
b'ls: /a/bad/path: No such file or directory\n'
```


Analyzing Results

```
# Printing raw result  
print(result)
```

```
[b'bar.txt\n', b'foo.txt\n']
```

```
#print each file  
for file in result:  
    print(file.strip())
```

```
b'bar.txt'  
b'foo.txt'
```

Practicing with the subprocess.Popen Class

COMMAND LINE AUTOMATION IN PYTHON

Sending input to processes

COMMAND LINE AUTOMATION IN PYTHON



Noah Gift

Lecturer, Northwestern & UC Davis & UC
Berkeley | Founder, Pragmatic AI Labs

Using Unix Pipes as input

- Two ways of connecting input
 - `Popen` method

```
proc1 = Popen(["process_one.sh"], stdout=subprocess.PIPE)
Popen(["process_two.sh"], stdin=proc1.stdout)
```

- `run` method (Higher Level Abstraction)

```
proc1 = run(["process_one.sh"], stdout=subprocess.PIPE)
run(["process_two.sh"], input=proc1.stdout)
```

Input Pipe from Unix

- Contents of the directory

```
ls -l
```

```
total 160
-rw-r--r--  1 staff  staff  13 Apr 15 06:56
-rw-r--r--  1 staff  staff  12 Apr 15 06:56 file_9.txt
```

- Sends output of one command to another

```
ls | wc
```

```
20      20     220
```

The string language of Unix Pipes

- Strings are the language of shell pipes
- Pass strings via STDOUT

```
echo "never odd or even" | rev
```

```
neve ro ddo reven
```

Translating between objects and strings

- Python objects contain
 - data
 - methods
- Unix strings are
 - data only
 - often columnar

User input

- Bash uses `read` .
- Python uses `input` .
- Python can also accept input from command-line libraries.
- Subprocess can pipe input to scripts that wait for user input.

Practicing Input


COMMAND LINE AUTOMATION IN PYTHON

Passing arguments safely to shell commands

COMMAND LINE AUTOMATION IN PYTHON

Noah Gift

Lecturer, Northwestern & UC Davis & UC
Berkeley | Founder, Pragmatic AI Labs



User input is unpredictable

- Expected input to a script

```
"/some/dir"
```

- Actual input to a script

```
"/some/dir && rm -rf /all/your/dirs"
```

Understanding shell=True in subprocess

- By default `shell=False`
- `shell=True` allows arbitrary code
- Best practice is to avoid `shell=True`

```
#shell=False is default  
run(["ls", "-l"], shell=False)
```

Using the shlex module

- `shlex` can sanitize strings

```
shlex.split("/tmp && rm -rf /all/my/dirs")
```

```
['/tmp', '&&', 'rm', '-rf', '/all/my/dirs']
```

```
directory = shlex.split("/tmp")  
cmd = ["ls"]  
cmd.extend(directory)  
run(cmd, shell=True)
```

```
CompletedProcess(args=['ls', '/tmp'], returncode=0)
```

Defaulting to items in a list

- Best practice is using a list
- Limits mistakes

```
with subprocess.Popen(["find", user_input, "-type", "f"],  
    stdout=subprocess.PIPE) as find:  
  
    #do something else in Python....
```

The problem with security by obscurity

- House key under the doormat
- Key cards for every door
- Integrated security is best

Security best practices for subprocess

- Always use shell=False
- Assume all users are malicious
- Never use security by obscurity
- Always use the principle of least privilege
- Reduce complexity

Security focused practice!

COMMAND LINE AUTOMATION IN PYTHON